


KITZ

GENERAL CATALOG

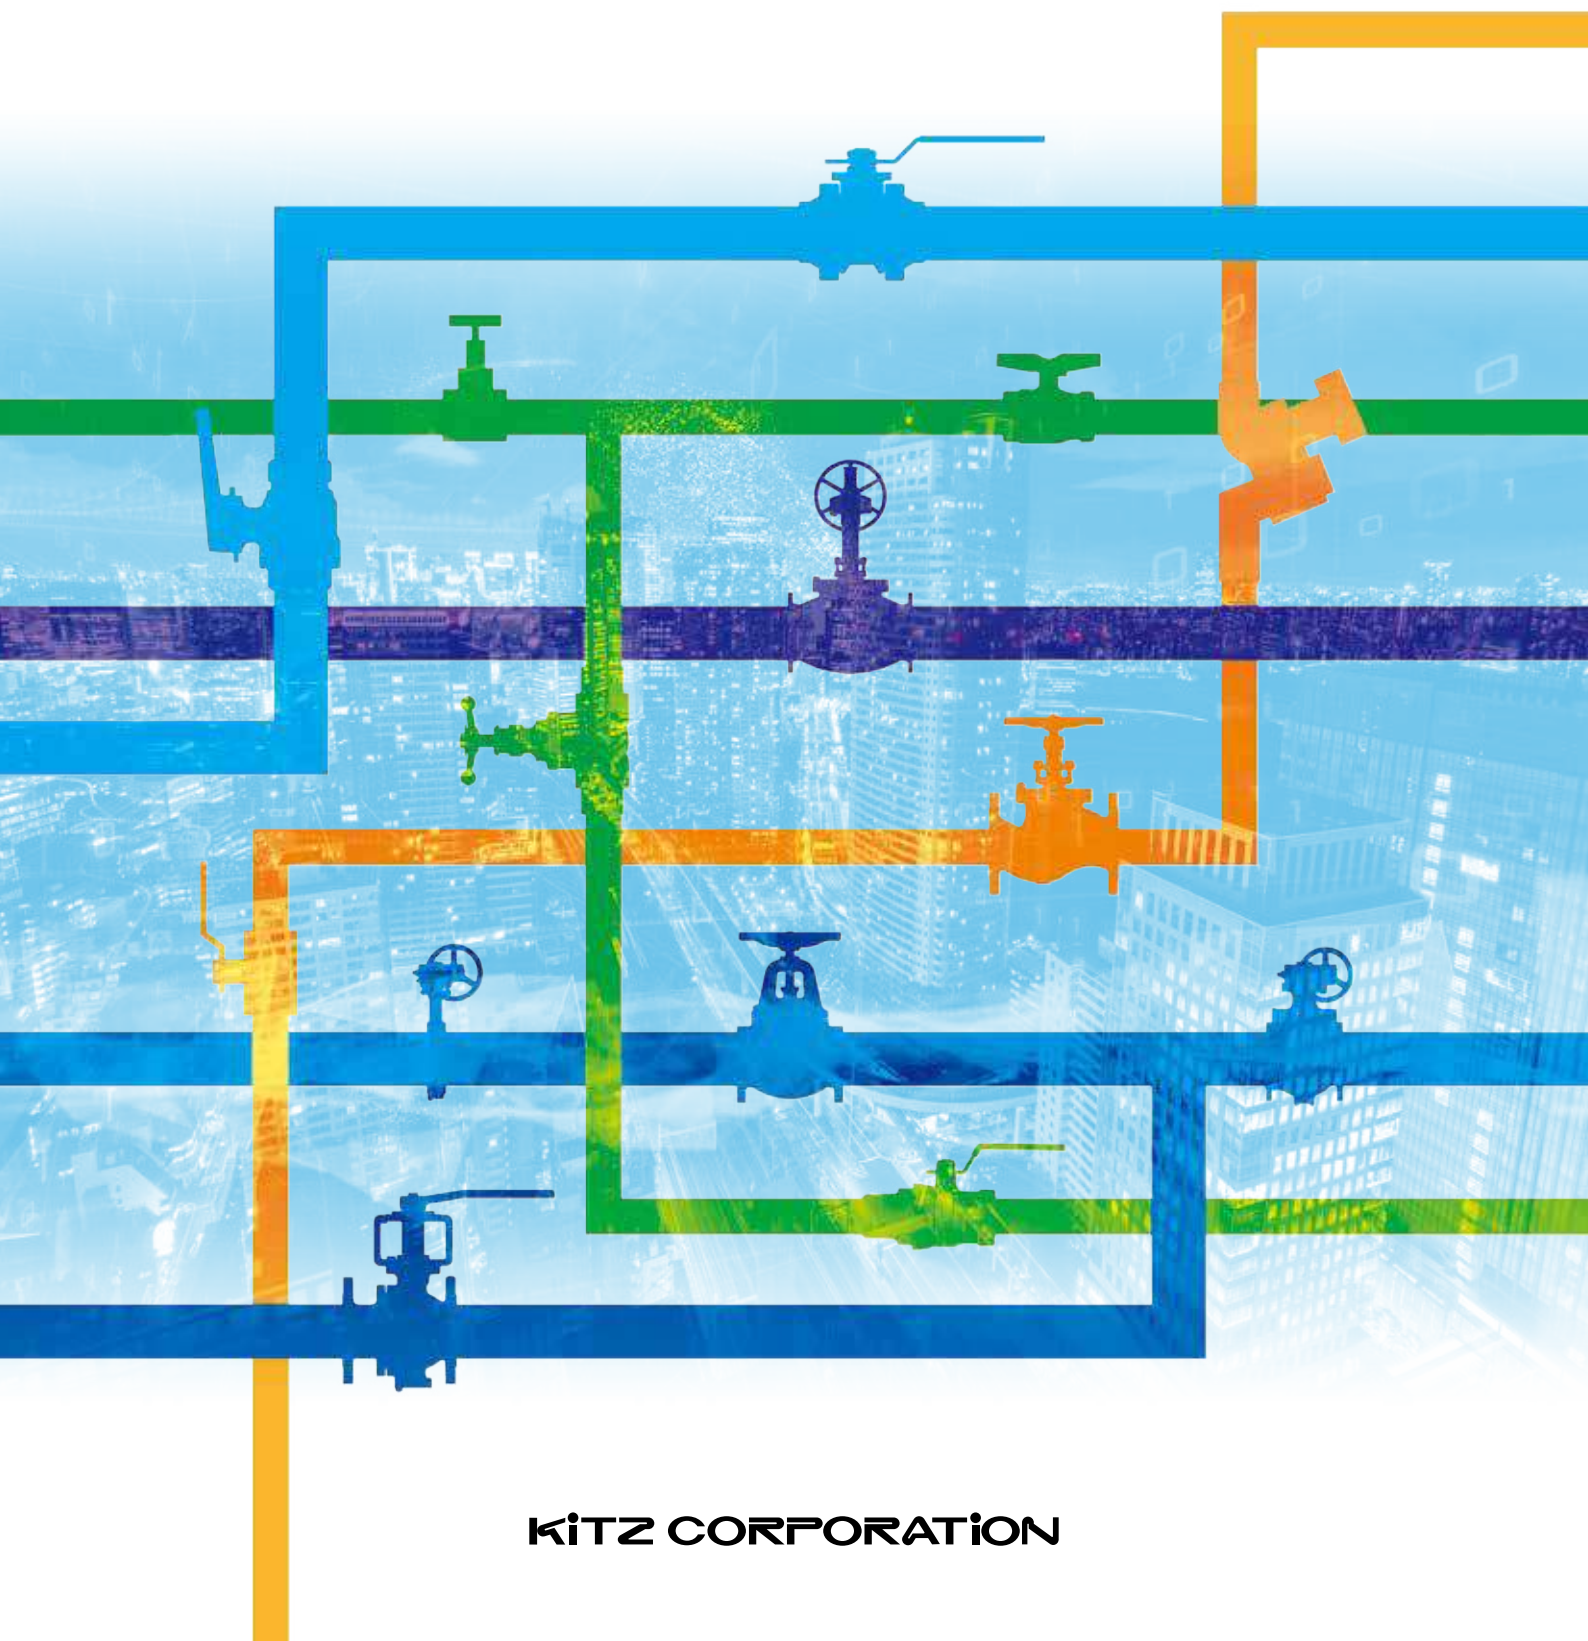

KITZ CORPORATION

Contents

| | Symbol | Products |
|---|-------------|--|
| Bronze & Brass | BR | General Valves, JIS, MSS, Ball Valves, Lead-free Valves, Fancoil Valves, Balancing Valves, Utility Valves |
| Compact SS/CS Valves & Miniature | CPT | SS General Valves (B/K Series), Steel Ball Floating Ball Valves, Miniature Valves |
| Cast Iron | CI | General Valves, JIS, MSS, Nylon Lining, Ball Valves |
| Ductile Iron | DI | General Valves, Ball Valves |
| Butterfly Valves | BFV | Aluminum, Ductile Iron, Stainless Steel (Concentric/Double/Triple Offset) |
| Steel Ball Valves | BAL | Stainless Steel, Carbon Steel (Floating, Trunnion) |
| Stainless Steel | SS | Stainless and High Alloy Steel Valves |
| Carbon Steel | CS | Carbon and Low Alloy Steel Valves |
| Technical Information | TECH | Allowable Port Information, Specification of Standard Strainer Screen, Unit Conversion Table, Temperature Pressure Table for Saturated Vapor etc |

Abbreviation

| | |
|--------------------------------------|---|
| TE Threaded | WRAS * Water Regulations Advisory Scheme |
| FE/FF Flat Face (Flanged End) | WSD * Water Supplies Department (Hong Kong) |
| RF Raised Face (Flanged End) | NSF * National Sanitation Foundation |
| SE Soldered | RoHS * Restriction of Hazardous Substances Directive |
| BW Butt Welding | AS Australian Standard |
| M&F Male & Female | JIS Japanese Industrial Standards |
| G Parallel Thread | JWWA Japan Water Works Association |
| Rc Taper Thread | MSS * Manufacturers Standardization Society of the Valve and Fittings |
| FB Full Bore | CSA * Canadian Standards Association |
| SB Standard Bore | UL * Underwriters Laboratories |
| RB Reduced Bore | FM * Factory Mutation |
| NRS Non Rising Stem | EAC * EurAsian Conformity (TR CU" Technical Regulation Customs Union) (Armenia, Belarus, Kazakhstan, Kyrgyz, Russia) |
| RS Rising Stem | UKCA * UK Conformity Assessment |
| BB Bolted Bonnet | PER * Pressure Equipment (Safety) Regulations |
| BC Bolted Cap | UKCA(Ex) * Potentially Explosive Atmospheres |
| SB Screwed Bonnet | CE * Communauté Européenne/Conformité Européenne |
| SOB Screwed Over Bonnet | PED * Pressure Equipment Directive |
| SC Screwed Cap | ATEX * AtmospheresExplosibles/Potentially Explosive Atmospheres |
| UB Union Bonnet | |
| IS Inside Screw | |
| OS&Y Outside Screw & Yoke | |
| SS Stainless Steel | |
| CS Carbon Steel | |
| F-to-F Face to Face | |

Note: * Option

https://www.kitz-valvesearch.com/

Product Search

- 1) When searching from a Product Code, please enter a Product Code (in Half Size British Number) into a and click **Detailed Search** button.
- 2) When searching from Valve Type, please select necessary information, such as Valve Type, Body Material etc and click **Search** button.

- Text Search is also available in fuzzy search. Possible to search by single criteria.
- Also, searching by Text Search and Item Selection is available.

Note: User registration is necessary to collect Drawing, CAD (DXF) and Non-Containing Report.

A Information Window of New Products and New Services

B Topics in this Web Site

C News from KITZ ⇒ OK!!!

1 From the list of product(s) searched for, select a document from pull down menu, and place it to download box to automatically format the requested document(s).

2 3 Click "Learn More" for products searched or "Download Page" to open "Product Details" page.

4 5 6 Check the box for the item(s) indicated in the "Download" column and click "Place in Download Box". "List of Products Selected" opens, click "Download Documents" to download.


Need Login: Drawing, CAD, Non-Containing Report
Not need Login: Catalogs, Manuals, Spec sheet

Should you have any questions, please press "Help" at the top of the page.

KITZ

GENERAL CATALOG

Bronze & Brass

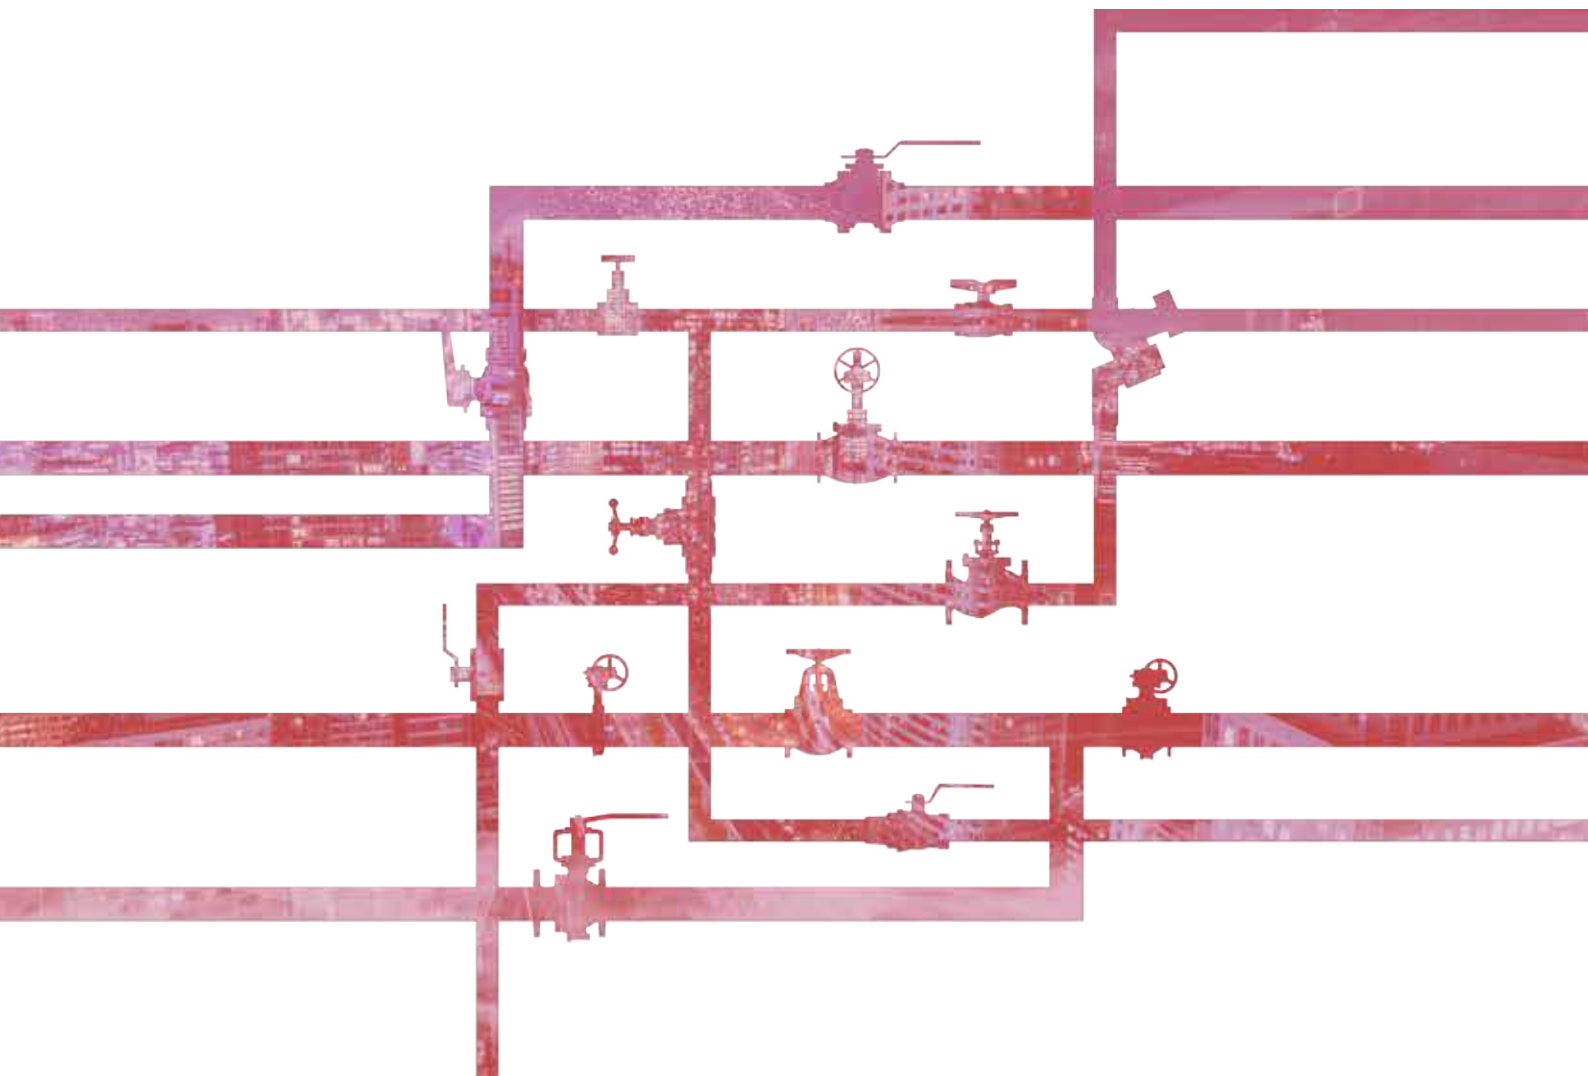


INDEX

| Title | Body Material | Type | Class | End Connection | Features | Fig | Page | | |
|--|---------------|-----------|------------------------|----------------|---|-------------|------------|-----------|-----------|
| KITZ Standard Gate, Globe, Check, Angle, & Butterfly Valves, Y-Strainers | Bronze | Globe | 100 | TE | Soft Seated (Rubber or PTFE) | A | AKA | BR5 8 | |
| | | | EN PN16 | | | PN16A | | | |
| | | | EN PN25 | | | PN25A | | | |
| | | | 100 | Q | QA | | | | |
| | | | 150 | C | AKC | | | | |
| | | | 125 | FE/FF | Angle Type | CA | AKCA | | BR6 9 |
| | 150 | TE | Soft Seated (G/F PTFE) | B | BH | | | | |
| | | FE/FF | | G | AKG | | | | |
| | | | | D | | | | | |
| | | | | DB | | | | | |
| | | | | DBH | | | | | |
| | Brass | Gate | 125 | TE,SE | NRS | FR | AKFS | CFS | BR7 10 |
| | | | EN PN16 | PN16 | | AKFH | CFH | | |
| | Special Brass | | EN PN16 (AS1628) | TE | | PN16FH | AS-FH | BR8 11 | |
| | | | 125 | TE,SE | | H | AKH | | CH |
| | | | EN PN16 | TE | | S | PN16S | | PN25S |
| | | | EN PN25 | | | E | | | |
| | | 150 | FE/FF | AKE | | | | | |
| | | 150 | TE | EB | EBH | | BR9 12 | | |
| | | 125 | TE,SE | F | AKF | | | | |
| | | EN PN16 | EN PN25 | R | AKR | | | | |
| | | | | PN16R | | | | | |
| | | | | PN25R | | | | | |
| | | | YR | | | BR10 13 | | | |
| | | | RF | AKAF | CAF | | | | |
| | | | VF | | | | | | |
| | | | FT&FTS | | | | | | |
| | | | 10K | Wafer | Dual Plate, Water Hammer Prevention, Bypass Valve Mounted | 10BWZ | BR11 14 | | |
| | | | 150 | TE,SE | | Y | | AKY | CY |
| | | | EN PN16 | | | PN16YE | | | |
| | | | EN PN25 | | | PN25YE | | | |
| | Brass | Butterfly | 175 | TE | NBR Lined Disc, Balancing Stop Handle Lever | FV | | | |
| JIS Standard Gate, Globe & Check Valves | Bronze | Globe | 5K | TE | | K | BR12 15 | | |
| | | | 10K | FE/FF | | J | | | |
| | | Gate | 5K | TE | RS | M | | | |
| | | | 10K | FE/FF | | L | | | |
| | | Check | 10K | TE | Swing | O | | | |
| | | | | FE/FF | | OB | | | |
| MSS SP-80 Gate, Globe & Check Valves | Bronze | Gate | 125 | TE | NRS | AK125M | BR13 16 | | |
| | | | | EN PN16 | | AK125E | | | |
| | | | | EN PN25 | | AK150E | | | |
| | | 150 | TE,SE | AK150L | C150L | | | | |
| | | 300 | TE | AK150LU | | | | | |
| | | | EN PN16 | AK300LU | | | | | |
| | Globe | 125 | TE,SE | AK125C | | | | | |
| | | 150 | TE | AK150D | C150D | | | | |
| | | 300 | TE | AK300J | | | | | |
| | Check | 125 | TE,SE | AK300D | | | | | |
| 150 | | TE | AKYR | CYR | | | | | |
| 300 | | TE | AK150YR | | | | | | |
| | | | AK300YR | | | | | | |
| Ball Valves | Brass | Ball | 600 | M & F | FB | ZO | BR15 18 | | |
| | | | 400 | TE | SB, For Steam Service | ZS | | | |
| | | | 600 | | FB, Compact Series | ZET | | | |
| | | | EN PN40 | | | SZA | | | |
| | | | | | | (WR)PN40SZA | | | |
| | | | | | | AKSZA | | | |
| | | | | | | CSZA | | | |
| | | | | | | AKSZAW | | | |
| | | | | | | CSZAW | | | |
| | | | | | | T | AKT | TT | |
| | | | | | | TG | | | |
| | | | | | | TO | | | |
| | | | | | | TM | | | |
| | | | | TK | AKTK | | | | |
| | | | | TKT | | | | | |
| | | | | TKW | | | | | |
| | | | | TFJ | | | | | |
| | | | | TL | | | | | |
| | | | | TLT | | | | | |
| | | | | TB | | | | | |
| | | | | AK3TM | | | | | |
| | | | | TN | | | | | |
| | | | | AKTN | | | | | |
| | | | AKTNP | | | | | | |
| | | | T4T | T4L | | | | | |
| | | | TV2T | TV2L | | | | | |
| | | | AKTAFLL | | | | | | |
| | | | CTAF | | | | | | |
| | | | AKTFL | | | | | | |
| | | | CTFLL | | | | | | |
| | | | AKTAFM | | | | | | |
| | | | CTAFM | | | | | | |
| | | | AKTFM | | | | | | |
| | | | CTFM | | | | | | |
| | | | AKTAFP | | | | | | |
| | | | AKTAFPM | | | | | | |
| | | | AKTAFO | | | | | | |
| | | | AKTAFU | | | | | | |
| | | | AKTAFS | | | | | | |
| | | | 200 | TE | FB, Gland Packing, Safety Exhaust | | BR20 23 | | |

| Title | Body Material | Type | Class | End Connection | Features | Fig | Page | |
|------------------|--------------------|-----------|----------------|---|---|----------------------|------------|----------------|
| Lead Free Valves | Bronze (KEEPALLOY) | Globe | 125 | TE | G/F PTFE | GN | BR21 24 | |
| | | Gate | 125 | | NRS | HN | | |
| | | Check | 10K | | NRS, Buried Type | WN | | |
| | | | 125 | Swing | RN CRN | | | |
| | | | 10K | Lift (Soft,Spring) | RFN | | | |
| | | Globe | 10K | Wafer | Wafer | 10BWZN | | BR22 25 |
| | | Gate | 5K | TE | JN | | | |
| | | Check | 10K | TE,SE | RS | MN CMN | | |
| | | | 10K | TE | Swing | LN CLN | | |
| | | Strainer | 10K | TE,SE | SB, Long Neck Type for Thermal Insulation | ON | | BR23 26 |
| | YNK CYNK | | | | | | | |
| | Ball | 400 | TE | FB, Long Neck Type for Thermal Insulation | TLN TLNT CTLN | BR24 27 | | |
| | | | | | TLNF TLNFT | | | |
| | Brass | Bronze | Gate | 125 | TE,SE | NRS | BR24 27 | |
| | | | | | | Swing | | AKFSN AKHN CHN |
| | Check | 125 | Y-type Swing | Lift (Soft,Spring) | AKRN AKYRN CYRN | BR25 28 | | |
| | | | | | AKYRNT CYRNT | | | |
| | Globe | 150 | 125 | FB | AKAFN CAFN | BR26 29 | | |
| | | | | | AK125CN C125CN | | | |
| | Brass | Ball | 600 | 3-Way | AKTAFN CTAFN | BR27 30 | | |
| AKTAFMN CTAFMN | | | | | | | | |
| Ball | 400 | TE | 3-Way | AKTFMNL CTFMNL | BR28 31 | | | |
| | | | | AK3TMN C3TMN | | | | |
| Ball | 400 | TE | 3-Way | AK3TMMN C3TMMN | BR29 32 | | | |
| | | | | AKSZAN CSZAN | | | | |
| Ball | 400 | TE | 3-Way | AKSZANW CSZANW | BR30 33 | | | |
| | | | | AKTNN CTNN | | | | |
| Fancoil Valves | Bronze | Ball | 10K | TE | RTRM | BR28 31 | | |
| | | | | M (G) & F | RTRO | | | |
| Ball | 10K | TE | M & F | M & F | RTRR | BR29 32 | | |
| | | | | TE | RTRU | | | |
| Ball | 10K | TE | M (G) & F | RB, Detachable Long Handle, Single Union | RTFM | BR30 33 | | |
| | | | | FB, Detachable Long Handle | RTFO | | | |
| Ball | 10K | TE | M (G) & F | FB, Detachable Long Handle, Single Union | RTFU | BR31 34 | | |
| | | | | FB, Long Neck Type for Thermal Insulation | TLF | | | |
| Ball | 10K | TE | M & F | FB, Long Neck Type for Thermal Insulation | TLFT | BR31 34 | | |
| | | | | With Indicator | NSH | | | |
| Balancing Valves | Bronze | Balancing | 10K | TE | Constant Flow Control, with Built-in Screen | BS15- BS20- | BR31 34 | |
| | | | | (F x Union nipple) | Constant Flow Control, Low Noise Type | BSS15- BSS20- BSS25- | | |
| Ball | 10K | TE | M (Rc x G) | Constant Flow Control, Detachable Handle | RTUC | BR31 34 | | |
| | | | | | TE | | S23N-S24N- | |
| Ball | 10K | TE | M (Rc x G) | Back flow prevention by automatic closing of spring-loaded built-in check valve (Water Hammer Proof), Detachable 2-way Handle (Short ' Long), Straight Type | S24N-3/4X | BR30 33 | | |
| | | | | | S25N-S26N- | | | |
| Ball | 10K | TE | M (G) x F (Rc) | Ditto, but Angle Type | S27N-S28N- | BR31 34 | | |
| | | | | | S28N-3/4X | | | |
| Ball | 10K | TE | M (G) x F (Rc) | Ditto, but Angle Type | S38A- | BR31 34 | | |
| | | | | | S1-S2- | | | |
| Ball | 10K | TE | M (Rc x G) | Straight Type | S5-S6- | BR31 34 | | |
| | | | | | S7-S8- | | | |
| Ball | 10K | TE | M (Rc x G) | Straight Type | S9-S10- | BR31 34 | | |
| | | | | | S11-S12- | | | |

* (Abbreviation) TE: Threaded Ends, FE: Flanged Ends, RF: Raised Face Ends,
SB: Screwed Bonnet, NRS: Non Rising Stem, RS: Rising Stem, FB: Full Bore, RB: Reduced Bore

| | |
|--|---|
|  CAUTION | The valves introduced in this catalog are not designed to handle toxic gases. Use specially designed or certified valves for flammable gas service. |
|--|---|

PRODUCT CODING

BC/BS Valves Except Fancoil/Balancing/Utility

(Note: Some products do not follow this coding system)

AK **125** **C** **N**
 1 2 3 4

1 End Connection

None Threaded Ends (BS21/JIS B0203)
 Flanged Ends
 AK Threaded Ends (ASME B1.20.1)
 C Solder Ends

2 Pressure Class

None KITZ Std., JIS, Ball Valve
 10 10K (Wafer Check Only)
 125 MSS SP-70 Class 125
 150 MSS SP-70 Class 150
 300 MSS SP-70 Class 300
 PN16 PN Rating
 PN25 PN Rating

3 Valve Type

A,Q/QA,C,CA,B/BH,G,D,DB/DBH,K,J,JB Globe
 FR/FS/FH,H,S,E,EB/EBH,LU,M,L,LB Gate
 F Check (Lift)
 R,O,OB Check (Swing)
 YR Check (Y Swing)
 RF,AF,VF Check (In-line Lift)
 BWZ Check (Wafer)
 Zxx,ZExx,SZxx,Txx,3Txx Ball
 Y,YU,YE Strainer

4 Lead Free Valves

N Lead Free

Fancoil (Ball)

RT **R** **M**
 1 2 3

1 Design

RT Detachable T Type Long Handle
 TL Long Neck

2 Bore Type

R Reduced Bore
 F Full Bore

3 Connection or Handle* Type

M F x F (Taper)
 O F (Taper) x M (Parallel)
 U F (Taper) x Union Nipple (M (Parallel))
 T* Reinforced Nylon Handle

*None 403SS Lever

Fancoil (Globe)

I **NAH**
 1 2


1 Indicator

None Without
 I With

2 Type

NAH Angle Type
 NSH Straight Type

Balancing Valves



1 Type

- BS With Built-in Screen
- BSS Low Noise Type
- RTUC Constant Flow Control

2 Nominal Size

15, 20, 25 (mm)

3 Predetermined Flow Rate

3 ~ 40 (L/min)

Predetermined Flow Rates and Product Coding for Balancing Valves and Balancers "SADAMARU"

Predetermined Flow Rate

Product Code: BS [Controllable Flow Rate ±10%]

(L/min)

| Normal Size (mm) | 3 | 4 | 5 | 6 | 7.5 | 8 | 10 | 12 | 12.5 | 15 | 16 | 17.5 | 20 | 25 | 30 | 35 | 40 |
|------------------|---|---|---|---|-----|---|----|----|------|----|----|------|----|----|----|----|----|
| 15 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 25 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |

Product Code: BSS [Controllable Flow Rate ±10%]

(L/min)

| Normal Size (mm) | 3 | 4 | 5 | 6 | 7.5 | 8 | 10 | 12 | 12.5 | 15 | 16 | 17.5 | 20 | 25 | 30 | 35 | 40 |
|------------------|---|---|---|---|-----|---|----|----|------|----|----|------|----|----|----|----|----|
| 15 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 20 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | |
| 25 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |


Product Code: RTUC [Controllable Flow Rate ±15%, ±20% (5 L/min only)]

(L/min)

| Normal Size (mm) | 3 | 4 | 5 | 6 | 7.5 | 8 | 10 | 12 | 12.5 | 15 | 16 | 17.5 | 20 | 25 | 30 | 35 | 40 |
|------------------|---|---|---|---|-----|---|----|----|------|----|----|------|----|----|----|----|----|
| 15 | | | ● | ● | ● | ● | ● | | ● | ● | | ● | | | | | |
| 20 | | | ● | ● | ● | ● | ● | | ● | ● | | ● | ● | ● | ● | | |
| 25 | | | | | | | | | | | | | | ● | ● | | |

Note: Flow rates marked with ● are available.

Utility Ball Valves



1 Series

- S S Ball & Orange Ball

2 Design & Connection

- 1 Straight, Brass Body, M (T) x M (P)
- 2 Straight, Cr. Plating Body, M (T) x M (P)
- 5 Angle, Cr. Plating Body, M (T) x M (P)
- 6 Straight, Brass Body, M (T) x F (T)
- 8 Straight, Cr. Plating Body, M (T) x M (P)
- 23 Straight, Brass Body, M (T) x M (P)
- 24 Straight, Cr. Plating Body, M (T) x M (P)
- 25 Straight, Cr. Plating Body, F (T) x F (F)
- 26 Straight, Cr. Plating Body, M (T) x Union Nut F (P)
- 27 Straight, Cr. Plating Body, F (T) x Union Nut F (P)
- 28 Straight, Cr. Plating Body, F (T) x M (P)
- 38 Angle, Cr. Plating Body, F (T) x M (P)

3 Type

- N Straight
- A Angle

4 Type

- 3/4X 3/4x1/2

| Type | Globe | | | | | Globe | | | | | Globe | | | | | Globe | | | | |
|---------------------------------|--|-----|-----|-----|-----|--|-----|----|-----|-----|--|-----|-----|----|-----|---|--|--|--|--|
| Bronze & Brass KITZ Standard | | | | | | | | | | | | | | | | | | | | |
| | A | | | | | AKA | | | | | PN16A | | | | | PN25A | | | | |
| Fig | A | | | | | AKA | | | | | PN16A | | | | | PN25A | | | | |
| End Connection | *BS21 (JIS B0203) | | | | | *ASME B1.20.1 | | | | | *BS21 (JIS B0203) | | | | | *BS21 (JIS B0203) | | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D | | | | |
| 1/4 | 8 | 40 | 66 | 50 | 40 | 66 | 50 | | | | | | | | | | | | | |
| 3/8 | 10 | 42 | 67 | 50 | 42 | 67 | 50 | | | | | | | | | | | | | |
| 1/2 | 15 | 48 | 69 | 55 | 48 | 69 | 55 | 48 | 69 | 55 | 48 | 69 | 55 | 48 | 69 | 55 | | | | |
| 3/4 | 20 | 53 | 80 | 60 | 53 | 80 | 60 | 53 | 80 | 60 | 53 | 80 | 60 | 53 | 80 | 60 | | | | |
| 1 | 25 | 63 | 94 | 70 | 63 | 94 | 70 | 63 | 94 | 70 | 63 | 94 | 70 | 63 | 94 | 70 | | | | |
| 1 1/4 | 32 | 73 | 104 | 80 | 73 | 104 | 80 | 73 | 104 | 80 | 73 | 104 | 80 | 73 | 104 | 80 | | | | |
| 1 1/2 | 40 | 81 | 127 | 90 | 81 | 127 | 90 | 81 | 127 | 90 | 81 | 127 | 90 | 81 | 127 | 90 | | | | |
| 2 | 50 | 94 | 147 | 100 | 94 | 147 | 100 | 94 | 147 | 100 | 94 | 147 | 100 | 94 | 147 | 100 | | | | |
| 2 1/2 | 65 | 115 | 179 | 115 | 115 | 179 | 115 | | | | | | | | | | | | | |
| 3 | 80 | 131 | 200 | 135 | 131 | 200 | 135 | | | | | | | | | | | | | |
| 4 | 100 | 171 | 250 | 180 | 171 | 250 | 180 | | | | | | | | | | | | | |
| Body | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | |
| Bonnet | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | |
| Stem | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | |
| Disc | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | |
| Gland Packing | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | |
| Hand Wheel | Aluminum Die-Cast/CI | | | | | Aluminum Die-Cast/CI | | | | | Aluminum Die-Cast/CI | | | | | Aluminum Die-Cast/CI | | | | |
| Standard/Approval | | | | | | | | | | | WSD: PN16A<ZH1W2> | | | | | | | | | |
| Service Conditions | W.O.G. Non-shock 1.03MPa(150psi), Saturated Steam Pressure 0.7MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 1.03MPa(150psi), Saturated Steam Pressure 0.7MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | | 16 bar at 100°C, 7 bar at 170°C (Do not use for flammable gas or toxic gas.) | | | | | 25 bar at 100°C, 10.5 bar at 186°C (Do not use for flammable gas or toxic gas.) | | | | |
| Reference Page | | | | | | | | | | | P-T Rating : Page BR38 | | | | | P-T Rating : Page BR38 | | | | |
| Remarks | EAC: Option | | | | | EAC: Option | | | | | WSD: Option | | | | | | | | | |





*The length of useful threads & the positions of gauge planes are built on KITZ standard.

| Type | Globe | | | | | Globe | | | | | Globe | | | | | Globe | | | | |
|---------------------------------|---|----|----|----|----|---|-----|-----|-----|-----|---|-----|-----|-----|-----|---|--|--|--|--|
| Bronze & Brass KITZ Standard | | | | | | | | | | | | | | | | | | | | |
| | Q | | | | | QA | | | | | C | | | | | AKC | | | | |
| Fig | Q | | | | | QA | | | | | C | | | | | AKC | | | | |
| End Connection | *BS21 (JIS B0203) | | | | | *BS21 (JIS B0203) | | | | | BS21 (JIS B0203) | | | | | ASME B1.20.1 | | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D | | | | |
| 1/4 | 8 | | | | | | | 44 | 66 | 50 | 44 | 66 | 50 | 44 | 66 | 50 | | | | |
| 3/8 | 10 | | | | | | | 44 | 68 | 50 | 44 | 68 | 50 | 44 | 68 | 50 | | | | |
| 1/2 | 15 | 44 | 70 | 50 | 44 | 70 | 50 | 53 | 79 | 60 | 53 | 79 | 60 | 53 | 79 | 60 | | | | |
| 3/4 | 20 | 50 | 73 | 55 | 50 | 73 | 55 | 65 | 93 | 70 | 65 | 93 | 70 | 65 | 93 | 70 | | | | |
| 1 | 25 | 63 | 86 | 60 | 63 | 86 | 60 | 77 | 104 | 80 | 77 | 104 | 80 | 77 | 104 | 80 | | | | |
| 1 1/4 | 32 | | | | 73 | 108 | 80 | 85 | 127 | 90 | 85 | 127 | 90 | 85 | 127 | 90 | | | | |
| 1 1/2 | 40 | | | | 81 | 132 | 90 | 100 | 145 | 100 | 100 | 145 | 100 | 100 | 145 | 100 | | | | |
| 2 | 50 | | | | 94 | 150 | 100 | 119 | 174 | 115 | 119 | 174 | 115 | 119 | 174 | 115 | | | | |
| 2 1/2 | 65 | | | | | | | 139 | 199 | 135 | 139 | 199 | 135 | 139 | 199 | 135 | | | | |
| 3 | 80 | | | | | | | 158 | 215 | 155 | 158 | 215 | 155 | 158 | 215 | 155 | | | | |
| Body | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | |
| Bonnet | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | |
| Stem | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | |
| Disc | Uretan Rubber | | | | | PTFE | | | | | Cast Bronze | | | | | Cast Bronze | | | | |
| Gland Packing | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | |
| Hand Wheel | Aluminum Die-Cast/ZDC | | | | | Aluminum Die-Cast/ZDC | | | | | Aluminum Die-Cast | | | | | Aluminum Die-Cast | | | | |
| Standard/Approval | | | | | | | | | | | RoHS: C<GS101> up to 1 ⁸ | | | | | | | | | |
| Service Conditions | W.O.G. Non-shock 0.78MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 0.78MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Remarks | For Water/Hot Water EAC: Option | | | | | For Oil Tank EAC: Option | | | | | RoHS: Option EAC: Option | | | | | EAC: Option | | | | |

*The length of useful threads & the positions of gauge planes are built on KITZ standard.





| Type | Angle Globe | | | | | Angle Globe | | | | | Globe | | | | | Globe | | | | |
|---------------------------------|---|----|-----|-----|--|---|------|-----|--|-----|---|-----|--|-----|-----|---|----|--|--|--|
| Bronze & Brass KITZ Standard | | | | | | | | | | | | | | | | | | | | |
| | Fig | CA | | | | | AKCA | | | | | B | | | | | BH | | | |
| End Connection | BS21 (JIS B0203) | | | | | ASME B1.20.1 | | | | | JIS B2240 | | | | | JIS B2240 | | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | L | H | D | | | | |
| 1/4 | 8 | 21 | 66 | 50 | | 21 | 66 | 50 | | | | | | | | | | | | |
| 3/8 | 10 | 24 | 68 | 50 | | 24 | 68 | 50 | | | | | | | | | | | | |
| 1/2 | 15 | 28 | 79 | 60 | | 28 | 79 | 60 | | 83 | 79 | 60 | | 83 | 79 | 60 | | | | |
| 3/4 | 20 | 34 | 93 | 70 | | 34 | 93 | 70 | | 88 | 94 | 70 | | 88 | 94 | 70 | | | | |
| 1 | 25 | 40 | 104 | 80 | | 40 | 104 | 80 | | 100 | 105 | 80 | | 100 | 105 | 80 | | | | |
| 1 1/4 | 32 | 47 | 127 | 90 | | 47 | 127 | 90 | | 113 | 127 | 90 | | 113 | 127 | 90 | | | | |
| 1 1/2 | 40 | 52 | 145 | 100 | | 52 | 145 | 100 | | 120 | 145 | 100 | | 120 | 145 | 100 | | | | |
| 2 | 50 | 61 | 174 | 115 | | 61 | 174 | 115 | | 145 | 174 | 115 | | 145 | 174 | 115 | | | | |
| 2 1/2 | 65 | 74 | 199 | 135 | | 74 | 199 | 135 | | 165 | 198 | 135 | | 165 | 198 | 135 | | | | |
| 3 | 80 | 85 | 215 | 155 | | 85 | 215 | 155 | | 177 | 215 | 155 | | 177 | 215 | 155 | | | | |
| 4 | 100 | | | | | | | | | 220 | 250 | 180 | | 220 | 250 | 180 | | | | |
| Body | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | |
| Bonnet | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | |
| Stem | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | |
| Disc | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | |
| Gland Packing | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | |
| Hand Wheel | Aluminum Die-Cast/ZDC | | | | | Aluminum Die-Cast/ZDC | | | | | Aluminum Die-Cast/ZDC/DI | | | | | Aluminum Die-Cast/ZDC/DI | | | | |
| Service Conditions | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Remarks | EAC: Option | | | | | EAC: Option | | | | | Flanged Ends Undrilled EAC: Option | | | | | Flanged end drilled according to JIS 10K. EAC: Option | | | | |

| Type | Globe | | | | | Globe | | | | | Globe | | | | | Globe | | | | |
|---------------------------------|---|-----|-----|-----|--|---|-----|-----|--|-----|---|-----|--|-----|-----|---|----|--|--|--|
| Bronze & Brass KITZ Standard | | | | | | | | | | | | | | | | | | | | |
| | Fig | G | | | | | AKG | | | | | D | | | | | DB | | | |
| End Connection | BS21 (JIS B0203) | | | | | ASME B1.20.1 | | | | | BS21 (JIS B0203) | | | | | JIS B2240 | | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | L | H | D | | | | |
| 1/4 | 8 | 47 | 68 | 50 | | 47 | 68 | 50 | | | | | | | | | | | | |
| 3/8 | 10 | 53 | 87 | 55 | | 53 | 87 | 55 | | | | | | | | | | | | |
| 1/2 | 15 | 57 | 87 | 60 | | 57 | 87 | 60 | | 64 | 113 | 60 | | 82 | 113 | 60 | | | | |
| 3/4 | 20 | 66 | 102 | 70 | | 66 | 102 | 70 | | 78 | 138 | 90 | | 95 | 138 | 90 | | | | |
| 1 | 25 | 76 | 113 | 80 | | 76 | 113 | 80 | | 90 | 156 | 100 | | 108 | 156 | 100 | | | | |
| 1 1/4 | 32 | 88 | 138 | 90 | | 88 | 138 | 90 | | 105 | 184 | 115 | | 120 | 184 | 115 | | | | |
| 1 1/2 | 40 | 100 | 154 | 100 | | 100 | 154 | 100 | | 120 | 187 | 115 | | 140 | 187 | 115 | | | | |
| 2 | 50 | 120 | 183 | 115 | | 120 | 183 | 115 | | 145 | 212 | 135 | | 165 | 212 | 135 | | | | |
| 2 1/2 | 65 | 147 | 210 | 135 | | 147 | 210 | 135 | | | | | | 190 | 244 | 155 | | | | |
| 3 | 80 | 162 | 229 | 155 | | 162 | 229 | 155 | | | | | | 220 | 281 | 180 | | | | |
| 4 | 100 | | | | | | | | | | | | | 270 | 321 | 225 | | | | |
| Body | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | | Cast Bronze | | | | |
| Bonnet | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | |
| Stem | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | |
| Disc | G/F PTFE | | | | | G/F PTFE | | | | | G/F PTFE | | | | | G/F PTFE | | | | |
| Gland Packing | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite/PTFE | | | | |
| Hand Wheel | Aluminum Die-Cast | | | | | Aluminum Die-Cast | | | | | Aluminum Die-Cast | | | | | Aluminum Die-Cast/ZDC/DI | | | | |
| Service Conditions | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 1.55MPa(225psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Remarks | EAC: Option | | | | | EAC: Option | | | | | EAC: Option | | | | | Flanged Ends Undrilled EAC: Option | | | | |

| Type | Globe | | | Gate | | | Gate | | | Gate | | | |
|---------------------------------|---|-----|-----|---|----|-----|---|----|-----|---|-----|-----|----|
| Bronze & Brass KITZ Standard |  | | |  | | |  | | |  | | | |
| | UB/BB IS EAC | | | SB IS NRS EAC | | | SB IS NRS EAC | | | SB IS NRS EAC | | | |
| Fig | DBH | | | FR | | | AKFS | | | CFS | | | |
| End Connection | JIS B2240 | | | *BS21 (JIS B0203) | | | *ASME B1.20.1 | | | **ASME B16.18 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | | | | 38 | 73 | 50 | 38 | 73 | 50 | 45 | 75 | 50 |
| 1/2 | 15 | 82 | 113 | 60 | 42 | 73 | 50 | 42 | 73 | 50 | 45 | 75 | 50 |
| 3/4 | 20 | 95 | 138 | 90 | 47 | 87 | 55 | 47 | 87 | 55 | 60 | 86 | 55 |
| 1 | 25 | 108 | 156 | 100 | 50 | 97 | 60 | 50 | 97 | 60 | 70 | 97 | 60 |
| 1 1/4 | 32 | 120 | 184 | 115 | 60 | 118 | 70 | 60 | 118 | 70 | 77 | 117 | 70 |
| 1 1/2 | 40 | 140 | 187 | 115 | 63 | 126 | 80 | 63 | 126 | 80 | 86 | 126 | 80 |
| 2 | 50 | 165 | 212 | 135 | 72 | 154 | 90 | 72 | 154 | 90 | 104 | 154 | 90 |
| 2 1/2 | 65 | 190 | 244 | 155 | | | | 80 | 167 | 100 | | | |
| 3 | 80 | 220 | 281 | 180 | | | | 90 | 200 | 115 | | | |
| 4 | 100 | 270 | 321 | 225 | | | | | | | | | |
| Body | Cast Bronze | | | Forged Brass | | | Forged Brass | | | Forged Brass | | | |
| Bonnet | Forged Brass/Cast Bronze | | | Forged Brass | | | Forged Brass | | | Forged Brass | | | |
| Stem | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | |
| Disc | G/F PTFE | | | Forged Brass | | | Forged Brass | | | Forged Brass | | | |
| Gland Packing | Aramid Fibers Graphite/PTFE | | | Aramid Fibers Graphite | | | Aramid Fibers Graphite | | | Aramid Fibers Graphite | | | |
| Hand Wheel | Aluminum Die-Cast/ZDC/DI | | | Aluminum Die-Cast | | | Aluminum Die-Cast | | | Aluminum Die-Cast | | | |
| Service Conditions | W.O.G. Non-shock 1.55MPa(225psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | |
| Reference Page | | | | | | | | | | P-T Rating : Page BR33 | | | |
| Remarks | Flanged end drilled according to JIS 10K. EAC: Option | | | EAC: Option | | | | | | | | | |

*The length of useful threads & the positions of gauge planes are built on KITZ standard.

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.

| Type | Gate | | | Gate | | | Gate | | | Gate | | | |
|---------------------------------|---|----|-----|---|----|-----|---|-----|-----|---|----|-----|-----|
| Bronze & Brass KITZ Standard |  | | |  | | |  | | |  | | | |
| | SB IS NRS EAC RoHS | | | SB IS NRS EAC | | | SB IS NRS EAC | | | SB IS NRS EAC | | | |
| Fig | FH | | | AKFH | | | CFH | | | PN16FH | | | |
| End Connection | *BS21 (JIS B0203) | | | *ASME B1.20.1 | | | **ASME B16.18 | | | *BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | 35 | 70 | 50 | 35 | 70 | 50 | | | | 35 | 70 | 50 |
| 3/8 | 10 | 38 | 73 | 50 | 38 | 73 | 50 | 37 | 77 | 50 | 38 | 73 | 50 |
| 1/2 | 15 | 42 | 73 | 50 | 42 | 73 | 50 | 45 | 77 | 50 | 42 | 73 | 50 |
| 3/4 | 20 | 47 | 87 | 55 | 47 | 87 | 55 | 60 | 87 | 55 | 47 | 87 | 55 |
| 1 | 25 | 50 | 97 | 60 | 50 | 97 | 60 | 70 | 97 | 60 | 50 | 97 | 60 |
| 1 1/4 | 32 | 60 | 118 | 70 | 60 | 118 | 70 | 77 | 118 | 70 | 60 | 118 | 70 |
| 1 1/2 | 40 | 63 | 126 | 80 | 63 | 126 | 80 | 86 | 126 | 80 | 63 | 126 | 80 |
| 2 | 50 | 72 | 154 | 90 | 72 | 154 | 90 | 104 | 154 | 90 | 72 | 154 | 90 |
| 2 1/2 | 65 | 82 | 187 | 100 | 82 | 187 | 100 | 115 | 187 | 100 | 82 | 187 | 100 |
| 3 | 80 | 92 | 205 | 115 | 92 | 205 | 115 | 127 | 205 | 115 | 92 | 205 | 115 |
| Body | Forged Brass | | | Forged Brass | | | Forged Brass | | | Forged Brass | | | |
| Bonnet | Forged Brass/Cast Bronze | | | Forged Brass/Cast Bronze | | | Forged Brass/Cast Bronze | | | Forged Brass/Cast Bronze | | | |
| Stem | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | |
| Disc | Forged Brass | | | Forged Brass | | | Forged Brass | | | Forged Brass | | | |
| Gland Packing | Aramid Fibers Graphite | | | Aramid Fibers Graphite | | | Aramid Fibers Graphite | | | Aramid Fibers Graphite | | | |
| Hand Wheel | Aluminum Die-Cast | | | Aluminum Die-Cast | | | Aluminum Die-Cast | | | Aluminum Die-Cast | | | |
| Standard/Approval | RoHS: FH<GS101> up to 1 ^B | | | | | | | | | | | | |
| Service Conditions | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | 16 bar at 100°C, 7 bar at 170°C (Do not use for flammable gas or toxic gas.) | | | |
| Reference Page | | | | | | | P-T Rating : Page BR33 | | | P-T Rating : Page BR38 | | | |
| Remarks | RoHS: Option EAC: Option | | | EAC: Option | | | | | | | | | |

*The length of useful threads & the positions of gauge planes are built on KITZ standard.

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.





| Type | Gate | | | | Gate | | | | Gate | | | | Gate | | | |
|---------------------------------|---|----|-----|----|---|-----|-----|-----|---|-----|-----|-----|---|--|--|--|
| Bronze & Brass KITZ Standard | | | | | | | | | | | | | | | | |
| | AS | | | | EAC | | | | EAC | | | | EAC | | | |
| Fig | AS-FH | | | | H | | | | AKH | | | | CH | | | |
| End Connection | AS 1722.1 | | | | *BS21 (JIS B0203) | | | | *ASME B1.20.1 | | | | **ASME B16.18 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | | | |
| 3/8 | 10 | | | | 38 | 73 | 50 | 38 | 73 | 50 | 37 | 73 | 50 | | | |
| 1/2 | 15 | 55 | 74 | 55 | 42 | 73 | 50 | 42 | 73 | 50 | 45 | 73 | 50 | | | |
| 3/4 | 20 | 60 | 86 | 55 | 47 | 85 | 55 | 47 | 85 | 55 | 60 | 85 | 55 | | | |
| 1 | 25 | 68 | 94 | 60 | 50 | 96 | 60 | 50 | 96 | 60 | 72 | 96 | 60 | | | |
| 1 1/4 | 32 | 78 | 116 | 70 | 60 | 115 | 70 | 60 | 115 | 70 | 78 | 115 | 70 | | | |
| 1 1/2 | 40 | 81 | 128 | 80 | 63 | 125 | 80 | 63 | 125 | 80 | 87 | 125 | 80 | | | |
| 2 | 50 | 94 | 158 | 90 | 72 | 155 | 90 | 72 | 155 | 90 | 102 | 155 | 90 | | | |
| 2 1/2 | 65 | | | | 90 | 202 | 115 | 90 | 202 | 115 | 115 | 202 | 115 | | | |
| 3 | 80 | | | | 100 | 223 | 135 | 100 | 223 | 135 | 130 | 223 | 135 | | | |
| 4 | 100 | | | | 121 | 280 | 155 | 121 | 280 | 155 | 173 | 280 | 155 | | | |
| Body | Special Brass (AS 2345) | | | | Cast Bronze | | | | Cast Bronze | | | | Cast Bronze | | | |
| Bonnet | Special Brass (AS 2345) | | | | Cast Bronze | | | | Cast Bronze | | | | Cast Bronze | | | |
| Stem | Special Brass (AS 2345) | | | | Dezincification Resistant Brass | | | | Dezincification Resistant Brass | | | | Dezincification Resistant Brass | | | |
| Disc | Special Brass (AS 2345) | | | | Forged Brass/Cast Bronze | | | | Forged Brass/Cast Bronze | | | | Forged Brass/Cast Bronze | | | |
| Gland Packing | Aramid Fibers Graphite | | | | Aramid Fibers Graphite | | | | Aramid Fibers Graphite | | | | Aramid Fibers Graphite | | | |
| Hand Wheel | Ductile Iron | | | | Aluminum Die-Cast | | | | Aluminum Die-Cast | | | | Aluminum Die-Cast | | | |
| Standard/Approval | AS 1628/WMKA02054 | | | | | | | | | | | | | | | |
| Service Conditions | Working Temperature and Pressure, Non-shock 99°C/1.6MPa | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | |
| Reference Page | | | | | | | | | | | | | P-T Rating : Page BR33 | | | |
| Remarks | AS: Austrarian standard | | | | EAC: Option | | | | EAC: Option | | | | | | | |





*The length of useful threads & the positions of gauge planes are built on KITZ standard.





**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.

| Type | Gate | | | | Gate | | | | Gate | | | | Gate | | | |
|---------------------------------|---------------------------------|----|-----|-----|--|-----|----|----|---|----|-----|-----|---|--|--|--|
| Bronze & Brass KITZ Standard | | | | | | | | | | | | | | | | |
| | EAC | | | | WRAS | | | | WRAS | | | | EAC | | | |
| Fig | S | | | | PN16S | | | | PN25S | | | | E | | | |
| End Connection | *BS21 (JIS B0203) | | | | *BS21 (JIS B0203) | | | | *BS21 (JIS B0203) | | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | | | |
| 3/8 | 10 | 38 | 75 | 50 | | | | | | | 43 | 86 | 50 | | | |
| 1/2 | 15 | 42 | 75 | 50 | 42 | 75 | 50 | 42 | 75 | 50 | 48 | 96 | 55 | | | |
| 3/4 | 20 | 47 | 86 | 55 | 47 | 86 | 55 | 47 | 86 | 55 | 53 | 111 | 60 | | | |
| 1 | 25 | 50 | 97 | 60 | 50 | 97 | 60 | 50 | 97 | 60 | 62 | 122 | 70 | | | |
| 1 1/4 | 32 | 60 | 117 | 70 | 60 | 117 | 70 | 60 | 117 | 70 | 69 | 141 | 80 | | | |
| 1 1/2 | 40 | 63 | 126 | 80 | 63 | 126 | 80 | 63 | 126 | 80 | 75 | 164 | 90 | | | |
| 2 | 50 | 72 | 154 | 90 | 72 | 154 | 90 | 72 | 154 | 90 | 86 | 197 | 100 | | | |
| 2 1/2 | 65 | 80 | 167 | 100 | | | | | | | 105 | 225 | 115 | | | |
| 3 | 80 | 90 | 200 | 115 | | | | | | | 116 | 261 | 135 | | | |
| Body | Cast Bronze | | | | Cast Bronze | | | | Cast Bronze | | | | Cast Bronze | | | |
| Bonnet | Forged Brass | | | | Forged Brass | | | | Forged Brass | | | | Forged Brass/Cast Bronze | | | |
| Stem | Dezincification Resistant Brass | | | | Dezincification Resistant Brass | | | | Dezincification Resistant Brass | | | | Dezincification Resistant Brass | | | |
| Disc | Forged Brass | | | | Forged Brass | | | | Forged Brass | | | | Cast Bronze | | | |
| Gland Packing | Aramid Fibers Graphite | | | | Aramid Fibers Graphite | | | | Aramid Fibers Graphite | | | | Aramid Fibers Graphite | | | |
| Hand Wheel | Aluminum Die-Cast | | | | Aluminum Die-Cast | | | | Aluminum Die-Cast | | | | Aluminum Die-Cast | | | |
| Standard/Approval | | | | | WRAS: (WR)PN16S, WSD: PN16S<ZH1W1> | | | | WRAS: (WR)PN25S | | | | | | | |
| Service Conditions | | | | | 16 bar at 100°C, 7 bar at 170°C (Do not use for flammable gas or toxic gas.) | | | | 25 bar at 100°C, 10.5 bar at 186°C (Do not use for flammable gas or toxic gas.) | | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | |
| Reference Page | | | | | P-T Rating : Page BR38 | | | | P-T Rating : Page BR38 | | | | | | | |
| Remarks | EAC: Option | | | | WRAS, WSD: Option | | | | WRAS: Option | | | | EAC: Option | | | |





*The length of useful threads & the positions of gauge planes are built on KITZ standard.

| Type | Gate | | | | | Gate | | | Gate | | | Lift Check | | |
|---------------------------------|---|-----|-----|-----|-----|---|-----|-----|---|-----|-----|---|----|---|
| Bronze & Brass KITZ Standard |  | | | | |  | | |  | | |  | | |
| | EAC | | | | | EAC | | | EAC | | | EAC | | |
| Fig | AKE | | | | | EB | | | EBH | | | F | | |
| End Connection | ASME B1.20.1 | | | | | JIS B2240 | | | JIS B2240 | | | BS21 (JIS B0203) | | |
| inch | mm | L | H | D | | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | 43 | 86 | 50 | | | | | | | | 44 | 26 | |
| 1/2 | 15 | 48 | 96 | 55 | 75 | 96 | 55 | 75 | 96 | 55 | 53 | 28 | | |
| 3/4 | 20 | 53 | 111 | 60 | 80 | 111 | 60 | 80 | 111 | 60 | 65 | 34 | | |
| 1 | 25 | 62 | 122 | 70 | 95 | 122 | 70 | 95 | 122 | 70 | 77 | 42 | | |
| 1 1/4 | 32 | 69 | 141 | 80 | 110 | 142 | 80 | 110 | 142 | 80 | 85 | 50 | | |
| 1 1/2 | 40 | 75 | 164 | 90 | 120 | 165 | 90 | 120 | 165 | 90 | 100 | 56 | | |
| 2 | 50 | 86 | 197 | 100 | 140 | 197 | 100 | 140 | 197 | 100 | 119 | 67 | | |
| 2 1/2 | 65 | 105 | 225 | 115 | 165 | 225 | 115 | 165 | 225 | 115 | 139 | 79 | | |
| 3 | 80 | 116 | 261 | 135 | 190 | 264 | 155 | 190 | 264 | 155 | 158 | 91 | | |
| 4 | 100 | | | | 230 | 309 | 225 | 230 | 309 | 225 | | | | |
| 5 | 125 | | | | 190 | 381 | 225 | 190 | 381 | 225 | | | | |
| 6 | 150 | | | | 210 | 427 | 250 | 210 | 427 | 250 | | | | |
| Body | Cast Bronze | | | | | Cast Bronze | | | Cast Bronze | | | Cast Bronze | | |
| Bonnet | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | Forged Brass/Cast Bronze | | | Forged Brass/Cast Bronze | | |
| Stem | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | |
| Disc | Cast Bronze | | | | | Cast Bronze | | | Cast Bronze | | | Cast Bronze | | |
| Gland Packing | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite/PTFE | | | Aramid Fibers Graphite/PTFE | | | Aramid Fibers Graphite/PTFE | | |
| Hand Wheel | Aluminum Die-Cast | | | | | Aluminum Die-Cast/ZDC/DI | | | Aluminum Die-Cast/ZDC/DI | | | Aluminum Die-Cast/ZDC/DI | | |
| Service Conditions | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | |
| Remarks | EAC: Option | | | | | Flanged Ends Undrilled EAC: Option | | | Flanged end drilled according to JIS 10K. EAC: Option | | | EAC: Option | | |





| Type | Lift Check | | | | | Swing Check | | | Swing Check | | | Swing Check | | |
|---------------------------------|---|-----|----|---|-----|---|---|-----|---|---|---|---|----|---|
| Bronze & Brass KITZ Standard |  | | | | |  | | |  | | |  | | |
| | EAC | | | | | EAC RoHS | | | EAC | | | EAC | | |
| Fig | AKF | | | | | R | | | AKR | | | PN16R | | |
| End Connection | ASME B1.20.1 | | | | | BS21 (JIS B0203) | | | ASME B1.20.1 | | | BS21 (JIS B0203) | | |
| inch | mm | L | H | D | | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | 44 | 26 | | 53 | 39 | | 53 | 39 | | | 53 | 39 | |
| 1/2 | 15 | 53 | 28 | | 60 | 39 | | 60 | 39 | | | 61 | 45 | |
| 3/4 | 20 | 65 | 34 | | 70 | 45 | | 70 | 45 | | | 70 | 50 | |
| 1 | 25 | 77 | 42 | | 80 | 52 | | 80 | 52 | | | 81 | 58 | |
| 1 1/4 | 32 | 85 | 50 | | 92 | 62 | | 92 | 62 | | | 91 | 65 | |
| 1 1/2 | 40 | 100 | 56 | | 102 | 67 | | 102 | 67 | | | 109 | 75 | |
| 2 | 50 | 119 | 67 | | 122 | 79 | | 122 | 79 | | | | | |
| 2 1/2 | 65 | 139 | 79 | | 150 | 91 | | 150 | 91 | | | | | |
| 3 | 80 | 158 | 91 | | 165 | 102 | | 165 | 102 | | | | | |
| 4 | 100 | | | | 195 | 119 | | 195 | 119 | | | | | |
| Body | Cast Bronze | | | | | Cast Bronze | | | Cast Bronze | | | Cast Bronze | | |
| Bonnet | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | Forged Brass/Cast Bronze | | | Forged Brass | | |
| Stem/Hinge Pin | Cast Bronze | | | | | Brass | | | Brass | | | Brass | | |
| Disc | Cast Bronze | | | | | Forged Brass/Cast Bronze | | | Forged Brass/Cast Bronze | | | Forged Brass | | |
| Standard/Approval | | | | | | RoHS: R<GS101> up to 1 ⁹ | | | | | | | | |
| Service Conditions | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | 16 bar at 100°C, 7 bar at 170°C (Do not use for flammable gas or toxic gas.) | | |
| Reference Page | | | | | | | | | | | | P-T Rating : Page BR38 | | |
| Remarks | EAC: Option | | | | | EAC: Option RoHS: Option | | | EAC: Option | | | | | |

| Type | Swing Check | | | Y-Pattern Swing Check | | | Vertical Lift Check | | | Vertical Lift Check | | | |
|---------------------------------|--|-----|----|--|-----|----|---|----|---|---|----|---|---|
| Bronze & Brass KITZ Standard |  | | |  | | |  | | |  | | | |
| | PN25R | | | YR | | | RF | | | AKAF | | | |
| Fig | BS21 (JIS B0203) | | | *BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | ASME B1.20.1 | | | |
| End Connection | BS21 (JIS B0203) | | | *BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | ASME B1.20.1 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | | | | 54 | 40 | | | | | | | |
| 1/2 | 15 | 53 | 39 | | 56 | 40 | | 53 | | | 53 | | |
| 3/4 | 20 | 61 | 45 | | 70 | 49 | | 59 | | | 59 | | |
| 1 | 25 | 70 | 50 | | 80 | 58 | | 67 | | | 67 | | |
| 1 1/4 | 32 | 81 | 58 | | 95 | 71 | | 78 | | | 78 | | |
| 1 1/2 | 40 | 91 | 65 | | 110 | 80 | | 84 | | | 84 | | |
| 2 | 50 | 109 | 75 | | 128 | 95 | | 98 | | | 98 | | |
| Body | Cast Bronze | | | Cast Bronze | | | Cast Bronze | | | Cast Bronze | | | |
| Bonnet | Forged Brass | | | Forged Brass | | | Cast Bronze | | | Cast Bronze | | | |
| Stem/Hinge Pin | Brass | | | Copper | | | Spring: P Bronze | | | Spring: P Bronze | | | |
| Disc | Forged Brass | | | Cast Bronze | | | NBR | | | FKM | | | |
| Standard/Approval | | | | WSD: YR<ZH1W3> | | | | | | | | | |
| Service Conditions | 25 bar at 100°C, 10.5 bar at 186°C (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.72MPa(250psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.72MPa(250psi) (Do not use for flammable gas or toxic gas.) | | | |
| Reference Page | P-T Rating : Page BR38 | | | | | | | | | | | | |
| Remarks | | | | EAC: Option, WSD: Option | | | | | | | | | |

*The length of useful threads & the positions of gauge planes are built on KITZ standard.




| Type | Vertical Lift Check | | | Vertical Lift Check | | | Vertical Lift Check | | | Screen for FT | | | |
|---------------------------------|---|-----|---|---|----|---|--|-----|---|---|----|---|---|
| Bronze & Brass KITZ Standard |  | | |  | | |  | | |  | | | |
| | CAF | | | VF | | | FT | | | FTS | | | |
| Fig | **ASME B16.18 | | | BS21 (JIS B0203) | | | BS21 (JIS B0203xB0202) | | | BS21 (JIS B0202) | | | |
| End Connection | **ASME B16.18 | | | BS21 (JIS B0203) | | | BS21 (JIS B0203xB0202) | | | BS21 (JIS B0202) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 61 | | | 37 | | | | | | 25 | | |
| 3/4 | 20 | 76 | | | 44 | | | 48 | | | 29 | | |
| 1 | 25 | 89 | | | 51 | | | 58 | | | 32 | | |
| 1 1/4 | 32 | 97 | | | 62 | | | 62 | | | 35 | | |
| 1 1/2 | 40 | 110 | | | 69 | | | 70 | | | 43 | | |
| 2 | 50 | 132 | | | 82 | | | 80 | | | 50 | | |
| 2 1/2 | 65 | | | | | | | 90 | | | 51 | | |
| 3 | 80 | | | | | | | 100 | | | | | |
| Body | Cast Bronze | | | Cast Bronze | | | Cast Bronze | | | Cast Bronze | | | |
| Bonnet | Cast Bronze | | | | | | | | | | | | |
| Stem | Spring: P Bronze | | | | | | | | | | | | |
| Disc | FKM | | | Special Brass/Cast Bronze | | | NBR | | | Cast Bronze | | | |
| Service Conditions | W.O.G. Non-shock 1.72MPa(250psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 120°C(0.5MPa) (Do not use for flammable gas or toxic gas.) | | | W.O.G. 80°C(0.5MPa) (Do not use for flammable gas or toxic gas.) | | | W.O.G. 80°C(0.5MPa) (Do not use for flammable gas or toxic gas.) | | | |
| Remarks | | | | | | | Threading: Taper for Male, Parallel for Female | | | Threading: Parallel | | | |

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.





| Type | Wafer Check | | | | Y-Pattern Strainer | | | Y-Pattern Strainer | | | Y-Pattern Strainer | | |
|---------------------------------|---|-----|-----|----|--|-----|-------|--|-----|-------|--|-----|-------|
| Bronze & Brass KITZ Standard |  | | | |  | | |  | | |  | | |
| | Dual | | | | SC | | | SC | | | SC | | |
| Fig | 10BWZ | | | | Y | | | AKY | | | CY | | |
| End Connection | Wafer (JIS 10K) | | | | BS21 (JIS B0203) | | | ASME B1.20.1 | | | **JIS B2011/ASME B16.18 | | |
| inch | mm | L | H | D | L | H | ***H1 | L | H | ***H1 | L | H | ***H1 |
| 3/8 | 10 | | | | 70 | 43 | 61 | 70 | 43 | 61 | | | |
| 1/2 | 15 | | | | 80 | 48 | 68 | 80 | 48 | 68 | 80 | 48 | 68 |
| 3/4 | 20 | | | | 100 | 57 | 83 | 100 | 57 | 83 | 105 | 57 | 83 |
| 1 | 25 | | | | 115 | 70 | 105 | 115 | 70 | 105 | 125 | 70 | 105 |
| 1 1/4 | 32 | | | | 135 | 82 | 124 | 135 | 82 | 124 | 145 | 82 | 124 |
| 1 1/2 | 40 | 54 | 132 | 55 | 160 | 98 | 149 | 160 | 98 | 149 | 170 | 98 | 149 |
| 2 | 50 | 56 | 139 | 70 | 195 | 121 | 188 | 195 | 121 | 188 | 210 | 121 | 188 |
| 2 1/2 | 65 | 56 | 146 | 70 | 230 | 149 | 216 | 230 | 149 | 216 | 250 | 149 | 216 |
| 3 | 80 | 59 | 152 | 70 | 240 | 182 | 267 | 240 | 182 | 267 | 280 | 182 | 267 |
| 4 | 100 | 66 | 165 | 70 | | | | | | | | | |
| 5 | 125 | 72 | 183 | 70 | | | | | | | | | |
| 6 | 150 | 78 | 208 | 80 | | | | | | | | | |
| 8 | 200 | 96 | 237 | 80 | | | | | | | | | |
| 10 | 250 | 109 | 289 | 90 | | | | | | | | | |
| 12 | 300 | 145 | 316 | 90 | | | | | | | | | |
| Body | Cast Bronze + NBR | | | | Cast Bronze | | | Cast Bronze | | | Cast Bronze | | |
| Bonnet/Cap/Cover | | | | | Forged Brass | | | Forged Brass | | | Forged Brass | | |
| Hinge Pin/Spring | 304SS | | | | | | | | | | | | |
| Disc/Screen | Brass/Cast Bronze | | | | 304SS | | | 304SS | | | 304SS | | |
| Gland Packing/Gasket | Aramid Fiber Graphite | | | | Gasket: Non Asbestos (V6500) up to 2 ^B , FKM for 2 1/2 ^B & 3 ^B | | | Gasket: Non Asbestos (V6500) up to 2 ^B , FKM for 2 1/2 ^B & 3 ^B | | | Gasket: Non Asbestos (V6500) up to 2 ^B , FKM for 2 1/2 ^B & 3 ^B | | |
| Hand Wheel | Aluminum Die Cast/ZDC | | | | | | | | | | | | |
| Standard/Approval | | | | | RoHS: Y<GS101> up to 1 ^B | | | | | | | | |
| Service Conditions | W.O.G. 80°C(1.4MPa) (Do not use for flammable gas or toxic gas.) | | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) up to 2 ^B (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) up to 2 ^B (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) up to 2 ^B (Do not use for flammable gas or toxic gas.) | | |
| Reference Page | Features: Page BR35 | | | | | | | | | | P-T Rating : Page BR33 | | |
| Remarks | Built-in Bypass Valve, Dual Plate Type | | | | EAC: Option, RoHS: Option | | | EAC: Option | | | JIS B2011 up to 2 ^B | | |





**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.







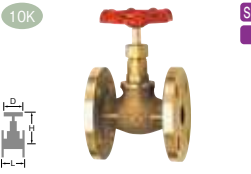





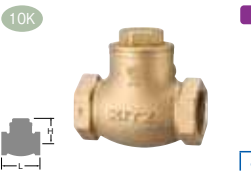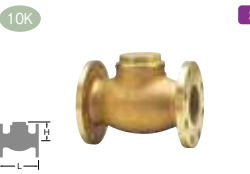



***Height for removing the screen

















| Type | Y-Pattern Strainer | | | | Y-Pattern Strainer | | | Butterfly | | |
|---------------------------------|---|-----|-----|-------|---|-----|-------|--|----|-----|
| Bronze & Brass KITZ Standard |  | | | |  | | |  | | |
| | WSD | | | | WRAS | | | | | |
| Fig | PN16YE | | | | PN25YE | | | FV | | |
| End Connection | BS21 (JIS B0203) | | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | |
| inch | mm | L | H | ***H1 | L | H | ***H1 | L | H | D |
| 1/2 | 15 | 65 | 42 | 56 | 65 | 42 | 56 | 47 | 44 | 85 |
| 3/4 | 20 | 80 | 52 | 72 | 80 | 52 | 72 | 51 | 47 | 85 |
| 1 | 25 | 92 | 60 | 89 | 92 | 60 | 89 | 58 | 50 | 85 |
| 1 1/4 | 32 | 110 | 72 | 107 | 110 | 72 | 107 | 67 | 60 | 110 |
| 1 1/2 | 40 | 122 | 81 | 121 | 122 | 81 | 121 | 73 | 63 | 110 |
| 2 | 50 | 150 | 101 | 150 | 150 | 101 | 150 | 82 | 70 | 110 |
| Body | Cast Bronze | | | | Cast Bronze | | | Forged Brass | | |
| Bonnet/Cap/Cover | Forged Brass | | | | Forged Brass | | | | | |
| Hinge Pin/Spring | | | | | | | | 304SS | | |
| Disc/Screen | 304SS | | | | 304SS | | | 304SS + W-NBR | | |
| Gland Packing/Gasket | Gasket: Non Asbestos (V6500) | | | | Gasket: Non Asbestos (V6500) | | | NBR | | |
| Hand Wheel | | | | | | | | 430SS | | |
| Standard/Approval | WSD: PN16YE<ZH1W4> | | | | WRAS | | | | | |
| Service Conditions | 16 bar at 100°C, 7 bar at 170°C (Do not use for flammable gas or toxic gas.) | | | | 25 bar at 100°C, 10.5 bar at 186°C (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.21MPa(175psi) (Do not use for flammable gas or toxic gas.) | | |
| Reference Page | P-T Rating : Page BR38 | | | | P-T Rating : Page BR38 | | | | | |
| Remarks | WSD: Option | | | | WRAS: Option | | | Balancing Stop Handle Lever | | |

***Height for removing the screen

| Type | Globe | | | Globe | | | Globe | | | Gate | | | |
|------------------------|---|-----|-----|---|-----|-----|---|-----|-----|---|-----|-----|-----|
| Bronze JIS Standard |  | | |  | | |  | | |  | | | |
| | 5K | | | 10K | | | 10K | | | 5K | | | |
| Fig | K | | | J | | | JB | | | M | | | |
| End Connection | JIS B0203 | | | JIS B0203 | | | JIS B2011 | | | JIS B0203 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | | | | 50 | 83 | 50 | | | | | | |
| 3/8 | 10 | 50 | 87 | 55 | 55 | 85 | 55 | | | | | | |
| 1/2 | 15 | 60 | 90 | 60 | 65 | 91 | 60 | 85 | 93 | 60 | 50 | 126 | 60 |
| 3/4 | 20 | 70 | 102 | 70 | 80 | 120 | 80 | 95 | 122 | 80 | 60 | 145 | 60 |
| 1 | 25 | 80 | 112 | 80 | 90 | 135 | 90 | 110 | 135 | 90 | 65 | 169 | 70 |
| 1 1/4 | 32 | 100 | 137 | 90 | 105 | 156 | 100 | 130 | 157 | 100 | 75 | 209 | 90 |
| 1 1/2 | 40 | 110 | 142 | 100 | 120 | 169 | 115 | 150 | 171 | 115 | 85 | 239 | 100 |
| 2 | 50 | 135 | 173 | 115 | 140 | 194 | 135 | 180 | 196 | 135 | 95 | 285 | 115 |
| 2 1/2 | 65 | 160 | 203 | 135 | 180 | 231 | 155 | 210 | 232 | 155 | 115 | 366 | 135 |
| 3 | 80 | 190 | 233 | 155 | 200 | 267 | 180 | 240 | 268 | 180 | 130 | 428 | 155 |
| 4 | 100 | | | | | | | 280 | 323 | 225 | | | |
| Body | CAC406 | | | CAC406 | | | CAC406 | | | CAC406 | | | |
| Bonnet | C3771/CAC406 | | | C3771/CAC406 | | | C3771/CAC406 | | | CAC406 | | | |
| Stem | C3531 | | | C3531 | | | C3531 | | | C3531 | | | |
| Disc | CAC406C/CAC406 | | | CAC406C/CAC406 | | | CAC406C/CAC406 | | | CAC406 | | | |
| Gland Packing | Aramid Fibers Graphite | | | Aramid Fibers Graphite | | | Aramid Fibers Graphite/PTFE for JB 4 th | | | Aramid Fibers Graphite | | | |
| Hand Wheel | Aluminum Die-Cast | | | Aluminum Die-Cast/DI | | | Aluminum Die-Cast/ZDC/DI | | | Aluminum Die-Cast/ZDC | | | |
| Standard/Approval | JIS B2011 except 3/8 th | | | JIS B2011 | | | | | | JIS B2011 | | | |
| Service Conditions | 0.7MPa at -29°C to +120°C, 0.5MPa at 159°C (Do not use for flammable gas or toxic gas.) | | | 1.4MPa at -29°C to +120°C, 1MPa at 185°C (Do not use for flammable gas or toxic gas.) | | | 1.4MPa at -29°C to +120°C, 1MPa at 185°C (Do not use for flammable gas or toxic gas.) | | | 0.7MPa at -29°C to +120°C, 0.5MPa at 134°C (Do not use for flammable gas or toxic gas.) | | | |
| Reference Page | P-T Rating : Page BR37 | | | P-T Rating : Page BR37 | | | P-T Rating : Page BR37 | | | P-T Rating : Page BR37 | | | |
| Remarks | | | | | | | Wall Thickness: KITZ Standard | | | | | | |

| Type | Gate | | | Gate | | | Swing Check | | | Swing Check | | | |
|------------------------|---|-----|-----|---|-----|-----|---|-----|------|---|-----|-----|---|
| Bronze JIS Standard |  | | |  | | |  | | |  | | | |
| | 10K | | | 10K | | | 10K | | | 10K | | | |
| Fig | L | | | LB | | | O | | | OB | | | |
| End Connection | JIS B0203 | | | JIS B2011 | | | JIS B0203 | | | JIS B2040 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | | | | | | | 55 | 38.5 | | | | |
| 1/2 | 15 | 55 | 126 | 60 | | | | 65 | 43 | | 85 | 43 | |
| 3/4 | 20 | 65 | 151 | 70 | 90 | 151 | 70 | 80 | 51.5 | | 95 | 52 | |
| 1 | 25 | 70 | 176 | 80 | 100 | 176 | 80 | 90 | 58.5 | | 110 | 59 | |
| 1 1/4 | 32 | 80 | 219 | 90 | 110 | 219 | 90 | 105 | 67 | | 130 | 67 | |
| 1 1/2 | 40 | 90 | 250 | 100 | 125 | 250 | 100 | 120 | 73.5 | | 150 | 74 | |
| 2 | 50 | 100 | 292 | 115 | 140 | 292 | 115 | 140 | 86 | | 180 | 86 | |
| 2 1/2 | 65 | 120 | 376 | 155 | 170 | 376 | 155 | 180 | 97 | | 210 | 97 | |
| 3 | 80 | 140 | 436 | 180 | 190 | 436 | 180 | 200 | 108 | | 240 | 108 | |
| 4 | 100 | | | | 220 | 327 | 225 | | | | 280 | 127 | |
| Body | CAC406 | | | CAC406 | | | CAC406 | | | CAC406 | | | |
| Bonnet | CAC406 | | | CAC406 | | | C3771/CAC406 | | | C3771/CAC406 | | | |
| Stem | C3531 | | | C3531 | | | CAC406/C3604 | | | CAC406/C3604 | | | |
| Disc | CAC406 | | | CAC406 | | | CAC406 | | | CAC406 | | | |
| Gland Packing | Aramid Fibers Graphite | | | Aramid Fibers Graphite | | | | | | | | | |
| Hand Wheel | Aluminum Die-Cast/ZDC/DI | | | Aluminum Die-Cast/ZDC/DI | | | | | | | | | |
| Standard/Approval | JIS B2011 | | | | | | JIS B2011 | | | | | | |
| Service Conditions | 1.4MPa at -29°C to +120°C, 1MPa at 171°C (Do not use for flammable gas or toxic gas.) | | | 1.4MPa at -29°C to +120°C, 1MPa at 171°C (Do not use for flammable gas or toxic gas.) | | | 1.4MPa at -29°C to +120°C, 1MPa at 185°C (Do not use for flammable gas or toxic gas.) | | | 1.4MPa at -29°C to +120°C, 1MPa at 185°C (Do not use for flammable gas or toxic gas.) | | | |
| Reference Page | P-T Rating : Page BR37 | | | P-T Rating : Page BR37 | | | P-T Rating : Page BR37 | | | P-T Rating : Page BR37 | | | |
| Remarks | | | | Wall Thickness: KITZ Standard | | | | | | Wall Thickness: KITZ Standard | | | |

| Type | Gate | | | Gate | | | Gate | | | Gate | | | | | | | | | |
|---------------------|---|---|---|---|---|---|---|---|---|---|---|---|-----|--------|---|---|--------|---|---|
| Bronze MSS SP-80 |  |  |  |  |  |  |  |  |  |  |  |  | | | | | | | |
| |  |  |  |  | Fig | | | AK125M | | | AK125E | | | AK150E | | | AK150L | | |
| End Connection | | ASME B1.20.1 | | | ASME B1.20.1 | | | ASME B1.20.1 | | | ASME B1.20.1 | | | | | | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | | | | 43 | 86 | 50 | 43 | 86 | 50 | 51 | 137 | 55 | | | | | | |
| 1/2 | 15 | 51 | 129 | 55 | 49 | 93 | 55 | 49 | 98 | 55 | 51 | 137 | 55 | | | | | | |
| 3/4 | 20 | 56 | 155 | 60 | 53 | 110 | 60 | 53 | 114 | 70 | 56 | 157 | 70 | | | | | | |
| 1 | 25 | 66 | 180 | 70 | 61 | 126 | 70 | 61 | 126 | 70 | 66 | 180 | 70 | | | | | | |
| 1 1/4 | 32 | 68 | 216 | 80 | 64 | 145 | 80 | 68 | 145 | 80 | 68 | 216 | 80 | | | | | | |
| 1 1/2 | 40 | 74 | 257 | 90 | 68 | 170 | 90 | 74 | 176 | 90 | 74 | 257 | 90 | | | | | | |
| 2 | 50 | 84 | 296 | 100 | 74 | 189 | 100 | 84 | 201 | 100 | 84 | 296 | 100 | | | | | | |
| 2 1/2 | 65 | 115 | 371 | 135 | | | | | | | 120 | 385 | 155 | | | | | | |
| 3 | 80 | 130 | 432 | 155 | | | | | | | 140 | 432 | 155 | | | | | | |
| Body | B62 | | | B62 | | | B62 | | | B62 | | | | | | | | | |
| Bonnet | B62 | | | B62 | | | B62 | | | B62 | | | | | | | | | |
| Stem | B62 | | | B62 | | | B62 | | | B62 | | | | | | | | | |
| Disc | B62 | | | B62 | | | B62 | | | B62 | | | | | | | | | |
| Gland Packing | Aramid Fibers Graphite | | | Aramid Fibers Graphite | | | Aramid Fibers Graphite | | | Aramid Fibers Graphite | | | | | | | | | |
| Hand Wheel | Aluminum Die-Cast | | | Aluminum Die-Cast | | | Aluminum Die-Cast | | | Aluminum Die-Cast | | | | | | | | | |
| Standard/Approval | MSS SP-80 | | | MSS SP-80 | | | MSS SP-80 | | | MSS SP-80 | | | | | | | | | |
| Service Conditions | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | | | | | |
| Reference Page | P-T Rating : Page BR38 | | | P-T Rating : Page BR38 | | | P-T Rating : Page BR38 | | | P-T Rating : Page BR38 | | | | | | | | | |
| Remarks | EAC: Option | | | EAC: Option | | | EAC: Option | | | EAC: Option | | | | | | | | | |





| Type | Gate | | | Gate | | | Gate | | | Globe | | | | | | | | | |
|---------------------|---|---|---|---|---|---|--|---|---|---|---|---|-----|---------|---|---|--------|---|---|
| Bronze MSS SP-80 |  |  |  |  |  |  |  |  |  |  |  |  | | | | | | | |
| |  |  |  |  | Fig | | | C150L | | | AK150LU | | | AK300LU | | | AK125C | | |
| End Connection | | **ASME B16.18 | | | ASME B1.20.1 | | | ASME B1.20.1 | | | ASME B1.20.1 | | | | | | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | | | | 45 | 108 | 50 | | | | | | | | | | | | |
| 3/8 | 10 | | | | 46 | 108 | 50 | 46 | 125 | 60 | | | | | | | | | |
| 1/2 | 15 | 49 | 137 | 55 | 51 | 137 | 55 | 51 | 149 | 70 | 53 | 76 | 60 | | | | | | |
| 3/4 | 20 | 64 | 157 | 70 | 56 | 157 | 70 | 56 | 173 | 80 | 65 | 98 | 70 | | | | | | |
| 1 | 25 | 76 | 180 | 70 | 66 | 180 | 70 | 66 | 194 | 80 | 77 | 108 | 80 | | | | | | |
| 1 1/4 | 32 | 82 | 216 | 80 | 68 | 216 | 80 | 74 | 228 | 100 | 85 | 137 | 90 | | | | | | |
| 1 1/2 | 40 | 86 | 257 | 90 | 74 | 257 | 90 | 84 | 274 | 115 | 100 | 160 | 100 | | | | | | |
| 2 | 50 | 109 | 296 | 100 | 84 | 297 | 100 | 98 | 313 | 135 | 119 | 180 | 115 | | | | | | |
| 2 1/2 | 65 | | | | | | | | | | 150 | 202 | 135 | | | | | | |
| 3 | 80 | | | | | | | | | | 178 | 246 | 155 | | | | | | |
| Body | B62 | | | B62 | | | B61 | | | B62 | | | | | | | | | |
| Bonnet | B62 | | | B62 | | | B61 | | | B62/C3771 | | | | | | | | | |
| Stem | B62 | | | B62 | | | B62 | | | B61 | | | | | | | | | |
| Disc | B62 | | | B62 | | | B61 | | | B62 | | | | | | | | | |
| Gland Packing | Aramid Fibers Graphite | | | Flex. Graphate & Aluminum | | | Flex. Graphate & Aluminum | | | Aramid Fibers Graphite | | | | | | | | | |
| Hand Wheel | Aluminum Die-Cast | | | Aluminum Die-Cast | | | Aluminum Die-Cast | | | Aluminum Die-Cast | | | | | | | | | |
| Standard/Approval | MSS SP-80 | | | MSS SP-80 | | | MSS SP-80 | | | MSS SP-80 | | | | | | | | | |
| Service Conditions | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 6.89MPa(1000psi), Saturated Steam Pressure 2.07MPa(300psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | | | | | |
| Reference Page | P-T Rating : Page BR33 and BR38 | | | P-T Rating : Page BR38 | | | P-T Rating : Page BR38 | | | P-T Rating : Page BR38 | | | | | | | | | |
| Remarks | EAC: Option | | | EAC: Option | | | | | | EAC: Option | | | | | | | | | |

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.





| Type | Globe | | | | | Globe | | | | | Globe | | | | | Globe | | | | |
|---------------------|---|-----|-----|-----|--|---|-----|-----|--|-----|---|-----|--|-----|-----|---|--|--|--|--|
| Bronze MSS SP-80 | | | | | | | | | | | | | | | | | | | | |
| | AK150D | | | | | C150D | | | | | AK300J | | | | | AK300D | | | | |
| Fig | AK150D | | | | | C150D | | | | | AK300J | | | | | AK300D | | | | |
| End Connection | ASME B1.20.1 | | | | | **ASME B16.18 | | | | | ASME B1.20.1 | | | | | ASME B1.20.1 | | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | L | H | D | | | | |
| 1/4 | 8 | 53 | 109 | 60 | | 58 | 109 | 60 | | 53 | 113 | 60 | | 53 | 113 | 60 | | | | |
| 3/8 | 10 | 55 | 109 | 60 | | 61 | 109 | 60 | | 55 | 113 | 60 | | 55 | 113 | 60 | | | | |
| 1/2 | 15 | 64 | 116 | 70 | | 72 | 116 | 70 | | 64 | 126 | 80 | | 64 | 126 | 80 | | | | |
| 3/4 | 20 | 78 | 136 | 90 | | 95 | 136 | 90 | | 78 | 139 | 90 | | 78 | 139 | 90 | | | | |
| 1 | 25 | 90 | 149 | 100 | | 112 | 149 | 100 | | 90 | 159 | 100 | | 90 | 157 | 100 | | | | |
| 1 1/4 | 32 | 105 | 173 | 115 | | 126 | 173 | 115 | | 105 | 187 | 115 | | 105 | 187 | 115 | | | | |
| 1 1/2 | 40 | 120 | 182 | 115 | | 145 | 182 | 115 | | 120 | 195 | 135 | | 120 | 192 | 135 | | | | |
| 2 | 50 | 145 | 209 | 135 | | 180 | 209 | 135 | | 145 | 224 | 155 | | 145 | 221 | 155 | | | | |
| 2 1/2 | 65 | 170 | 247 | 155 | | 205 | 247 | 155 | | | | | | | | | | | | |
| 3 | 80 | 200 | 275 | 180 | | 244 | 275 | 180 | | | | | | | | | | | | |
| 4 | 100 | 245 | 298 | 225 | | 312 | 298 | 225 | | | | | | | | | | | | |
| Body | B62 | | | | | B62 | | | | | B61 | | | | | B61 | | | | |
| Bonnet | B62 | | | | | B62 | | | | | B61 | | | | | B61 | | | | |
| Stem | B62 | | | | | B62 | | | | | B61 | | | | | B61 | | | | |
| Disc | G/F PTFE | | | | | G/F PTFE | | | | | B61 | | | | | G/F PTFE | | | | |
| Gland Packing | Aramid Fibers Graphite/PTFE | | | | | Aramid Fibers Graphite/PTFE | | | | | Flex. Graphate & Aluminum | | | | | Flex. Graphate & Aluminum | | | | |
| Hand Wheel | Alminum Die-Cast/DI | | | | | Alminum Die-Cast/DI | | | | | Alminum Die-Cast | | | | | Alminum Die-Cast | | | | |
| Standard/Approval | MSS SP-80 | | | | | MSS SP-80 | | | | | MSS SP-80 | | | | | MSS SP-80 | | | | |
| Service Conditions | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), Saturated Steam Pressure 2.07MPa(300psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), Saturated Steam Pressure 2.07MPa(300psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Reference Page | P-T Rating : Page BR38 | | | | | P-T Rating : Page BR33 and BR38 | | | | | P-T Rating : Page BR38 | | | | | P-T Rating : Page BR38 | | | | |
| Remarks | EAC: Option | | | | | EAC: Option | | | | | EAC: Option | | | | | EAC: Option | | | | |

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.

| Type | Y-Pattern Swing Check | | | | | Y-Pattern Swing Check | | | | | Y-Pattern Swing Check | | | | | Y-Pattern Swing Check | | | | |
|---------------------|---|-----|-----|---|--|---|-----|---|--|-----|---|---|--|-----|----|---|--|--|--|--|
| Bronze MSS SP-80 | | | | | | | | | | | | | | | | | | | | |
| | AKYR | | | | | CYR | | | | | AK150YR | | | | | AK300YR | | | | |
| Fig | AKYR | | | | | CYR | | | | | AK150YR | | | | | AK300YR | | | | |
| End Connection | ASME B1.20.1 | | | | | **ASME B16.18 | | | | | ASME B1.20.1 | | | | | ASME B1.20.1 | | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | L | H | D | | | | |
| 3/8 | 10 | | | | | | | | | 54 | 39 | | | | | | | | | |
| 1/2 | 15 | 56 | 40 | | | 67 | 38 | | | 60 | 39 | | | 60 | 42 | | | | | |
| 3/4 | 20 | 70 | 49 | | | 86 | 47 | | | 72 | 49 | | | 72 | 51 | | | | | |
| 1 | 25 | 80 | 58 | | | 105 | 56 | | | 84 | 58 | | | 84 | 61 | | | | | |
| 1 1/4 | 32 | 95 | 71 | | | 121 | 69 | | | 99 | 70 | | | 99 | 74 | | | | | |
| 1 1/2 | 40 | 110 | 80 | | | 137 | 77 | | | 113 | 79 | | | 113 | 83 | | | | | |
| 2 | 50 | 128 | 95 | | | 170 | 92 | | | 131 | 95 | | | 131 | 98 | | | | | |
| 2 1/2 | 65 | 156 | 114 | | | 194 | 111 | | | 162 | 114 | | | | | | | | | |
| 3 | 80 | 184 | 131 | | | 222 | 127 | | | 186 | 132 | | | | | | | | | |
| Body | B62 | | | | | B62 | | | | | B62 | | | | | B61 | | | | |
| Bonnet | C3771 | | | | | C3771 | | | | | C3771 | | | | | B61 | | | | |
| Stem/Hinge Pin | Copper | | | | | Copper | | | | | Copper | | | | | Copper | | | | |
| Disc | B62 | | | | | B62 | | | | | B62 | | | | | B61 | | | | |
| Standard/Approval | MSS SP-80 | | | | | MSS SP-80 | | | | | MSS SP-80 | | | | | MSS SP-80 | | | | |
| Service Conditions | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.07MPa(300psi), Saturated Steam Pressure 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), Saturated Steam Pressure 2.07MPa(300psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Reference Page | P-T Rating : Page BR38 | | | | | P-T Rating : Page BR33 and BR38 | | | | | P-T Rating : Page BR38 | | | | | P-T Rating : Page BR38 | | | | |
| Remarks | EAC: Option | | | | | EAC: Option | | | | | EAC: Option | | | | | EAC: Option | | | | |
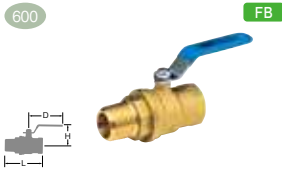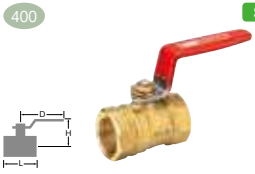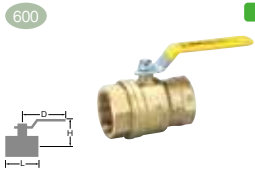
| Type | Ball | | | | | Ball | | | Ball | | | Ball | | |
|------------------------|--|----|----|-----|--|---|----|-----|--|----|-----|---|-----|-----|
| Brass Z Ball Series |  | | | | |  | | |  | | |  | | |
| | 600 FB | | | | | 400 SB | | | 600 FB | | | 600 FB | | |
| Fig | ZO | | | | | ZS | | | ZET | | | SZA | | |
| End Connection | BS21 (JIS B0203) | | | | | *BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | |
| inch | mm | L | H | D | | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | 59 | 37 | 70 | | 42 | 42 | 72 | 42 | 34 | 55 | 42 | 37 | 70 |
| 3/8 | 10 | 60 | 37 | 70 | | 43 | 42 | 72 | 42 | 34 | 55 | 42 | 37 | 70 |
| 1/2 | 15 | 74 | 40 | 80 | | 51 | 44 | 87 | 53 | 40 | 70 | 53 | 40 | 80 |
| 3/4 | 20 | 80 | 44 | 80 | | 59 | 48 | 87 | 60 | 44 | 70 | 60 | 44 | 80 |
| 1 | 25 | 94 | 50 | 110 | | 71 | 61 | 116 | 72 | 54 | 100 | 72 | 50 | 110 |
| 1 1/4 | 32 | | | | | 78 | 65 | 116 | 84 | 59 | 100 | 84 | 55 | 110 |
| 1 1/2 | 40 | | | | | 88 | 71 | 117 | 92 | 75 | 130 | 92 | 65 | 150 |
| 2 | 50 | | | | | 99 | 76 | 117 | 110 | 82 | 130 | 110 | 72 | 150 |
| 2 1/2 | 65 | | | | | | | | | | | 138 | 101 | 200 |
| 3 | 80 | | | | | | | | | | | 167 | 113 | 300 |
| 4 | 100 | | | | | | | | | | | 193 | 131 | 300 |
| Body & Cap | Forged Brass | | | | | Forged Brass | | | Forged Brass | | | Forged Brass/Cast Bronze | | |
| Stem | Brass + Ni Plated | | | | | Brass + Cr Plated | | | Brass + Ni Plated | | | Brass + Ni Plated | | |
| Ball | Forged Brass + Ni Plated | | | | | Forged Brass+Cr Plated/304SS | | | Forged Brass+Cr Plated/304SS | | | Forged Brass+Ni-Cr Plated/304SS | | |
| Ball Seat | PTFE | | | | | PTFE | | | PTFE | | | PTFE | | |
| Gland Packing/O ring | FKM | | | | | G/F PTFE | | | FKM | | | FKM | | |
| Handle | 430SS | | | | | 430SS | | | CS + Zn Plated | | | CS + Zn Plated/DI | | |
| Bore | Full Bore | | | | | Standard Bore | | | Full Bore | | | Full Bore | | |
| Service Conditions | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi), Saturated Steam Pressure 0.98MPa(142psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi)/4 ^B : 2.76MPa(400psi) , W.O.G 150°C 1.03MPa(150psi)/4 ^B : 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | |
| Remarks | BS21: Male & Female Full Bore, Double O-ring | | | | | Standard Bore | | | Full Bore, Double O-ring Butterfly (Wing) Handle | | | Full Bore, Double O-ring | | |

*The length of useful threads & the positions of gauge planes are built on KITZ standard.
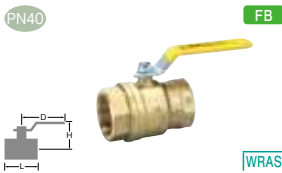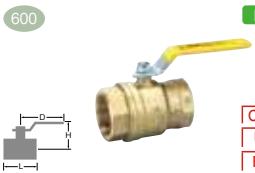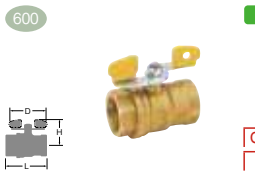
| Type | Ball | | | | | Ball | | | Ball | | | Ball | | |
|------------------------|---|-----|----|-----|--|---|-----|-----|---|-----|-----|---|----|-----|
| Brass Z Ball Series |  | | | | |  | | |  | | |  | | |
| | PN40 FB | | | | | 600 FB | | | 600 FB | | | 600 FB | | |
| Fig | PN40SZA | | | | | AKSZA | | | CSZA | | | AKSZAW | | |
| End Connection | BS21 (JIS B0203) | | | | | ASME B1.20.1 | | | **ASME B16.18 | | | ASME B1.20.1 | | |
| inch | mm | L | H | D | | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | | | | | 42 | 37 | 70 | | | | 42 | 34 | 55 |
| 3/8 | 10 | | | | | 42 | 37 | 70 | 46 | 37 | 70 | 42 | 34 | 55 |
| 1/2 | 15 | 53 | 40 | 80 | | 53 | 40 | 80 | 54 | 40 | 80 | 53 | 40 | 70 |
| 3/4 | 20 | 60 | 43 | 80 | | 60 | 44 | 80 | 73 | 44 | 80 | 60 | 44 | 70 |
| 1 | 25 | 72 | 50 | 110 | | 72 | 50 | 110 | 88 | 50 | 110 | 72 | 53 | 100 |
| 1 1/4 | 32 | 84 | 55 | 110 | | 84 | 55 | 110 | 100 | 55 | 110 | 84 | 58 | 100 |
| 1 1/2 | 40 | 92 | 65 | 150 | | 92 | 65 | 150 | 115 | 65 | 150 | 92 | 74 | 130 |
| 2 | 50 | 110 | 72 | 150 | | 110 | 72 | 150 | 140 | 72 | 150 | 110 | 81 | 130 |
| 2 1/2 | 65 | | | | | 138 | 101 | 200 | 164 | 101 | 200 | | | |
| 3 | 80 | | | | | 167 | 113 | 300 | 187 | 113 | 300 | | | |
| 4 | 100 | | | | | 193 | 131 | 300 | | | | | | |
| Body & Cap | Forged Brass | | | | | Forged Brass/Cast Bronze | | | Forged Brass | | | Forged Brass | | |
| Stem | Brass + Ni Plated | | | | | Brass + Ni Plated | | | Brass + Ni Plated | | | Brass + Ni Plated | | |
| Ball | Forged Brass + Cr Plated | | | | | Forged Brass+Sn-Ni Plated/304SS | | | Forged Brass+Sn-Ni Plated/304SS | | | Forged Brass+Sn-Ni Plated/304SS | | |
| Ball Seat | PTFE | | | | | PTFE | | | PTFE | | | PTFE | | |
| Gland Packing/O ring | FKM | | | | | FKM | | | FKM | | | FKM | | |
| Handle | CS + Zn Plated | | | | | CS + Zn Plated/DI | | | CS + Zn Plated/DI | | | CS + Zn Plated/DI | | |
| Bore | Full Bore | | | | | Full Bore | | | Full Bore | | | Full Bore | | |
| Standard/Approval | WRAS:(WR)PN40SZA | | | | | CSA, UL, FM | | | UL, FM | | | CSA, UL | | |
| Service Conditions | 40 bar for W.O.G. Non-shock, 10 bar at 150°C (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi)/4 ^B : 2.76MPa(400psi) , W.O.G 150°C 1.03MPa(150psi)/4 ^B : 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi)/4 ^B : 2.76MPa(400psi) , W.O.G 150°C 1.03MPa(150psi)/4 ^B : 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi)/4 ^B : 2.76MPa(400psi) , W.O.G 150°C 1.03MPa(150psi)/4 ^B : 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | |
| Reference Page | | | | | | | | | P-T Rating : Page BR33 | | | | | |
| Remarks | Full Bore, Double O-ring WRAS: Option | | | | | Full Bore, Double O-ring | | | Full Bore, Double O-ring | | | Full Bore, Double O-ring Butterfly (Wing) Handle | | |

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.

| | | | | | |
|------------------------|--|-----|----|-----|--|
| Type | Ball | | | | |
| Brass Z Ball Series | 600 | | FB | | |
| | | | | | |
| Fig | CSZAW | | | | |
| End Connection | **ASME B16.18 | | | | |
| inch | mm | L | H | D | |
| 3/8 | 10 | 46 | 34 | 55 | |
| 1/2 | 15 | 54 | 40 | 70 | |
| 3/4 | 20 | 73 | 44 | 70 | |
| 1 | 25 | 88 | 53 | 100 | |
| 1 1/4 | 32 | 100 | 58 | 100 | |
| 1 1/2 | 40 | 115 | 74 | 130 | |
| 2 | 50 | 140 | 81 | 130 | |
| Body & Cap | Forged Brass | | | | |
| Stem | Brass + Ni Plated | | | | |
| Ball | Forged Brass+Sn-Ni Plated/304SS | | | | |
| Ball Seat | PTFE | | | | |
| Gland Packing/O ring | FKM | | | | |
| Handle | CS + Zn Plated/DI | | | | |
| Bore | Full Bore | | | | |
| Standard/Approval | UL | | | | |
| Service Conditions | W.O.G. Non-shock 4.14MPa(600psi)/4 ^B : 2.76MPa(400psi) , W.O.G 150°C 1.03MPa(150psi)/4 ^B : 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Reference Page | P-T Rating : Page BR33 | | | | |
| Remarks | Full Bore, Double O-ring Butterfly (Wing) Handle | | | | |

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.





| | | | | | | | | | | | | | | | |
|---------------------------------|--|-----|-----|-----|--|--|-----|-----|--|-----|-----|--|----|--|--|
| Type | Ball | | | | | Ball | | | Ball | | | Ball | | | |
| Bronze & Brass T Ball Series | 400 | | SB | | | 400 | | SB | | | 400 | | SB | | |
| | | | | | | | | | | | | | | | |
| Fig | T | | | | | AKT | | | TT | | | TG | | | |
| End Connection | *BS21 (JIS B0203) | | | | | ASME B1.20.1 | | | *BS21 (JIS B0203) | | | *BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | | |
| 1/4 | 8 | 50 | 39 | 60 | | 50 | 39 | 60 | | 50 | 34 | 65 | | | |
| 3/8 | 10 | 50 | 39 | 60 | | 50 | 39 | 60 | | 50 | 34 | 65 | | | |
| 1/2 | 15 | 65 | 39 | 80 | | 65 | 39 | 80 | | 65 | 37 | 80 | | | |
| 3/4 | 20 | 68 | 42 | 80 | | 68 | 42 | 80 | | 68 | 40 | 80 | | | |
| 1 | 25 | 79 | 46 | 110 | | 79 | 46 | 110 | | 79 | 46 | 90 | | | |
| 1 1/4 | 32 | 86 | 51 | 110 | | 86 | 51 | 110 | | 86 | 52 | 105 | | | |
| 1 1/2 | 40 | 96 | 56 | 110 | | 96 | 56 | 110 | | 96 | 57 | 105 | | | |
| 2 | 50 | 109 | 65 | 140 | | 109 | 65 | 140 | | 109 | 71 | 120 | | | |
| 2 1/2 | 65 | 127 | 85 | 200 | | 127 | 85 | 200 | | | | | | | |
| 3 | 80 | 153 | 105 | 300 | | 153 | 105 | 300 | | | | | | | |
| 4 | 100 | 179 | 126 | 400 | | 179 | 126 | 400 | | | | | | | |
| Body & Cap | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | Forged Brass | | | Forged Brass/Cast Bronze | | | |
| Stem | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | |
| Ball | Forged Brass+Ni-Cr Plated/304SS | | | | | Forged Brass+Ni-Cr Plated/304SS | | | Forged Brass+Ni-Cr Plated/304SS | | | Forged Brass+Ni-Cr Plated/304SS | | | |
| Ball Seat | PTFE | | | | | PTFE | | | PTFE | | | PTFE | | | |
| Gland Packing/O ring | FKM | | | | | FKM | | | FKM | | | NBR | | | |
| Handle | 430SS/DI | | | | | ZDC | | | 430SS/DI | | | 430SS/DI | | | |
| Bore | Standard Bore | | | | | Standard Bore | | | Standard Bore | | | Standard Bore | | | |
| Standard/Approval | RoHS: T<GS101> up to 1 ^B | | | | | | | | | | | | | | |
| Service Conditions | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | |
| Remarks | RoHS:Option Standard Bore, Double O-ring | | | | | Standard Bore, Double O-ring | | | T Handle Standard Bore, Double O-ring | | | For Gas Service Standard Bore, Double O-ring | | | |

*The length of useful threads & the positions of gauge planes are built on KITZ standard. (1 1/4^B & above)





| Type | Ball | | | Ball | | | Ball | | | Ball | | | |
|---------------------------------|--|----|----|--|-----|-----|--|------|----|--|------|----|-----|
| Bronze & Brass T Ball Series | | | | | | | | | | | | | |
| Fig | TO | | | TM | | | TK | | | AKTK | | | |
| End Connection | BS21 (JIS B0203) | | | *BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | ASME B1.20.1 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/8 | | | | | | | | 32 | 30 | 60 | | | |
| 1/4 | 8 | 59 | 39 | 60 | | | | 39 | 30 | 60 | 39 | 30 | 60 |
| 3/8 | 10 | 60 | 39 | 60 | 56 | 45 | 60 | 44 | 35 | 70 | 44 | 35 | 70 |
| 1/2 | 15 | 74 | 39 | 80 | 60 | 45 | 80 | 56.5 | 38 | 85 | 56.5 | 38 | 85 |
| 3/4 | 20 | 80 | 42 | 80 | 68 | 49 | 80 | 59 | 42 | 85 | 59 | 42 | 85 |
| 1 | 25 | 94 | 46 | 110 | 80 | 55 | 110 | 71 | 47 | 100 | 71 | 47 | 100 |
| 1 1/4 | 32 | | | | 86 | 60 | 110 | 78 | 52 | 100 | 78 | 52 | 100 |
| 1 1/2 | 40 | | | | 101 | 65 | 110 | 83 | 63 | 125 | 83 | 63 | 125 |
| 2 | 50 | | | | 117 | 75 | 140 | 100 | 70 | 125 | 100 | 70 | 125 |
| 2 1/2 | 65 | | | | 136 | 91 | 200 | | | | | | |
| 3 | 80 | | | | 160 | 105 | 300 | | | | | | |
| Body & Cap | Forged Brass | | | Forged Brass | | | Forged Brass | | | Forged Brass | | | |
| Stem | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | |
| Ball | Forged Brass+Ni-Cr Plated/304SS | | | Forged Brass+Ni-Cr Plated/304SS | | | Forged Brass+Cr Plated | | | Forged Brass+Cr Plated | | | |
| Ball Seat | PTFE | | | PTFE | | | G/F PTFE | | | G/F PTFE | | | |
| Gland Packing/O ring | FKM | | | FKM | | | G/F PTFE | | | G/F PTFE | | | |
| Handle | 430SS/DI | | | 430SS/DI | | | 430SS | | | 430SS | | | |
| Bore | Standard Bore | | | Standard Bore | | | Reduced Bore | | | Reduced Bore | | | |
| Standard/Approval | | | | | | | RoHS: TK<GS101> up to 1 ^B | | | | | | |
| Service Conditions | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G. 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G. 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | |
| Remarks | BS21: Male & Female | | | Split Type | | | RoHS:Option Reduced Bore, One-piece Body | | | Reduced Bore, One-piece Body | | | |





*The length of useful threads & the positions of gauge planes are built on KITZ standard. (1 1/4^B & above)

| Type | Ball | | | Ball | | | Ball | | | Ball | | | |
|---------------------------------|--|------|----|--|------|----|---|-----|------|--|-----|-----|-----|
| Bronze & Brass T Ball Series | | | | | | | | | | | | | |
| Fig | TKT | | | TKW | | | TFJ | | | TL | | | |
| End Connection | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/8 | | 32 | 22 | 35 | 32 | 24 | 35 | | | | | | |
| 1/4 | 8 | 39 | 22 | 35 | 39 | 24 | 35 | | | | | | |
| 3/8 | 10 | 44 | 26 | 40 | 44 | 29 | 40 | | | | | | |
| 1/2 | 15 | 56.5 | 29 | 60 | 56.5 | 34 | 55 | | | | | | |
| 3/4 | 20 | 59 | 33 | 60 | 59 | 37 | 55 | 62 | 53 | 65 | 56 | 75 | 80 |
| 1 | 25 | 71 | 46 | 76 | 71 | 41 | 69 | 73 | 58 | 65 | 65 | 79 | 80 |
| 1 1/4 | 32 | 78 | 45 | 76 | | | | 85 | 67 | 90 | 78 | 83 | 110 |
| 1 1/2 | 40 | 83 | 51 | 100 | | | | 98 | 72 | 90 | 86 | 98 | 110 |
| 2 | 50 | 100 | 58 | 100 | | | | 108 | 90 | 110 | 96 | 102 | 110 |
| 2 1/2 | | | | | | | | 124 | 98.5 | 110 | 109 | 109 | 140 |
| Body & Cap | Forged Brass | | | Forged Brass | | | Forged Brass/Cast Bronze | | | Cast Bronze | | | |
| Stem | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | |
| Ball | Forged Brass+Cr Plated | | | Forged Brass+Cr Plated | | | Forged Brass+Ni-Cr Plated | | | CF8 (SCS13A) | | | |
| Ball Seat | G/F PTFE | | | G/F PTFE | | | PTFE | | | PTFE | | | |
| Gland Packing/O ring | G/F PTFE | | | G/F PTFE | | | FKM | | | FKM | | | |
| Handle | ZDC | | | ZDC | | | ZDC | | | 430SS | | | |
| Bore | Reduced Bore | | | Reduced Bore | | | Full Bore | | | Standard Bore | | | |
| Standard/Approval | RoHS: TKT<GS101> up to 1 ^B JWWA E-2 up to 1 1/2 ^B | | | RoHS: TKW<GS101> up to 1 ^B | | | | | | | | | |
| Service Conditions | W.O.G. Non-shock 4.14MPa(600psi), W.O.G. 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G. 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.03MPa(150psi) , W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | |
| Remarks | RoHS:Option, T Handle Reduced Bore, One-piece Body | | | RoHS:Option, Wing Handle Reduced Bore, One-piece Body | | | Full Bore, Double O-ring Locking Device | | | Standard Bore, Double O-ring For Thermal Insulation | | | |

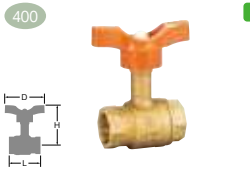
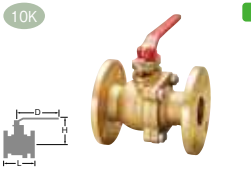
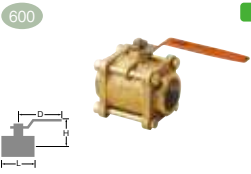
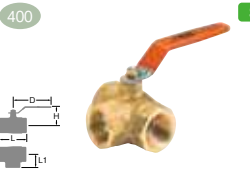
| Type | Ball | | | Ball | | | Ball | | | 3-Way Ball (2-seat, L-port) | | | | |
|---------------------------------|---|-----|-----|--|-----|-----|--|-----|----|--|-----|-----|-----|------|
| Bronze & Brass T Ball Series |  | | |  | | |  | | |  | | | | |
| | 400 SB | | | 10K FB | | | 600 FB | | | 400 SB | | | | |
| Fig | TLT | | | TB | | | AK3TM | | | TN | | | | |
| End Connection | BS21 (JIS B0203) | | | JIS B2240 | | | BS21 (JIS B0203) | | | *BS21 (JIS B0203) | | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L1 |
| 1/4 | 8 | | | | | | | 49 | 39 | 82 | 40 | 30 | 60 | 20 |
| 3/8 | 10 | | | | | | | 49 | 39 | 82 | 46 | 35 | 70 | 23 |
| 1/2 | 15 | 56 | 79 | 82 | 110 | 85 | 130 | 61 | 42 | 82 | 67 | 44 | 80 | 33.5 |
| 3/4 | 20 | 65 | 83 | 82 | 120 | 88 | 130 | 70 | 51 | 100 | 68 | 49 | 80 | 34 |
| 1 | 25 | 78 | 90 | 94 | 130 | 95 | 160 | 83 | 59 | 130 | 79 | 55 | 110 | 39.5 |
| 1 1/4 | 32 | 86 | 105 | 94 | 140 | 98 | 160 | 99 | 64 | 130 | 89 | 59 | 110 | 44.5 |
| 1 1/2 | 40 | 96 | 109 | 94 | 165 | 115 | 230 | 117 | 73 | 150 | 100 | 64 | 110 | 50 |
| 2 | 50 | 109 | 124 | 120 | 180 | 121 | 230 | 139 | 80 | 150 | 115 | 74 | 140 | 57.5 |
| 2 1/2 | 65 | | | | 190 | 152 | 400 | | | | 138 | 91 | 200 | 69 |
| 3 | 80 | | | | 200 | 161 | 400 | | | | 166 | 105 | 300 | 83 |
| 4 | 100 | | | | 230 | 190 | 460 | | | | | | | |
| Body & Cap | Cast Bronze | | | Cast Bronze | | | Forged Brass | | | Forged Brass/Cast Bronze | | | | |
| Stem | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | | |
| Ball | 304SS | | | Forged Brass+Ni-Cr Plated/304SS | | | Forged Brass+Sn-Ni Plated | | | Forged Brass+Cr Plated | | | | |
| Ball Seat | PTFE | | | PTFE | | | PTFE | | | PTFE | | | | |
| Gland Packing/O ring | FKM | | | FKM | | | PTFE | | | G/F PTFE up to 3/8 ^B & FKM | | | | |
| Handle | Reinforced nylon | | | DI | | | CS | | | 430SS/DI | | | | |
| Bore | Standard Bore | | | Full Bore | | | Full Bore | | | Standard Bore | | | | |
| Standard/Approval | | | | | | | | | | RoHS: TN<GS101> up to 1 ^B JWWA E-2 up to 1 1/2 ^B | | | | |
| Service Conditions | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 80°C 1.96MPa(296psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.4MPa(14KGf/ CM2), W.O.G. 150°C 0.69MPa(7KGf/ CM2) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Reference Page | | | | | | | | | | Port Orientation : Page TECH1 | | | | |
| Remarks | Standard Bore, Double O-ring, T Handle, For Thermal Insulation | | | For Gas Service, Full Bore, Double O-ring | | | Full Bore, 3-piece Body w/Mounting Pad | | | Standard Bore, Double O-ring, L-port, RoHS&JWWA:Option | | | | |

*The length of useful threads & the positions of gauge planes are built on KITZ standard. (1 1/4^B & above)

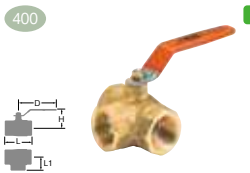
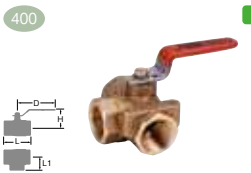
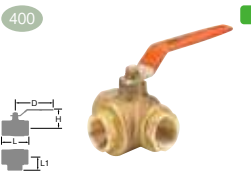

| Type | 3-Way Ball (2-seat, L-port) | | | | | 3-Way Ball (2-seat, L-port) | | | | | 3-Way Ball (4-seat, L/T-port) | | | | | 3-Way Ball (2-seat, L/T-port) | | | | | |
|---------------------------------|--|-----|-----|-----|------|--|----|-----|------|-----|--|-----|------|-----|----|--|------|---|---|---|----|
| Bronze & Brass T Ball Series |  | | | | |  | | | | |  | | | | |  | | | | | |
| | 400 SB | | | | | 400 SB | | | | | 400 SB | | | | | 400 SB | | | | | |
| Fig | AKTN | | | | | AKTNP | | | | | T4T/T4L | | | | | TV2T/TV2L | | | | | |
| End Connection | ASME B1.20.1 | | | | | ASME B1.20.1 | | | | | BS21 (JIS B0203) | | | | | BS21 (JIS B0203) | | | | | |
| inch | mm | L | H | D | L1 | L | H | D | L1 | L | H | D | L1 | L | H | D | L1 | L | H | D | L1 |
| 1/4 | 8 | 40 | 30 | 60 | 20 | | | | | | | | | 40 | 31 | 60 | 20 | | | | |
| 3/8 | 10 | 46 | 35 | 70 | 23 | | | | | | | | | 46 | 35 | 80 | 23 | | | | |
| 1/2 | 15 | 67 | 44 | 80 | 33.5 | 67 | 44 | 80 | 33.5 | 70 | 52 | 130 | 35 | 67 | 45 | 100 | 33.5 | | | | |
| 3/4 | 20 | 68 | 49 | 80 | 34 | 68 | 49 | 80 | 34 | 85 | 56 | 130 | 42.5 | 68 | 50 | 100 | 34 | | | | |
| 1 | 25 | 79 | 55 | 110 | 39.5 | 79 | 55 | 110 | 39.5 | 100 | 63 | 150 | 50 | 79 | 56 | 130 | 39.5 | | | | |
| 1 1/4 | 32 | 89 | 59 | 110 | 44.5 | 89 | 59 | 110 | 44.5 | 115 | 68 | 150 | 57.5 | 89 | 60 | 130 | 44.5 | | | | |
| 1 1/2 | 40 | 100 | 64 | 110 | 50 | 100 | 64 | 110 | 50 | 130 | 94.5 | 230 | 65 | 100 | 66 | 130 | 50 | | | | |
| 2 | 50 | 115 | 74 | 140 | 57.5 | 115 | 74 | 140 | 57.5 | 150 | 102 | 230 | 75 | 115 | 75 | 150 | 57.5 | | | | |
| 2 1/2 | 65 | 138 | 91 | 200 | 69 | | | | | | | | | | | | | | | | |
| 3 | 80 | 166 | 105 | 300 | 83 | | | | | | | | | | | | | | | | |
| Body & Cap | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | | Body: Cast Bronze/Cap: Forged Brass | | | | | Body: Cast Bronze/Cap: Forged Brass | | | | | |
| Stem | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | | |
| Ball | Forged Brass+Cr Plated | | | | | Forged Brass+Cr Plated | | | | | Forged Brass+Cr Plated | | | | | Forged Brass+Cr Plated | | | | | |
| Ball Seat | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | | |
| Gland Packing/O ring | G/F PTFE up to 3/8 ^B & FKM | | | | | G/F PTFE up to 3/8 ^B & FKM | | | | | FKM | | | | | G/F PTFE up to 3/8 ^B & FKM | | | | | |
| Handle | 430SS/DI | | | | | 430SS/DI | | | | | 430SS/DI | | | | | 430SS | | | | | |
| Bore | Standard Bore | | | | | Standard Bore | | | | | Standard Bore | | | | | Standard Bore | | | | | |
| Standard/Approval | RoHS: TN<GS101> up to 1 ^B | | | | | RoHS: TN<GS101> up to 1 ^B | | | | | | | | | | | | | | | |
| Service Conditions | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | | |
| Reference Page | Port Orientation : Page TECH1 | | | | | Port Orientation : Page TECH1 | | | | | Port Orientation : Page TECH1 | | | | | Port Orientation : Page TECH2 | | | | | |
| Remarks | Standard Bore, Double O-ring, L-port, | | | | | Standard Bore, Double O-ring, L-port, with Mounting Pad | | | | | Standard Bore, Double O-ring L-port or T-port | | | | | Standard Bore, Double O-ring L-port or T-port, Vertical Type | | | | | |

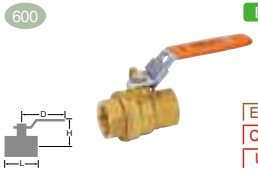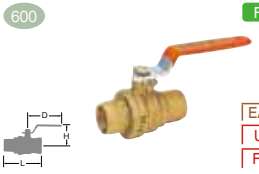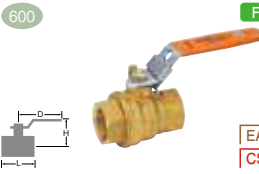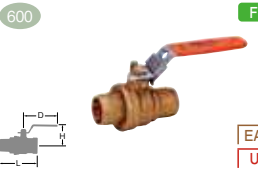
| Type | Ball | | | | | Ball | | | Ball | | | Ball | | |
|---------------------------------|---|-----|----|-----|-----|---|-----|---|---|----|-----|---|----|-----|
| Bronze & Brass T Ball Series |  | | | | |  | | |  | | |  | | |
| | EAC CSA UL | | | | | EAC UL FM | | | EAC CSA | | | EAC UL | | |
| Fig | AKTAFLL | | | | | CTAF | | | AKTFLL | | | CTFLL | | |
| End Connection | ASME B1.20.1 | | | | | **ASME B16.18 | | | ASME B1.20.1 | | | **ASME B16.18 | | |
| inch | mm | L | H | D | | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | 41 | 39 | 81 | | | | | 41 | 35 | 81 | | | |
| 3/8 | 10 | 42 | 39 | 81 | 46 | 39 | 82 | | 42 | 35 | 81 | | | |
| 1/2 | 15 | 53 | 42 | 81 | 54 | 42 | 82 | | 53 | 38 | 81 | 54 | 38 | 81 |
| 3/4 | 20 | 60 | 51 | 100 | 73 | 51 | 100 | | 60 | 47 | 100 | 73 | 47 | 100 |
| 1 | 25 | 72 | 58 | 130 | 88 | 59 | 130 | | 72 | 54 | 130 | 88 | 54 | 130 |
| 1 1/4 | 32 | 82 | 64 | 130 | 100 | 64 | 130 | | 82 | 59 | 130 | 100 | 59 | 130 |
| 1 1/2 | 40 | 92 | 73 | 150 | 115 | 73 | 150 | | 92 | 67 | 150 | 115 | 67 | 150 |
| 2 | 50 | 105 | 80 | 150 | 140 | 80 | 150 | | 105 | 75 | 150 | 140 | 75 | 150 |
| 2 1/2 | 65 | | | | 163 | 108 | 200 | | | | | | | |
| 3 | 80 | | | | 187 | 122 | 300 | | | | | | | |
| Body & Cap | Forged Brass | | | | | Forged Brass/Cast Bronze | | | Forged Brass | | | Forged Brass | | |
| Stem | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | | Dezincification Resistant Brass | | |
| Ball | Forged Brass + Cr Plated | | | | | Forged Brass/304SS | | | Forged Brass + Cr Plated | | | Forged Brass + Cr Plated | | |
| Ball Seat | PTFE | | | | | PTFE | | | PTFE | | | PTFE | | |
| Gland Packing/O ring | PTFE | | | | | PTFE | | | FKM+NBR | | | FKM+NBR | | |
| Handle | CS + Zn Plated | | | | | CS + Zn Plated | | | CS + Zn Plated | | | CS + Zn Plated | | |
| Bore | Full Bore | | | | | Full Bore | | | Full Bore | | | Full Bore | | |
| Standard/Approval | CSA, UL | | | | | UL, FM | | | CSA | | | UL | | |
| Service Conditions | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | |
| Reference Page | | | | | | P-T Rating : Page BR33 | | | | | | P-T Rating : Page BR33 | | |
| Remarks | Latch Lock Handle EAC: Option | | | | | EAC: Option | | | Latch Lock Handle EAC: Option | | | Latch Lock Handle EAC: Option | | |









**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.

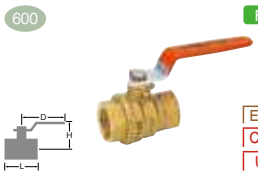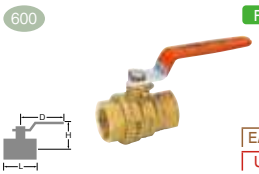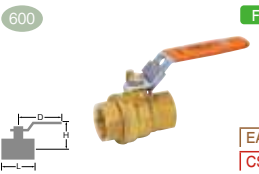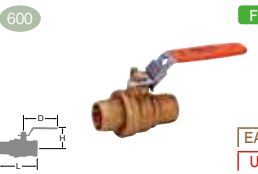







| Type | Ball | | | | | Ball | | | Ball | | | Ball | | |
|---------------------------------|---|-----|----|-----|-----|---|-----|---|---|----|-----|---|----|-----|
| Bronze & Brass T Ball Series |  | | | | |  | | |  | | |  | | |
| | EAC CSA UL | | | | | EAC UL | | | EAC CSA | | | EAC UL | | |
| Fig | AKTAFM | | | | | CTAFM | | | AKTFMLL | | | CTFMLL | | |
| End Connection | ASME B1.20.1 | | | | | **ASME B16.18 | | | ASME B1.20.1 | | | **ASME B16.18 | | |
| inch | mm | L | H | D | | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | 41 | 39 | 82 | | | | | 41 | 35 | 81 | | | |
| 3/8 | 10 | 42 | 39 | 82 | 46 | 39 | 82 | | 42 | 35 | 81 | | | |
| 1/2 | 15 | 53 | 42 | 82 | 54 | 42 | 82 | | 53 | 38 | 81 | 54 | 38 | 81 |
| 3/4 | 20 | 60 | 51 | 100 | 73 | 51 | 100 | | 60 | 47 | 100 | 73 | 47 | 100 |
| 1 | 25 | 72 | 58 | 130 | 88 | 59 | 130 | | 72 | 54 | 130 | 88 | 54 | 130 |
| 1 1/4 | 32 | 82 | 64 | 130 | 100 | 64 | 130 | | 82 | 59 | 130 | 100 | 59 | 130 |
| 1 1/2 | 40 | 92 | 73 | 150 | 115 | 73 | 150 | | 92 | 67 | 150 | 115 | 67 | 150 |
| 2 | 50 | 105 | 80 | 150 | 140 | 80 | 150 | | 105 | 75 | 150 | 140 | 75 | 150 |
| Body/Cap | Forged Brass | | | | | Forged Brass | | | Forged Brass | | | Forged Brass | | |
| Stem | 316SS | | | | | 316SS | | | 316SS | | | 316SS | | |
| Ball | 316SS | | | | | 316SS | | | 316SS | | | 316SS | | |
| Ball Seat | PTFE | | | | | PTFE | | | PTFE | | | PTFE | | |
| Gland Packing/O ring | PTFE | | | | | PTFE | | | FKM+NBR | | | FKM+NBR | | |
| Handle | CS + Zn Plated | | | | | CS + Zn Plated | | | CS + Zn Plated | | | CS + Zn Plated | | |
| Bore | Full Bore | | | | | Full Bore | | | Full Bore | | | Full Bore | | |
| Standard/Approval | CSA, UL | | | | | UL | | | CSA | | | UL | | |
| Service Conditions | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | |
| Reference Page | | | | | | P-T Rating : Page BR33 | | | | | | P-T Rating : Page BR33 | | |
| Remarks | 316SS Trim EAC: Option | | | | | 316SS Trim EAC: Option | | | Latch Lock Handle 316SS Trim, EAC: Option | | | Latch Lock Handle EAC: Option | | |

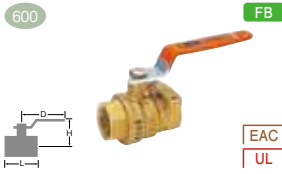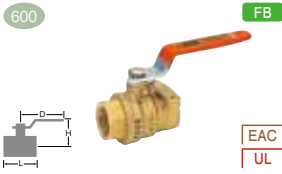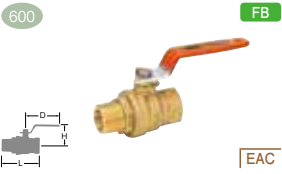**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.





| Type | Ball | | | | | Ball | | | | | Ball | | | | | Ball | | | | |
|---------------------------------|---|-----|-----|-----|--|---|-----|-----|--|----|---|-----|--|-----|----|---|--|--|--|--|
| Bronze & Brass T Ball Series |  | | | | |  | | | | |  | | | | |  | | | | |
| | EAC UL | | | | | EAC UL | | | | | EAC | | | | | EAC | | | | |
| Fig | AKTAFP | | | | | AKTAFPM | | | | | AKTAFO | | | | | AKTAFU | | | | |
| End Connection | ASME B1.20.1 | | | | | ASME B1.20.1 | | | | | ASME B1.20.1 | | | | | ASME B1.20.1 | | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | L | H | D | | | | |
| 1/4 | 8 | 41 | 39 | 82 | | 41 | 39 | 81 | | 52 | 39 | 82 | | 52 | 39 | 82 | | | | |
| 3/8 | 10 | 42 | 39 | 82 | | 42 | 39 | 81 | | 53 | 39 | 82 | | 52 | 39 | 82 | | | | |
| 1/2 | 15 | 53 | 42 | 82 | | 53 | 42 | 81 | | 66 | 42 | 82 | | 63 | 42 | 82 | | | | |
| 3/4 | 20 | 60 | 51 | 100 | | 60 | 51 | 100 | | 73 | 51 | 100 | | 75 | 51 | 100 | | | | |
| 1 | 25 | 72 | 59 | 130 | | 72 | 59 | 130 | | 88 | 59 | 130 | | 88 | 59 | 130 | | | | |
| 1 1/4 | 32 | 82 | 64 | 130 | | 82 | 64 | 130 | | | | | | 98 | 64 | 130 | | | | |
| 1 1/2 | 40 | 92 | 74 | 150 | | 92 | 73 | 150 | | | | | | 113 | 73 | 150 | | | | |
| 2 | 50 | 105 | 81 | 150 | | 105 | 80 | 150 | | | | | | 126 | 80 | 150 | | | | |
| 2 1/2 | 65 | 135 | 109 | 200 | | 135 | 108 | 200 | | | | | | | | | | | | |
| 3 | 80 | 156 | 123 | 300 | | 156 | 122 | 300 | | | | | | | | | | | | |
| 4 | 100 | 192 | 141 | 300 | | 192 | 140 | 300 | | | | | | | | | | | | |
| Body & Cap | Forged Brass/Cast Bronze | | | | | Forged Brass/Cast Bronze | | | | | Forged Brass | | | | | Forged Brass | | | | |
| Stem | Dezincification Resistant Brass | | | | | 316SS | | | | | Dezincification Resistant Brass | | | | | Dezincification Resistant Brass | | | | |
| Ball | Forged Brass/304SS | | | | | 316SS | | | | | Fprged Brass + Cr Plated | | | | | Fprged Brass + Cr Plated | | | | |
| Ball Seat | PTFE | | | | | Reinforced PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Gland Packing/O ring | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Handle | CS + Zn Plated | | | | | CS + Zn Plated | | | | | CS + Zn Plated | | | | | CS + Zn Plated | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Standard/Approval | UL | | | | | UL | | | | | | | | | | | | | | |
| Service Conditions | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Remarks | With Mounting Pad EAC: Option | | | | | Latch Lock Handle, With mounting pad, 316SS Trim, EAC: Option | | | | | Male & Female EAC: Option | | | | | Single Union Gasket : FKM, EAC: Option | | | | |

| Type | Ball | | | | | | |
|---------------------------------|---|-----|----|---|-----|--|--|
| Bronze & Brass T Ball Series |  | | | | | | |
| | EAC | | | | | | |
| Fig | AKTAFS | | | | | | |
| End Connection | ASME B1.20.1 | | | | | | |
| inch | mm | L | H | E | D | | |
| 1/4 | 8 | 41 | 39 | 4 | 81 | | |
| 3/8 | 10 | 42 | 39 | 4 | 81 | | |
| 1/2 | 15 | 53 | 42 | 4 | 81 | | |
| 3/4 | 20 | 60 | 51 | 4 | 100 | | |
| 1 | 25 | 72 | 59 | 4 | 130 | | |
| 1 1/4 | 32 | 82 | 64 | 4 | 130 | | |
| 1 1/2 | 40 | 92 | 73 | 4 | 150 | | |
| 2 | 50 | 105 | 80 | 4 | 150 | | |
| Body & Cap | Forged Brass | | | | | | |
| Stem | Dezincification Resistant Brass | | | | | | |
| Ball | Fprged Brass + Cr Plated | | | | | | |
| Ball Seat | PTFE | | | | | | |
| Gland Packing/O ring | PTFE | | | | | | |
| Handle | CS + Zn Plated | | | | | | |
| Bore | Full Bore | | | | | | |
| Service Conditions | W.O.G. Non-shock 1.38MPa(200psi), -18°C to +93°C(not freezing) (Do not use for flammable gas or toxic gas.) | | | | | | |
| Remarks | Exhaust Hole, Latch Lock Handle Gasket for 2 nd : NBR, EAC: Option | | | | | | |




| Type | Globe | | | Gate | | | Gate | | | Swing Check | | | |
|-------------------------------------|---|----------|---|---|---------------------|---|--|-----------------|---|---|-----|---|---|
| Lead Free Bronze & Brass KEEPALLOY® |  | UB IS |  |  | SB/SOB IS NRS |  |  | SB IS NRS |  |  | SC |  | |
| Fig | GN | | | HN | | | WN | | | RN | | | |
| End Connection | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | | | | | | | | | | 53 | 39 | |
| 1/2 | 15 | 57 | 87 | 60 | 45 | 80 | 50 | 55 | 104 | 60 | 60 | 39 | |
| 3/4 | 20 | 66 | 102 | 70 | 50 | 90 | 55 | 65 | 112 | 70 | 70 | 45 | |
| 1 | 25 | 76 | 113 | 80 | 57 | 105 | 60 | 70 | 135 | 80 | 80 | 52 | |
| 1 1/4 | 32 | 88 | 138 | 90 | 61 | 118 | 70 | 80 | 157 | 90 | 92 | 62 | |
| 1 1/2 | 40 | 100 | 154 | 100 | 67 | 135 | 80 | 90 | 175 | 100 | 102 | 67 | |
| 2 | 50 | 120 | 183 | 115 | 74 | 159 | 90 | 100 | 201 | 120 | 122 | 79 | |
| 2 1/2 | 65 | | | | 90 | 202 | 115 | | | | 150 | 91 | |
| 3 | 80 | | | | 100 | 223 | 135 | | | | | | |
| 4 | 100 | | | | 121 | 280 | 155 | | | | | | |
| Body | CAC911 | | | CAC911 | | | CAC911 | | | CAC911 | | | |
| Bonnet/Cap/Cover | C6803 | | | CAC911 | | | CAC911 | | | C6803/Forged Brass | | | |
| Stem/Hinge Pin | C6803 | | | C6803 | | | C6803 | | | C1100 | | | |
| Disc | G/F PTFE | | | C6803/CAC911 | | | CAC911 | | | C6803/Forged Brass | | | |
| Gland Packing/O ring | Aramid Fibers Graphite | | | Aramid Fibers Graphite | | | NBR | | | | | | |
| Hand Wheel | Aluminum Die-Cast | | | Aluminum Die-Cast/ZDC | | | C3771BE | | | | | | |
| Standard/Approval | JWWA E-1 | | | JWWA E-1 | | | JWWA E-1 | | | JWWA E-464 | | | |
| Service Conditions | Stream Water up to 100°C 1.18MPa | | | Stream Water up to 100°C 1.18MPa | | | Stream Water up to 80°C 1.4MPa, Pulsating Water up to 80°C 1.0MPa | | | Stream Water up to 100°C 1.18MPa | | | |
| Remarks | | | | | | | Buried Type, Brass Hand Wheel | | | | | | |

| Type | Swing Check | | | Vertical Lift Check | | | Wafer Check | | | Globe | | | |
|-------------------------------------|---|-----|---|---|----|---|--|------|---|---|-------------|---|-----|
| Lead Free Bronze & Brass KEEPALLOY® |  | SC |  |  | |  |  | Dual |  |  | SB/BB RS |  | |
| Fig | CRN | | | RFN | | | 10BWZN | | | JN | | | |
| End Connection | **JIS B2011 | | | BS21 (JIS B0203) | | | Wafer (JIS 10K) | | | JIS B0203 | | | |
| inch | mm | L | H | D | L | S | L | H | D | L | H | D | |
| 1/4 | 8 | | | | | | | | | 50 | 83 | 50 | |
| 3/8 | 10 | 56 | 39 | | | | | | | 55 | 85 | 55 | |
| 1/2 | 15 | 67 | 39 | | 53 | 28 | | | | 65 | 91 | 60 | |
| 3/4 | 20 | 89 | 45 | | 59 | 34 | | | | 80 | 120 | 80 | |
| 1 | 25 | 104 | 52 | | 67 | 41 | | | | 90 | 135 | 90 | |
| 1 1/4 | 32 | 120 | 62 | | 78 | 50 | | | | 105 | 156 | 100 | |
| 1 1/2 | 40 | 134 | 67 | | 84 | 57 | | 54 | 132 | 55 | 120 | 169 | 115 |
| 2 | 50 | 164 | 79 | | 98 | 70 | | 56 | 139 | 70 | 140 | 194 | 135 |
| 2 1/2 | 65 | | | | | | | 56 | 146 | 70 | | | |
| 3 | 80 | | | | | | | 59 | 152 | 70 | | | |
| 4 | 100 | | | | | | | 66 | 165 | 70 | | | |
| 5 | 125 | | | | | | | 72 | 183 | 70 | | | |
| 6 | 150 | | | | | | | 78 | 208 | 80 | | | |
| 8 | 200 | | | | | | | 96 | 237 | 80 | | | |
| Body | CAC911 | | | CAC911 | | | CAC911+NBR | | | CAC911 | | | |
| Bonnet/Cap/Cover | C6803/Forged Brass | | | CAC911 | | | | | | CAC911 | | | |
| Hinge Pin/Spring | C1100 | | | Spring: P Bronze(C519W-H) | | | 304SS | | | C6803 | | | |
| Disc/Screen | C6803/Forged Brass | | | FKM | | | CAC911 | | | C6803/CAC911 | | | |
| Gland Packing/Gasket | | | | | | | Aramid Fiber Graphite | | | Aramid Fiber Graphite | | | |
| Hand Wheel | | | | | | | Aluminum Die-Cast/DI | | | Aluminum Die-Cast/DI | | | |
| Standard/Approval | JWWA E-464 | | | JWWA F-68 | | | JWWA E-628 | | | JIS B2011 | | | |
| Service Conditions | Stream Water up to 100°C 1.18MPa | | | Stream Water up to 85°C 1.4MPa, Pulsating Water up to 85°C 1.0MPa | | | Stream Water up to 80°C 1.4MPa, Pulsating Water up to 80°C 1.0MPa | | | Stream Water up to 100°C 1.4MPa, Pulsating Water up to 100°C 1.0MPa | | | |
| Reference Page | P-T Rating : Page BR33 | | | | | | Features: Page BR41 | | | | | | |
| Remarks | | | | | | | Built-in Bypass Valve, Dual Plate Type | | | | | | |

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.





| Type | Gate | | | | | Gate | | | | | Gate | | | | | Gate | | | | | |
|---|---|-----|-----|-----|--|---|-----|-----|-----|--|--|-----|-----|-----|--|--|-----|-----|-----|--|--|
| Lead Free Bronze & Brass KEEPALLOY® |  | | | | |  | | | | |  | | | | |  | | | | | |
| | JIS | | | | | JIS | | | | | JIS | | | | | JIS | | | | | |
| Fig | MN | | | | | CMN | | | | | LN | | | | | CLN | | | | | |
| End Connection | JIS B0203 | | | | | **JIS B2011 | | | | | JIS B0203 | | | | | **JIS B2011 | | | | | |
| inch | L | H | D | | | L | H | D | | | L | H | D | | | L | H | D | | | |
| 1/2 | 15 | 50 | 126 | 60 | | | 50 | 126 | 60 | | | 55 | 126 | 60 | | | 50 | 126 | 60 | | |
| 3/4 | 20 | 60 | 145 | 60 | | | 65 | 145 | 60 | | | 65 | 151 | 70 | | | 65 | 151 | 70 | | |
| 1 | 25 | 65 | 169 | 70 | | | 75 | 169 | 70 | | | 70 | 176 | 80 | | | 75 | 176 | 80 | | |
| 1 1/4 | 32 | 75 | 209 | 90 | | | 80 | 209 | 90 | | | 80 | 219 | 90 | | | 82 | 219 | 90 | | |
| 1 1/2 | 40 | 85 | 239 | 100 | | | 88 | 239 | 100 | | | 90 | 250 | 100 | | | 92 | 250 | 100 | | |
| 2 | 50 | 95 | 285 | 115 | | | 108 | 285 | 115 | | | 100 | 292 | 115 | | | 110 | 292 | 115 | | |
| 2 1/2 | 65 | 115 | 366 | 135 | | | | | | | | 120 | 376 | 155 | | | | | | | |
| 3 | 80 | 130 | 428 | 155 | | | | | | | | 140 | 436 | 180 | | | | | | | |
| Body | CAC911 | | | | | CAC911 | | | | | CAC911 | | | | | CAC911 | | | | | |
| Bonnet | CAC911 | | | | | CAC911 | | | | | CAC911 | | | | | CAC911 | | | | | |
| Stem | C6803 | | | | | C6803 | | | | | C6803 | | | | | C6803 | | | | | |
| Disc | CAC911/C6803 | | | | | CAC911/C6803 | | | | | CAC911 | | | | | CAC911 | | | | | |
| Gland Packing | Aramid Fibers Graphite/PTFE | | | | | Aramid Fibers Graphite/PTFE | | | | | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | | |
| Hand Wheel | Aluminum Die-Cast/ZDC | | | | | Aluminum Die-Cast/ZDC | | | | | Aluminum Die-Cast/ZDC/DI | | | | | Aluminum Die-Cast/ZDC/DI | | | | | |
| Standard/Approval | JIS B2011 | | | | | JIS B2011 | | | | | JIS B2011 | | | | | JIS B2011 | | | | | |
| Service Conditions | Stream Water up to 100°C 0.7MPa, Pulsating Water up to 100°C 0.5MPa | | | | | Stream Water up to 100°C 0.7MPa, Pulsating Water up to 100°C 0.5MPa | | | | | Stream Water up to 100°C 1.4MPa, Pulsating Water up to 100°C 1.0MPa | | | | | Stream Water up to 100°C 1.4MPa for up to 1", 1.2MPa for 1 1/4" & over, Pulsating Water up to 100°C 1.0MPa for up to 1", 0.8MPa for 1 1/4" & over | | | | | |
| Reference Page | | | | | | P-T Rating : Page BR33 | | | | | | | | | | P-T Rating : Page BR33 | | | | | |

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.


| Type | Swing Check | | | | | Y-Pattern Swing Check | | | | | Y-Pattern Swing Check | | | | |
|---|---|-----|------|--|--|---|-----|-------|--|--|--|-----|-------|--|--|
| Lead Free Bronze & Brass KEEPALLOY® |  | | | | |  | | | | |  | | | | |
| | JIS | | | | | JWWA | | | | | JWWA | | | | |
| Fig | ON | | | | | YNK | | | | | CYNK | | | | |
| End Connection | JIS B0203 | | | | | JIS B0203 | | | | | **JIS B2011 | | | | |
| inch | L | H | D | | | L | H | ***H1 | | | L | H | ***H1 | | |
| 3/8 | 10 | 55 | 38.5 | | | | | | | | | | | | |
| 1/2 | 15 | 65 | 43 | | | 80 | 50 | 68 | | | 80 | 51 | 68 | | |
| 3/4 | 20 | 80 | 51.5 | | | 100 | 59 | 83 | | | 105 | 59 | 83 | | |
| 1 | 25 | 90 | 58.5 | | | 115 | 71 | 105 | | | 125 | 72 | 105 | | |
| 1 1/4 | 32 | 105 | 67 | | | 135 | 84 | 124 | | | 145 | 84 | 124 | | |
| 1 1/2 | 40 | 120 | 73.5 | | | 160 | 100 | 149 | | | 170 | 100 | 149 | | |
| 2 | 50 | 140 | 86 | | | 195 | 123 | 188 | | | 210 | 123 | 188 | | |
| Body | CAC911 | | | | | CAC911 | | | | | CAC911 | | | | |
| Bonnet/Cap/Cover | C6803 | | | | | C6803 | | | | | C6803 | | | | |
| Stem/Hinge Pin | Copper | | | | | | | | | | | | | | |
| Disc/Screen | CAC911 | | | | | 304SS | | | | | 304SS | | | | |
| O ring | | | | | | FKM | | | | | FKM | | | | |
| Standard/Approval | | | | | | JWWA Z-49 | | | | | JWWA Z-49 | | | | |
| Service Conditions | Stream Water up to 100°C 1.4MPa, Pulsating Water up to 100°C 1.0MPa | | | | | Stream Water up to 85°C 1.4MPa, Pulsating Water up to 85°C 1.0MPa | | | | | Stream Water up to 85°C 1.4MPa, Pulsating Water up to 85°C 1.0MPa | | | | |
| Reference Page | | | | | | | | | | | P-T Rating : Page BR33 | | | | |
| Remarks | | | | | | 40 mesh | | | | | 40 mesh | | | | |





**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.

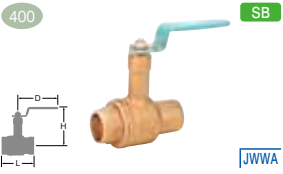***Height for removing the screen


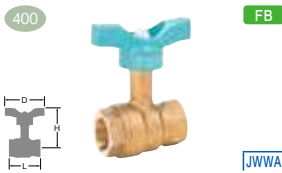


| Type | Ball | | | | | Ball | | | Ball | | | Ball | | |
|-------------------------------------|---|-----|-----|-----|--|---|-----|-----|--|-----|-----|---|-----|-----|
| Lead Free Bronze & Brass KEEPALLOY® |  | | | | |  | | |  | | |  | | |
| Fig | TLN | | | | | TLNT | | | CTLN | | | TLNF | | |
| End Connection | BS21 (JIS B0203) | | | | | BS21 (JIS B0203) | | | **JIS B2011 | | | BS21 (JIS B0203) | | |
| inch | mm | L | H | D | | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 56 | 75 | 80 | | 56 | 79 | 82 | 58 | 75 | 80 | 56 | 75 | 80 |
| 3/4 | 20 | 65 | 79 | 80 | | 65 | 83 | 82 | 73 | 79 | 80 | 65 | 79 | 80 |
| 1 | 25 | 78 | 83 | 110 | | 78 | 90 | 94 | 88 | 83 | 110 | 77 | 85 | 110 |
| 1 1/4 | 32 | 86 | 98 | 110 | | 86 | 105 | 94 | 99 | 98 | 110 | 90 | 102 | 110 |
| 1 1/2 | 40 | 96 | 102 | 110 | | 96 | 109 | 94 | 114 | 102 | 110 | 98 | 110 | 140 |
| 2 | 50 | 109 | 109 | 140 | | 109 | 124 | 120 | 135 | 109 | 140 | 119 | 118 | 140 |
| Body & Cap | CAC911 | | | | | CAC911 | | | CAC911 | | | CAC911 | | |
| Stem | C6803 | | | | | C6803 | | | C6803 | | | 304SS | | |
| Ball | 304SS | | | | | 304SS | | | 304SS | | | 304SS | | |
| Ball Seat | PTFE | | | | | PTFE | | | PTFE | | | PTFE | | |
| Gland Packing/O ring | FKM | | | | | FKM | | | FKM | | | FKM | | |
| Handle | 430SS | | | | | Reinforced Nylon | | | 430SS | | | 430SS | | |
| Bore | Standard Bore | | | | | Standard Bore | | | Standard Bore | | | Full Bore | | |
| Standard/Approval | JWWA E-1 | | | | | JWWA E-1 | | | JWWA E-1 | | | JWWA E-1 | | |
| Service Conditions | Stream Water up to 85°C 1.4MPa, Pulsating Water up to 85°C 1.0MPa | | | | | Stream Water up to 85°C 1.4MPa, Pulsating Water up to 85°C 1.0MPa | | | Stream Water up to 85°C 1.4MPa, Pulsating Water up to 85°C 1.0MPa | | | Stream Water up to 85°C 1.4MPa, Pulsating Water up to 85°C 1.0MPa | | |
| Reference Page | | | | | | | | | P-T Rating : Page BR33 | | | | | |
| Remarks | Standard Bore, Double O-ring For Thermal Insulation | | | | | Standard Bore, Double O-ring T Handle, For Thermal Insulation | | | Standard Bore, Double O-ring For Thermal Insulation | | | Full Bore, Double O-ring For Thermal Insulation | | |

**Solder jointed end valve should not be used in service where the temperature of line fluid is higher than the softening point of the solder.





| Type | Ball | | | | |
|-------------------------------------|---|-----|-----|-----|--|
| Lead Free Bronze & Brass KEEPALLOY® |  | | | | |
| Fig | TLNFT | | | | |
| End Connection | BS21 (JIS B0203) | | | | |
| inch | mm | L | H | D | |
| 1/2 | 15 | 56 | 80 | 82 | |
| 3/4 | 20 | 65 | 84 | 82 | |
| 1 | 25 | 77 | 93 | 94 | |
| 1 1/4 | 32 | 90 | 110 | 94 | |
| 1 1/2 | 40 | 98 | 125 | 120 | |
| 2 | 50 | 119 | 134 | 120 | |
| Body & Cap | CAC911 | | | | |
| Stem | 304SS | | | | |
| Ball | 304SS | | | | |
| Ball Seat | PTFE | | | | |
| Gland Packing/O ring | FKM | | | | |
| Handle | Reinforced Nylon | | | | |
| Bore | Full Bore | | | | |
| Standard/Approval | JWWA E-1 | | | | |
| Service Conditions | Stream Water up to 85°C 1.4MPa, Pulsating Water up to 85°C 1.0MPa | | | | |
| Remarks | Full Bore, Double O-ring T Handle, For Thermal Insulation | | | | |

| Type | Gate | | | | | Gate | | | | | Gate | | | | | Swing Check | | | | |
|--|---|----|-----|----|----|---|----|-----|-----|----|---|----|---|---|---|---|--|--|--|--|
| Lead Free Bronze & Brass NSF61-G |  | | | | |  | | | | |  | | | | |  | | | | |
| | 125 | | | | | 125 | | | | | 125 | | | | | 125 | | | | |
| Fig | AKFSN | | | | | AKHN | | | | | CHN | | | | | AKRN | | | | |
| End Connection | ASME B1.20.1 | | | | | ASME B1.20.1 | | | | | **ASME B16.18 | | | | | ASME B1.20.1 | | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D | | | | |
| 1/2 | 15 | 42 | 75 | 50 | 45 | 80 | 50 | 46 | 80 | 50 | 60 | 39 | | | | | | | | |
| 3/4 | 20 | 47 | 86 | 55 | 50 | 90 | 55 | 61 | 90 | 55 | 70 | 45 | | | | | | | | |
| 1 | 25 | 50 | 97 | 60 | 57 | 105 | 60 | 72 | 105 | 60 | 80 | 52 | | | | | | | | |
| 1 1/4 | 32 | 60 | 117 | 70 | 61 | 118 | 70 | 78 | 118 | 70 | 92 | 62 | | | | | | | | |
| 1 1/2 | 40 | 63 | 126 | 80 | 67 | 135 | 80 | 87 | 135 | 80 | 102 | 67 | | | | | | | | |
| 2 | 50 | 72 | 154 | 90 | 74 | 159 | 90 | 102 | 159 | 90 | 122 | 79 | | | | | | | | |
| Body | Forged Brass | | | | | CAC911 | | | | | CAC911 | | | | | CAC911 | | | | |
| Bonnet/Cap | Forged Brass | | | | | CAC911 | | | | | CAC911 | | | | | Forged Brass | | | | |
| Stem/Hinge Pin | Forged Brass | | | | | Forged Brass | | | | | Forged Brass | | | | | Copper | | | | |
| Disc | Forged Brass | | | | | Forged Brass/CAC911 | | | | | | | | | | Forged Brass | | | | |
| Gland Packing | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | | Aramid Fibers Graphite | | | | | | | | | |
| Hand Wheel | Aluminum Die-Cast | | | | | Aluminum Die-Cast | | | | | Aluminum Die-Cast | | | | | | | | | |
| Standard/Approval | NSF | | | | | NSF | | | | | NSF | | | | | NSF | | | | |
| Service Conditions | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Reference Page | | | | | | | | | | | P-T Rating : Page BR33 | | | | | | | | | |


**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.

| Type | Swing Check | | | | | Y-Pattern Swing Check | | | | | Y-Pattern Swing Check | | | | | Y-Pattern Swing Check | | | | |
|--|---|-----|----|---|-----|---|---|-----|----|---|---|----|---|---|---|---|--|--|--|--|
| Lead Free Bronze & Brass NSF61-G |  | | | | |  | | | | |  | | | | |  | | | | |
| | 125 | | | | | 125 | | | | | 125 | | | | | 125 | | | | |
| Fig | CRN | | | | | AKYRN | | | | | CYRN | | | | | AKYRNT | | | | |
| End Connection | **ASME B16.18 | | | | | ASME B1.20.1 | | | | | **ASME B16.18 | | | | | ASME B1.20.1 | | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D | | | | |
| 1/2 | 15 | 67 | 39 | | 56 | 40 | | 67 | 38 | | 56 | 40 | | | | | | | | |
| 3/4 | 20 | 89 | 45 | | 70 | 49 | | 86 | 47 | | 70 | 49 | | | | | | | | |
| 1 | 25 | 104 | 52 | | 80 | 58 | | 105 | 56 | | 80 | 58 | | | | | | | | |
| 1 1/4 | 32 | 120 | 62 | | 95 | 71 | | 121 | 69 | | 95 | 71 | | | | | | | | |
| 1 1/2 | 40 | 134 | 67 | | 110 | 80 | | 137 | 77 | | 110 | 80 | | | | | | | | |
| 2 | 50 | 164 | 79 | | 128 | 95 | | 170 | 92 | | 128 | 95 | | | | | | | | |
| Body | CAC911 | | | | | B584 C89530 | | | | | B584 C89530 | | | | | B584 C89530 | | | | |
| Bonnet/Cap | Forged Brass | | | | | B283 C46750 | | | | | B283 C46750 | | | | | B283 C46750 | | | | |
| Stem/Hinge Pin | Copper | | | | | Copper (CDA No. C11000) | | | | | Copper (CDA No. C11000) | | | | | Copper (CDA No. C11000) | | | | |
| Disc | Forged Brass | | | | | B584 C89530 | | | | | B584 C89530 | | | | | PTFE | | | | |
| Standard/Approval | NSF | | | | | MSS SP-80, NSF | | | | | MSS SP-80, NSF | | | | | MSS SP-80, NSF | | | | |
| Service Conditions | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Reference Page | P-T Rating : Page BR33 | | | | | | | | | | P-T Rating : Page BR33 | | | | | | | | | |





**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.

| Type | Y Swing Check | | | | Vertical Lift Check | | | Vertical Lift Check | | | Globe | | |
|--|---|-----|----|---|---|---|---|--|---|---|---|-----|-----|
| Lead Free Bronze & Brass NSF61-G |  | | | |  | | |  | | |  | | |
| | 125 SC | | | | 150 NSF | | | 150 NSF | | | 125 SB RS | | |
| Fig | C125CN | | | | AKAFN | | | CAFN | | | AK125CN | | |
| End Connection | ASME B16.18 | | | | ASME B1.20.1 | | | **ASME B16.18 | | | ASME B1.20.1 | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 67 | 38 | | 53 | | | 61 | | | 53 | 76 | 60 |
| 3/4 | 20 | 86 | 47 | | 59 | | | 76 | | | 65 | 98 | 70 |
| 1 | 25 | 105 | 56 | | 67 | | | 89 | | | 77 | 108 | 80 |
| 1 1/4 | 32 | 121 | 69 | | 78 | | | 97 | | | 85 | 137 | 90 |
| 1 1/2 | 40 | 137 | 77 | | 84 | | | 110 | | | 100 | 160 | 100 |
| 2 | 50 | 170 | 92 | | 98 | | | 132 | | | 119 | 180 | 115 |
| Body | B584 C89530 | | | | CAC911 | | | CAC911 | | | CAC911 | | |
| Bonnet/Cap | B283 C46750 | | | | CAC911 | | | CAC911 | | | Forged Brass | | |
| Stem/Hinge Pin | Copper (CDA No. C11000) | | | | Spring: P Bronze | | | Spring: P Bronze | | | Forged Brass | | |
| Disc | PTFE | | | | FKM | | | FKM | | | Forged Brass | | |
| Gland Packing | | | | | | | | | | | Aramid Fibers Graphite | | |
| Hand Wheel | | | | | | | | | | | Aluminum Die-Cast | | |
| Standard/Approval | MSS SP-80, NSF | | | | NSF | | | NSF | | | NSF | | |
| Service Conditions | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | | W.O.G. Non-shock 1.72MPa(250psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.72MPa(250psi) (Do not use for flammable gas or toxic gas.) | | | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | |
| Reference Page | P-T Rating : Page BR33 | | | | Features : Page BR33 | | | P-T Rating, Features : Page BR33 | | | | | |





**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.

| Type | Globe | | | |
|--|---|-----|-----|-----|
| Lead Free Bronze & Brass NSF61-G |  | | | |
| | 125 SB RS | | | |
| Fig | C125CN | | | |
| End Connection | **ASME B16.18 | | | |
| inch | mm | L | H | D |
| 1/2 | 15 | 64 | 76 | 60 |
| 3/4 | 20 | 84 | 98 | 70 |
| 1 | 25 | 100 | 108 | 80 |
| 1 1/4 | 32 | 115 | 137 | 90 |
| 1 1/2 | 40 | 130 | 160 | 100 |
| 2 | 50 | 155 | 180 | 115 |
| Body | CAC911 | | | |
| Bonnet | Forged Brass | | | |
| Stem | Forged Brass | | | |
| Disc | Forged Brass | | | |
| Gland Packing | Aramid Fibers Graphite | | | |
| Hand Wheel | Aluminum Die-Cast | | | |
| Standard/Approval | NSF | | | |
| Service Conditions | W.O.G. Non-shock 1.38MPa(200psi), Saturated Steam Pressure 0.86MPa(125psi) (Do not use for flammable gas or toxic gas.) | | | |
| Reference Page | P-T Rating : Page BR33 | | | |





**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.
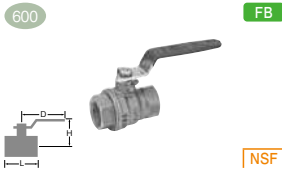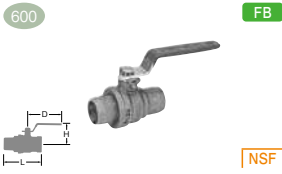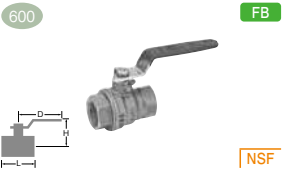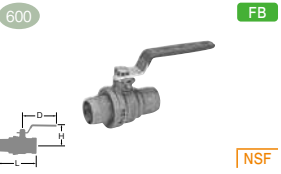
| Type | Ball | | | | | Ball | | | | | Ball | | | | | Ball | | | | |
|--|---|-----|----|-----|-----|---|-----|-----|----|-----|---|----|-----|-----|----|---|--|--|--|--|
| Lead Free Bronze & Brass NSF61-G |  | | | | |  | | | | |  | | | | |  | | | | |
| | AKTAFN | | | | | CTAFN | | | | | AKTAFMN | | | | | CTAFMN | | | | |
| Fig | ASME B1.20.1 | | | | | **ASME B16.18 | | | | | ASME B1.20.1 | | | | | **ASME B16.18 | | | | |
| End Connection | ASME B1.20.1 | | | | | **ASME B16.18 | | | | | ASME B1.20.1 | | | | | **ASME B16.18 | | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D | | | | |
| 1/4 | 8 | 41 | 39 | 82 | | | | 41 | 39 | 82 | 46 | 39 | 82 | 46 | 39 | 82 | | | | |
| 3/8 | 10 | 42 | 39 | 82 | 46 | 39 | 82 | 42 | 39 | 82 | 46 | 39 | 82 | 46 | 39 | 82 | | | | |
| 1/2 | 15 | 53 | 42 | 82 | 54 | 42 | 82 | 53 | 42 | 82 | 54 | 42 | 82 | 54 | 42 | 82 | | | | |
| 3/4 | 20 | 60 | 51 | 100 | 73 | 51 | 100 | 60 | 51 | 100 | 73 | 51 | 100 | 73 | 51 | 100 | | | | |
| 1 | 25 | 72 | 59 | 130 | 88 | 59 | 130 | 72 | 59 | 130 | 88 | 59 | 130 | 88 | 59 | 130 | | | | |
| 1 1/4 | 32 | 82 | 64 | 130 | 100 | 64 | 130 | 82 | 64 | 130 | 100 | 64 | 130 | 100 | 64 | 130 | | | | |
| 1 1/2 | 40 | 92 | 73 | 150 | 115 | 73 | 150 | 92 | 73 | 150 | 115 | 73 | 150 | 115 | 73 | 150 | | | | |
| 2 | 50 | 105 | 80 | 150 | 140 | 80 | 150 | 105 | 80 | 150 | 140 | 80 | 150 | 140 | 80 | 150 | | | | |
| Body & Cap | Forged Brass | | | | | Forged Brass | | | | | Forged Brass | | | | | Forged Brass | | | | |
| Stem | Forged Brass | | | | | Forged Brass | | | | | 316SS | | | | | 316SS | | | | |
| Ball | Forged Brass/304SS | | | | | Forged Brass/304SS | | | | | 316SS | | | | | 316SS | | | | |
| Ball Seat | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Handle | CS + Zn Plated | | | | | CS + Zn Plated | | | | | CS + Zn Plated | | | | | CS + Zn Plated | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Standard/Approval | NSF | | | | | NSF | | | | | NSF | | | | | NSF | | | | |
| Service Conditions | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Reference Page | | | | | | P-T Rating : Page BR33 | | | | | | | | | | P-T Rating : Page BR33 | | | | |
| Remarks | | | | | | | | | | | 316SS Trim | | | | | 316SS Trim | | | | |



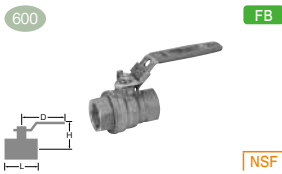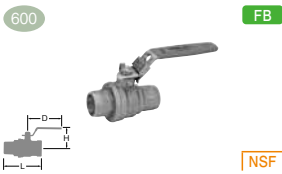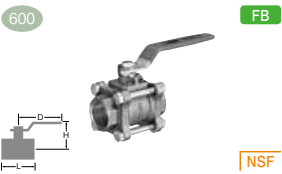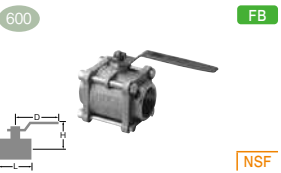

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.
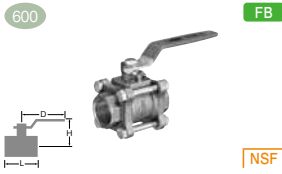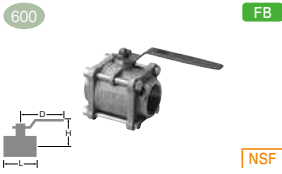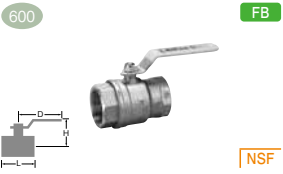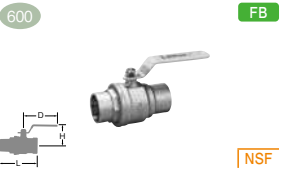
| Type | Ball | | | | | Ball | | | | | Ball | | | | | Ball | | | | |
|--|---|-----|----|-----|-----|---|-----|-----|----|-----|---|----|-----|-----|----|---|--|--|--|--|
| Lead Free Bronze & Brass NSF61-G |  | | | | |  | | | | |  | | | | |  | | | | |
| | AKTFMNL | | | | | CTFMNL | | | | | AK3TMN | | | | | C3TMN | | | | |
| Fig | ASME B1.20.1 | | | | | **ASME B16.18 | | | | | ASME B1.20.1 | | | | | **ASME B16.18 | | | | |
| End Connection | ASME B1.20.1 | | | | | **ASME B16.18 | | | | | ASME B1.20.1 | | | | | **ASME B16.18 | | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D | | | | |
| 1/2 | 15 | 53 | 39 | 81 | 54 | 39 | 81 | 61 | 42 | 82 | 61 | 42 | 82 | 61 | 42 | 82 | | | | |
| 3/4 | 20 | 60 | 47 | 100 | 73 | 47 | 100 | 70 | 51 | 100 | 73 | 51 | 100 | 73 | 51 | 100 | | | | |
| 1 | 25 | 72 | 55 | 130 | 88 | 55 | 130 | 83 | 59 | 130 | 88 | 59 | 130 | 88 | 59 | 130 | | | | |
| 1 1/4 | 32 | 82 | 59 | 130 | 100 | 59 | 130 | 99 | 64 | 130 | 99 | 64 | 130 | 99 | 64 | 130 | | | | |
| 1 1/2 | 40 | 92 | 67 | 150 | 115 | 67 | 150 | 117 | 73 | 150 | 117 | 73 | 150 | 117 | 73 | 150 | | | | |
| 2 | 50 | 105 | 75 | 150 | 140 | 75 | 150 | 139 | 80 | 150 | 139 | 80 | 150 | 139 | 80 | 150 | | | | |
| Body & Cap | Forged Brass | | | | | Forged Brass | | | | | Forged Brass | | | | | Forged Brass | | | | |
| Stem | 316SS | | | | | 316SS | | | | | Forged Brass | | | | | Forged Brass | | | | |
| Ball | 316SS | | | | | 316SS | | | | | Forged Brass/304SS | | | | | Forged Brass/304SS | | | | |
| Ball Seat | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Gland Packing/O ring | FKM+NBR | | | | | FKM+NBR | | | | | PTFE, Gasket: FKM | | | | | PTFE, Gasket: FKM | | | | |
| Handle | CS + Zn Plated | | | | | CS + Zn Plated | | | | | CS + Zn Plated | | | | | CS + Zn Plated | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Standard/Approval | NSF | | | | | NSF | | | | | NSF | | | | | NSF | | | | |
| Service Conditions | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | |
| Reference Page | | | | | | P-T Rating : Page BR33 | | | | | | | | | | P-T Rating : Page BR33 | | | | |
| Remarks | Latch Lock Handle 316SS Trim | | | | | Latch Lock Handle 316SS Trim | | | | | Full Bore | | | | | Full Bore | | | | |

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.

| Type | Ball | | | | Ball | | | | Ball | | | | Ball | | | |
|--|--|-----|----|-----|--|----|-----|-----|---|-----|-----|-----|---|---|---|---|
| Lead Free Bronze & Brass NSF61-G |  | | | |  | | | |  | | | |  | | | |
| | 600 FB NSF | | | | 600 FB NSF | | | | 600 FB NSF | | | | 600 FB NSF | | | |
| Fig | AK3TMMN | | | | C3TMMN | | | | AKSZAN | | | | CSZAN | | | |
| End Connection | ASME B1.20.1 | | | | **ASME B16.18 | | | | ASME B1.20.1 | | | | **ASME B16.18 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | | | | | | | 42 | 37 | 70 | | | | | | |
| 3/8 | 10 | | | | | | | 42 | 37 | 70 | 46 | 37 | 70 | | | |
| 1/2 | 15 | 61 | 42 | 82 | 61 | 42 | 82 | 53 | 40 | 80 | 54 | 40 | 80 | | | |
| 3/4 | 20 | 70 | 51 | 100 | 73 | 51 | 100 | 60 | 44 | 80 | 73 | 44 | 80 | | | |
| 1 | 25 | 83 | 59 | 130 | 88 | 59 | 130 | 72 | 50 | 110 | 88 | 50 | 110 | | | |
| 1 1/4 | 32 | 99 | 64 | 130 | 99 | 64 | 130 | 84 | 55 | 110 | 100 | 55 | 110 | | | |
| 1 1/2 | 40 | 117 | 73 | 150 | 117 | 73 | 150 | 92 | 65 | 150 | 115 | 65 | 150 | | | |
| 2 | 50 | 139 | 80 | 150 | 139 | 80 | 150 | 110 | 72 | 150 | 140 | 72 | 150 | | | |
| 2 1/2 | 65 | | | | | | | 138 | 101 | 200 | 164 | 101 | 200 | | | |
| 3 | 80 | | | | | | | 167 | 112 | 300 | 187 | 112 | 300 | | | |
| 4 | 100 | | | | | | | 193 | 131 | 300 | | | | | | |
| Body & Cap | Forged Brass | | | | Forged Brass | | | | Forged Brass | | | | Forged Brass | | | |
| Stem | 316SS | | | | 316SS | | | | Forged Brass | | | | Forged Brass | | | |
| Ball | 316SS | | | | 316SS | | | | Forged Brass/304SS | | | | Forged Brass/304SS | | | |
| Ball Seat | PTFE | | | | PTFE | | | | PTFE | | | | PTFE | | | |
| Gland Packing/O ring | PTFE, Gasket: FKM | | | | PTFE, Gasket: FKM | | | | FKM | | | | FKM | | | |
| Handle | CS + Zn Plated | | | | CS + Zn Plated | | | | CS + Zn Plated | | | | CS + Zn Plated | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | |
| Standard/Approval | NSF | | | | NSF | | | | NSF | | | | NSF | | | |
| Service Conditions | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | W.O.G. Non-shock 4.14MPa(600psi), W.O.G 150°C 1.03MPa(150psi) (Do not use for flammable gas or toxic gas.) | | | | W.O.G. Non-shock 4.14MPa(600psi)/4 ^º : 2.76MPa(400psi) , W.O.G 150°C 1.03MPa(150psi)/4 ^º : 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | W.O.G. Non-shock 4.14MPa(600psi)/4 ^º : 2.76MPa(400psi) , W.O.G 150°C 1.03MPa(150psi)/4 ^º : 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | |
| Reference Page | | | | | P-T Rating : Page BR33 | | | | | | | | P-T Rating : Page BR33 | | | |
| Remarks | Full Bore | | | | Full Bore | | | | Full Bore, Double O-ring | | | | Full Bore, Double O-ring | | | |

**Solder jointed end valves should not be used in service where the temperature of line fluid is higher than the softening point of the solder.





| Type | Ball | | | | Ball | | | | 3-Way Ball (2-seat, L-port) | | | | 3-Way Ball (2-seat, L-port) | | | |
|--|---|-----|----|-----|---|----|-----|-----|---|-----|------|-----|---|-----|------|--|
| Lead Free Bronze & Brass NSF61-G |  | | | |  | | | |  | | | |  | | | |
| | 600 FB NSF | | | | 600 FB NSF | | | | 400 SB NSF | | | | 400 SB NSF | | | |
| Fig | AKSZANW | | | | CSZANW | | | | AKTNN | | | | CTNN | | | |
| End Connection | ASME B1.20.1 | | | | **ASME B16.18 | | | | ASME B1.20.1 | | | | **ASME B16.18 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L1 | L | H | D | L1 | |
| 1/4 | 8 | 42 | 34 | 55 | | | | | | | | | | | | |
| 3/8 | 10 | 42 | 34 | 55 | 46 | 34 | 55 | | | | | | | | | |
| 1/2 | 15 | 53 | 39 | 70 | 54 | 39 | 70 | 67 | 45 | 80 | 33.5 | 56 | 45 | 80 | 28 | |
| 3/4 | 20 | 60 | 43 | 70 | 73 | 43 | 70 | 68 | 48 | 80 | 34 | 74 | 48 | 80 | 37 | |
| 1 | 25 | 72 | 52 | 100 | 88 | 52 | 100 | 79 | 55 | 110 | 39.5 | 88 | 55 | 110 | 44 | |
| 1 1/4 | 32 | 84 | 58 | 100 | 100 | 58 | 100 | 89 | 60 | 110 | 44.5 | 99 | 60 | 110 | 50.5 | |
| 1 1/2 | 40 | 92 | 73 | 130 | 115 | 73 | 130 | 100 | 65 | 110 | 50 | 114 | 65 | 110 | 59 | |
| 2 | 50 | 110 | 81 | 130 | 140 | 81 | 130 | 115 | 75 | 140 | 57.5 | 136 | 75 | 140 | 71.5 | |
| Body & Cap | Forged Brass | | | | Forged Brass | | | | Forged Brass | | | | Forged Brass | | | |
| Stem | Forged Brass | | | | Forged Brass | | | | Forged Brass | | | | Forged Brass | | | |
| Ball | Forged Brass/304SS | | | | Forged Brass/304SS | | | | Forged Brass+Sn-Ni Plated | | | | Forged Brass+Sn-Ni Plated | | | |
| Ball Seat | PTFE | | | | PTFE | | | | PTFE | | | | PTFE | | | |
| O ring | FKM | | | | FKM | | | | FKM | | | | FKM | | | |
| Handle | CS + Zn Plated | | | | CS + Zn Plated | | | | 430SS | | | | 430SS | | | |
| Bore | Full Bore | | | | Full Bore | | | | Standard Bore | | | | Standard Bore | | | |
| Standard/Approval | NSF | | | | NSF | | | | NSF | | | | NSF | | | |
| Service Conditions | W.O.G. Non-shock 4.14MPa(600psi)/4 ^º : 2.76MPa(400psi) , W.O.G 150°C 1.03MPa(150psi)/4 ^º : 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | W.O.G. Non-shock 4.14MPa(600psi)/4 ^º : 2.76MPa(400psi) , W.O.G 150°C 1.03MPa(150psi)/4 ^º : 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | | W.O.G. Non-shock 2.76MPa(400psi), W.O.G. 150°C 0.69MPa(100psi) (Do not use for flammable gas or toxic gas.) | | | |
| Reference Page | | | | | P-T Rating : Page BR33 | | | | Port Orientation : Page TECH1 | | | | P-T Rating : Page BR33, Port Orientation : Page TECH1 | | | |
| Remarks | Full Bore, Double O-ring Butterfly (Wing) Handle | | | | Full Bore, Double O-ring Butterfly (Wing) Handle | | | | Standard Bore, Double O-ring, L-port | | | | Standard Bore, Double O-ring, L-port | | | |





| Type | Ball for Fancoil Unit | | | | Ball for Fancoil Unit | | | | Ball for Fancoil Unit | | | | Ball for Fancoil Unit | | | |
|----------------------------------|--|------|------|----|--|------|----|------|---|----|------|------|--|------|------|----|
| Bronze & Brass Fancoil Valves | | | | | | | | | | | | | | | | |
| | RTRM | | | | RTRM | | | | RTRM | | | | RTRM | | | |
| Fig | RTRM | | | | RTRM | | | | RTRM | | | | RTRM | | | |
| End Connection | BS21 (JIS B0203) | | | | BS21(JIS B0203xB0202) | | | | BS21 (JIS B0203) | | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 56 | 72 | 40 | 62 | 72 | 40 | 62 | 72 | 40 | 88 | 72 | 40 | 88 | 72 | 40 |
| 3/4 | 20 | 61 | 72 | 40 | 66 | 72 | 40 | 66 | 72 | 40 | 92.5 | 72 | 40 | 92.5 | 72 | 40 |
| 1 | 25 | 70.5 | 75.5 | 40 | 75.5 | 75.5 | 40 | 75.5 | 75.5 | 40 | 104 | 75.5 | 40 | 104 | 75.5 | 40 |
| Body & Cap | CAC406 | | | | CAC406 | | | | CAC406 | | | | CAC406 | | | |
| Stem | C3531 | | | | C3531 | | | | C3531 | | | | C3531 | | | |
| Ball | C3771 + Ni-Cr Plating | | | | C3771 + Ni-Cr Plating | | | | C3771 + Ni-Cr Plating | | | | C3771 + Ni-Cr Plating | | | |
| Ball Seat | PTFE | | | | PTFE | | | | PTFE | | | | PTFE | | | |
| O ring | EPDM | | | | EPDM | | | | EPDM | | | | EPDM | | | |
| Handle | Polyacetal | | | | Polyacetal | | | | Polyacetal | | | | Polyacetal | | | |
| Bore | Reduced Bore | | | | Reduced Bore | | | | Reduced Bore | | | | Reduced Bore | | | |
| Service Conditions | Stream Water 0°C to 90°C 1.0MPa (not freezing) | | | | Stream Water 0°C to 90°C 1.0MPa (not freezing) | | | | Stream Water 0°C to 90°C 1.0MPa (not freezing) | | | | Stream Water 0°C to 90°C 1.0MPa (not freezing) | | | |
| Remarks | Taper Thread Detachable & T Type Long Handle | | | | Taper Thread (Female) x Parallel Thread (Male) Detachable & T Type Long Handle | | | | Taper Thread (Female) x Taper Thread (Male) Detachable & T Type Long Handle | | | | Female x Male (Union Nipple) Detachable & T Type Long Handle | | | |





| Type | Ball for Fancoil Unit | | | | Ball for Fancoil Unit | | | | Ball for Fancoil Unit | | | | Ball for Fancoil Unit | | | |
|----------------------------------|--|------|----|-----|--|----|-----|-----|--|-----|-----|-----|---|-----|-----|-----|
| Bronze & Brass Fancoil Valves | | | | | | | | | | | | | | | | |
| | RTFM | | | | RTFO | | | | RTFU | | | | TLF | | | |
| Fig | RTFM | | | | RTFO | | | | RTFU | | | | TLF | | | |
| End Connection | BS21 (JIS B0203) | | | | BS21(JIS B0203xB0202) | | | | BS21 (JIS B0203) | | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 59 | 76 | 61 | 73 | 76 | 61 | 96 | 76 | 61 | 56 | 75 | 80 | 56 | 75 | 80 |
| 3/4 | 20 | 67.5 | 79 | 61 | 82 | 79 | 61 | 106 | 79 | 61 | 65 | 79 | 80 | 65 | 79 | 80 |
| 1 | 25 | 78.5 | 97 | 100 | 96 | 97 | 100 | 120 | 97 | 100 | 77 | 85 | 110 | 77 | 85 | 110 |
| 1 1/4 | 32 | | | | | | | | | | 90 | 102 | 110 | 90 | 102 | 110 |
| 1 1/2 | 40 | | | | | | | | | | 98 | 110 | 140 | 98 | 110 | 140 |
| 2 | 50 | | | | | | | | | | 119 | 118 | 140 | 119 | 118 | 140 |
| Body & Cap | CAC406 | | | | CAC406 | | | | CAC406 | | | | CAC406 | | | |
| Stem | C3531 | | | | C3531 | | | | C3531 | | | | 304SS | | | |
| Ball | 316SS | | | | 316SS | | | | 316SS | | | | 304SS | | | |
| Ball Seat | G/F PTFE | | | | G/F PTFE | | | | G/F PTFE | | | | PTFE | | | |
| O ring | EPDM | | | | EPDM | | | | EPDM | | | | FKM | | | |
| Handle | Polyacetal | | | | Polyacetal | | | | Polyacetal | | | | 430SS | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | |
| Service Conditions | Stream Water 0°C to 100°C 1.4MPa, Pulsating Water 0°C to 100°C 1.0MPa (not freezing) | | | | Stream Water 0°C to 100°C 1.4MPa, Pulsating Water 0°C to 100°C 1.0MPa (not freezing) | | | | Stream Water 0°C to 100°C 1.4MPa, Pulsating Water 0°C to 100°C 1.0MPa (not freezing) | | | | Stream Water up to 80°C 1.4MPa, (Pulsating Water).O.G. up to 80°C 1.0MPa (Do not use for flammable gas or toxic gas.) | | | |
| Remarks | Taper Thread Detachable & T Type Long Handle | | | | Taper Thread (Female) x Parallel Thread (Male) Detachable & T Type Long Handle | | | | Female x Male (Union Nipple) Detachable & T Type Long Handle | | | | Full Bore, Double O-ring For Thermal Insulation | | | |



| Type | Ball for Fancoil Unit | | | | Flow Control, Globe | | | Flow Control, Angle | | | Flow Control, Globe | | |
|----------------------------------|-----------------------|--|--|--------------------|---------------------|--|--------------------|---------------------|--|--------------------|---------------------|--|--|
| Bronze & Brass Fancoil Valves | | | | | | | | | | | | | |
| | Fig | | | | Fig | | | Fig | | | Fig | | |
| End Connection | | | | End Connection | | | End Connection | | | End Connection | | | |
| inch | | | | inch | | | inch | | | inch | | | |
| mm | | | | mm | | | mm | | | mm | | | |
| 1/2 | | | | 1/2 | | | 1/2 | | | 1/2 | | | |
| 3/4 | | | | 3/4 | | | 3/4 | | | 3/4 | | | |
| 1 | | | | 1 | | | 1 | | | 1 | | | |
| 11/4 | | | | 11/4 | | | 11/4 | | | 11/4 | | | |
| 11/2 | | | | 11/2 | | | 11/2 | | | 11/2 | | | |
| 2 | | | | 2 | | | 2 | | | 2 | | | |
| Body & Cap/Bonnet | | | | Body & Cap/Bonnet | | | Body & Cap/Bonnet | | | Body & Cap/Bonnet | | | |
| Stem | | | | Stem | | | Stem | | | Stem | | | |
| Disk & Ball | | | | Disk & Ball | | | Disk & Ball | | | Disk & Ball | | | |
| Ball Seat | | | | Ball Seat | | | Ball Seat | | | Ball Seat | | | |
| O ring | | | | O ring | | | O ring | | | O ring | | | |
| Gasket | | | | Gasket | | | Gasket | | | Gasket | | | |
| Handle | | | | Handle | | | Handle | | | Handle | | | |
| Bore | | | | Bore | | | Bore | | | Bore | | | |
| Service Conditions | | | | Service Conditions | | | Service Conditions | | | Service Conditions | | | |
| Reference Page | | | | Reference Page | | | Reference Page | | | Reference Page | | | |
| Remarks | | | | Remarks | | | Remarks | | | Remarks | | | |

| Type | Globe w/ Built-in Screen | | | Ball (Low Noise Type) | | | Ball (Constant Flow) | | |
|------------------------------------|--------------------------|--|--------------------|-----------------------|--|--------------------|----------------------|--|--|
| Bronze & Brass Balancing Valves | | | | | | | | | |
| | Fig | | | Fig | | | Fig | | |
| End Connection | | | End Connection | | | End Connection | | | |
| inch | | | inch | | | inch | | | |
| mm | | | mm | | | mm | | | |
| 1/2 | | | 1/2 | | | 1/2 | | | |
| 3/4x1/2 | | | 3/4x1/2 | | | 3/4x1/2 | | | |
| 3/4 | | | 3/4 | | | 3/4 | | | |
| 1 | | | 1 | | | 1 | | | |
| Body & Bonnet | | | Body & Bonnet | | | Body & Bonnet | | | |
| Stem | | | Stem | | | Stem | | | |
| Disk & Ball | | | Disk & Ball | | | Disk & Ball | | | |
| Ball Seat | | | Ball Seat | | | Ball Seat | | | |
| O ring | | | O ring | | | O ring | | | |
| Gasket | | | Gasket | | | Gasket | | | |
| Handle | | | Handle | | | Handle | | | |
| Bore | | | Bore | | | Bore | | | |
| Service Conditions | | | Service Conditions | | | Service Conditions | | | |
| Reference Page | | | Reference Page | | | Reference Page | | | |
| Remarks | | | Remarks | | | Remarks | | | |

| Type | S Ball (Straight) | | | | S Ball (Straight) | | | | S Ball (Straight) | | | | S Ball (Straight) | | | |
|---|---|----|--------|----|---|--------|----|----|---|----|----|--------|--|----|--------|----|
| Bronze & Brass S Ball Series for Water Heater |  | | | |  | | | |  | | | |  | | | |
| | 10K | | | | 10K | | | | 10K | | | | 10K | | | |
| Fig | S23N- | | | | S24N- | | | | S24N-3/4X | | | | S25N- | | | |
| End Connection | BS21 (JIS B0203xB0202) | | | | BS21 (JIS B0203xB0202) | | | | BS21 (JIS B0203xB0202) | | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 72 | 51/63* | 40 | 72 | 51/63* | 40 | 73 | 51/63* | 40 | 73 | 51/63* | 40 | 75 | 51/63* | 40 |
| 3/4 | 20 | 74 | 51/63* | 40 | 74 | 51/63* | 40 | | | | | | | | | |
| Body & Bonnet | C3771 | | | | C3771 + Ni-Cr Plating | | | | C3771 + Ni-Cr Plating | | | | C3771 + Ni-Cr Plating | | | |
| Stem | C3531 | | | | C3531 | | | | C3531 | | | | C3531 | | | |
| Ball | C3771 + Sn-Ni Plating | | | | C3771 + Sn-Ni Plating | | | | C3771 + Sn-Ni Plating | | | | C3771 + Sn-Ni Plating | | | |
| Ball Seat | PTFE | | | | PTFE | | | | PTFE | | | | PTFE | | | |
| Check Valve | Polyacetal | | | | Polyacetal | | | | Polyacetal | | | | Polyacetal | | | |
| O ring / Spring | EPDM, NBR / 304SS | | | | EPDM, NBR / 304SS | | | | EPDM, NBR / 304SS | | | | EPDM, NBR / 304SS | | | |
| Handle/Attachment | Polyacetal | | | | Polyacetal | | | | Polyacetal | | | | Polyacetal | | | |
| Standard/Approval | JWWA E-3 | | | | JWWA E-3 | | | | JWWA E-3 | | | | JWWA E-3 | | | |
| Service Conditions | 1.0 MPa Water, 0°C+40°C (Not Freezing) Direct Flow 40°C max, Reserve Flow 80°C max | | | | 1.0 MPa Water, 0°C+40°C (Not Freezing) Direct Flow 40°C max, Reserve Flow 80°C max | | | | 1.0 MPa Water, 0°C+40°C (Not Freezing) Direct Flow 40°C max, Reserve Flow 80°C max | | | | 1.0 MPa Water, 0°C+40°C (Not Freezing) Direct Flow 40°C max, Reserve Flow 80°C max | | | |
| Reference Page | Features: Page BR36 | | | | Features: Page BR36 | | | | Features: Page BR36 | | | | Features: Page BR36 | | | |
| Remarks | Male (Parallel) x Male (Taper) With Spring-loaded Built-in Check Valve (Water Hammer Proof). Detachable T Handle with attachment for extension of handle. * For adding attachment | | | | Male (Parallel) x Male (Taper) With Spring-loaded Built-in Check Valve (Water Hammer Proof). Detachable T Handle with attachment for extension of handle. * For adding attachment | | | | Male (Parallel) x Male (Taper) With Spring-loaded Built-in Check Valve (Water Hammer Proof). Detachable T Handle with attachment for extension of handle. * For adding attachment | | | | Female (Taper) x Female (Taper) With Spring-loaded Built-in Check Valve (Water Hammer Proof). Detachable T Handle with attachment for extension of handle. * For adding attachment | | | |

| Type | S Ball (Straight) | | | | S Ball (Straight) | | | | S Ball (Straight) | | | | S Ball (Straight) | | | |
|---|---|------|--------|----|---|--------|----|------|---|----|------|--------|---|---|---|---|
| Bronze & Brass S Ball Series for Water Heater |  | | | |  | | | |  | | | |  | | | |
| | 10K | | | | 10K | | | | 10K | | | | 10K | | | |
| Fig | S26N- | | | | S27N- | | | | S28N- | | | | S28N-3/4X | | | |
| End Connection | BS21 (JIS B0203xB0202) | | | | BS21 (JIS B0203xB0202) | | | | BS21 (JIS B0203xB0202) | | | | BS21 (JIS B0203xB0202) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 86.5 | 51/63* | 40 | 85 | 51/63* | 40 | 70.5 | 51/63* | 40 | 71.5 | 51/63* | 40 | | | |
| 3/4 | 20 | 91 | 51/63* | 40 | 89.5 | 51/63* | 40 | 72.5 | 51/63* | 40 | | | | | | |
| Body & Bonnet | C3771 + Ni-Cr Plating | | | | C3771 + Ni-Cr Plating | | | | C3771 + Ni-Cr Plating | | | | C3771 + Ni-Cr Plating | | | |
| Stem | C3531 | | | | C3531 | | | | C3531 | | | | C3531 | | | |
| Ball | C3771 + Sn-Ni Plating | | | | C3771 + Sn-Ni Plating | | | | C3771 + Sn-Ni Plating | | | | C3771 + Sn-Ni Plating | | | |
| Ball Seat | PTFE | | | | PTFE | | | | PTFE | | | | PTFE | | | |
| Check Valve | Polyacetal | | | | Polyacetal | | | | Polyacetal | | | | Polyacetal | | | |
| O ring / Spring | EPDM, NBR / 304SS | | | | EPDM, NBR / 304SS | | | | EPDM, NBR / 304SS | | | | EPDM, NBR / 304SS | | | |
| Handle/Attachment | Polyacetal | | | | Polyacetal | | | | Polyacetal | | | | Polyacetal | | | |
| Standard/Approval | JWWA E-3 | | | | JWWA E-3 | | | | JWWA E-3 | | | | JWWA E-3 | | | |
| Service Conditions | 1.0 MPa Water, 0°C+40°C (Not Freezing) Direct Flow 40°C max, Reserve Flow 80°C max | | | | 1.0 MPa Water, 0°C+40°C (Not Freezing) Direct Flow 40°C max, Reserve Flow 80°C max | | | | 1.0 MPa Water, 0°C+40°C (Not Freezing) Direct Flow 40°C max, Reserve Flow 80°C max | | | | 1.0 MPa Water, 0°C+40°C (Not Freezing) Direct Flow 40°C max, Reserve Flow 80°C max | | | |
| Reference Page | Features: Page BR36 | | | | Features: Page BR36 | | | | Features: Page BR36 | | | | Features: Page BR36 | | | |
| Remarks | Male (Taper) x Union Nut (Female (Parallel)) With Spring-loaded Built-in Check Valve (Water Hammer Proof). Detachable T Handle with attachment for extension of handle. * For adding attachment | | | | Female (Taper) x Union Nut (Female (Parallel)) With Spring-loaded Built-in Check Valve (Water Hammer Proof). Detachable T Handle with attachment for extension of handle. * For adding attachment | | | | Female (Taper) x Male (Parallel) With Spring-loaded Built-in Check Valve (Water Hammer Proof). Detachable T Handle with attachment for extension of handle. * For adding attachment | | | | Female (Taper) x Male (Parallel) With Spring-loaded Built-in Check Valve (Water Hammer Proof). Detachable T Handle with attachment for extension of handle. * For adding attachment | | | |

| Type | S Ball (Angle) | Orange Ball (Straight) | Orange Ball (Straight) | Orange Ball (Angle) | | | | | | | | | |
|---|---|---|--|---|--|--------|----|--|--------|----|----|----|----|
| Bronze & Brass S Ball Series for Water Heater Orange Ball Series |  |  |  |  | | | | | | | | | |
| Fig | S38A- | S1- | S2- | S5- | | | | | | | | | |
| End Connection | BS21 (JIS B0203xB0202) | | | BS21 (JIS B0203xB0202) | | | | | | | | | |
| inch | L | H | D | L | H | D | L | H | D | | | | |
| 1/2 | 15 | 47.3 | 52/64* | 40 | 52.5 | 39/52* | 40 | 52.5 | 39/52* | 40 | 13 | 39 | 40 |
| 3/4 | 20 | 48.3 | 52/64* | 40 | 58 | 42/55* | 40 | 58 | 42/55* | 40 | 14 | 42 | 40 |
| Body & Bonnet | C3771 + Ni-Cr Plating | | | C3771/C3604 | C3771/C3604+Ni-Cr Plating | | | C3771/C3604+Ni-Cr Plating | | | | | |
| Stem | C3531 | | | C3531 | C3531 | | | C3531 | | | | | |
| Ball | C3771 + Sn-Ni Plating | | | C3771 + Sn-Ni Plating | C3771 + Sn-Ni Plating | | | C3771 + Sn-Ni Plating | | | | | |
| Ball Seat | PTFE | | | G/F PTFE | G/F PTFE | | | G/F PTFE | | | | | |
| Check Valve | Polyacetal+NBR | | | | | | | | | | | | |
| O ring / Spring | EPDM, NBR / 304SS | | | EPDM | EPDM | | | EPDM | | | | | |
| Handle/Attachment | Polyacetal | | | Polyacetal | Polyacetal | | | Polyacetal | | | | | |
| Bore | | | | Standard Bore | Standard Bore | | | Standard Bore | | | | | |
| Standard/Approval | JWWA E-3 | | | JWWA E-2 | JWWA E-2 | | | JWWA E-2 | | | | | |
| Service Conditions | 1.0 MPa Water, 0°C+40°C (Not Freezing) Direct Flow 40°C max, Reserve Flow 80°C max | | | 1.0 MPa Water, -20°C to +100°C (Not Freezing) | 1.0 MPa Water, -20°C to +100°C (Not Freezing) | | | 1.0 MPa Water, -20°C to +100°C (Not Freezing) | | | | | |
| Reference Page | Features: Page BR36 | | | | | | | | | | | | |
| Remarks | Female (Taper) x Male (Parallel) With Spring-loaded Built-in Check Valve (Water Hammer Proof). Detachable T Handle with attachment for extension of handle. * For adding attachment | | | Male (Parallel) x Male (Taper) T Handle. * For adding attachment | Male (Parallel) x Male (Taper) T Handle. * For adding attachment | | | Male (Parallel) x Male (Taper) T Handle. * For adding attachment | | | | | |

| Type | Orange Ball (Straight) | Orange Ball (Straight) | | | | | |
|---|---|---|---|----|------|------|----|
| Bronze & Brass S Ball Series for Water Heater Orange Ball Series |  |  | | | | | |
| Fig | S6- | S8- | | | | | |
| End Connection | BS21 (JIS B0203) | | | | | | |
| inch | L | H | D | L | H | D | |
| 1/2 | 15 | 54 | 39/52* | 40 | 52.5 | 44 | 40 |
| 3/4 | 20 | 59 | 42/55* | 40 | 58 | 46.5 | 40 |
| Body & Bonnet | C3771 | | C3771/C3604+Ni-Cr Plating | | | | |
| Stem | C3531 | | C3531 | | | | |
| Ball | C3771 + Sn-Ni Plating | | C3771 + Sn-Ni Plating | | | | |
| Ball Seat | G/F PTFE | | G/F PTFE | | | | |
| O ring / Spring | EPDM | | EPDM | | | | |
| Handle/Attachment | Polyacetal | | ZDC2 | | | | |
| Bore | Standard Bore | | Standard Bore | | | | |
| Standard/Approval | JWWA E-2 | | JWWA E-2 | | | | |
| Service Conditions | 1.0 MPa Water, -20°C to +100°C (Not Freezing) | | 1.0 MPa Water, -20°C to +100°C (Not Freezing) | | | | |
| Remarks | Male (Taper) x FemMale (Taper) T Handle. * For adding attachment | | Male (Parallel) x Male (Taper) T Handle | | | | |



As a world leader in manufacturing general service valves, KITZ Corporation is glad to offer a broad range of bronze/brass valves for commercial and industrial applications.

KITZ bronze/brass valves are exclusively produced in modern factories used for valve manufacturing. Each phase of manufacturing process, from selection of raw materials to casting, forging, machining, assembly and testing, have improved with automated production facilities and unparalleled production technology.

Standardization and automation yield KITZ bronze/brass valves of superior quality and higher uniformity at competitive prices supported by incomparably prompt delivery.

KITZ bronze/brass valves are designed by state-of-the-art computers, built by automation, and inspected by people who care about quality.

Design Features of KITZ Bronze/Brass Valves

Human Engineering in Hand Wheel Design

Computer designed hand wheels of all KITZ bronze/brass valves, the product of KITZ human engineering, feature the ideal combination of operational efficiency and high mechanical strength for reliability.

Asbestos-free Gland Packing

All KITZ bronze/brass gate and globe valves employ Aramid Fiber PTFE as the material in the asbestos-free gland packing, which meets the latest industrial requirement to minimize concerns about pollution. With the leak-free sealing performance and reduced valve operating torque, Aramid Fiber PTFE is considered a reliable substitute for conventional asbestos sheets for the service of water, oil, gas, and saturated steam pressure at a maximum 300psi at temperatures up to 300°C.

Pressure Rating

The pressure rating designation of KITZ valves follows accepted practice of today's valve and pipe fitting industry. Each product is rated for W.O.G. (Non-shock cold water, oil, and gas*) and saturated steam pressure service.

Inspection and Testing

KITZ valves are manufactured under strict quality control requirements throughout all stages of production, beginning with the inspection of chemical composition and mechanical properties of the materials. Extra care is given to inspection and testing at all machine shops and assembly plants by using up-to-date precision equipment. All KITZ valves meet strict pressure testing specifications for the body and seat seals to assure a long service life and quality performance.

*The valves presented in this catalog are not designed to handle toxic gases.
Use specially designed or certified valves for flammable gas service.

KITZ Corporation, Chino Plant, Japan (ISO 9001)



KITZ (Thailand) Ltd, Bangplee Plant, Thailand (ISO 9001)



This catalog uses MPa, an SI unit, to indicate pressure. For reader convenience, however, psi is also used for ASME and JIS related products, respectively. The products in this catalog are all covered by ISO 9001 certification.

Lead-free Bronze & Brass (KEEPALLOY®): N in suffix of Fig. “Ex, JN, AKSZAN”

(1) MHLW (Ministry of Health, Labour and Welfare) Ordinance No. 138, April 1, 2003.

Restriction of leaching lead less than 0.01 mg/little. JIS H5120 CAC911, JIS H3250 C6803

(2) NSF/ANSI 61-8 Annex G & NSF/ANSI 372

January 4, 2014 “Reduction of lead in drinking water act” : Less than 0.25% of lead by weight

RoHS, Reach, WRAS, WSD and AS 1628/MMKA

KITZ “K-METAL®” : Unique Dezincification-Resistant Brass (UNS No. C35350)

Water pollution and employment of new piping material have amplified valve dezincification problems.

What is dezincification?

Copper alloy used in bronze valves contains zinc, tin, and lead, with copper as the base. When bronze valves are subjected to unfavorable service conditions, the zinc component of copper alloy separates from the copper base, and the metal corrodes. This is called dezincification.

In case of bronze valve, body, bonnet, and other cast bronze parts rarely corrode, because of the small percentage of zinc contained in the alloy. However, brass valve parts such as stem, which contains 40 % zinc, often corrode because of extreme dezincification.

What causes dezincification?

The following factors cause dezincification. These factors are generally believed to occur together, rather than independently.

- 1 Excessive acidity in aqueous solution.
- 2 Warm water containing excessive free carbonic acid with high electric conductivity.
- 3 High electric conductivity with presence of excessive chlorides and sulfides.
- 4 Copper or vinyl chloride pipes.
- 5 Excessive dissolved oxygen.




Fig. 1 Comparison of tensile strength




Fig. 2 Comparison of hardness




Fig. 3 Comparison of corrosion (1 mg/cm²=0.014 mlb/in²)




Fig. 4 Comparison of dezincification (to AS C316)

Bronze/Brass Valve Solder Joints

Copper tubing is widely used with bronze/brass valves in steam and water-line applications in schools, hospitals, hotels, and private houses because of its excellent physical characteristics. It resists corrosion, meets sanitation requirements, and is easy to install.

Copper Tubes: Three types of copper tubing have been developed for complying with ASTM B88, as listed below. Each type is provided with a different wall thickness to meet application requirements.

| | |
|---------------|---|
| Type K | For use in steam, oil, and gas lines for underground installation and/or severe conditions. |
| Type L | For general cooling and heating systems and related water piping and ventilation systems. |
| Type M | For home air-conditioning and heating applications. |

Soldering of Leak Free Joints

Use solder of 95-5 tin-antimony or 96-4 tin-silver, and an open-flame torch. Keep the torch temperature relatively low to ensure firm soldered joint. Because the melting point of solder is around 500°F (260°C), solder-jointed valves cannot be used for high-temperature service.

Solder P-T Rating

| Solder | Max. temp. (°C) | Max. Working Pressure | | | | | |
|-------------------------------|-----------------|---------------------------------------|-----|---|-----|---|-----|
| | | size 1/4 ^B -1 ^B | | size 1 1/4 ^B -2 ^B | | size 2 1/4 ^B -4 ^B | |
| | | MPa | psi | MPa | psi | MPa | psi |
| 95-5 tin-antimony [H95 Sb-5A] | 38 | 3.45 | 500 | 2.76 | 400 | 2.07 | 300 |
| | 66 | 2.76 | 400 | 2.41 | 350 | 1.90 | 275 |
| 96-4 tin-silver [H96 Ag-3.5A] | 93 | 2.07 | 300 | 1.72 | 250 | 1.38 | 200 |
| | 121 | 1.38 | 200 | 1.21 | 175 | 1.03 | 150 |

| | |
|----------------|---|
| CAUTION | Solder-jointed end valves should not be used in service where the temperature of the line fluid is higher than the softening point of the solder. |
|----------------|---|

KITZ Bronze and Brass Materials to JIS Standards

JIS H5120 (Copper & Copper Alloy Castings)

| Cast Bronze Class 6 | Designation | Chemical Composition (%) | | | | | | | | | | Mechanical Properties | |
|---------------------|--------------|--------------------------|---------|---------|---------|----------|----------|-----------|----------|-----------|-----------|--|---------------------------|
| | | Cu | Sn | Zn | Pb | Ni | Fe | P | Sb | Al | Si | Tensile Strength 195 Min. (N/mm ²) | Elongation (%) 15 Min. |
| | CAC406 (BC6) | 83.0-87.0 | 4.0-6.0 | 4.0-6.0 | 4.0-6.0 | 1.0 Max. | 0.3 Max. | 0.05 Max. | 0.2 Max. | 0.01 Max. | 0.01 Max. | | |

JIS H3250 (Copper & Copper Alloy Rods and Bars)

| Forged Brass Alloy No. 3771 | Designation | | Chemical Composition (%) | | | | Mechanical Properties | |
|-----------------------------|-------------|---------|--------------------------|---------|----------|-----------|--|---------------------------|
| | Extruded | Drawn | Cu | Pb | Fe + Sn | Zn | Tensile Strength 315 Min. (N/mm ²) | Elongation (%) 15 Min. |
| | C3771BE | C3771BD | 57.0-61.0 | 1.0-2.5 | 1.0 Max. | Remainder | | |

JIS H3250 (Copper & Copper Alloy Rods and Bars)

| Free-cutting Brass Alloy No. 3604 | Designation | | Chemical Composition (%) | | | | | Mechanical Properties | |
|-----------------------------------|-------------|---------|--------------------------|---------|----------|----------|-----------|--|---------------------|
| | Extruded | Drawn | Cu | Pb | Fe | Fe + Sn | Zn | Tensile Strength 335 Min. (N/mm ²) | Elongation (%) — |
| | C3604BE | C3604BD | 57.0-61.0 | 1.8-3.7 | 0.5 Max. | 1.0 Max. | Remainder | | |

KITZ Bronze and Brass Materials to ASTM Standards

ASTM B61

| Chemical Composition (%) | | | | | | | | | | | Mechanical Properties | | |
|--------------------------|---------|---------|---------|-----------------|-----------|-----------|------------|-----------|------------|------------|----------------------------|--------------------------|----------------------------|
| Copper | Tin | Lead | Zinc | Nickel & cobalt | Iron | Sulfur | Phosphorus | Antimony | Aluminum | Silicon | Minimum | | |
| 86.0-90.0 | 5.5-6.5 | 1.0-2.0 | 3.0-5.0 | 1.0 Max. | 0.25 Max. | 0.05 Max. | 0.05 Max. | 0.25 Max. | 0.005 Max. | 0.005 Max. | Tensile Strength 34 ksi | Yield Strength 16 ksi | Elongation in 2 in. 24% |

ASTM B62

| Chemical Composition (%) | | | | | | | | | | | Mechanical Properties | | |
|--------------------------|---------|---------|---------|-----------------|-----------|-----------|------------|-----------|------------|------------|----------------------------|--------------------------|----------------------------|
| Copper | Tin | Lead | Zinc | Nickel & cobalt | Iron | Sulfur | Phosphorus | Antimony | Aluminum | Silicon | Minimum | | |
| 84.0-86.0 | 4.0-6.0 | 4.0-6.0 | 4.0-6.0 | 1.0 Max. | 0.30 Max. | 0.08 Max. | 0.05 Max. | 0.25 Max. | 0.005 Max. | 0.005 Max. | Tensile Strength 30 ksi | Yield Strength 14 ksi | Elongation in 2 in. 20% |

ASTM B283 C37700

| Chemical Composition (%) | | | | Mechanical Properties | | |
|--------------------------|---------|-----------|-----------|----------------------------|--------------------------|-----------------------------------|
| Copper | Lead | Iron | Zinc | Minimum | | |
| 58.0-61.0 | 1.5-2.5 | 0.30 Max. | Remainder | Tensile Strength 50 ksi | Yield Strength 18 ksi | Elongation in 4x Thickness 25% |

In-line Lift Check Valve with Spring (RF, AKAF)

Reduction of water hammer

Excellent sealing performance by means of rubber seats & spring

KITZ Wafer Check Valve (10BWZ(N), 10FWZ, 10/20SWZU, 20SWZ, 10UW, 10/20UWS)

Construction:


Single Plate (stainless steel wafer check) and Dual Plate (others except SS)

Features

- (1) Reduction of water hammer by closing the disc with independent helical spring mechanism
- (2) Built-in Bypass Valve
- (3) Excellent sealing performance by means of rubber seats & spring mechanism
- (4) Direct mounting of pump. (*stainless steel wafer check valves are not available due to single plate construction.
Provide straight runs of pipe at least two times of the valve bore (three times in case when pipe expansion is used to pump discharge) to the both sides of the valve.
- (5) Compact and Light Mass

Spring Serviceable Range:


- (1) Standard Torque Spring (2)High Torque Spring (3)Low Torque Spring

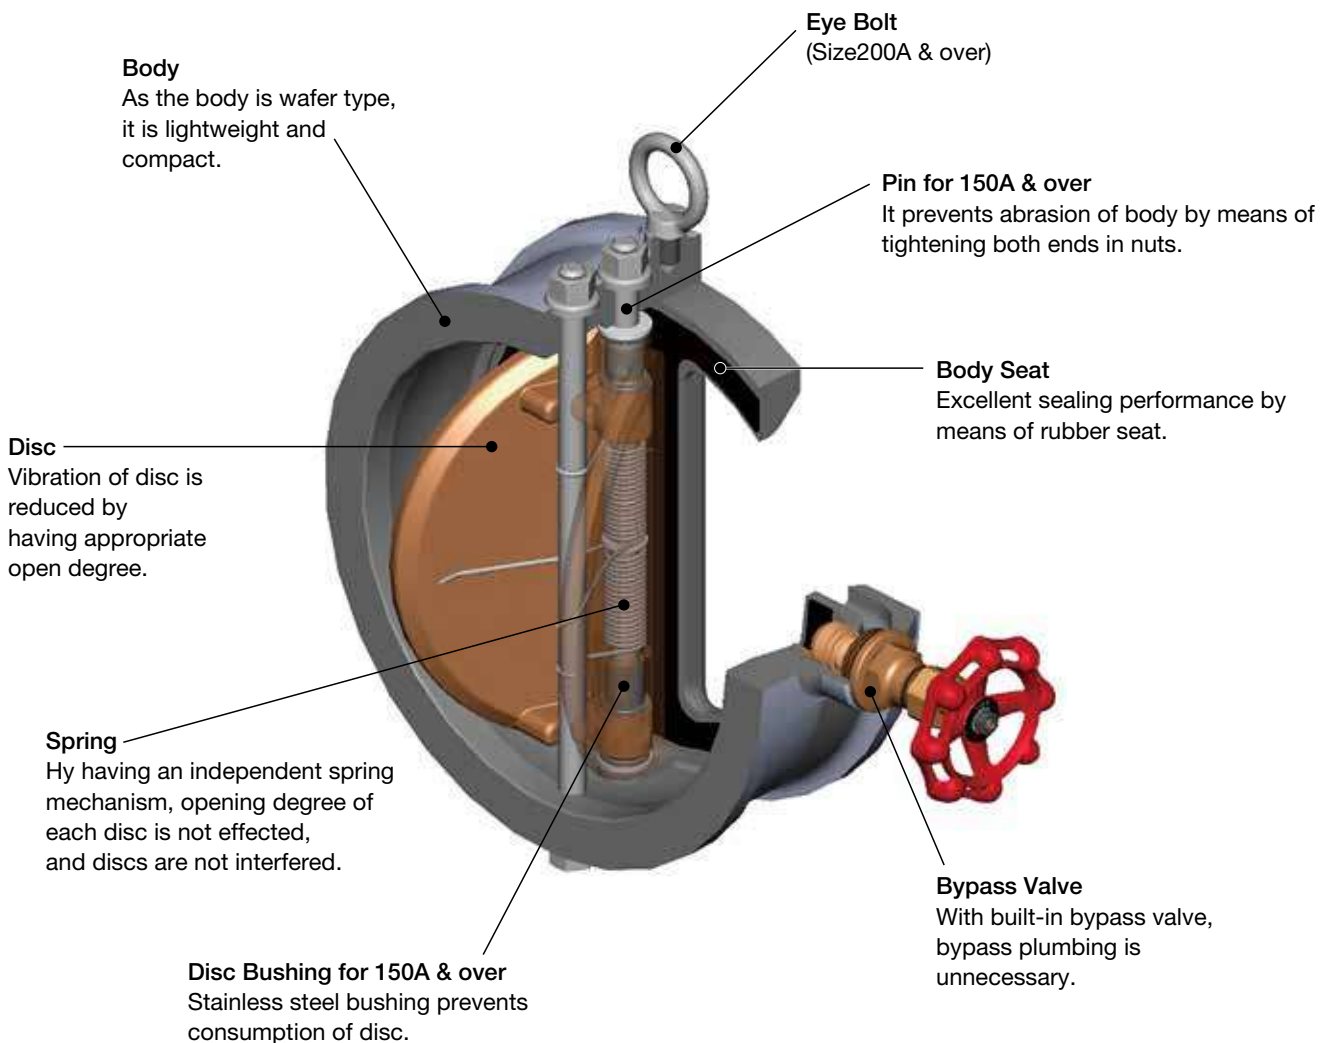


Design Features of KITZ S Ball Valve: Ball Valve with Built-in Check Valve in its Body

Compact design with a built-in check valve in the body of ball valve.
Prevents back flow by automatic closing of spring-loaded built-in check valve (water hammer proof).

Cross-sectional illustration of ball valves with built-in check valves

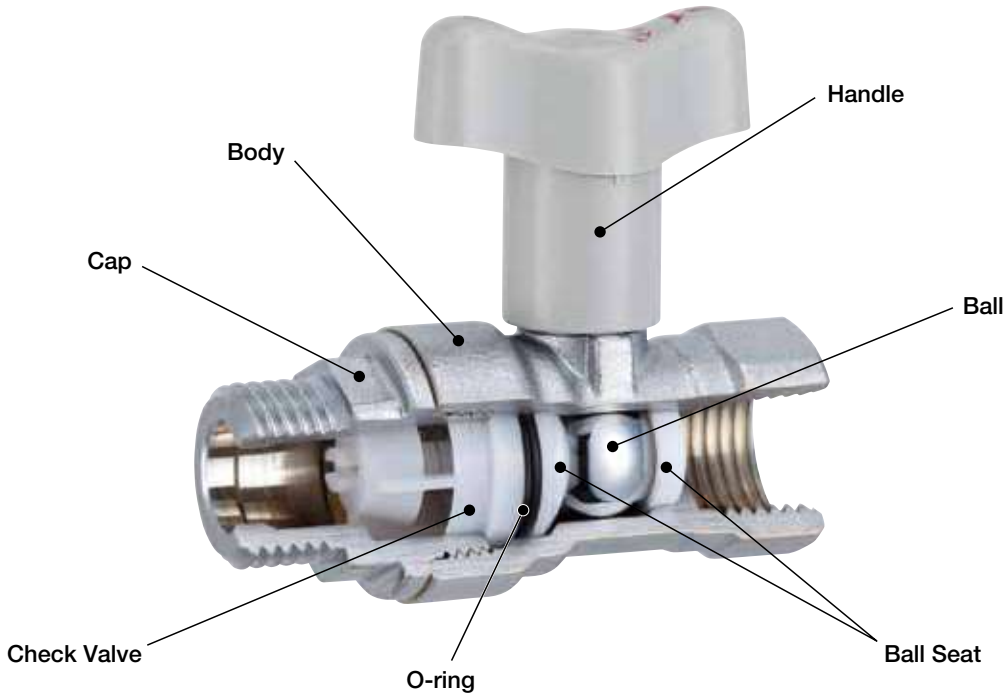


2-Way Handle

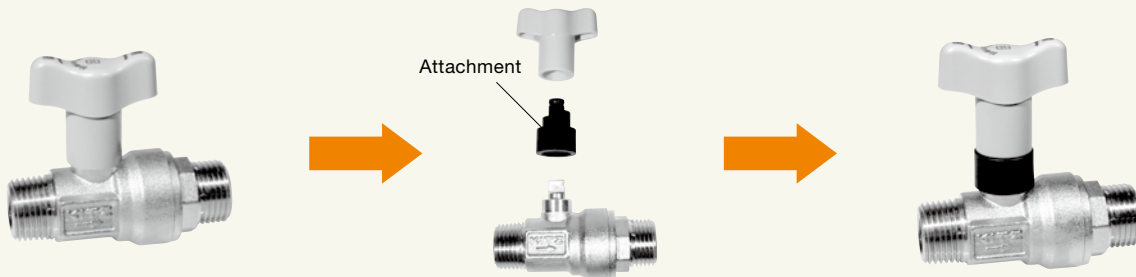


Flow Characteristics of KITZ Fancoil Valve, Flow Control, Globe Type

B


■ Nominal Size: 1/2^B Cv=1.8

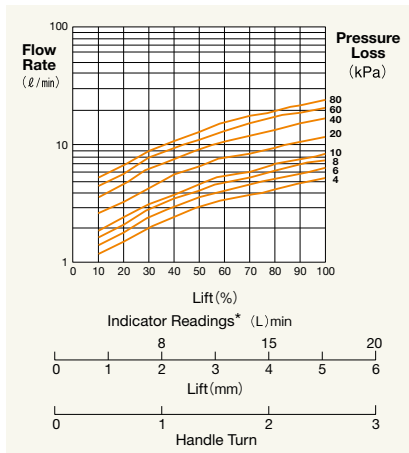

■ Nominal Size: 3/4^B Cv=2.6

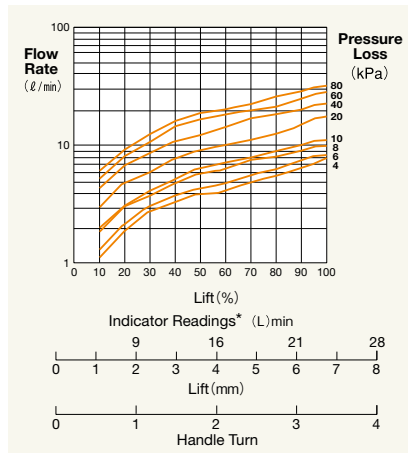

■ Nominal Size: 1^B, 1 1/4^B Cv=3.3

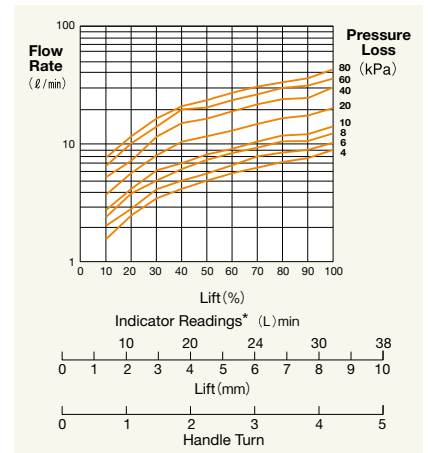

* Indicator readings refer to the flow rates when the pressure loss is 60 kPa.

1 Fluid

Water, oil, gas, air and steam.
However, flammable gas and toxic gas are excluded.

2 Relationship between the temperature of the fluid and the maximum permissible pressure (hereinafter referred to as the “pressure-temperature criteria”) shall be in accordance with Table 1. However, the fluid shall not be frozen.


3 In case where use of valves is prohibited or restricted by the High Pressure Gas Safety Act and other regulations, the user shall use them within the framework of laws and ordinances.

Table 1 Pressure-Temperature Criteria


| Nominal Pressure | Temperature of Fluid °C | Maximum Permissible Working Pressure ^{c)} MPa |
|------------------|-------------------------|--|
| 5K | -29 to 120 | 0.7 |
| | 159 ^{a)} | 0.5 |
| 10K | -29 to 120 | 1.4 |
| | 185 ^{b)} | 1.0 |

Notes: a) Maximum service temperature. In case of gate valves, it will be 144°C.
 b) Maximum service temperature. In case of gate valves, it will be 171°C.
 c) Maximum permissible pressure at intermediate temperature between temperature above 120°C and the maximum service temperature shall be obtained by proportional interpolation.

■ Nominal Pressure 5K

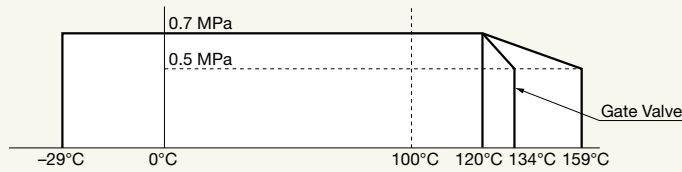

■ Nominal Pressure 10K

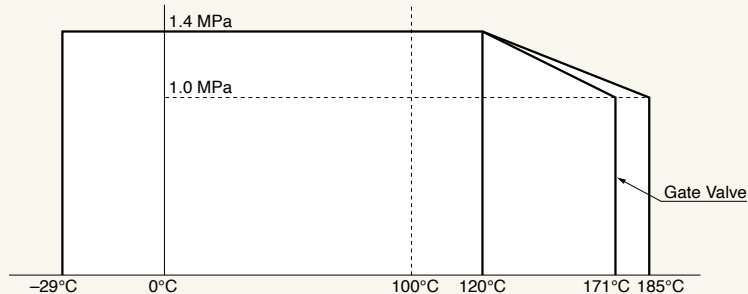

Pressure and Temperature Ratings of PN Bronze Valves

| Temperature of Fluid °C | Maximum Permissible Working Pressure MPa | |
|----------------------------|---|------|
| | PN16 | PN25 |
| -10 to 100 | 1.60 | 2.50 |
| 120 | 1.35 | 2.18 |
| 150 | 0.95 | 1.65 |
| 170 | 0.70 | 1.28 |
| 180 | - | 1.13 |
| 186 | - | 1.05 |


Pressure and Temperature Ratings of Class 125, 150, 300 Bronze Valves (Extracted from MSS SP-80)

| Temperature of Fluid | | Maximum Permissible Working Pressure MPa (psi) | | | |
|----------------------|------------|---|--|-----------------------------|-------------|
| °C | °F | CL125 | CL150 | CL300 | |
| Fig. | | AK125M AK125E AK125C AKYR CYR | AK150E AK150L C150L AK150LU AK150D C150D AK150YR | AK300J AK300D AK300YR | AK300LU |
| -29 to 66 | -20 to 150 | 1.38 (200) | 2.07 (300) | 4.14 (600) | 6.89 (1000) |
| 93 | 200 | 1.28 (185) | 1.86 (270) | 3.86 (560) | 6.34 (920) |
| 121 | 250 | 1.17 (170) | 1.65 (240) | 3.62 (525) | 5.72 (830) |
| 149 | 300 | 1.07 (155) | 1.45 (210) | 3.38 (490) | 5.10 (740) |
| 177 | 350 | 0.97 (140) | 1.24 (180) | 3.10 (450) | 4.48 (650) |
| 204 | 400 | - | - | 2.83 (410) | 3.86 (560) |
| 208 | 406 | 0.86 (125) | 1.03 (150) | - | - |
| 232 | 450 | - | - | 2.59 (375) | 3.31 (480) |
| 260 | 500 | - | - | 2.34 (340) | 2.69 (390) |
| 288 | 550 | - | - | 2.07 (300) | 2.07 (300) |
| Saturated Steam | | 0.86 (125) | 1.03 (150) | 2.07 (300) | 2.07 (300) |

KITZ

GENERAL CATALOG

Compact SS/CS Valves & Miniature

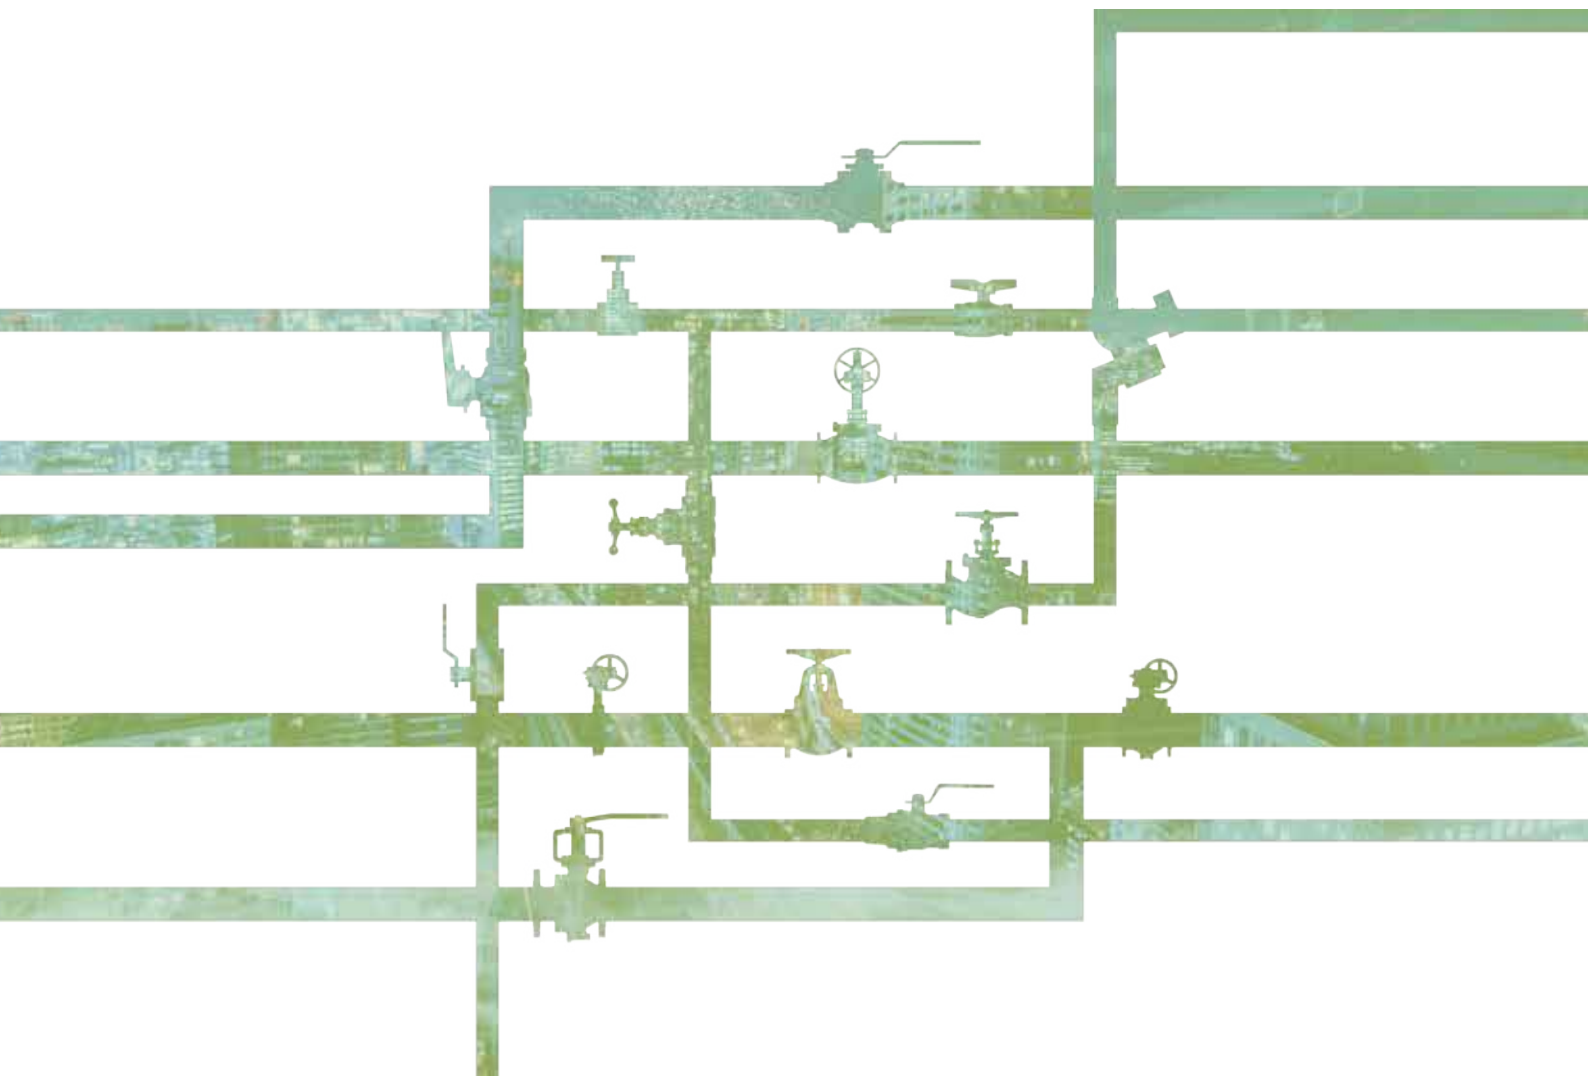

INDEX

CPT

Compact SS/CS Valves & Miniature


| Title | Body Material | Type | Class | End Connection* | Features* | Fig | | | Page | | |
|--|----------------|-------------|-------------------|--------------------------|---|---|-------------------------------------|-------------|------------|------------|------------|
| KITZ Standard Stainless Steel Gate/Globe/Check Valves & Strainers (B Series) | SS | Gate | 10K/200 | TE | SB, NRS | UEL | UELM | AKUEL | CPT3 46 | | |
| | | | 10K | FE/FF | | UE | UEM | AKUEM | | | |
| | | Globe | 5K | FE/FF | 10K | SB, RS | UAB | | | | CPT4 47 |
| | | | 10K | | | | UCB | | | | |
| | | | 10K/200 | TE | UCL | | UCLM | AKUCLM | | | |
| | | | 10K | FE/FF | UJ | | UJM | AKUJM | | | |
| | | | | TE | UJB | | UJBM | CPT5 48 | | | |
| | | | | FE/FF | UD | | UDM | | | | |
| | | Check | 10K | TE | 10K/200 | Screwed Bonnet, Rising Stem, Soft Seated (PTFE) | UDB | UDBM | | | CPT6 49 |
| | | | 10K | | | | Lift | UN | | | |
| | | | 10K | FE/FF | Swing | | UO | UOM | | | |
| | | Strainer | 20K | TE | 10K | FE/FF | Y-Pattern, 40 Mesh | UOB | UOBM | CPT7 50 | |
| | | | 10K | FE/FF | | | | UY | UYM | | |
| | | Wafer Check | 10K | Wafer | 10K | FE/FF | Single Plate, Built-in Bypass Valve | UYB | UYBM | CPT8 51 | |
| 20K | 10UW | | 10UWS | | | | | 20UWS | | | |
| Ball Check | 10K | TE | 10K | TE | Ball Check | 10UFT | 10UFTM | CPT9 52 | | | |
| | Air Vent | | | | | - | Air Vent Valve | | UFTA | | |
| Ball Check | 10K | TE/RF | 10K | TE/RF | Ball Check | 10UFT | 10UFTM | CPT10 53 | | | |
| | | | | | | | | | | | |
| Stainless & Carbon Steel Compact Floating Ball Valve | SS | Ball | 10K | TE | FB, Split Body | 10UT | 10UTM | CPT11 54 | | | |
| | | | Type 600 | | Reduced Bore, Uni-Body | UTK | UTKM | | AKUTKM | | |
| | | | | | Type 800 | Full Body, Split Body | UTKW | UTKMW | | | |
| | | | UTFKW | | | | UTFKMW | | | | |
| | | | Type 1000 | | Reduced Body, Split Body | UTHM | AKUTHM | CPT12 55 | | | |
| | | | | | | Full Body, Split Body | UTFM | | AKUTFM | | |
| | | | | | Reduced Body, Split Body, Long Neck Type for Thermal Insulation | UTHL | | CPT13 56 | | | |
| | | | | | | U3TZM | | | | | |
| | | | | | Reduced Bore, 3pc Body | AKU3TZM | | CPT14 57 | | | |
| | | | | | | SW | Reduced Bore, 3pc Body | | SWU3TZM | AWU3TZM | |
| | | | TE | | Reduced Bore, 3pc Body | U3TZFM | AKU3TZFM | | | | |
| | | | SW | | Reduced Bore, 3pc Body | SWU3TZFM | AWU3TZFM | | | | |
| | | | 3000 | | TE | Reduced Bore, Welded Body, Antistatic, Blowout Proof, Fire Safe | 3000UTKM | | | | |
| | | | Type 800 | | TE | Reduced Bore, 3-Way, 4-Seat, L or T Port | UTH4LM | UTH4TM | | | |
| CS | 600 | TE | 600 | TE | Reduced Bore, Uni-Body | SCTK | AKSCTK | CPT15 58 | | | |
| | 800 | SW | 800 | SW | Reduced Bore, Welded Body for Threaded Ends, Split Body for Socket Welding Ends, Antistatic, Blowout Proof, Fire Safe | 800SCTK | AK800SCTK | | | | |
| | 3000 | TE | 3000 | TE | Reduced Bore, Welded Body for Threaded Ends, Split Body for Socket Welding Ends, Antistatic, Blowout Proof, Fire Safe | AW800SCTK | AK800SCTK | | | | |
| | | SW | 3000 | SW | Reduced Bore, Welded Body for Threaded Ends, Split Body for Socket Welding Ends, Antistatic, Blowout Proof, Fire Safe | 3000SCTK | AK3000SCTK | | | | |
| Stainless Steel & Brass Miniature Valves | SUS316/SUSU630 | Needle | 30K | TE | Straight (Metric) | UN3-AP- | CPT16 59 | | | | |
| | | | | | Angle (Metric) | UN3-BP- | | | | | |
| | | | | | Straight (Metric) (Inch) | UN3-CP- | | | | | |
| | | | | | Angle (Metric) (Inch) | UN3-DP- | | | | | |
| | | | COUPLE LOK | Straight (Metric) (Inch) | UN3-EP- | | | | | | |
| | | | | Angle (Metric) (Inch) | UN3-FP- | | | | | | |
| | | | | TE | UN26-AP- | | | | | | |
| | | | | COUPLE LOK | UN26-CP- | | | | | | |
| | 260K | SW | Straight (Metric) | UN26-SP- | | | | | | | |
| | | COUPLE LOK | Straight (Inch) | UN26-CP- | | | | | | | |
| | Brass | Needle | 10K | TE | Straight | N1-A- | CPT17 60 | | | | |
| | | | | | Straight | N2-A- | | | | | |
| | | | | | Straight with Lock | N2-AL- | | | | | |
| | | | | | Angle | N2-B- | | | | | |

* (Abbreviation) TE: Threaded Ends, FE: Flanged Ends, RF: Raised Face, SW: Socket Welding Ends
 SB: Screwed Bonnet, NRS: Non Rising Stem, RS: Rising Stem, FB: Full Bore, RB: Reduced Bore

PRODUCT CODING

Compact SS/CS Valves except Miniature

(Note: Some products do not follow this coding system)



1 End Connection

- None Threaded Ends (BS/JIS)
- AK Threaded Ends (NPT)
- AW Socket Welding Ends

2 Pressure Class

- None KITZ Standard
- 10 10K
- 20 20K
- 800 Class 800
- 3000 Type 3000

3 Symbol of Shell Material

- U Stainless Steel
- SC Carbon Steel

4 Valve Type

- E, EL, EB Gate
- AB, CB, CL, J, JB Globe
- D, DB Soft Seated Globe
- N Lift Check
- O, OB Swing Check
- W Wafer Check (NBR Seat)
- WS Wafer Check (Metal Seat)
- Y, YB Strainer
- UFT, UFTE Ball Check
- T, TK, TF, TFK, TH, THL, TH4L/T, 3TZ, 3TZF Ball

5 Trim

- None 304SS
- M 316SS

Miniature Valves



1 Body Material

- U 316 Stainless Steel
- None Forged Brass

2 Service Application

- N Needle Valves for General Flow Control

3 Pressure Class

- 1 10K
- 2 20K
- 3 30K
- 26 260K

4 Design & End Connection

- A Straight/Threaded
- B Angle/Threaded
- C Straight/COUPLE LOK Type
- D Angle/COUPLE LOK Type
- E Straight/COUPLE LOK Type & Threaded
- F Angle/COUPLE LOK Type & Threaded
- S Straight/Socket Weld

5 Auxiliary Items

- P Complete with Nut for Panel Tap
- L With Locking Lever

6 Nominal Size

| Threaded End | Metric Tubing End |
|--------------------------|-------------------|
| 1 1/8 ^B | 3 3mm |
| 2 1/4 ^B | 4 4mm |
| 3 3/8 ^B | 6 6mm |
| 4 1/2 ^B | 8 8mm |
| 6 3/4 ^B | 10 10mm |
| 8 1 ^B | 12 12mm |

Inch Tubing End (Outside Diameter)

| |
|------------------------|
| 01 1/8 (3.17mm) |
| 02 1/4 (6.35mm) |
| 03 3/8 (9.52mm) |
| 04 1/2 (12.70mm) |

























(Example)

























- UN3-EP-6-2 (A)-(B)
- (A) 6mm Tubing End
- (B) 1/4^B Threaded End











CAUTION





Valves introduced in this catalog are not designed to be used in toxic gases.





| Type | Gate | | | Gate | | | Gate | | | Gate | | | |
|--|---|---|--|---|---|--|---|---|--|---|---|--|-----|
| Stainless Steel B Series KITZ Standard |  |  |  SB IS NRS |  |  |  SB IS NRS |  |  |  SB IS NRS |  |  |  SB IS NRS | |
| |  |  |  |  |  |  |  |  |  |  |  |  | |
| Fig | UEL | | | UE | | | UELM | | | AKUELM | | | |
| KCA Code | - | | | - | | | - | | | 31 | | | |
| End Connection | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | ASME B1.20.1 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 54 | 96 | 70 | | | | 54 | 96 | 70 | | | |
| 3/4 | 20 | 58 | 101 | 70 | | | | 58 | 101 | 70 | | | |
| 1 | 25 | 65 | 112 | 80 | | | | 65 | 112 | 80 | | | |
| 1 1/4 | 32 | 74 | 123 | 80 | | | | 74 | 123 | 80 | | | |
| 1 1/2 | 40 | 76 | 150 | 100 | | | | 76 | 150 | 100 | | | |
| 2 | 50 | 87 | 167 | 100 | | | | 87 | 167 | 100 | | | |
| 2 1/2 | 65 | | | | 115 | 248 | 135 | | | | 115 | 248 | 135 |
| 3 | 80 | | | | 130 | 275 | 155 | | | | 130 | 275 | 155 |
| 4 | 100 | | | | 155 | 315 | 200 | | | | 155 | 315 | 200 |
| Body | CF8 | | | CF8M | | | CF8M | | | CF8M | | | |
| Bonnet | CF8 | | | CF8M | | | CF8M | | | CF8M | | | |
| Stem | 304SS + Hard Cr Plating | | | 316SS | | | 316SS + Hard Cr Plating | | | 316SS + Hard Cr Plating | | | |
| Disc | CF8 | | | CF8M | | | CF8M | | | CF8M | | | |
| Gland Packing | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | |
| Hand Wheel | ZDC/Aluminum Die-Cast | | | Aluminum Die-Cast/DI | | | ZDC/Aluminum Die-Cast | | | ZDC/Aluminum Die-Cast | | | |
| Standard/Approval | RoHS | | | RoHS up to 3 ^B | | | RoHS | | | RoHS up to 3 ^B | | | |
| Service Condition | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | |
| Reference Page | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | |
| Remarks | RoHS: Option EAC: Option | | | RoHS: Option EAC: Option | | | RoHS: Option EAC: Option | | | RoHS: Option EAC: Option | | | |





| Type | Gate | | | Gate | | | Gate | | | Gate | | | |
|--|---|---|--|---|---|--|---|---|--|---|---|--|-----|
| Stainless Steel B Series KITZ Standard |  |  |  SB IS NRS |  |  |  SB IS NRS |  |  |  SB IS NRS |  |  |  SB IS NRS | |
| |  |  |  |  |  |  |  |  |  |  |  |  | |
| Fig | UEM | | | AKUEM | | | UEB | | | UEBM | | | |
| KCA Code | - | | | 31 | | | - | | | - | | | |
| End Connection | BS21 (JIS B0203) | | | ASME B1.20.1 | | | JIS B2220* 10K FF | | | JIS B2220* 10K FF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | | | | | | | 85 | 99 | 70 | | | |
| 3/4 | 20 | | | | | | | 95 | 105 | 70 | | | |
| 1 | 25 | | | | | | | 100 | 116 | 80 | 100 | 116 | 80 |
| 1 1/4 | 32 | | | | | | | 110 | 128 | 80 | 110 | 128 | 80 |
| 1 1/2 | 40 | | | | | | | 125 | 170 | 100 | 125 | 170 | 100 |
| 2 | 50 | | | | | | | 140 | 188 | 100 | 140 | 188 | 100 |
| 2 1/2 | 65 | 115 | 248 | 135 | 115 | 248 | 135 | 170 | 248 | 135 | 170 | 248 | 135 |
| 3 | 80 | 130 | 275 | 155 | 130 | 275 | 155 | 190 | 275 | 135 | 190 | 275 | 135 |
| 4 | 100 | 155 | 315 | 200 | 155 | 315 | 200 | | | | | | |
| Body | CF8M | | | CF8M | | | CF8 | | | CF8M | | | |
| Bonnet | CF8M | | | CF8M | | | 304SS/CF8 | | | 316SS/CF8M | | | |
| Stem | 316SS | | | 316SS | | | 304SS | | | 316SS | | | |
| Disc | CF8M | | | CF8M | | | CF8 | | | CF8M | | | |
| Gland Packing | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | |
| Hand Wheel | Aluminum Die-Cast/DI | | | Aluminum Die-Cast/DI | | | ZDC/Aluminum Die-Cast | | | Aluminum Die-Cast/DI | | | |
| Standard/Approval | RoHS up to 3 ^B | | | RoHS up to 3 ^B | | | RoHS | | | RoHS | | | |
| Service Condition | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | |
| Reference Page | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | |
| Remarks | RoHS: Option EAC: Option | | | RoHS: Option EAC: Option | | | * Except Flange Thickness RoHS: Option, EAC: Option | | | * Except Flange Thickness RoHS: Option, EAC: Option | | | |




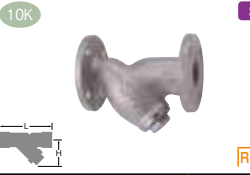
| Type | Globe | | | Globe | | | Globe | | | Globe | | | |
|--|---|-----|-----|---|-----|-----|--|-----|-----|---|-----|-----|-----|
| Stainless Steel B Series KITZ Standard |  | | |  | | |  | | |  | | | |
| | SB IS RS EAC RoHS | | | SB IS RS EAC RoHS | | | SB IS RS EAC RoHS | | | SB IS RS EAC RoHS | | | |
| Fig | UAB | | | UCL | | | UCLM | | | AKUCLM | | | |
| KCA Code | - | | | - | | | - | | | - | | | |
| End Connection | JIS B2220* 5K FF | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | ASME B1.20.1 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | | | | 44 | 68 | 55 | 44 | 68 | 55 | 44 | 68 | 55 |
| 3/8 | 10 | 73 | 106 | 70 | 48 | 68 | 55 | 48 | 68 | 55 | 48 | 68 | 55 |
| 1/2 | 15 | 85 | 106 | 70 | 52 | 68 | 55 | 52 | 68 | 55 | 52 | 68 | 55 |
| 3/4 | 20 | 95 | 108 | 70 | 60 | 93 | 60 | 60 | 93 | 60 | 60 | 93 | 60 |
| 1 | 25 | 108 | 119 | 80 | 72 | 100 | 70 | 72 | 100 | 70 | 72 | 100 | 70 |
| 1 1/4 | 32 | 120 | 142 | 90 | 80 | 122 | 80 | 80 | 122 | 80 | 80 | 122 | 80 |
| 1 1/2 | 40 | 135 | 155 | 90 | 90 | 138 | 90 | 90 | 138 | 90 | 90 | 138 | 90 |
| 2 | 50 | 155 | 186 | 115 | 100 | 153 | 100 | 100 | 153 | 100 | 100 | 153 | 100 |
| Body | CF8 | | | CF8 | | | CF8M | | | CF8M | | | |
| Bonnet | CF8 | | | CF8 | | | CF8M | | | CF8M | | | |
| Stem | 304SS + Hard Cr Plating | | | 304SS + Hard Cr Plating | | | 316SS + Hard Cr Plating | | | 316SS + Hard Cr Plating | | | |
| Disc | 304SS | | | 304SS | | | 316SS | | | 316SS | | | |
| Gland Packing | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided * | | | Flexible Graphite+PTFE Braided * | | | Flexible Graphite+PTFE Braided * | | | |
| Hand Wheel | ZDC/Aluminum Die-Cast | | | ZDC/Aluminum Die-Cast | | | ZDC/Aluminum Die-Cast | | | ZDC/Aluminum Die-Cast | | | |
| Standard/Approval | RoHS | | | RoHS | | | RoHS | | | RoHS | | | |
| Service Condition | Pressure-Temperature: 0.5 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | |
| Reference Page | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | |
| Remarks | * Except Flange Thickness RoHS: Option, EAC: Option | | | * PTFE up to 1/2 ^B RoHS: Option, EAC: Option | | | * PTFE up to 1/2 ^B RoHS: Option, EAC: Option | | | * PTFE up to 1/2 ^B RoHS: Option, EAC: Option | | | |

| Type | Globe | | | Globe | | | Globe | | | Globe | | | |
|--|---|-----|-----|---|-----|-----|--|-----|-----|---|-----|-----|-----|
| Stainless Steel B Series KITZ Standard |  | | |  | | |  | | |  | | | |
| | SB IS RS EAC RoHS | | | SB IS RS EAC RoHS | | | SB IS RS EAC RoHS | | | SB IS RS EAC RoHS | | | |
| Fig | UJ | | | UJM | | | AKUJM | | | UCB | | | |
| KCA Code | - | | | - | | | 33 | | | - | | | |
| End Connection | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | ASME B1.20.1 | | | JIS B2220* 10K FF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | 55 | 109 | 60 | 55 | 109 | 60 | 55 | 109 | 60 | 73 | 106 | 70 |
| 1/2 | 15 | 65 | 111 | 60 | 65 | 111 | 60 | 65 | 111 | 60 | 85 | 106 | 70 |
| 3/4 | 20 | 80 | 112 | 70 | 80 | 112 | 70 | 80 | 112 | 70 | 95 | 108 | 70 |
| 1 | 25 | 90 | 142 | 90 | 90 | 142 | 90 | 90 | 142 | 90 | 108 | 119 | 80 |
| 1 1/4 | 32 | 105 | 150 | 90 | 105 | 150 | 90 | 105 | 150 | 90 | 120 | 142 | 90 |
| 1 1/2 | 40 | 120 | 171 | 100 | 120 | 171 | 100 | 120 | 171 | 100 | 135 | 155 | 90 |
| 2 | 50 | 140 | 189 | 115 | 140 | 189 | 115 | 140 | 189 | 115 | 155 | 186 | 115 |
| 2 1/2 | 65 | 180 | 253 | 180 | 180 | 253 | 180 | 180 | 253 | 180 | | | |
| 3 | 80 | 200 | 280 | 225 | 200 | 280 | 225 | 200 | 280 | 225 | | | |
| Body | CF8 | | | CF8M | | | CF8M | | | CF8 | | | |
| Bonnet | CF8 | | | CF8M | | | CF8M | | | 304SS/CF8 | | | |
| Stem | 304SS + Hard Cr Plating | | | 316SS + Hard Cr Plating | | | 316SS + Hard Cr Plating | | | 304SS + Hard Cr Plating | | | |
| Disc | 304SS/CF8 | | | 316SS/CF8M | | | 316SS/CF8M | | | 304SS | | | |
| Gland Packing | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | |
| Hand Wheel | ZDC/Aluminum Die-Cast/DI | | | ZDC/Aluminum Die-Cast/DI | | | ZDC/Aluminum Die-Cast/DI | | | ZDC/Aluminum Die-Cast | | | |
| Standard/Approval | RoHS up to 2 ^B | | | RoHS up to 2 ^B | | | RoHS up to 2 ^B | | | RoHS | | | |
| Service Condition | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | |
| Reference Page | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | |
| Remarks | RoHS: Option EAC: Option | | | RoHS: Option, EAC: Option | | | RoHS: Option, EAC: Option | | | * Except Flange Thickness RoHS: Option, EAC: Option | | | |

| Type | Globe | | | Globe | | | Globe | | | Globe | | | |
|--|---|-----|-----|---|-----|-----|--|-----|-----|---|-----|-----|-----|
| Stainless Steel B Series KITZ Standard |  | | |  | | |  | | |  | | | |
| | EAC RoHS | | | EAC RoHS | | | EAC RoHS | | | EAC RoHS | | | |
| Fig | UJB | | | UJBM | | | UD | | | UDM | | | |
| KCA Code | - | | | - | | | - | | | - | | | |
| End Connection | JIS B2220* 10K FF | | | JIS B2220* 10K FF | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | 85 | 109 | 60 | 85 | 109 | 60 | 55 | 109 | 60 | 55 | 109 | 60 |
| 1/2 | 15 | 85 | 111 | 60 | 85 | 111 | 60 | 65 | 112 | 60 | 65 | 112 | 60 |
| 3/4 | 20 | 95 | 112 | 70 | 95 | 112 | 70 | 80 | 113 | 70 | 80 | 113 | 70 |
| 1 | 25 | 110 | 142 | 90 | 110 | 142 | 90 | 90 | 143 | 90 | 90 | 143 | 90 |
| 1 1/4 | 32 | 130 | 150 | 90 | 130 | 150 | 90 | 105 | 150 | 90 | 105 | 150 | 90 |
| 1 1/2 | 40 | 150 | 171 | 100 | 150 | 171 | 100 | 120 | 171 | 100 | 120 | 171 | 100 |
| 2 | 50 | 180 | 189 | 115 | 180 | 189 | 115 | 140 | 189 | 115 | 140 | 189 | 115 |
| 2 1/2 | 65 | 210 | 253 | 180 | 210 | 253 | 180 | | | | | | |
| 3 | 80 | 240 | 280 | 225 | 240 | 280 | 225 | | | | | | |
| Body | CF8 | | | CF8M | | | CF8 | | | CF8M | | | |
| Bonnet | CF8 | | | CF8M | | | CF8 | | | CF8M | | | |
| Stem | 304SS + Hard Cr Plating | | | 316SS + Hard Cr Plating | | | 304SS + Hard Cr Plating | | | 316SS + Hard Cr Plating | | | |
| Disc | 304SS/CF8 | | | 316SS/CF8M | | | PTFE | | | PTFE | | | |
| Gland Packing | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | |
| Hand Wheel | ZDC/Aluminum Die-Cast/DI | | | ZDC/Aluminum Die-Cast/DI | | | ZDC/Aluminum Die-Cast | | | ZDC/Aluminum Die-Cast | | | |
| Standard/Approval | RoHS up to 2 ^B | | | RoHS up to 2 ^B | | | RoHS | | | RoHS | | | |
| Service Condition | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | |
| Reference Page | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | |
| Remarks | * Except Flange Thickness RoHS: Option, EAC: Option | | | * Except Flange Thickness RoHS: Option, EAC: Option | | | RoHS: Option, EAC: Option | | | RoHS: Option, EAC: Option | | | |

| Type | Globe | | | Globe | | | Lift Check | | | Swing Check | | | |
|--|---|-----|-----|---|-----|-----|--|-----|----|---|-----|-----|---|
| Stainless Steel B Series KITZ Standard |  | | |  | | |  | | |  | | | |
| | EAC RoHS | | | EAC RoHS | | | EAC RoHS | | | EAC RoHS | | | |
| Fig | UDB | | | UDBM | | | UN | | | UO | | | |
| KCA Code | - | | | - | | | - | | | - | | | |
| End Connection | JIS B2220* 10K FF | | | JIS B2220* 10K FF | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | | | | | | | 55 | 50 | | | | |
| 1/2 | 15 | 85 | 112 | 60 | 85 | 112 | 60 | 65 | 53 | | 65 | 45 | |
| 3/4 | 20 | 95 | 113 | 70 | 95 | 113 | 70 | 80 | 54 | | 80 | 55 | |
| 1 | 25 | 110 | 143 | 90 | 110 | 143 | 90 | 90 | 62 | | 90 | 61 | |
| 1 1/4 | 32 | 130 | 150 | 90 | 130 | 150 | 90 | 105 | 66 | | 105 | 71 | |
| 1 1/2 | 40 | 150 | 171 | 100 | 150 | 171 | 100 | 120 | 76 | | 120 | 72 | |
| 2 | 50 | 180 | 189 | 115 | 180 | 189 | 115 | 140 | 85 | | 140 | 81 | |
| 2 1/2 | 65 | 210 | 252 | 180 | 210 | 252 | 180 | | | | 180 | 93 | |
| 3 | 80 | 240 | 277 | 225 | 240 | 277 | 225 | | | | 200 | 104 | |
| Body | CF8 | | | CF8M | | | CF8 | | | CF8 | | | |
| Bonnet/Cap | CF8 | | | CF8M | | | 304SS/CF8 | | | 304SS/CF8 | | | |
| Stem/Hinge Pin | 316SS + Hard Cr Plating | | | 316SS + Hard Cr Plating | | | 304SS/CF8 | | | 304SS | | | |
| Disc | PTFE | | | PTFE | | | CF8 | | | CF8 | | | |
| Gland Packing | Flexible Graphite+PTFE Braided | | | Flexible Graphite+PTFE Braided | | | | | | | | | |
| Hand Wheel | ZDC/Aluminum Die-Cast/DI | | | ZDC/Aluminum Die-Cast/DI | | | | | | | | | |
| Standard/Approval | RoHS up to 2 ^B | | | RoHS up to 2 ^B | | | RoHS | | | RoHS | | | |
| Service Condition | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | Pressure-Temperature: 1.0 MPa: 180°C | | | |
| Reference Page | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | |
| Remarks | * Except Flange Thickness RoHS: Option, EAC: Option | | | * Except Flange Thickness RoHS: Option, EAC: Option | | | RoHS: Option, EAC: Option | | | RoHS: Option, EAC: Option | | | |



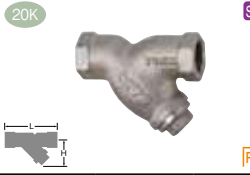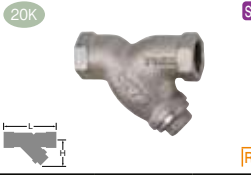

| Type | Swing Check | | | | Swing Check | | | | Swing Check | | | | Swing Check | | | |
|--|---|-----|-----|---|---|-----|---|-----|--|---|-----|-----|---|-----|-----|---|
| Stainless Steel B Series KITZ Standard |  | | | |  | | | |  | | | |  | | | |
| | EAC RoHS | | | | EAC RoHS | | | | EAC RoHS | | | | EAC RoHS | | | |
| Fig | UOM | | | | AKUOM | | | | UOB | | | | UOBM | | | |
| KCA Code | - | | | | 34 | | | | - | | | | - | | | |
| End Connection | BS21 (JIS B0203) | | | | ASME B1.20.1 | | | | JIS B2220* 10K FF | | | | JIS B2220* 10K FF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 65 | 45 | | 65 | 45 | | 85 | 45 | | 85 | 45 | | 85 | 45 | |
| 3/4 | 20 | 80 | 55 | | 80 | 55 | | 95 | 55 | | 95 | 55 | | 95 | 55 | |
| 1 | 25 | 90 | 61 | | 90 | 61 | | 110 | 61 | | 110 | 61 | | 110 | 61 | |
| 1 1/4 | 32 | 105 | 71 | | 105 | 71 | | 130 | 71 | | 130 | 71 | | 130 | 71 | |
| 1 1/2 | 40 | 120 | 72 | | 120 | 72 | | 150 | 72 | | 150 | 72 | | 150 | 72 | |
| 2 | 50 | 140 | 81 | | 140 | 81 | | 180 | 81 | | 180 | 81 | | 180 | 81 | |
| 2 1/2 | 65 | 180 | 93 | | 180 | 93 | | 210 | 93 | | 210 | 93 | | 210 | 93 | |
| 3 | 80 | 200 | 104 | | 200 | 104 | | 240 | 104 | | 240 | 104 | | 240 | 104 | |
| Body | CF8M | | | | CF8M | | | | CF8 | | | | CF8M | | | |
| Bonnet/Cap | 316SS/CF8M | | | | 316SS/CF8M | | | | 304SS/CF8 | | | | 316SS/CF8M | | | |
| Stem/Hinge Pin | 316SS | | | | 316SS | | | | 304SS | | | | 316SS | | | |
| Disc/Screen | CF8M | | | | CF8M | | | | CF8 | | | | CF8M | | | |
| Standard/Approval | RoHS | | | | RoHS | | | | RoHS | | | | RoHS | | | |
| Service Condition | Pressure-Temperature: 1.0 MPa: 180°C | | | | Pressure-Temperature: 1.0 MPa: 180°C | | | | Pressure-Temperature: 1.0 MPa: 180°C | | | | Pressure-Temperature: 1.0 MPa: 180°C | | | |
| Reference Page | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | |
| Remarks | RoHS: Option, EAC: Option | | | | RoHS: Option, EAC: Option | | | | * Except Flange Thickness RoHS: Option, EAC: Option | | | | * Except Flange Thickness RoHS: Option, EAC: Option | | | |





| Type | Strainer | | | | Strainer | | | | Strainer | | | | Strainer | | | |
|--|---|-----|-----|-----|---|-----|-----|-----|--|-----|-----|-----|---|-----|-----|-----|
| Stainless Steel B Series KITZ Standard |  | | | |  | | | |  | | | |  | | | |
| | EAC RoHS | | | | EAC RoHS | | | | EAC RoHS | | | | EAC RoHS | | | |
| Fig | UY | | | | UYM | | | | UYB | | | | UYBM | | | |
| KCA Code | - | | | | - | | | | - | | | | - | | | |
| End Connection | BS21 (JIS B0203) | | | | BS21 (JIS B0203) | | | | JIS B2220* 10K FF | | | | JIS B2220* 10K FF | | | |
| inch | mm | L | H | *H1 | L | H | *H1 | L | H | *H1 | L | H | *H1 | L | H | *H1 |
| 1/4 | 8 | 65 | 50 | 66 | 65 | 50 | 66 | 110 | 50 | 67 | 110 | 50 | 67 | 110 | 50 | 67 |
| 3/8 | 10 | 70 | 50 | 67 | 70 | 50 | 67 | 120 | 58 | 79 | 120 | 58 | 79 | 120 | 58 | 79 |
| 1/2 | 15 | 85 | 58 | 79 | 85 | 58 | 79 | 130 | 66 | 91 | 130 | 66 | 91 | 130 | 66 | 91 |
| 3/4 | 20 | 100 | 64 | 89 | 100 | 64 | 89 | 150 | 78 | 109 | 150 | 78 | 109 | 150 | 78 | 109 |
| 1 | 25 | 115 | 76 | 107 | 115 | 76 | 107 | 170 | 93 | 131 | 170 | 93 | 131 | 170 | 93 | 131 |
| 1 1/4 | 32 | 135 | 89 | 127 | 135 | 89 | 127 | 190 | 103 | 144 | 190 | 103 | 144 | 190 | 103 | 144 |
| 1 1/2 | 40 | 150 | 98 | 139 | 150 | 98 | 139 | 220 | 121 | 173 | 220 | 121 | 173 | 220 | 121 | 173 |
| 2 | 50 | 180 | 115 | 167 | 180 | 115 | 167 | | | | | | | | | |
| 2 1/2 | 65 | 220 | 156 | 214 | 220 | 156 | 214 | | | | | | | | | |
| 3 | 80 | 250 | 192 | 266 | 250 | 192 | 266 | | | | | | | | | |
| Body | CF8 | | | | CF8M | | | | CF8 | | | | CF8M | | | |
| Bonnet/Cap/Cover | CF8 | | | | CF8M | | | | CF8 | | | | CF8M | | | |
| Disc/Screen | 304SS | | | | 316SS | | | | 304SS | | | | 316SS | | | |
| Gasket | Reinforced PTFE | | | | Reinforced PTFE | | | | Reinforced PTFE | | | | Reinforced PTFE | | | |
| Standard/Approval | RoHS | | | | RoHS | | | | RoHS | | | | RoHS | | | |
| Service Condition | Pressure-Temperature: 1.0 MPa: 180°C | | | | Pressure-Temperature: 1.0 MPa: 180°C | | | | Pressure-Temperature: 1.0 MPa: 180°C | | | | Pressure-Temperature: 1.0 MPa: 180°C | | | |
| Reference Page | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | | Design, Packing/Gasket, P-T Rating: Page SS18&19 | | | |
| Remarks | 40-mesh, RoHS: Option | | | | 40-mesh, RoHS: Option | | | | * Except Flange Thickness 40-mesh, RoHS: Option | | | | * Except Flange Thickness 40-mesh, RoHS: Option | | | |

*Height for removing the screen

| Type | Wafer Check | | | Wafer Check | | | Wafer Check | | | |
|--|---|-----|-----|--|-----|-----|--|-----|-----|----|
| Stainless Steel B Series KITZ Standard | | | | | | | | | | |
| | 10UW | | | 10UWS | | | 20UWS | | | |
| KCA Code | - | | | - | | | - | | | |
| End Connection | Wafer (JIS 10K) | | | Wafer (JIS 10K) | | | Wafer (JIS 20K) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D |
| 2 | 50 | 60 | 147 | 60 | 60 | 148 | 60 | 60 | 142 | 60 |
| 2 1/2 | 65 | 67 | 155 | 60 | 67 | 156 | 60 | 67 | 158 | 60 |
| 3 | 80 | 73 | 163 | 60 | 73 | 164 | 60 | 73 | 163 | 60 |
| 4 | 100 | 73 | 175 | 60 | 73 | 176 | 60 | 73 | 176 | 60 |
| 5 | 125 | 89 | 189 | 70 | 89 | 189 | 70 | 89 | 189 | 70 |
| 6 | 150 | 98 | 202 | 70 | 98 | 203 | 70 | 98 | 203 | 70 |
| 8 | 200 | 127 | 229 | 70 | 127 | 229 | 70 | 127 | 229 | 70 |
| 10 | 250 | 146 | 280 | 90 | 146 | 284 | 90 | 146 | 284 | 90 |
| 12 | 300 | 181 | 307 | 90 | 181 | 310 | 90 | 181 | 310 | 90 |
| Body | CF8 + NBR | | | CF8 + Metal Seat | | | CF8 + Metal Seat | | | |
| Bonnet/Cap | CF8 | | | CF8 | | | CF8 | | | |
| Stem/Hinge pin | 304SS | | | 304SS | | | 304SS | | | |
| Disc/Screen | CF8 | | | CF8 | | | CF8 | | | |
| Gasket | Flexible Graphite + PTFE Braded | | | Flexible Graphite + PTFE Braded | | | Flexible Graphite + PTFE Braded | | | |
| Service Condition | W.O.G. 80°C (1.4MPa) (DO NOT USE for Flammable Gas or Toxic Gas.) | | | W.O.G. 120°C (1.4MPa) (DO NOT USE for Flammable Gas or Toxic Gas.) | | | W.O.G. 120°C (3.4MPa) (DO NOT USE for Flammable Gas or Toxic Gas.) | | | |
| Reference Page | Features: Page BR35 | | | Features: Page BR35 | | | Features: Page BR35 | | | |
| Remarks | Built-in Bypass Valve Single Plate Type | | | Built-in Bypass Valve Single Plate Type | | | Built-in Bypass Valve Single Plate Type | | | |

| Type | Ball Check | | | Air Vent | | | Ball Check | | | Ball Check | | | |
|--|---|-----|------|----------------------------|----|---|---|-----|-------|---|-----|-------|---|
| Stainless Steel K Series KITZ Standard | | | | | | | | | | | | | |
| | UFTE | | | UFTA | | | 10UFT | | | 10UFTE | | | |
| KCA Code | - | | | - | | | - | | | - | | | |
| End Connection | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | JIS B2220 10K RF | | | JIS B2220 10K RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | | | | 80 | | | | | | | | |
| 3/8 | 10 | | | | 80 | | | | | | | | |
| 1/2 | 15 | 105 | 59.5 | | | | | | | | | | |
| 3/4 | 20 | | | | | | | 190 | 87 | | | | |
| 1 | 25 | | | | | | | 200 | 100.5 | | 200 | 97 | |
| 1 1/4 | 32 | | | | | | | 220 | 123.5 | | 220 | 120.5 | |
| 1 1/2 | 40 | | | | | | | 240 | 150 | | 240 | 146 | |
| 2 | 50 | | | | | | | 290 | 187 | | 290 | 187 | |
| 3 | 80 | | | | | | | 410 | 275 | | 410 | 275 | |
| 4 | 100 | | | | | | | | | | 500 | 366 | |
| Body | CF8 | | | CF8 | | | CF8 | | | CF8 | | | |
| Bonnet/Cap/Cover | CF8 | | | CF8 | | | CF8 | | | CF8 | | | |
| Disc | NBR | | | EPDM | | | NBR | | | NBR | | | |
| O ring/Gasket | NBR | | | | | | NBR | | | NBR | | | |
| Plug | 304SS | | | | | | | | | 304SS | | | |
| Service Condition | Non-Shock Water : 0.05~1.4MPa, 0~60°C | | | Air : 0.7MPa at 0°C~+60°C | | | Non-Shock Water : 0.05~1.4MPa, 0~60°C | | | Non-Shock Water : 0.05~1.4MPa, 0~60°C | | | |
| Reference Page | Features & Pressure Loss: Page CPT19&20 | | | | | | Features & Pressure Loss: Page CPT19&20 | | | Features & Pressure Loss: Page CPT19&20 | | | |
| Remarks | Vertical Installation Only | | | Vertical Installation Only | | | Vertical Installation Only | | | Vertical & Horizontal | | | |

| Type | SS Ball | | | SS Ball | | | SS Ball | | | SS Ball | | | |
|--------------------------------------|---|---|--|---|-----|-----|-------------------------|------|----|-------------------------|------|----|-----|
| SS/CS Threaded or Welded Ball Valves |  |  |  |  | | | | | | | | | |
| Fig | 10UT | | | 10UTM | | | UTK | | | UTKM | | | |
| KCA Code | - | | | - | | | - | | | - | | | |
| End Connection | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | | | | | | | 39 | 31 | 60 | 39 | 31 | 60 |
| 3/8 | 10 | 62 | 72 | 130 | 62 | 72 | 130 | 44 | 35 | 70 | 44 | 35 | 70 |
| 1/2 | 15 | 65 | 102 | 130 | 65 | 102 | 130 | 56.5 | 38 | 85 | 56.5 | 38 | 85 |
| 3/4 | 20 | 80 | 105 | 130 | 80 | 105 | 130 | 59 | 42 | 85 | 59 | 42 | 85 |
| 1 | 25 | 90 | 124 | 160 | 90 | 124 | 160 | 71 | 47 | 100 | 71 | 47 | 100 |
| 1 1/4 | 32 | 110 | 130 | 160 | 110 | 130 | 160 | 78 | 52 | 100 | 78 | 52 | 100 |
| 1 1/2 | 40 | 120 | 113 | 230 | 120 | 113 | 230 | 83 | 63 | 125 | 83 | 63 | 125 |
| 2 | 50 | 140 | 120 | 230 | 140 | 120 | 230 | 100 | 69 | 125 | 100 | 69 | 125 |
| 2 1/2 | 65 | 160 | 154 | 400 | 160 | 154 | 400 | | | | | | |
| 3 | 80 | 182 | 163 | 400 | 182 | 163 | 400 | | | | | | |
| Body & Cap | CF8 | | | CF8M | | | CF8 | | | CF8M | | | |
| Stem | 304SS | | | 316SS | | | 304SS/316SS | | | 316SS | | | |
| Ball | 304SS/CF8 | | | 316SS/CF8M | | | 304SS/316SS/CF8/CF8M | | | 316SS/CF8M | | | |
| Ball Seat | PTFE | | | PTFE | | | G/F PTFE | | | G/F PTFE | | | |
| Gland Packing | PTFE | | | PTFE | | | G/F PTFE | | | G/F PTFE | | | |
| Gasket | PTFE | | | PTFE | | | | | | | | | |
| Handle | DI | | | DI | | | SS | | | SS | | | |
| Bore | Full Bore | | | Full Bore | | | Reduced Bore | | | Reduced Bore | | | |
| Standard/ Approval | | | | | | | RoHS | | | RoHS | | | |
| Reference Page | P-T Rating : Page CPT16 | | | P-T Rating : Page CPT16 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | |
| Remarks | Split Body | | | Split Body | | | RoHS: Option | | | RoHS: Option | | | |

| Type | SS Ball | | | SS Ball | | | SS Ball | | | SS Ball | | | |
|--------------------------------------|---|---|--|---|------|----|---|------|----|-------------------------------------|----|----|----|
| SS/CS Threaded or Welded Ball Valves |  |  |  |  | | | | | | | | | |
| Fig | AKUTKM | | | UTKW | | | UTKMW | | | UTFKW | | | |
| KCA Code | 52 | | | - | | | - | | | - | | | |
| End Connection | ASME B1.20.1 | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | 39 | 31 | 60 | 39 | 24 | 35 | 39 | 24 | 35 | | | |
| 3/8 | 10 | 44 | 35 | 70 | 44 | 29 | 40 | 44 | 29 | 40 | | | |
| 1/2 | 15 | 56.5 | 38 | 85 | 56.5 | 34 | 55 | 56.5 | 34 | 55 | 62 | 46 | 60 |
| 3/4 | 20 | 59 | 42 | 85 | 59 | 37 | 55 | 59 | 37 | 55 | 73 | 49 | 60 |
| 1 | 25 | 71 | 47 | 100 | 71 | 41 | 69 | 71 | 41 | 69 | 85 | 59 | 82 |
| 1 1/4 | 32 | 78 | 52 | 100 | | | | | | | | | |
| 1 1/2 | 40 | 83 | 63 | 125 | | | | | | | | | |
| 2 | 50 | 100 | 69 | 125 | | | | | | | | | |
| Body & Cap | CF8M | | | CF8 | | | CF8M | | | CF8 | | | |
| Stem | 316SS | | | 304SS/316SS | | | 316SS | | | 304SS | | | |
| Ball | 316SS/CF8M | | | 304SS/316SS/CF8/CF8M | | | 316SS/CF8M | | | 304SS | | | |
| Ball Seat | G/F PTFE | | | G/F PTFE | | | G/F PTFE | | | HYPATITE® PTFE | | | |
| Gland Packing | G/F PTFE | | | G/F PTFE | | | G/F PTFE | | | FKM | | | |
| Gasket | | | | | | | | | | PTFE | | | |
| Handle | SS | | | ZDC | | | ZDC | | | SS | | | |
| Bore | Reduced Bore | | | Reduced Bore | | | Reduced Bore | | | Full Bore | | | |
| Standard/ Approval | RoHS | | | RoHS | | | RoHS | | | | | | |
| Reference Page | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT16 | | | |
| Remarks | Uni-Body RoHS: Option | | | Uni-Body, Butterfly (Wing) Handle RoHS: Option | | | Uni-Body, Butterfly (Wing) Handle RoHS: Option | | | Split Body, Butterfly (Wing) Handle | | | |

| Type | SS Ball | | | SS Ball | | | SS Ball | | | SS Ball | | | |
|--------------------------------------|-------------------------------------|----|----|----------------------------|-----|-----|----------------------------|-----|----|----------------------------|-----|----|-----|
| SS/CS Threaded or Welded Ball Valves | | | | | | | | | | | | | |
| | RoHS | | | RoHS | | | RoHS | | | RoHS | | | |
| Fig | UTFKMW | | | UTFZ | | | UTHM | | | AKUTHM | | | |
| KCA Code | - | | | - | | | - | | | 53 | | | |
| End Connection | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | ASME B1.20.1 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | | | | 58 | 47 | 100 | | | | 60 | 48 | 100 |
| 1/2 | 15 | 62 | 46 | 60 | 62 | 53 | 100 | 60 | 47 | 100 | 60 | 48 | 100 |
| 3/4 | 20 | 73 | 49 | 60 | 73 | 63 | 130 | 70 | 53 | 100 | 70 | 54 | 100 |
| 1 | 25 | 85 | 59 | 82 | 85 | 67 | 130 | 80 | 63 | 130 | 80 | 64 | 130 |
| 1 1/4 | 32 | | | | 98 | 76 | 150 | 95 | 67 | 130 | 95 | 68 | 130 |
| 1 1/2 | 40 | | | | 108 | 82 | 150 | 108 | 79 | 150 | 108 | 79 | 150 |
| 2 | 50 | | | | 124 | 101 | 200 | 124 | 85 | 150 | 124 | 85 | 150 |
| Body & Cap | CF8M | | | CF8 | | | CF8M | | | CF8M | | | |
| Stem | 316SS | | | 304SS | | | 316SS | | | 316SS | | | |
| Ball | 316SS/CF8M | | | 304SS/CF8 | | | 316SS/CF8M | | | 316SS/CF8M | | | |
| Ball Seat | HYPATITE® PTFE | | | HYPATITE® PTFE | | | PTFE | | | PTFE | | | |
| Gland Packing | FKM | | | PTFE | | | PTFE | | | PTFE | | | |
| Gasket | PTFE | | | PTFE | | | PTFE | | | PTFE | | | |
| Handle | SS | | | SS | | | SS | | | SS | | | |
| Bore | Full Bore | | | Full Bore | | | Reduced Bore | | | Reduced Bore | | | |
| Standard/Approval | - | | | RoHS | | | RoHS | | | RoHS | | | |
| Reference Page | P-T Rating : Page CPT16 | | | P-T Rating : Page CPT16 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | |
| Remarks | Split Body, Butterfly (Wing) Handle | | | Split Body RoHS: Option | | | Split Body RoHS: Option | | | Split Body RoHS: Option | | | |

| Type | SS Ball | | | SS Ball | | | SS Ball | | | SS Ball | | | |
|--------------------------------------|-------------------------|-----|-----|-------------------------|-----|-----|--|-----|-----|--------------------------|-----|-----|-----|
| SS/CS Threaded or Welded Ball Valves | | | | | | | | | | | | | |
| | RoHS | | | RoHS | | | RoHS | | | RoHS | | | |
| Fig | UTFM | | | AKUTFM | | | UTHL | | | U3TZM | | | |
| KCA Code | - | | | 53F | | | - | | | - | | | |
| End Connection | BS21 (JIS B0203) | | | ASME B1.20.1 | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 62 | 53 | 100 | 62 | 53 | 100 | 60 | 76 | 100 | 63 | 48 | 120 |
| 3/4 | 20 | 73 | 63 | 130 | 73 | 63 | 130 | 70 | 80 | 100 | 71 | 60 | 130 |
| 1 | 25 | 85 | 67 | 130 | 85 | 67 | 130 | 80 | 85 | 130 | 90 | 69 | 130 |
| 1 1/4 | 32 | 98 | 75 | 150 | 98 | 75 | 150 | 95 | 99 | 130 | 103 | 83 | 150 |
| 1 1/2 | 40 | 108 | 81 | 150 | 108 | 81 | 150 | 108 | 105 | 150 | 110 | 88 | 150 |
| 2 | 50 | 124 | 102 | 200 | 124 | 102 | 200 | 124 | 113 | 150 | 127 | 104 | 180 |
| Body & Cap | CF8M | | | CF8M | | | CF8 | | | CF8M | | | |
| Stem | 316SS | | | 316SS | | | 304SS | | | 316SS | | | |
| Ball | 316SS/CF8M | | | 316SS/CF8M | | | 304SS/CF8 | | | 316SS/CF8M | | | |
| Ball Seat | HYPATITE® PTFE | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | |
| Gland Packing | PTFE | | | PTFE | | | PTFE | | | PTFE | | | |
| Gasket | PTFE | | | PTFE | | | PTFE | | | PTFE | | | |
| Handle | SS | | | SS | | | SS | | | SS | | | |
| Bore | Full Bore | | | Full Bore | | | Reduced Bore | | | Reduced Bore | | | |
| Standard/Approval | RoHS | | | RoHS | | | RoHS | | | RoHS | | | |
| Reference Page | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | |
| Remarks | RoHS: Option | | | RoHS: Option | | | For Thermal Insulation RoHS: Option | | | 3pc Body RoHS: Option | | | |





| Type | SS Ball | | | SS Ball | | | SS Ball | | | SS Ball | | | |
|--------------------------------------|--------------------------|-----|-----|--------------------------|-----|-----|--------------------------|-----|-----|--------------------------|-----|-----|-----|
| SS/CS Threaded or Welded Ball Valves | | | | | | | | | | | | | |
| Fig | AKU3TZM | | | SWU3TZM | | | AWU3TZM | | | U3TZFM | | | |
| KCA Code | - | | | - | | | - | | | - | | | |
| End Connection | ASME B1.20.1 | | | BS5351 | | | ASME B16.11 | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | | | | | | | | | | 63 | 48 | 120 |
| 3/8 | 10 | | | | | | | | | | 63 | 48 | 120 |
| 1/2 | 15 | 63 | 48 | 120 | 63 | 48 | 120 | 63 | 48 | 120 | 71 | 60 | 130 |
| 3/4 | 20 | 71 | 60 | 130 | 71 | 60 | 130 | 71 | 60 | 130 | 90 | 69 | 130 |
| 1 | 25 | 90 | 69 | 130 | 90 | 69 | 130 | 90 | 69 | 130 | 103 | 82 | 150 |
| 1 1/4 | 32 | 103 | 83 | 150 | 103 | 83 | 150 | 103 | 83 | 150 | 110 | 88 | 150 |
| 1 1/2 | 40 | 110 | 88 | 150 | 110 | 88 | 150 | 110 | 88 | 150 | 127 | 104 | 180 |
| 2 | 50 | 127 | 104 | 180 | 127 | 104 | 180 | 127 | 104 | 180 | | | |
| Body & Cap | CF8M | | | CF8M | | | CF8M | | | CF8M | | | |
| Stem | 316SS | | | 316SS | | | 316SS | | | 316SS | | | |
| Ball | 316SS/CF8M | | | 316SS/CF8M | | | 316SS/CF8M | | | 316SS/CF8M | | | |
| Ball Seat | HYPATITE® PTFE | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | |
| Gland Packing | PTFE | | | PTFE | | | PTFE | | | PTFE | | | |
| Gasket | PTFE | | | PTFE | | | PTFE | | | PTFE | | | |
| Handle | SS | | | SS | | | SS | | | SS | | | |
| Bore | Reduced Bore | | | Reduced Bore | | | Reduced Bore | | | Full Bore | | | |
| Standard/Approval | RoHS | | | RoHS | | | RoHS | | | RoHS | | | |
| Reference Page | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | |
| Remarks | 3pc Body RoHS: Option | | | 3pc Body RoHS: Option | | | 3pc Body RoHS: Option | | | 3pc Body RoHS: Option | | | |





| Type | SS Ball | | | SS Ball | | | SS Ball | | | SS Ball | | | |
|--------------------------------------|--------------------------|-----|-----|--------------------------|-----|-----|--------------------------|-----|-----|-------------------------|-----|----|-----|
| SS/CS Threaded or Welded Ball Valves | | | | | | | | | | | | | |
| Fig | AKU3TZFM | | | SWU3TZFM | | | AWU3TZFM | | | 3000UTKM | | | |
| KCA Code | 327F | | | - | | | 327FS | | | - | | | |
| End Connection | ASME B1.20.1 | | | BS5351 | | | ASME B16.11 | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | 63 | 48 | 120 | 63 | 48 | 120 | 63 | 48 | 120 | 88 | 45 | 100 |
| 3/8 | 10 | 63 | 48 | 120 | 63 | 48 | 120 | 63 | 48 | 120 | 88 | 45 | 100 |
| 1/2 | 15 | 71 | 60 | 130 | 71 | 60 | 130 | 71 | 60 | 130 | 88 | 45 | 100 |
| 3/4 | 20 | 90 | 69 | 130 | 90 | 69 | 130 | 90 | 69 | 130 | 90 | 58 | 115 |
| 1 | 25 | 103 | 82 | 150 | 103 | 82 | 150 | 103 | 82 | 150 | 105 | 57 | 115 |
| 1 1/4 | 32 | 110 | 88 | 150 | 110 | 88 | 150 | 110 | 88 | 150 | | | |
| 1 1/2 | 40 | 127 | 104 | 180 | 127 | 104 | 180 | 127 | 104 | 180 | 130 | 72 | 160 |
| 2 | 50 | | | | | | | | | | 150 | 82 | 230 |
| Body & Cap | CF8M | | | CF8M | | | CF8M | | | 316SS | | | |
| Stem | 316SS | | | 316SS | | | 316SS | | | 329J1 | | | |
| Ball | 316SS/CF8M | | | 316SS/CF8M | | | 316SS/CF8M | | | 316SS | | | |
| Ball Seat | HYPATITE® PTFE | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | PTFE | | | |
| Gland Packing | PTFE | | | PTFE | | | PTFE | | | PTFE | | | |
| Gasket | PTFE | | | PTFE | | | PTFE | | | HYPATITE® PTFE | | | |
| Handle | SS | | | SS | | | SS | | | SS | | | |
| Bore | Full Bore | | | Full Bore | | | Full Bore | | | Reduced Bore | | | |
| Standard/Approval | RoHS | | | RoHS | | | RoHS | | | RoHS | | | |
| Reference Page | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | |
| Remarks | 3pc Body RoHS: Option | | | 3pc Body RoHS: Option | | | 3pc Body RoHS: Option | | | Welded Body | | | |





| Type | SS 3-Way 4-Seats Ball L-Port | | | | | SS 3-Way 4-Seats Ball T-Port | | | | |
|--------------------------------------|--|----|-----|------|-----|--|-----|------|-----|-----|
| SS/CS Threaded or Welded Ball Valves | | | | | | | | | | |
| Fig | UTH4LM | | | | | UTH4TM | | | | |
| KCA Code | - | | | | | - | | | | |
| End Connection | BS21 (JIS B0203) | | | | | BS21 (JIS B0203) | | | | |
| | inch | mm | L | L1 | H | D | L | L1 | H | D |
| | 1/2 | 15 | 69 | 34.5 | 63 | 130 | 69 | 34.5 | 63 | 130 |
| | 3/4 | 20 | 84 | 42 | 65 | 130 | 84 | 42 | 65 | 130 |
| | 1 | 25 | 96 | 48 | 76 | 150 | 96 | 48 | 76 | 150 |
| | 1 1/4 | 32 | 114 | 57 | 80 | 150 | 114 | 57 | 80 | 150 |
| | 1 1/2 | 40 | 132 | 66 | 96 | 230 | 132 | 66 | 96 | 230 |
| | 2 | 50 | 150 | 75 | 101 | 230 | 150 | 75 | 101 | 230 |
| Body & Cap | CF8M | | | | | CF8M | | | | |
| Stem | 316SS | | | | | 316SS | | | | |
| Ball | 316SS/CF8M | | | | | 316SS/CF8M | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | |
| Gasket | PTFE | | | | | PTFE | | | | |
| Handle | SS | | | | | SS | | | | |
| Bore | Reduced Bore | | | | | Reduced Bore | | | | |
| Standard/Approval | RoHS: UTH4LM<GS101> | | | | | RoHS: UTH4TM<GS101> | | | | |
| Reference Page | P-T Rating : Page CPT15 Port Orientation : Page TECH1 | | | | | P-T Rating : Page CPT15 Port Orientation : Page TECH1 | | | | |
| Remarks | Split Body RoHS: Option | | | | | Split Body RoHS: Option | | | | |

| Type | CS Ball | | | CS Ball | | | CS Ball | | | CS Ball | | | | |
|--------------------------------------|-------------------------|----|------|-------------------------|-----|------|-------------------------|-----|-----|-------------------------|-----|-----|----|-----|
| SS/CS Threaded or Welded Ball Valves | | | | | | | | | | | | | | |
| Fig | SCTK | | | AKSCTK | | | 800SCTK | | | AK800SCTK | | | | |
| KCA Code | - | | | - | | | - | | | - | | | | |
| End Connection | BS21 (JIS B0203) | | | ASME B1.20.1 | | | BS21 (JIS B0203) | | | ASME B1.20.1 | | | | |
| | inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| | 1/4 | 8 | 39 | 30 | 60 | 39 | 30 | 60 | 88 | 45 | 100 | 88 | 45 | 100 |
| | 3/8 | 10 | 44 | 35 | 70 | 44 | 35 | 70 | 88 | 45 | 100 | 88 | 45 | 100 |
| | 1/2 | 15 | 56.5 | 38 | 85 | 56.5 | 38 | 85 | 88 | 45 | 100 | 88 | 45 | 100 |
| | 3/4 | 20 | 59 | 42 | 85 | 59 | 42 | 85 | 90 | 54 | 115 | 90 | 54 | 115 |
| | 1 | 25 | 71 | 47 | 100 | 71 | 47 | 100 | 105 | 58 | 115 | 105 | 58 | 115 |
| | 1 1/4 | 32 | 78 | 52 | 100 | 78 | 52 | 100 | 117 | 65 | 135 | 117 | 65 | 135 |
| | 1 1/2 | 40 | 83 | 63 | 125 | 83 | 63 | 125 | 130 | 70 | 135 | 130 | 70 | 135 |
| | 2 | 50 | 100 | 69 | 125 | 100 | 69 | 125 | 150 | 80 | 150 | 150 | 80 | 150 |
| Body & Cap | WCB | | | WCB | | | A105 | | | A105 | | | | |
| Stem | 304SS/316SS | | | 304SS/316SS | | | 316SS | | | 316SS | | | | |
| Ball | 304SS/316SS | | | 304SS/316SS | | | 316SS | | | 316SS | | | | |
| Ball Seat | G/F PTFE | | | G/F PTFE | | | PTFE | | | PTFE | | | | |
| Gland Packing | G/F PTFE | | | G/F PTFE | | | PTFE | | | PTFE | | | | |
| Gasket | | | | | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | | |
| Handle | SS | | | SS | | | CS | | | CS | | | | |
| Bore | Reduced Bore | | | Reduced Bore | | | Reduced Bore | | | Reduced Bore | | | | |
| Reference Page | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | | |
| Remarks | Split Body | | | Split Body | | | Welded Body | | | Welded Body | | | | |

| Type | CS Ball | | | CS Ball | | | CS Ball | | | CS Ball | | | |
|--------------------------------------|---|-----|----|---|-----|----|--|-----|----|---|-----|----|-----|
| SS/CS Threaded or Welded Ball Valves |  | | |  | | |  | | |  | | | |
| Fig | AW800SCTK | | | 3000SCTK | | | AK3000SCTK | | | AW3000SCTK | | | |
| KCA Code | - | | | - | | | - | | | - | | | |
| End Connection | ASME B16.11 | | | BS21 (JIS B0203) | | | ASME B1.20.1 | | | ASME B16.11 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/4 | 8 | 170 | 44 | 100 | 88 | 45 | 100 | 88 | 45 | 100 | 170 | 44 | 100 |
| 3/8 | 10 | 170 | 44 | 100 | 88 | 45 | 100 | 88 | 45 | 100 | 170 | 44 | 100 |
| 1/2 | 15 | 170 | 44 | 100 | 88 | 45 | 100 | 88 | 45 | 100 | 170 | 44 | 100 |
| 3/4 | 20 | 176 | 54 | 115 | 90 | 54 | 115 | 90 | 54 | 115 | 176 | 54 | 115 |
| 1 | 25 | 196 | 57 | 115 | 105 | 58 | 115 | 105 | 58 | 115 | 196 | 57 | 115 |
| 1 1/4 | 32 | 210 | 65 | 135 | 117 | 67 | 160 | 117 | 67 | 160 | 210 | 65 | 160 |
| 1 1/2 | 40 | 226 | 70 | 135 | 130 | 72 | 160 | 130 | 72 | 160 | 226 | 70 | 160 |
| 2 | 50 | 262 | 81 | 150 | 150 | 82 | 230 | 150 | 82 | 230 | 262 | 81 | 230 |
| Body & Cap | A105 | | | A105 | | | A105 | | | A105 | | | |
| Stem | 316SS | | | 329J1SS | | | 329J1SS | | | 329J1SS | | | |
| Ball | 316SS | | | 316SS | | | 316SS | | | 316SS | | | |
| Ball Seat | PTFE | | | PCTFE | | | PCTFE | | | PCTFE | | | |
| Gland Packing | PTFE | | | PTFE | | | PTFE | | | PTFE | | | |
| Gasket | HYPATITE® PTFE | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | |
| Handle | CS | | | CS | | | CS | | | CS | | | |
| Bore | Reduced Bore | | | Reduced Bore | | | Reduced Bore | | | Reduced Bore | | | |
| Reference Page | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | P-T Rating : Page CPT15 | | | |
| Remarks | Split Body | | | Welded Body | | | Welded Body | | | Split Body | | | |

| Type | Needle (Straight) | | Needle (Angle) | | Needle (Straight) | | Needle (Straight) | | |
|----------------------|--|----------|--|----------|---|-----------|---|-----------|-----------|
| Miniature Valves |  | |  | |  | |  | | |
| Fig | UN3-AP- | | UN3-BP- | | UN3-CP- | | UN3-CP- | | |
| KCA Code | - | | - | | - | | - | | |
| End Connection | JIS B0203 | | JIS B0203 | | COUPLE LOK | | COUPLE LOK | | |
| inch | mm | Fig | Threaded | Fig | Threaded | Fig | Tube O.D. | Fig | Tube O.D. |
| 1/8 | 6 | UN3-AP-1 | Rc1/8 | UN3-BP-1 | Rc1/8 | UN3-CP-6 | 6 | | |
| 1/4 | 8 | UN3-AP-2 | Rc1/4 | UN3-BP-2 | Rc1/4 | UN3-CP-8 | 8 | UN3-CP-02 | 1/4 |
| 3/8 | 10 | UN3-AP-3 | Rc3/8 | UN3-BP-3 | Rc3/8 | UN3-CP-10 | 10 | UN3-CP-03 | 3/8 |
| | 12 | | | | | UN3-CP-12 | 12 | | |
| 1/2 | 15 | UN3-AP-4 | Rc1/2 | | | | | UN3-CP-04 | 1/2 |
| Body | 316SS | | 316SS | | 316SS | | 316SS | | |
| Stem | 630SS | | 630SS | | 630SS | | 630SS | | |
| Gland Packing/O ring | PTFE | | PTFE | | PTFE | | PTFE | | |
| Handle | ZDC | | ZDC | | ZDC | | ZDC | | |
| Panel Gasket/Gasket | Asbestos-Free | | Asbestos-Free | | Asbestos-Free | | Asbestos-Free | | |
| Ferrule/Ring | | | | | 316SS | | 316SS | | |
| Standard/Approval | RoHS: UN3-AP-<GS101> | | RoHS: UN3-BP-<GS101> | | RoHS: UN3-CP-<GS101> | | RoHS: UN3-CP-<GS101> | | |
| Service Conditions | 2.65MPa for 150°C & lower, 2.94MPa for 100°C & lower, 3.43MPa for 38°C down to -20°C | | 2.65MPa for 150°C & lower, 2.94MPa for 100°C & lower, 3.43MPa for 38°C down to -20°C | | 2.65MPa for 150°C & lower, 2.94MPa for 100°C & lower, 3.43MPa for 38°C down to -20°C | | 2.65MPa for 150°C & lower, 2.94MPa for 100°C & lower, 3.43MPa for 38°C down to -20°C | | |
| Reference Page | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | |
| Remarks | Metric Tube Series RoHS: Option | | Metric Tube Series RoHS: Option | | Metric Tube Series RoHS: Option | | Inch Tube Series RoHS: Option | | |

| Type | Needle (Angle) | | Needle (Angle) | | Needle (Straight) | | Needle (Straight) | | |
|----------------------|--|----------|--|-----------|--|-------------|--|-------------|-----------|
| Miniature Valves |  | |  | |  | |  | | |
| | 30K | Metric | 30K | Inch | 30K | Metric | 30K | Inch | |
| Fig | UN3-DP- | | UN3-DP- | | UN3-EP- | | UN3-EP- | | |
| KCA Code | - | | - | | - | | - | | |
| End Connection | COUPLE LOK | | COUPLE LOK | | Male (JIS B0203) x COUPLE LOK | | Male (JIS B0203) x COUPLE LOK | | |
| inch | mm | Fig | Tube O.D. | Fig | Tube O.D. | Fig | Tube O.D. | Fig | Tube O.D. |
| 1/8 | 6 | UN3-DP-6 | 6 | | | UN3-EP-6-2 | 6 | | |
| 1/4 | 8 | UN3-DP-8 | 8 | UN3-DP-02 | 1/4 | UN3-EP-8-2 | 8 | UN3-EP-02-2 | 1/4 |
| 1/4 | 10 | | | | | UN3-EP-10-2 | 10 | | |
| 3/8 | 10 | | | | | UN3-EP-10-3 | 10 | UN3-EP-03-2 | 3/8 |
| 1/4 | 12 | | | | | UN3-EP-12-2 | 12 | | |
| 3/8 | 12 | | | | | UN3-EP-12-3 | 12 | | |
| 3/8 | | | | | | | | UN3-EP-03-3 | 3/8 |
| Body | 316SS | | 316SS | | 316SS | | 316SS | | |
| Stem | 630SS | | 630SS | | 630SS | | 630SS | | |
| Gland Packing/O ring | PTFE | | PTFE | | PTFE | | PTFE | | |
| Handle | ZDC | | ZDC | | ZDC | | ZDC | | |
| Panel Gasket/Gasket | Asbestos-Free | | Asbestos-Free | | Asbestos-Free | | Asbestos-Free | | |
| Ferrule/Ring | 316SS | | 316SS | | 316SS | | 316SS | | |
| Standard/Approval | RoHS: UN3-DP-<GS101> | | RoHS: UN3-DP-<GS101> | | RoHS: UN3-EP-<GS101> | | RoHS: UN3-EP-<GS101> | | |
| Service Conditions | 2.65MPa for 150°C & lower, 2.94MPa for 100°C & lower, 3.43MPa for 38°C down to -20°C | | 2.65MPa for 150°C & lower, 2.94MPa for 100°C & lower, 3.43MPa for 38°C down to -20°C | | 2.65MPa for 150°C & lower, 2.94MPa for 100°C & lower, 3.43MPa for 38°C down to -20°C | | 2.65MPa for 150°C & lower, 2.94MPa for 100°C & lower, 3.43MPa for 38°C down to -20°C | | |
| Reference Page | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | |
| Remarks | Metric Tube Series RoHS: Option | | Inch Tube Series RoHS: Option | | Metric Tube Series RoHS: Option | | Inch Tube Series RoHS: Option | | |

| Type | Needle (Angle) | | Needle (Angle) | | Needle (Straight) | | Needle (Straight) | | |
|----------------------|--|-------------|--|-------------|--|-----------|--|------------|----|
| Miniature Valves |  | |  | |  | |  | | |
| | 30K | Metric | 30K | Inch | 260K | Metric | 260K | Metric | |
| Fig | UN3-FP- | | UN3-FP- | | UN26-AP- | | UN26-CP- | | |
| KCA Code | - | | - | | - | | - | | |
| End Connection | Male (JIS B0203) x COUPLE LOK | | Male (JIS B0203) x COUPLE LOK | | JIS B0203 | | COUPLE LOK | | |
| inch | mm | L | D | L | D | L | D | L | D |
| 1/8 | 6 | UN3-FP-6-2 | 6 | | | UN26-AP-1 | Rc1/8 | UN26-CP-6 | 6 |
| 1/4 | 8 | UN3-FP-8-2 | 8 | UN3-FP-02-2 | 1/4 | UN26-AP-2 | Rc1/4 | UN26-CP-8 | 8 |
| 1/4 | 10 | UN3-FP-10-2 | 10 | | | | | UN26-CP-10 | 10 |
| 3/8 | 10 | UN3-FP-10-3 | 10 | UN3-FP-03-2 | 3/8 | UN26-AP-3 | Rc3/8 | | |
| 1/4 | 12 | UN3-FP-12-2 | 12 | | | | | | |
| 3/8 | 12 | UN3-FP-12-3 | 12 | | | | | UN26-CP-12 | 12 |
| 3/8 | | | | UN3-FP-03-3 | 3/8 | | | | |
| 1/2 | 15 | | | | | UN26-AP-4 | Rc1/2 | | |
| 3/4 | 20 | | | | | UN26-AP-6 | Rc3/4 | | |
| 1 | 25 | | | | | UN26-AP-8 | Rc1 | | |
| Body | 316SS | | 316SS | | 316SS | | 316SS | | |
| Stem | 630SS | | 630SS | | 630SS | | 630SS | | |
| Gland Packing/O ring | PTFE | | PTFE | | PTFE | | PTFE | | |
| Handle | ZDC | | ZDC | | ZDC | | ZDC | | |
| Panel Gasket/Gasket | Asbestos-Free | | Asbestos-Free | | Asbestos-Free | | Asbestos-Free | | |
| Ferrule/Ring | 316SS | | 316SS | | 316SS | | 316SS | | |
| Standard/Approval | RoHS: UN3-FP-<GS101> | | RoHS: UN3-FP-<GS101> | | RoHS: UN26-AP-<GS101> | | RoHS: UN3-CP-<GS101> | | |
| Service Conditions | 2.65MPa for 150°C & lower, 2.94MPa for 100°C & lower, 3.43MPa for 38°C down to -20°C | | 2.65MPa for 150°C & lower, 2.94MPa for 100°C & lower, 3.43MPa for 38°C down to -20°C | | 19.81MPa for 150°C & lower, 21.774MPa for 100°C & lower, 25.50MPa for 38°C down to -20°C | | 19.81MPa for 150°C & lower, 21.774MPa for 100°C & lower, 25.50MPa for 38°C down to -20°C | | |
| Reference Page | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | |
| Remarks | Metric Tube Series RoHS: Option | | Inch Tube Series RoHS: Option | | Metric Tube Series RoHS: Option | | Inch Tube Series RoHS: Option | | |

| Type | Needle (Straight) | | Needle (Straight) | | |
|----------------------|--|-----------|--|------------|-----------|
| Miniature Valves | | | | | |
| | Metric | | Inch | | |
| Fig | UN26-SP- | | UN26-CP- | | |
| KCA Code | - | | - | | |
| End Connection | JIS B2316(Socket weld) | | COUPLE LOK | | |
| inch | mm | Fig | Threaded | Fig | Tube O.D. |
| 1/8 | 6 | UN26-SP-1 | 1/8 | | |
| 1/4 | 8 | UN26-SP-2 | 1/4 | UN26-CP-02 | 1/4 |
| 3/8 | 10 | UN26-SP-3 | 3/8 | UN26-CP-03 | 3/8 |
| 1/2 | 15 | UN26-SP-4 | 1/2 | UN26-CP-04 | 1/2 |
| 3/4 | 20 | UN26-SP-6 | 3/4 | | |
| 1 | 25 | UN26-SP-8 | 1 | | |
| Body | 316SS | | 316SS | | |
| Stem | 630SS | | 630SS | | |
| Gland Packing/O ring | PTFE | | PTFE | | |
| Handle | ZDC | | ZDC | | |
| Panel Gasket/Gasket | Asbestos-Free | | Asbestos-Free | | |
| Ferrule/Ring | | | 316SS | | |
| Standard/Approval | RoHS: UN3-SP-<GS101> | | RoHS: UN3-CP-<GS101> | | |
| Service Conditions | 19.81MPa for 150°C & lower, 21.774MPa for 100°C & lower, 25.50MPa for 38°C down to -20°C | | 19.81MPa for 150°C & lower, 21.774MPa for 100°C & lower, 25.50MPa for 38°C down to -20°C | | |
| Reference Page | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | |
| Remarks | Metric Tube Series RoHS: Option | | Inch Tube Series RoHS: Option | | |


| Type | Needle (Straight) | | Needle (Straight) | | Needle (Straight with lock lever) | | Needle (Angle) | | |
|----------------------|---|--------|---|--------|---|---------|---|--------|----------|
| Miniature Valves | | | | | | | | | |
| | 10K | | 20K | | 20K | | 20K | | |
| Fig | N1-A- | | N2-A- | | N2-AL- | | N2-B- | | |
| KCA Code | - | | - | | - | | - | | |
| End Connection | JIS B0203 | | JIS B0203 | | JIS B0203 | | JIS B0203 | | |
| inch | mm | Fig | Threaded | Fig | Threaded | Fig | Threaded | Fig | Threaded |
| 1/8 | 6 | N1-A-1 | Rc1/8 | N2-A-1 | Rc1/8 | N2-AL-1 | Rc1/8 | N2-B-1 | Rc1/8 |
| 1/4 | 8 | N1-A-2 | Rc1/4 | N2-A-2 | Rc1/4 | N2-AL-2 | Rc1/4 | N2-B-2 | Rc1/4 |
| 3/8 | 10 | N1-A-3 | Rc3/8 | N2-A-3 | Rc3/8 | N2-AL-3 | Rc3/8 | N2-B-3 | Rc3/8 |
| 1/2 | 15 | | | N2-A-4 | Rc1/2 | N2-AL-4 | Rc1/2 | N2-B-4 | Rc1/2 |
| Body | C3771 | | C3771 | | C3771 | | C3771 | | |
| Stem | C3531 | | C3531 | | C3531 | | C3531 | | |
| Gland Packing/O ring | NBR | | NBR | | NBR | | NBR | | |
| Handle | ZDC | | ZDC | | ZDC | | ZDC | | |
| Gasket | | | Nylon | | | | Nylon | | |
| Service Conditions | 1.37MPa for 80°C & lower | | 2.75MPa for 80°C & lower | | 2.75MPa for 80°C & lower | | 2.75MPa for 80°C & lower | | |
| Reference Page | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | P-T Rating & Flow Characteristics: Page CPT17&18 | | |
| Remarks | *Dezincification Resistant Brass | | *Dezincification Resistant Brass | | *Dezincification Resistant Brass | | *Dezincification Resistant Brass | | |

Pressure-Temperature Ratings


CPT

Compact SS/CS Valves & Miniature


Type 600: SCTK/UTK(M)/AKUTKM/UTK(M)W

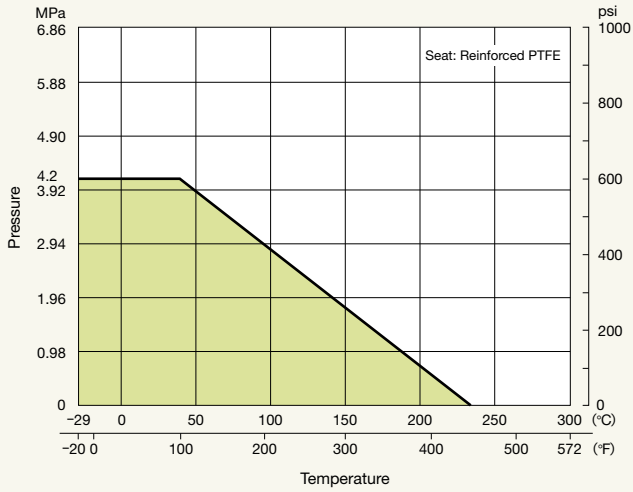


Type 1000: UTFM/AKUTFM/UTHL

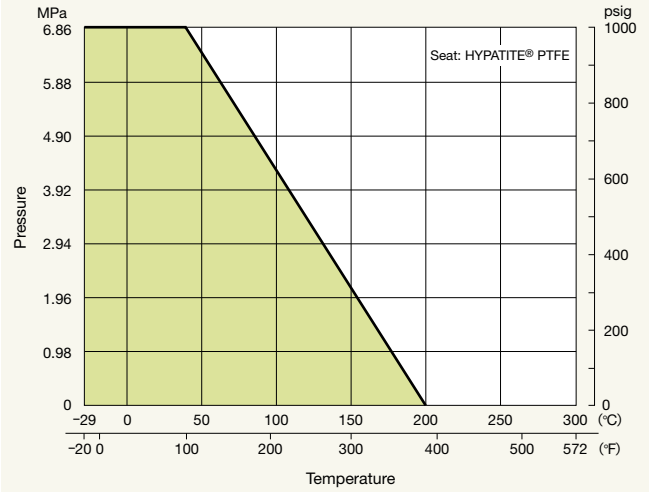

Type 800: UTH(M)/AKUTHM

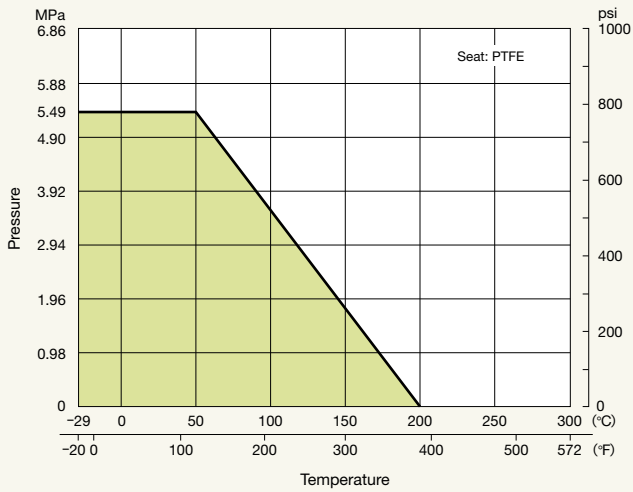


Class 800 and Type 3000: SCTK

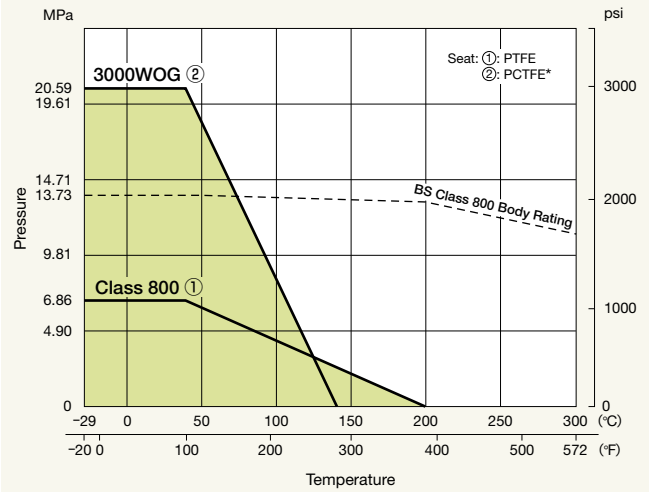


* Polychloro-Trifluoro-Ethylene

Type 800: UTH4LM/4TM

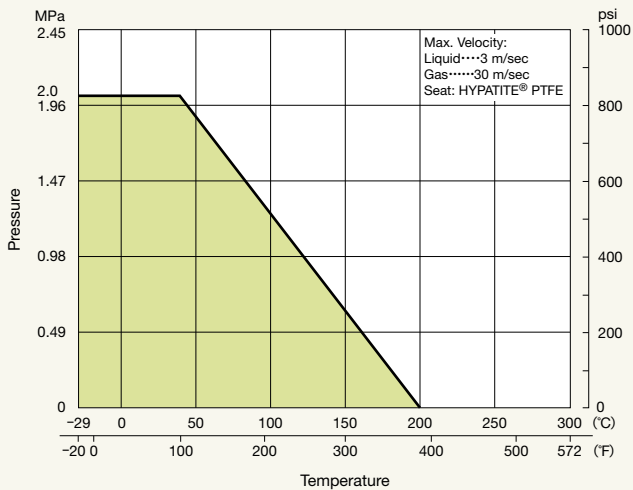


Type 1000: SC3TZ/U3TZ Series

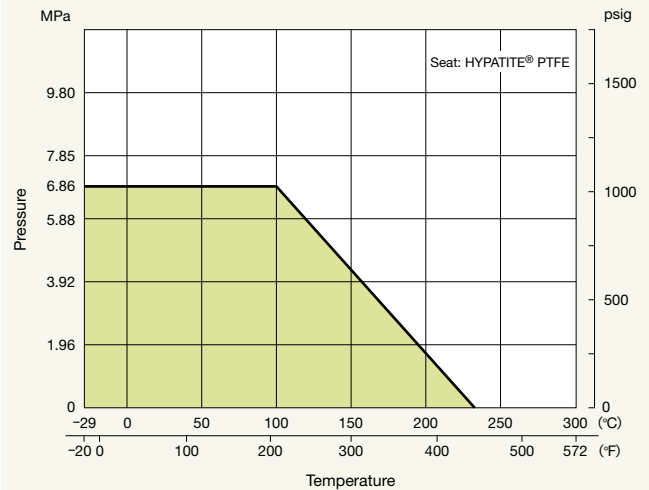


Note: Type 1500 is optionally available

Pressure-Temperature Ratings


Type 1500/2000:
AKSCTHZM/AKSCTHWZM/AKUTHZM/AKUTHWZM

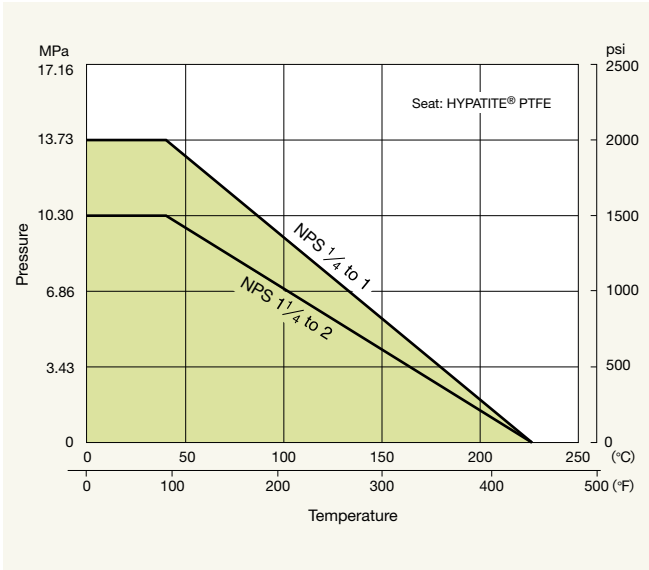


Class 150: AK150UT(M)/10UT(M)

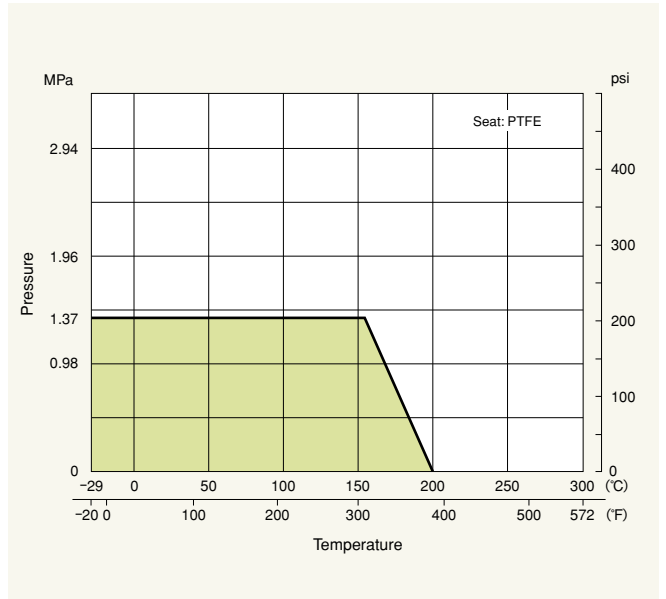

Type 600: UTFK(M)W

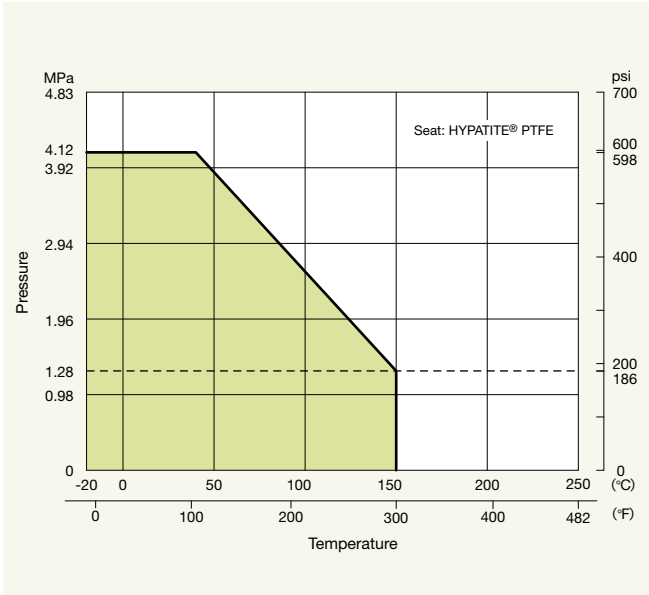

Type 800: UTFZ



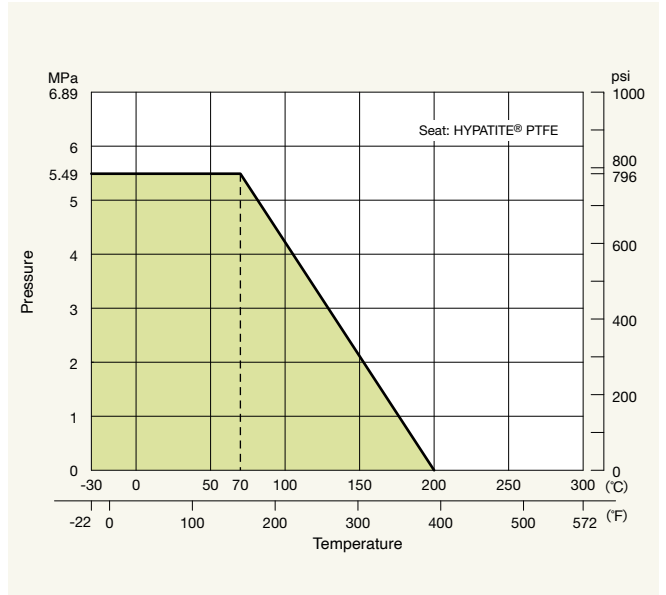


Pressure-Temperature Rating/Flow Characteristics







Pressure-Temperature Rating

Compact SS/CS Valves & Miniature





CPT

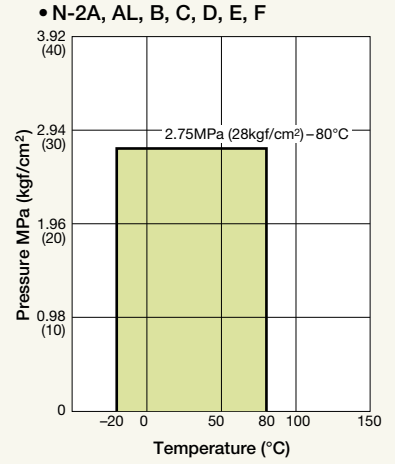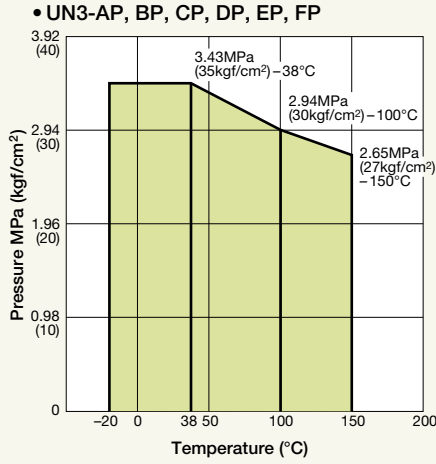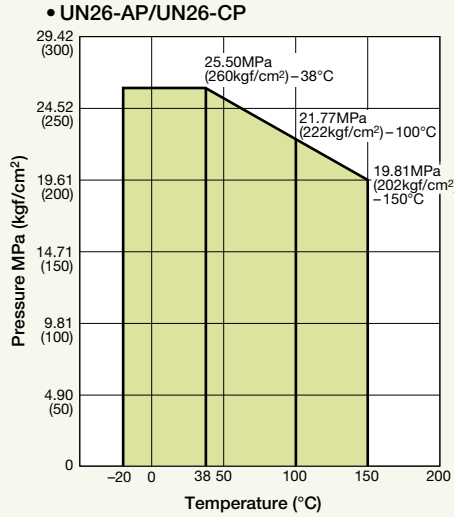

Flow Characteristics

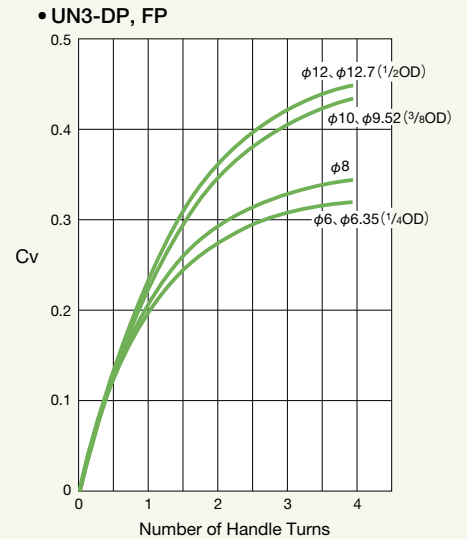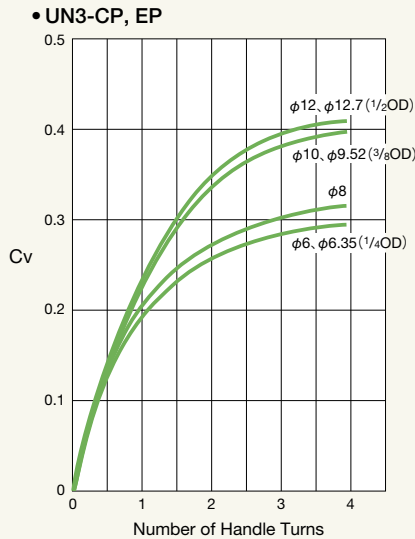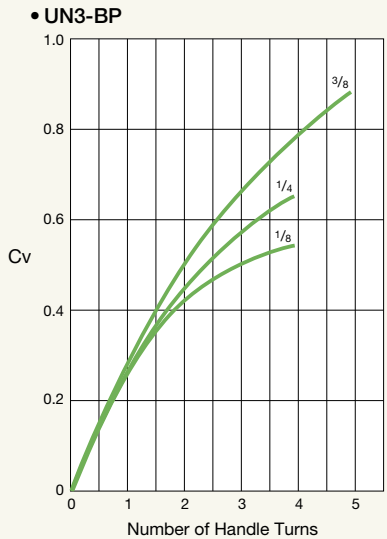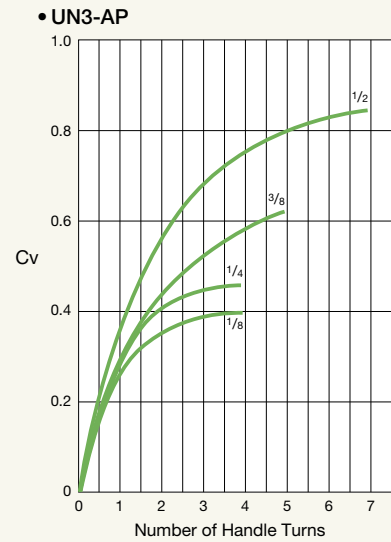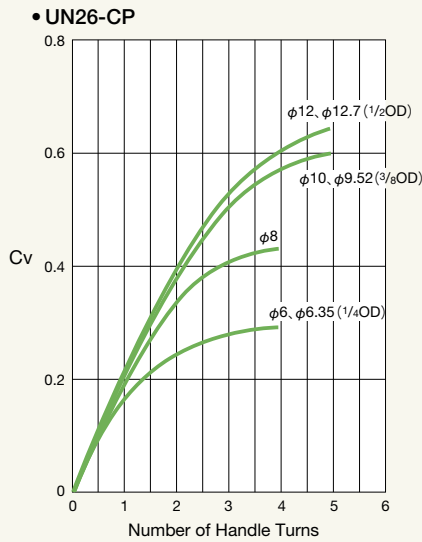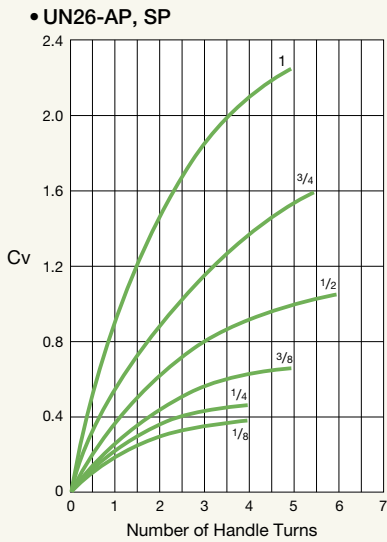


Flow Characteristics

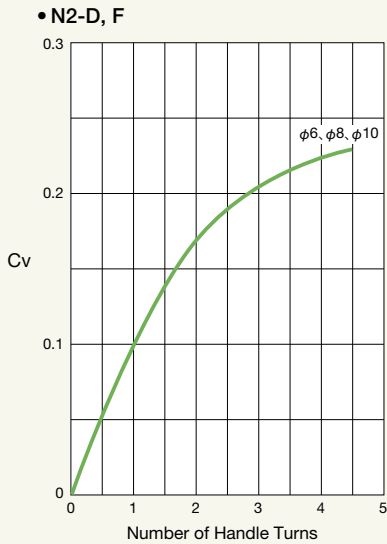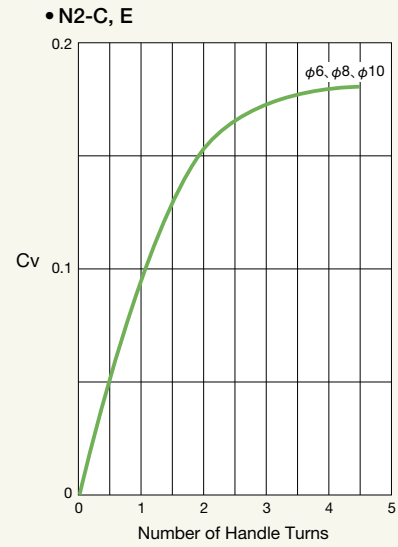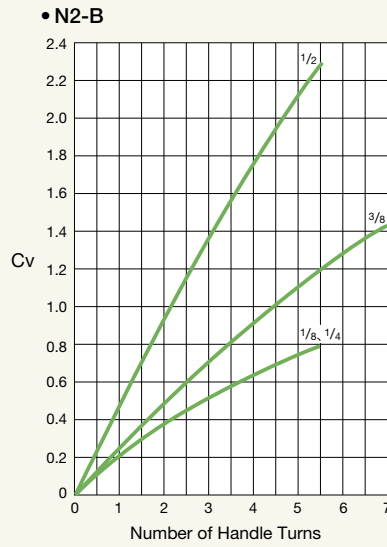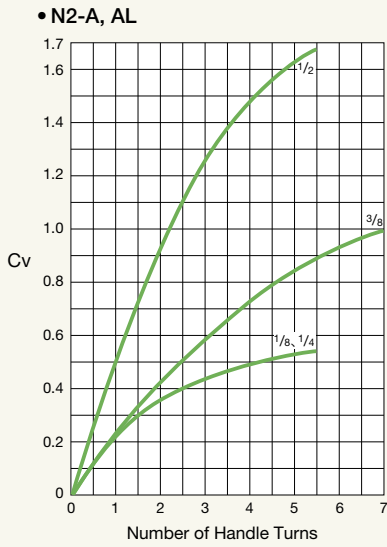

Panel Mounting Procedures for KITZ Stainless Steel Miniature Valves

1. Loosen set screw which locks the handle and remove the handle with an Allen Wrench if Nominal Size 2.5 (Nominal Screw Size 2.5)
2. Remove packing nut, panel nut, then panel gasket.
3. Place the valve through hole on the panel. Required hole size is dimension D3 of valve size plus 0.5mm.
4. Fit the panel gasket and tighten panel nut to securely mount the valve.
5. Tighten packing nut, place the handle and lock the handle with set screw to complete assembly.

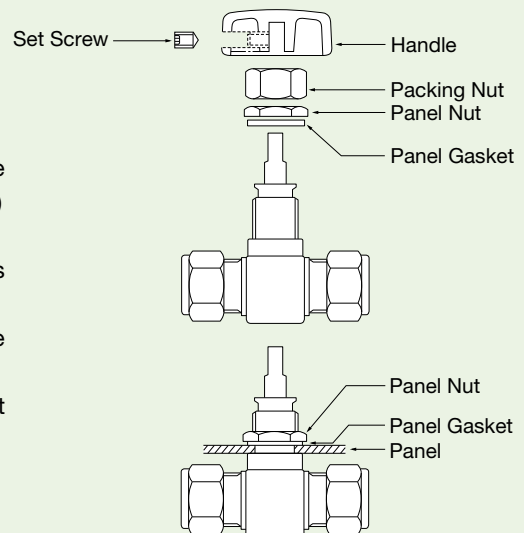


Design Features




KITZ check valves are backflow prevention valve having superior sealing performance for fluids such as clean water, waste water, sewage water and drainage water that may affect efficiency of existing swing type valves in some cases due to foreign objects trapped in the valve internal parts.

Valves covered in this manual are ball type check valves that have no obstructive parts in the valve interior and can handle fluids containing foreign objects.

Furthermore, flanged end ball check valves with vent hole(s) can be installed horizontally or vertically.

 **CAUTION**

(1) Make sure to install the valve under specified installation conditions to ensure its sealing performance.
See the valve mounting orientation of each product type shown below.

| | | |
|--|---|--|
|  <p>Vertical installation with downstream side upwards <u>Product Code:</u> 10UFTE 10UFT UFTE 10FCFTN</p> |  <p>Horizontal installation hydraulic head pressure of 0.05 MPa or above in downstream side which has same bore size as the valve.</p> |  <p>Not applicable.</p> |
|--|---|--|

- 1.1 Non-obstructive structure of ball-shaped disc prevents entanglement of foreign objects from the service fluid.
- 1.2 Ball-shaped rubber disc slides into the seating position by back-pressure of the fluid and provides excellent sealing performance.
- 1.3 Pressure loss is low due to the valve body shape design based on fluid engineering.

Product Names and Product Coding

| Product Name | Product Coding |
|--|----------------|
| Cast Iron Nylon 11-lined Flanged End Ball Check Valve | 10FCFTN |
| Stainless Steel Flanged End Ball Check Valve | 10UFT |
| Stainless Steel Flanged End Ball Check Valve with Vent Hole | 10UFTE |
| Stainless Steel Threaded End Ball Check Valve with Vent Hole | UFTE |

Specifications

| Product Code | 10UFTE | 10UFT | UFTE | 10FCFTN |
|----------------------------|---|---|------------------------------|---------|
| Service Temperature Range | 0°C to 60°C | | | |
| Service Pressure Range | 0.05 to 1.37 MPa (0.5 to 14.0 kgf/cm ²) | | | |
| Test Pressure (hydraulic) | Shell Test | 2.06 MPa (21 kgf/cm ²) | | |
| | Seat Test Leakage | 0.05 to 1.51 MPa (0.5 to 15.4 kgf/cm ²) | | |
| Pipe Connection | JIB B 2238 10K Standard (RF) | JIS B 0203 Threaded End | JIS B 2239 10K Standard (FF) | |
| Face-to-Face Dimensions | JIS B 2002 | JIS B 2011 | JIS B 2002 | |
| Wall Thickness | ASME B 16.34 Class 150* ¹ | JIS B 2011 | JIS B 2031* ² | |
| Valve Mounting Orientation | Horizontal and Vertical Piping | Vertical Piping | | |


*1: Nominal size 80A and below of 10UFTE are KITZ standard.

*2: Nominal size 40A does not comply with JIS B 2031.


Note) Minimum differential pressure to move the ball is 0.05 MPa (0.5 kgf/cm²). For pump selection, check opening pressure and pressure loss.

Pressure Loss (Clean Water)


UFTE

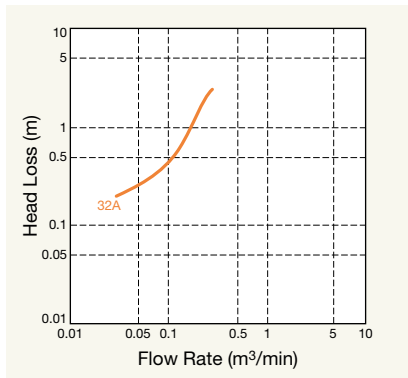

10UFT, 10FCFTN

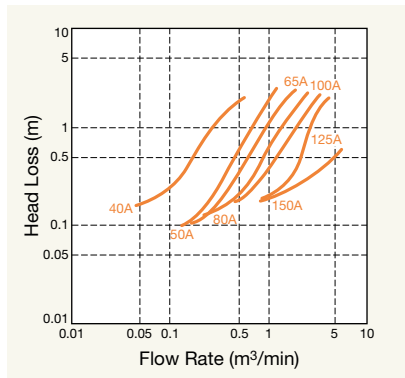


10UFTE

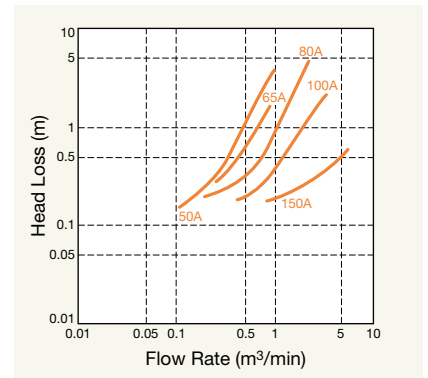

KITZ

GENERAL CATALOG

Cast Iron

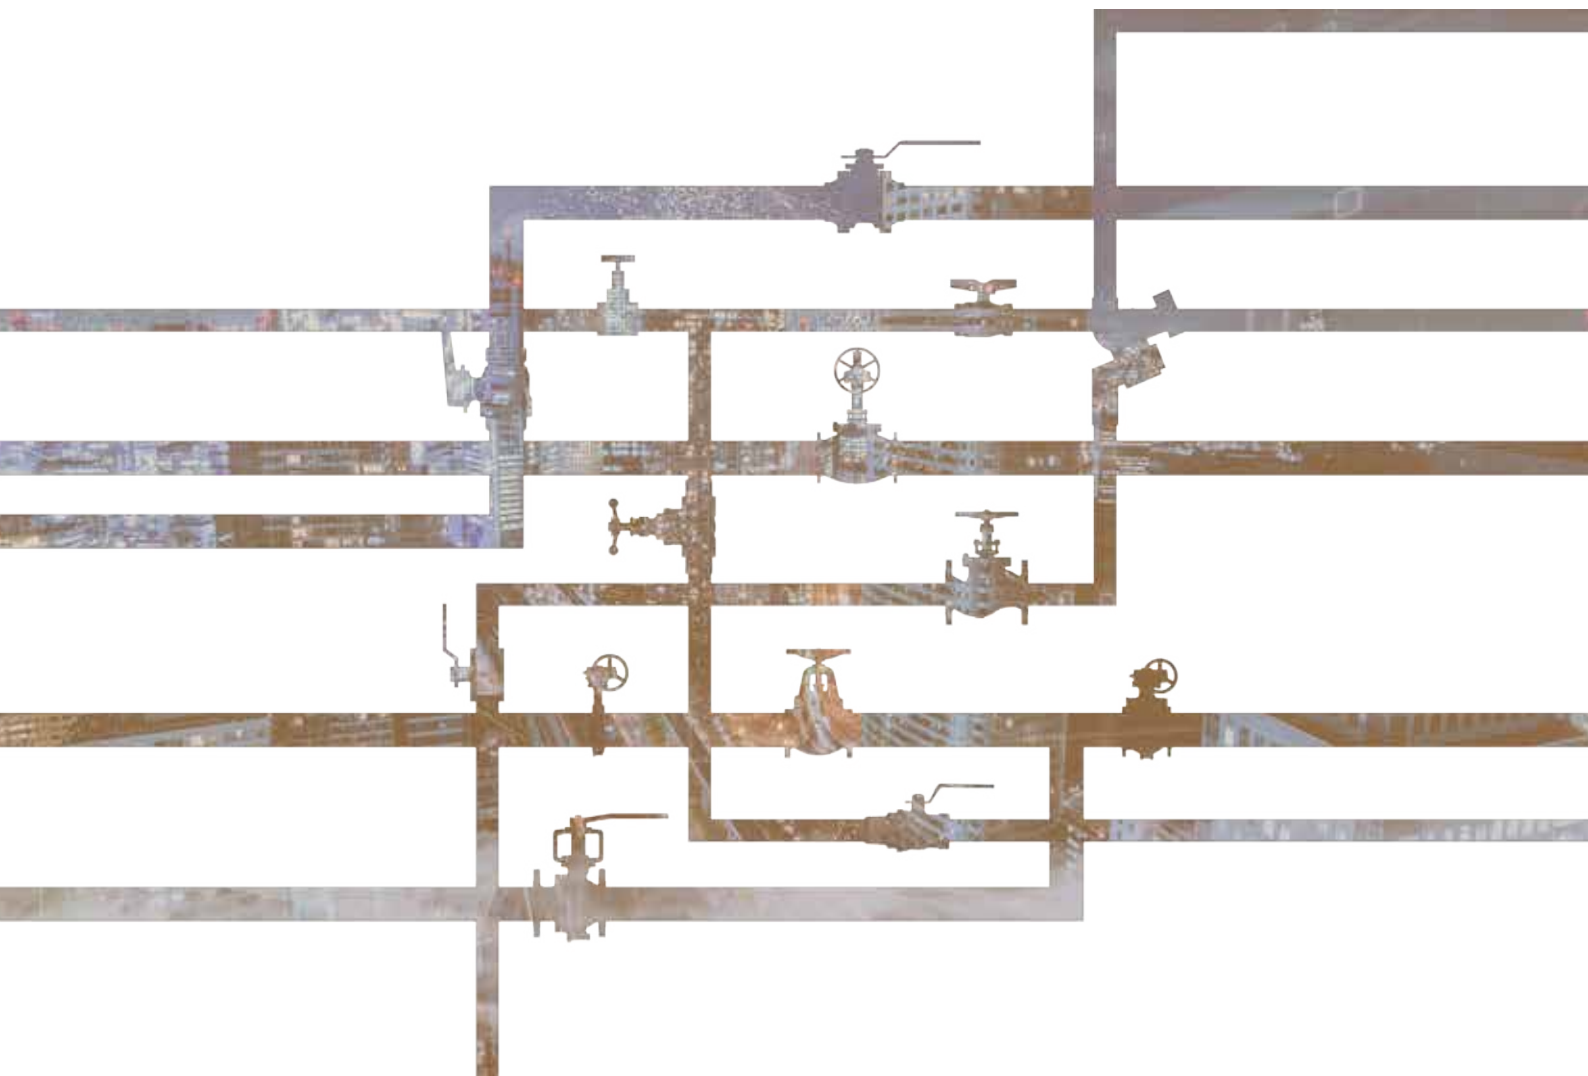

INDEX

| Title | Body Material | Type | Class | End Connection | Features | Fig | Page | | | |
|--------------------------------|---------------|-----------------------------|-----------------------------|----------------|--|-----------------------------|-----------------------------|---------------|-----------------|-----------|
| Cast Iron Valves | CI | Gate | 5K | FE/FF | BB, OS&Y | 5FCM | C12 67 | | | |
| | | | 10K | | | 10FCL | | 10FCLS | 10FCLU | |
| | | | 125 | | | 125FCL | | 125FCLS | | |
| | | | EN PN16 | EN16FCL | | EN16FCLM | | | | |
| | | | EN PN25 | (PHOX)EN25FCLE | | | | | | |
| | | | 10K | FE/FF | | BB, IS, NRS, with Indicator | | 10FCWI | C13 68 | |
| | | 125 | 125FCWI | | | | | | | |
| | | EN PN16 | BB, IS, NRS | | EN16FCW | EN16FCWI | | | | |
| | | 10K | BB, IS, NRS, with Indicator | | 10FCHI | C14 69 | | | | |
| | | 125 | 125FCHI | | | | | | | |
| | | 10K | FE/FF | | BB, OS&Y | | 10FCJ | | | |
| | | 125 | | 10FCJS | | 10FCJU | | | | |
| | | EN PN16 | | 125FCJ | | 125FCJS | | | | |
| | | Globe | | EN16FCJ | | EN16FCJM | | | | |
| | | | | Check | | 10K | Swing, BC | 10FCO | 10FCOS | |
| | | | | | | 125 | Swing, BC, with Rubber Seat | 10FCOR | 10FCOUR | |
| | | | EN PN16 | | Swing, BC, with Counter Weight | 10FCOU-C | C15 70 | | | |
| | | | EN PN25 | Swing, BC | 125FCO | 125FCOS | | | | |
| | | | EN PN25 | Swing, BC | EN16FCO | EN16FCOM | | | | |
| | | Wafer | 10K | FE/RF | Wafer Type with Bypass Valve, Dual Plate | 10FWZ | C16 71 | | | |
| | | | 125 | | 125FWNB | 125FWNBE | | | | |
| | | | EN PN16 | | Wafer Type, Dual Plate | PN16FWNB | | PN16FWNBME | | |
| | | | Strainer | | 10K | FE/FF | | Y-Pattern, BC | 10FCY | |
| | | | | | 125 | | | | 125FCY | C17 72 |
| | | | | | EN PN16 | | | | 125FCETY<Z0P02> | |
| | | EN PN25 | EN16FCY | EN16FCYM | | | | | | |
| | | Ductile Iron, Y-Pattern, BC | 10K | FE/RF | Ductile Iron, Y-Pattern, BC | | (PHOX)EN25FCOE | | | |
| | | | 125 | | | | (PHOX)EN25FDYBE | | | |
| | | | EN PN25 | | | | | | | |
| | | Nylon Lining | Gate | 10K | | BB, OS&Y | 5FCMN | C18 73 | | |
| | | | Globe | | | 10FCLN | | | | |
| | | | Check | | | 10FCJN | | | | |
| | | | Strainer | | | Swing, BC | 10FCON | | | |
| Swing, BC, with Counter Weight | 10FCON-C | | | | | | | | | |
| Ball Check, BC | 10FCFTN | | | | | | | | | |
| Y-Pattern, BC | 10FCYN | | | | | | | | | |
| CI | Ball | 10K | FE/FF | TE | FB | 10FCT | C19 74 | | | |
| | | | | FE/FF | (G-)10FCTB | | | | | |
| | | | | | RB | 10FCTR | | | | |
| | | | | | FB | 125FCTB | | | | |
| | | | | | RB | 125FCTR | | | | |
| | | | | | FB, 3-way | 10FCTB2L | | | | |
| RB, 3-way | 10FCTR2L | | | | | | | | | |

* (Abbreviation) FE: Flanged Ends, FF: Flat Face Ends, RF: Raised Face Ends, TE: Threaded Ends
 BB: Bolted Bonnet, OS&Y: Outside Screw & Yoke, BC: Bolted Cover, IS: Inside Screw, NRS: Non Rising Stem, RS: Rising Stem, FB: Full Bore, RB: Reduced Bore

PRODUCT CODING

Cast Iron Valves

(Note: Some products do not follow this coding system)

G - 10 FC O U R

1 2 3 4 5 6

1 Valve Operation

None Handwheel or Lever
 G Gear

2 Pressure Class

5 5K
 10 10K
 PN16 or EN16 PN16
 EN25---E PN25
 125 Class 125

3 Symbol of Shell Material

FC Cast Iron
 F Cast Iron
 FD Ductile Iron

4 Valve Type





L Gate (OS&Y)
 W or H Gate (NRS, IS)
 WI or HI Gate with Indicator
 J Globe
 O Swing Check
 WZ Wafer Check with By-Pass
 WNBM Wafer Check
 Y Strainer
 ETY Strainer
 T or TB FB ball
 TR RB ball





5 Trim









None Bronze
 U 304SS
 S 403SS
 M 316SS









6 Others





R Rubber Seat
 N Nylon Lining
 -C With Counter Weight





| Type | Gate | | | | Gate | | | | Gate | | | | Gate | | | |
|----------------------|---|-----|------|-----|---|------|-----|-----|--|-----|-----|------|---|-----|------|-----|
| Cast Iron |  | | | |  | | | |  | | | |  | | | |
| | 5K | | | | 10K | | | | 10K | | | | 10K | | | |
| Fig | 5FCM | | | | 10FCL | | | | 10FCLS | | | | 10FCLU | | | |
| End Connection | JIS B2239 5K FF | | | | JIS B2239 10K FF | | | | JIS B2239 10K FF | | | | JIS B2239 10K FF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 11/2 | 40 | | | | 165 | 305 | 160 | 165 | 305 | 160 | 165 | 305 | 160 | 165 | 305 | 160 |
| 2 | 50 | 160 | 329 | 160 | 180 | 343 | 170 | 180 | 343 | 170 | 180 | 343 | 170 | 180 | 343 | 170 |
| 2 1/2 | 65 | 170 | 383 | 170 | 190 | 390 | 170 | 190 | 390 | 170 | 190 | 390 | 170 | 190 | 390 | 170 |
| 3 | 80 | 180 | 437 | 170 | 200 | 464 | 200 | 200 | 464 | 200 | 200 | 464 | 200 | 200 | 464 | 200 |
| 4 | 100 | 200 | 534 | 225 | 230 | 548 | 250 | 230 | 548 | 250 | 230 | 548 | 250 | 230 | 548 | 250 |
| 5 | 125 | 220 | 629 | 225 | 250 | 649 | 280 | 250 | 649 | 280 | 250 | 649 | 280 | 250 | 649 | 280 |
| 6 | 150 | 240 | 727 | 250 | 270 | 760 | 300 | 270 | 760 | 300 | 270 | 760 | 300 | 270 | 760 | 300 |
| 8 | 200 | 260 | 920 | 280 | 290 | 957 | 350 | 290 | 957 | 350 | 290 | 957 | 350 | 290 | 957 | 350 |
| 10 | 250 | 300 | 1135 | 350 | 330 | 1169 | 400 | 330 | 1169 | 400 | 330 | 1169 | 400 | 330 | 1169 | 400 |
| 12 | 300 | | | | 350 | 1364 | 450 | 350 | 1364 | 450 | 350 | 1364 | 450 | 350 | 1364 | 450 |
| 14 | 350 | | | | 381 | 1561 | 500 | 381 | 1561 | 500 | 381 | 1561 | 500 | 381 | 1561 | 500 |
| 16 | 400 | | | | 406 | 1795 | 600 | 406 | 1795 | 600 | 406 | 1795 | 600 | 406 | 1795 | 600 |
| 18 | 450 | | | | | | | 432 | 1999 | 600 | 432 | 1999 | 600 | 432 | 1999 | 600 |
| 20 | 500 | | | | | | | 457 | 2232 | 680 | 457 | 2232 | 680 | 457 | 2232 | 680 |
| 24 | 600 | | | | | | | 508 | 2644 | 760 | 508 | 2644 | 760 | 508 | 2644 | 760 |
| Body | FC200 | | | | FC200 | | | | FC200 | | | | FC200 | | | |
| Bonnet | FC200 | | | | FC200 | | | | FC200 | | | | FC200 | | | |
| Stem | C3771 | | | | C3771 | | | | 403SS | | | | 304SS | | | |
| Disc | FC200 | | | | FC200 | | | | FC200 | | | | FC200 | | | |
| Body/Disc Seat Rings | CAC406 | | | | CAC406 | | | | 403SS | | | | 304SS | | | |
| Gland Packing | Asbestos-free (P/A4531K) | | | | Asbestos-free (P/A4531K) | | | | Asbestos-free (P/A4531K) | | | | Asbestos-free (P/A4531K) | | | |
| Gasket | Asbestos-free (T/1995) | | | | Asbestos-free (T/1995) | | | | Asbestos-free (T/1995) | | | | Asbestos-free (T/1995) | | | |
| Bolt/Nut | CS | | | | CS | | | | CS | | | | CS | | | |
| Standard/Approval | JIS B2031 | | | | JIS B2031 for 2 ^B -12 ^B | | | | JIS B2031 for 2 ^B -12 ^B | | | | JIS B2031 for 2 ^B -12 ^B | | | |
| Reference Page | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | |





| Type | Gate | | | | Gate | | | | Gate | | | | Gate | | | |
|----------------------|---|-----|------|-----|---|------|-----|-----|--|-----|-----|------|---|-----|------|-----|
| Cast Iron |  | | | |  | | | |  | | | |  | | | |
| | 125 | | | | 125 | | | | PN16 | | | | PN16 | | | |
| Fig | 125FCL | | | | 125FCLS | | | | EN16FCL | | | | EN16FCLM | | | |
| End Connection | ASME B16.1 CI.125FF | | | | ASME B16.1 CI.125FF | | | | EN 1092-2 PN16 RF | | | | EN 1092-2 PN16 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 11/2 | 40 | 178 | 329 | 160 | 178 | 329 | 160 | 178 | 343 | 170 | 178 | 343 | 170 | 178 | 343 | 170 |
| 2 | 50 | 190 | 383 | 170 | 190 | 382 | 170 | 190 | 389 | 170 | 190 | 389 | 170 | 190 | 389 | 170 |
| 2 1/2 | 65 | 203 | 437 | 170 | 203 | 437 | 170 | 203 | 462 | 200 | 203 | 462 | 200 | 203 | 462 | 200 |
| 3 | 80 | 229 | 534 | 225 | 229 | 534 | 225 | 229 | 547 | 250 | 229 | 547 | 250 | 229 | 547 | 250 |
| 4 | 100 | 254 | 629 | 225 | 254 | 628 | 225 | 254 | 648 | 280 | 254 | 648 | 280 | 254 | 648 | 280 |
| 5 | 125 | 267 | 727 | 250 | 267 | 726 | 250 | 267 | 759 | 300 | 267 | 759 | 300 | 267 | 759 | 300 |
| 6 | 150 | 292 | 920 | 280 | 292 | 920 | 280 | 292 | 956 | 350 | 292 | 956 | 350 | 292 | 956 | 350 |
| 8 | 200 | 330 | 1135 | 350 | 330 | 1135 | 350 | 330 | 1168 | 400 | 330 | 1168 | 400 | 330 | 1168 | 400 |
| 10 | 250 | 356 | 1364 | 450 | 356 | 1364 | 450 | 356 | 1363 | 450 | 356 | 1363 | 450 | 356 | 1363 | 450 |
| 12 | 300 | 381 | 1561 | 500 | 381 | 1561 | 500 | | | | | | | | | |
| Body | FC200 | | | | FC200 | | | | EN-JL1030 | | | | EN-JL1030 | | | |
| Bonnet | FC200 | | | | FC200 | | | | FC200 | | | | FC200 | | | |
| Stem | C3771 | | | | 403SS | | | | C3771 | | | | 316SS | | | |
| Disc | FC200 | | | | FC200 | | | | FC200 | | | | FC200 | | | |
| Body/Disc Seat Rings | CAC406 | | | | 403SS | | | | CAC406 | | | | 316SS | | | |
| Gland Packing | Asbestos-free (P/A4531K) | | | | Asbestos-free (P/A4531K) | | | | Asbestos-free (P/A4531K) | | | | Asbestos-free (P/A4531K) | | | |
| Gasket | Asbestos-free (T/1995) | | | | Asbestos-free (T/1995) | | | | Graphite (P/6633) | | | | Graphite (P/6633) | | | |
| Bolt/Nut | CS | | | | CS | | | | CS | | | | CS | | | |
| Standard/Approval | MSS SP-70: Option | | | | MSS SP-70: Option | | | | | | | | | | | |
| Reference Page | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | |

| Type | Gate | | | Gate | | | Gate | | | Gate | | | |
|----------------------|---|-------|--------|---|-----|-----|--|-----|-----|---|-----|-----|-----|
| Cast Iron |  | | |  | | |  | | |  | | | |
| |  | | |  | | |  | | |  | | | |
| Fig | (PHOX)EN25FCLE | | | 10FCWI | | | 125FCWI | | | EN16FCW | | | |
| End Connection | EN 1092-2 PN25 RF | | | JIS B2239 10K FF | | | ASME B16.1 Cl.125FF | | | EN 1092-2 PN16 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 11/2 | 40 | | | | 165 | 285 | 160 | | | | | | |
| 2 | 50 | 215.9 | 385 | 175 | 180 | 313 | 180 | 178 | 249 | 140 | 178 | 271 | 180 |
| 2 1/2 | 65 | 241.3 | 437 | 200 | 190 | 344 | 180 | 190 | 287 | 160 | 190 | 297 | 180 |
| 3 | 80 | 282.5 | 493 | 254 | 200 | 401 | 200 | 203 | 247 | 160 | 203 | 352 | 200 |
| 4 | 100 | 304.8 | 611 | 300 | 230 | 444 | 250 | 229 | 397 | 180 | 229 | 394 | 250 |
| 5 | 125 | 381 | 716 | 300 | 250 | 517 | 280 | 254 | 459 | 225 | 254 | 451 | 280 |
| 6 | 150 | 403.2 | 813 | 348 | 270 | 577 | 300 | 267 | 510 | 225 | 267 | 518 | 300 |
| 8 | 200 | 419.1 | 1023.5 | 400 | 290 | 693 | 350 | 292 | 635 | 300 | 292 | 618 | 350 |
| 10 | 250 | 457 | 1211 | 457 | 330 | 814 | 400 | 330 | 762 | 350 | 330 | 760 | 400 |
| 12 | 300 | 502 | 1386 | 457 | 350 | 925 | 450 | 356 | 873 | 350 | 356 | 867 | 450 |
| Body | EN-JL1030 | | | FC200 | | | FC200 | | | EN-JL1030 | | | |
| Bonnet | FC200 | | | FC200 | | | FC300 | | | EN-JL1030 | | | |
| Stem | C3771 | | | C3771BD | | | C3771 | | | C3771 | | | |
| Disc | FC200 | | | FC200 | | | FC300 | | | EN-JL1030 | | | |
| Body/Disc Seat Rings | CAC406 | | | CAC406 | | | CAC406 | | | CAC406 | | | |
| Gland Packing | Asbestos-free (P/A4531K) | | | Asbestos-free (P/A4531K) | | | Asbestos-free (P/A4531K) | | | P6619W | | | |
| Gasket | Graphite (P/6633) | | | Asbestos-free (T/1995) | | | Asbestos-free (T/1995) | | | DP1102 | | | |
| Bolt/Nut | CS | | | CS | | | CS | | | CS | | | |
| Standard/Approval | | | | JIS B2031 for 2 ^B -12 ^B | | | MSS SP-70: Option | | | | | | |
| Reference Page | P-T Rating : Page CI10 | | | P-T Rating : Page CI10 | | | P-T Rating : Page CI10 | | | P-T Rating : Page CI10 | | | |
| Remarks | | | | * with Indicator | | | * with Indicator | | | | | | |





| Type | Gate | | | Gate | | | Gate | | | Globe | | | |
|----------------------|---|-----|-----|---|-----|-----|--|-----|-----|---|-----|-----|-----|
| Cast Iron |  | | |  | | |  | | |  | | | |
| |  | | |  | | |  | | |  | | | |
| Fig | EN16FCWI | | | 10FCHI | | | 125FCHI | | | 10FCJ | | | |
| End Connection | EN 1092-2 PN16 RF | | | JIS B2239 10K FF | | | ASME B16.1 Cl.125FF | | | JIS B2239 10K FF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1 1/2 | 40 | 178 | 271 | 180 | 140 | 210 | 140 | 140 | 213 | 140 | 190 | 261 | 160 |
| 2 | 50 | 190 | 297 | 180 | 146 | 250 | 140 | 146 | 249 | 140 | 200 | 274 | 180 |
| 2 1/2 | 65 | 203 | 352 | 200 | 159 | 285 | 160 | 159 | 287 | 160 | 220 | 301 | 180 |
| 3 | 80 | 229 | 394 | 250 | 165 | 350 | 160 | 165 | 347 | 160 | 240 | 353 | 225 |
| 4 | 100 | 254 | 451 | 280 | 171 | 400 | 180 | 171 | 397 | 180 | 290 | 403 | 280 |
| 5 | 125 | 267 | 518 | 300 | 190 | 460 | 225 | 190 | 459 | 225 | 360 | 465 | 300 |
| 6 | 150 | 292 | 618 | 350 | 210 | 515 | 225 | 210 | 510 | 225 | 410 | 531 | 350 |
| 8 | 200 | 330 | 760 | 400 | 241 | 635 | 300 | 241 | 635 | 300 | 500 | 618 | 450 |
| 10 | 250 | 356 | 867 | 450 | 273 | 760 | 350 | | | | | | |
| 12 | 300 | | | | 305 | 870 | 350 | | | | | | |
| Body | EN-JL1030 | | | FC300 | | | FC300 | | | FC200 | | | |
| Bonnet | EN-JL1030 | | | FC300 | | | FC300 | | | FC200 | | | |
| Stem | C3771 | | | C3771BE | | | C3771 | | | C3771 | | | |
| Disc | EN-JL1030 | | | FC300/CAC406 for 1 1/2 ^B | | | CAC406 or FC300 | | | CAC406 or FC200 | | | |
| Body/Disc Seat Rings | CAC406 | | | CAC406 | | | CAC406 | | | CAC406 | | | |
| Gland Packing | P6619W | | | Asbestos-free (P/A4531K) | | | Asbestos-free (P/A4531K) | | | Asbestos-free (P/A4531K) | | | |
| Gasket | DP1102 | | | Asbestos-free (T/1995) | | | Asbestos-free (T/1995) | | | Graphite (P/6633) | | | |
| Bolt/Nut | CS | | | CS | | | CS | | | CS | | | |
| Standard/Approval | | | | | | | | | | JIS B2031 | | | |
| Reference Page | P-T Rating : Page CI10 | | | P-T Rating : Page CI10 | | | P-T Rating : Page CI10 | | | P-T Rating : Page CI10 | | | |
| Remarks | * with Indicator | | | * with Indicator | | | * with Indicator | | | | | | |

| Type | Globe | | | | | Globe | | | | | Globe | | | | | Globe | | | | |
|----------------------|---|-----|-----|-----|-----|---|-----|-----|-----|-----|--|-----|-----|---|---|---|--|--|--|--|
| Cast Iron |  | | | | |  | | | | |  | | | | |  | | | | |
| | 10K | | | | | 10K | | | | | 125 | | | | | 125 | | | | |
| Fig | 10FCJS | | | | | 10FCJU | | | | | 125FCJ | | | | | 125FCJS | | | | |
| End Connection | JIS B2239 10K FF | | | | | JIS B2239 10K FF | | | | | ASME B16.1 Cl.125FF | | | | | ASME B16.1 Cl.125FF | | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D | | | | |
| 11/2 | 40 | 190 | 261 | 160 | 190 | 261 | 160 | | | | | | | | | | | | | |
| 2 | 50 | 200 | 274 | 180 | 200 | 274 | 180 | 203 | 274 | 180 | 203 | 274 | 180 | | | | | | | |
| 2 1/2 | 65 | 220 | 301 | 180 | 220 | 301 | 180 | 216 | 301 | 180 | 216 | 300 | 180 | | | | | | | |
| 3 | 80 | 240 | 353 | 225 | 240 | 353 | 225 | 241 | 353 | 225 | 241 | 353 | 225 | | | | | | | |
| 4 | 100 | 290 | 403 | 280 | 290 | 403 | 280 | 292 | 403 | 280 | 292 | 403 | 280 | | | | | | | |
| 5 | 125 | 360 | 465 | 300 | 360 | 465 | 300 | 330 | 465 | 300 | 330 | 465 | 300 | | | | | | | |
| 6 | 150 | 410 | 533 | 350 | 410 | 533 | 350 | 356 | 531 | 350 | 356 | 533 | 350 | | | | | | | |
| 8 | 200 | 500 | 618 | 450 | 500 | 618 | 450 | 495 | 618 | 450 | 495 | 618 | 450 | | | | | | | |
| 10 | 250 | 620 | 669 | 450 | 620 | 669 | 450 | | | | | | | | | | | | | |
| 12 | 300 | 700 | 756 | 500 | 700 | 756 | 500 | | | | | | | | | | | | | |
| Body | FC200 | | | | | FC200 | | | | | FC200 | | | | | FC200 | | | | |
| Bonnet | FC200 | | | | | FC200 | | | | | FC200 | | | | | FC200 | | | | |
| Stem | 403SS | | | | | 304SS | | | | | C3771 | | | | | 403SS | | | | |
| Disc | 403SS or FC200 | | | | | 304SS or FC200 | | | | | CAC406 or FC200 | | | | | 403SS or FC200 | | | | |
| Body/Disc Seat Rings | 403SS | | | | | 304SS | | | | | CAC406 | | | | | 403SS | | | | |
| Gland Packing | Asbestos-free (P/A4531K) | | | | | Asbestos-free (P/A4531K) | | | | | Asbestos-free (P/A4531K) | | | | | Asbestos-free (P/A4531K) | | | | |
| Gasket | Graphite (P/6633) | | | | | Asbestos-free (T/1995) | | | | | Asbestos-free (T/1995) | | | | | Asbestos-free (T/1995) | | | | |
| Bolt/Nut | CS | | | | | CS | | | | | CS | | | | | CS | | | | |
| Standard/Approval | JIS B2031 | | | | | JIS B2031 | | | | | MSS SP-70: Option | | | | | MSS SP-70: Option | | | | |
| Reference Page | P-T Rating : Page CI10 | | | | | P-T Rating : Page CI10 | | | | | P-T Rating : Page CI10 | | | | | P-T Rating : Page CI10 | | | | |





| Type | Globe | | | | | Globe | | | | | Swing Check | | | | | Swing Check | | | | |
|----------------------|---|-----|-----|-----|-----|---|-----|-----|-----|---|--|-----|---|---|---|---|--|--|--|--|
| Cast Iron |  | | | | |  | | | | |  | | | | |  | | | | |
| | PN16 | | | | | PN16 | | | | | 10K | | | | | 10K | | | | |
| Fig | EN16FCJ | | | | | EN16FCJM | | | | | 10FCO | | | | | 10FCOS | | | | |
| End Connection | EN 1092-2 PN16 RF | | | | | EN 1092-2 PN16 RF | | | | | JIS B2239 10K FF | | | | | JIS B2239 10K FF | | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D | | | | |
| 1 1/2 | 40 | | | | | | | 190 | 108 | | 190 | 108 | | | | | | | | |
| 2 | 50 | 203 | 277 | 180 | 203 | 277 | 180 | 200 | 113 | | 200 | 113 | | | | | | | | |
| 2 1/2 | 65 | 216 | 307 | 180 | 216 | 307 | 180 | 220 | 123 | | 220 | 123 | | | | | | | | |
| 3 | 80 | 241 | 353 | 225 | 241 | 353 | 225 | 240 | 149 | | 240 | 145 | | | | | | | | |
| 4 | 100 | 292 | 404 | 280 | 292 | 404 | 280 | 290 | 165 | | 290 | 165 | | | | | | | | |
| 5 | 125 | 330 | 467 | 300 | 330 | 467 | 300 | 360 | 207 | | 360 | 207 | | | | | | | | |
| 6 | 150 | 356 | 533 | 350 | 356 | 533 | 350 | 410 | 225 | | 410 | 225 | | | | | | | | |
| 8 | 200 | 495 | 620 | 450 | 495 | 620 | 450 | 500 | 271 | | 500 | 268 | | | | | | | | |
| 10 | 250 | 622 | 665 | 450 | 622 | 665 | 450 | 620 | 319 | | 620 | 319 | | | | | | | | |
| 12 | 300 | | | | | | | 700 | 356 | | 700 | 356 | | | | | | | | |
| 14 | 350 | | | | | | | | | | 787 | 381 | | | | | | | | |
| Body | EN-JL1030 | | | | | EN-JL1030 | | | | | FC200 | | | | | FC200 | | | | |
| Bonnet | FC200 | | | | | FC200 | | | | | FC200 | | | | | FC200 | | | | |
| Stem | C3771 | | | | | 316SS | | | | | C3771BD | | | | | 403SS | | | | |
| Disc | CAC406 or FC200 | | | | | 316SS or FC200 | | | | | CAC406 or FC200 | | | | | 403SS or FC200 | | | | |
| Body/Disc Seat Rings | CAC406 | | | | | 316SS | | | | | CAC406 | | | | | 403SS/304SS | | | | |
| Gland Packing | P/6619W | | | | | P/A4532K | | | | | | | | | | | | | | |
| Gasket | Graphite (P/6633 or 6630) | | | | | Graphite (P/6633 or 6630) | | | | | Asbestos-free (T/1995) | | | | | P/6630 or 6633 | | | | |
| Bolt/Nut | CS | | | | | CS | | | | | CS | | | | | CS | | | | |
| Standard/Approval | | | | | | | | | | | JIS B2031 for 2 nd -8 th | | | | | JIS B2031 for 2 nd -8 th | | | | |
| Reference Page | P-T Rating : Page CI10 | | | | | P-T Rating : Page CI10 | | | | | P-T Rating : Page CI10 | | | | | P-T Rating : Page CI10 | | | | |

| Type | Swing Check | | | | Swing Check | | | | Swing Check | | | | Swing Check | | | |
|----------------------|---|-----|-----|---|---|-----|---|-----|--|---|-----|-----|---|--|--|--|
| Cast Iron |  | | | |  | | | |  | | | |  | | | |
| | 10K | | | | 10K | | | | 10K | | | | 10K | | | |
| Fig | 10FCOU | | | | 10FCOR | | | | 10FCOUR | | | | 10FCOU-C | | | |
| End Connection | JIS B2239 10K FF | | | | JIS B2239 10K FF | | | | JIS B2239 10K FF | | | | JIS B2239 10K FF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | | | |
| 11/2 | 40 | 190 | 108 | | 190 | 106 | | 190 | 106 | | | | | | | |
| 2 | 50 | 200 | 113 | | 200 | 111 | | 200 | 111 | | 200 | 111 | | | | |
| 2 1/2 | 65 | 220 | 123 | | 220 | 121 | | 220 | 121 | | 220 | 121 | | | | |
| 3 | 80 | 240 | 145 | | 240 | 145 | | 240 | 145 | | 240 | 145 | | | | |
| 4 | 100 | 290 | 165 | | 290 | 165 | | 290 | 165 | | 290 | 165 | | | | |
| 5 | 125 | 360 | 207 | | 360 | 207 | | 360 | 207 | | 360 | 207 | | | | |
| 6 | 150 | 410 | 225 | | 410 | 225 | | 410 | 225 | | 410 | 225 | | | | |
| 8 | 200 | 500 | 268 | | 500 | 268 | | 500 | 268 | | 500 | 268 | | | | |
| 10 | 250 | 620 | 319 | | 620 | 315 | | 620 | 315 | | | | | | | |
| 12 | 300 | 700 | 356 | | 700 | 356 | | 700 | 356 | | | | | | | |
| 14 | 350 | 787 | 381 | | | | | | | | | | | | | |
| Body | FC200 | | | | FC200 | | | | FC200 | | | | FC200 | | | |
| Bonnet | FC200 | | | | FC200 | | | | FC200 | | | | FC200 | | | |
| Stem | 304SS | | | | C3771BD | | | | C3771BD | | | | 304SS | | | |
| Disc | 304SS or FC200 | | | | 304SS+NBR or FC200+NBR | | | | 304SS+NBR or FC200+NBR | | | | 304SS or FC200 | | | |
| Body/Disc Seat Rings | 403SS/304SS | | | | CAC406 | | | | 304SS | | | | 304SS | | | |
| Gasket | P/6630 or 6633 | | | | P/6630 or 6633 | | | | P/6630 or 6633 | | | | P/6630 or 6633 | | | |
| Bolt/Nut | CS | | | | CS | | | | CS | | | | CS | | | |
| Standard/Approval | JIS B2031 for 2 ^B -8 ^B | | | | | | | | | | | | | | | |
| Reference Page | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | |
| Remarks | | | | | NBR Disc Seat | | | | NBR Disc Seat | | | | Counter Weight | | | |



| Type | Swing Check | | | | Swing Check | | | | Swing Check | | | | Swing Check | | | |
|----------------------|---|-----|-----|---|---|-----|---|-----|--|---|-----|-----|---|--|--|--|
| Cast Iron |  | | | |  | | | |  | | | |  | | | |
| | 125 | | | | 125 | | | | PN16 | | | | PN16 | | | |
| Fig | 125FCO | | | | 125FCOS | | | | EN16FCO | | | | EN16FCOM | | | |
| End Connection | ASME B16.1 CI.125FF | | | | ASME B16.1 CI.125FF | | | | EN 1092-2 PN16 RF | | | | EN 1092-2 PN16 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | | | |
| 2 | 50 | 203 | 113 | | 203 | 113 | | 203 | 111 | | 203 | 111 | | | | |
| 2 1/2 | 65 | 216 | 123 | | 216 | 123 | | 216 | 121 | | 216 | 121 | | | | |
| 3 | 80 | 241 | 143 | | 241 | 143 | | 241 | 145 | | 241 | 145 | | | | |
| 4 | 100 | 292 | 175 | | 292 | 175 | | 292 | 165 | | 292 | 165 | | | | |
| 5 | 125 | 330 | 207 | | 330 | 207 | | 330 | 207 | | 330 | 207 | | | | |
| 6 | 150 | 356 | 225 | | 356 | 225 | | 356 | 225 | | 356 | 225 | | | | |
| 8 | 200 | 495 | 268 | | 495 | 268 | | 495 | 268 | | 495 | 268 | | | | |
| 10 | 250 | 622 | 319 | | 622 | 319 | | 622 | 315 | | 622 | 315 | | | | |
| 12 | 300 | 698 | 356 | | 698 | 356 | | 698 | 356 | | 698 | 356 | | | | |
| 14 | 350 | | | | 787 | 381 | | | | | | | | | | |
| Body | FC200 | | | | FC200 | | | | EN-JL1030 | | | | EN-JL1030 | | | |
| Bonnet | FC200 | | | | FC200 | | | | FC200 | | | | FC200 | | | |
| Stem | CAC406 or FC200 | | | | 403SS | | | | C3771 | | | | 316SS | | | |
| Disc | CAC406 | | | | 403SS | | | | CAC406 or FC200 | | | | 316SS or FC200 | | | |
| Body/Disc Seat Rings | CAC406 | | | | 403SS | | | | CAC406 | | | | 316SS | | | |
| Gasket | Asbestos-free (T/1995) | | | | Asbestos-free (T/1995) | | | | P/6633 | | | | P/6633 | | | |
| Bolt/Nut | CS | | | | CS | | | | CS | | | | CS | | | |
| Standard/Approval | MSS SP-71: Option | | | | MSS SP-71: Option | | | | | | | | | | | |
| Reference Page | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | | P-T Rating : Page CI10 | | | |

| Type | Swing Check | | | Wafer Check | | | Wafer Check | | | Wafer Check | | | |
|----------------------|---|-----|-----|---|-----|-----|--|-----|---|--|-----|---|-----|
| Cast Iron |  | | |  | | |  | | |  | | | |
| | PN25 BC | | | 10K Dual | | | 125 Dual | | | 125 Dual | | | |
| Fig | (PHOX)EN25FCOE | | | 10FWZ | | | 125FWNB | | | 125FWNBE | | | |
| End Connection | EN 1092-2 PN25 RF | | | Wafer (JIS 10K) | | | Wafer (Class 125) | | | Wafer (Class 125) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 11/2 | 40 | | | | 54 | 126 | 55 | | | | | | |
| 2 | 50 | 267 | 135 | | 56 | 140 | 70 | 54 | | 105 | 54 | | 105 |
| 2 1/2 | 65 | 292 | 150 | | 56 | 148 | 70 | 54 | | 124 | 54 | | 124 |
| 3 | 80 | 318 | 166 | | 59 | 153 | 70 | 57 | | 137 | 57 | | 137 |
| 4 | 100 | 356 | 190 | | 66 | 166 | 70 | 64 | | 175 | 64 | | 175 |
| 5 | 125 | 400 | 206 | | 72 | 180 | 70 | 70 | | 197 | 70 | | 197 |
| 6 | 150 | 444 | 244 | | 78 | 214 | 80 | 76 | | 222 | 76 | | 222 |
| 8 | 200 | 533 | 291 | | 96 | 241 | 80 | 95 | | 279 | 95 | | 279 |
| 10 | 250 | 622 | 337 | | 109 | 289 | 90 | 108 | | 340 | 108 | | 340 |
| 12 | 300 | 711 | 383 | | 145 | 315 | 90 | 143 | | 410 | 143 | | 410 |
| 14 | 350 | | | | 184 | 328 | 90 | | | | | | |
| 16 | 400 | | | | 191 | 355 | 90 | | | | | | |
| 18 | 450 | | | | 204 | 386 | 90 | | | | | | |
| Body | EN-GJL-250 | | | FC250+NBR | | | A126 CL.B+NBR | | | A126 CL.B+EPDM | | | |
| Bonnet | EN-GJL-250 | | | C3771/CAC406 | | | B584 C83600 | | | B584 C83600 | | | |
| Stem | BS970 304S15 | | | 304SS | | | 304SS/Spring 316SS | | | 304SS/Spring 316SS | | | |
| Disc | EN-GJL-250 | | | CAC406 | | | B584 C83600 | | | B584 C83600 | | | |
| Body/Disc Seat Rings | BS1400 LG2 | | | | | | | | | | | | |
| Gasket | PTFE | | | | | | | | | | | | |
| Bolt/Nut | CS | | | | | | | | | | | | |
| Service Conditions | | | | 80°C W.O.G. : 1.4MPa | | | 16bar at 80°C Non-shock Water (NBR Seat), 16bar at 100°C Non-shock Water (EPDM Seat) | | | 16bar at 80°C Non-shock Water (NBR Seat), 16bar at 100°C Non-shock Water (EPDM Seat) | | | |
| Reference Page | P-T Rating : Page CI10 | | | Features: Page BR35 | | | | | | | | | |
| Remarks | | | | Built-in Bypass Valve Dual Plate Type | | | Dual Plate Type | | | Dual Plate Type | | | |





| Type | Wafer Check | | | Wafer Check | | | |
|--------------------|--|-----|---|--|-----|---|-----|
| Cast Iron |  | | |  | | | |
| | PN16 Dual | | | PN16 Dual | | | |
| Fig | PN16FWNB | | | PN16FWNBME | | | |
| End Connection | Wafer (PN16) | | | Wafer (PN16) | | | |
| inch | mm | L | H | D | L | H | D |
| 2 | 50 | 54 | | 109 | 54 | | 109 |
| 2 1/2 | 65 | 54 | | 129 | 54 | | 129 |
| 3 | 80 | 57 | | 144 | 57 | | 144 |
| 4 | 100 | 64 | | 164 | 64 | | 164 |
| 5 | 125 | 70 | | 194 | 70 | | 194 |
| 6 | 150 | 76 | | 220 | 76 | | 220 |
| 8 | 200 | 95 | | 275 | 95 | | 275 |
| 10 | 250 | 108 | | 331 | 108 | | 331 |
| 12 | 300 | 143 | | 386 | 143 | | 386 |
| 14 | 350 | 184 | | 446 | 184 | | 446 |
| 16 | 400 | 191 | | 498 | 191 | | 498 |
| 18 | 450 | 203 | | 558 | 203 | | 558 |
| 20 | 500 | 213 | | 620 | 213 | | 620 |
| 24 | 600 | 222 | | 737 | 222 | | 737 |
| Body | A126 CL.B+NBR | | | A126 CL.B+EPDM | | | |
| Stem/Hinge Pin | 304SS/Spring 316SS | | | 304SS/Spring 316SS | | | |
| Disc | CF8M | | | CF8M | | | |
| Service Conditions | 16bar at 80°C Non-shock Water (NBR Seat), 16bar at 100°C Non-shock Water (EPDM Seat) | | | 16bar at 80°C Non-shock Water (NBR Seat), 16bar at 100°C Non-shock Water (EPDM Seat) | | | |
| Remarks | Dual Plate Type | | | Dual Plate Type | | | |




| Type | Y-Strainer | | | | | Y-Strainer | | | Y-Strainer | | | Y-Strainer | | |
|--------------------|--|-----|-----|------|-----|---|------|------|--|------|-----|---|------|--|
| Cast Iron |  | | | | |  | | |  | | |  | | |
| | 10K | | | | | 125 | | | 125 | | | PN16 | | |
| Fig | 10FCY | | | | | 125FCY | | | 125FCETY<Z0P02> | | | EN16FCY | | |
| End Connection | JIS B2239 10K FF | | | | | ASME B16.1 Cl.125FF | | | ASME B16.1 Cl.125FF | | | EN 1092-2 PN16 RF | | |
| inch | mm | L | H | H1** | L | H | H1** | L | H | H1** | L | H | H1** | |
| 3/8 | 10 | 115 | 46 | 63 | | | | | | | | | | |
| 1/2 | 15 | 125 | 57 | 81 | | | | | | | | | | |
| 3/4 | 20 | 140 | 62 | 90 | | | | | | | | | | |
| 1 | 25 | 150 | 77 | 114 | | | | | | | | | | |
| 1 1/4 | 32 | 170 | 90 | 134 | | | | | | | | | | |
| 1 1/2 | 40 | 190 | 100 | 145 | | | | | | | | | | |
| 2 | 50 | 230 | 138 | 173 | 250 | 157 | 207 | | | | 250 | 168 | 208 | |
| 2 1/2 | 65 | 305 | 207 | 288 | 285 | 207 | 288 | | | | 285 | 212 | 289 | |
| 3 | 80 | 360 | 237 | 334 | 315 | 237 | 334 | | | | 315 | 242 | 335 | |
| 4 | 100 | 415 | 278 | 387 | 370 | 278 | 387 | | | | 370 | 284 | 388 | |
| 5 | 125 | 465 | 321 | 445 | 420 | 321 | 445 | | | | 420 | 325 | 446 | |
| 6 | 150 | 515 | 367 | 497 | 490 | 367 | 497 | | | | 490 | 370 | 497 | |
| 8 | 200 | 580 | 457 | 622 | 570 | 457 | 622 | | | | 570 | 440 | 589 | |
| 10 | 250 | 680 | 536 | 743 | 680 | 536 | 743 | | | | 680 | 515 | 694 | |
| 12 | 300 | 800 | 625 | 869 | 800 | 625 | 869 | | | | 800 | 600 | 818 | |
| 14 | 350 | 950 | 741 | 1031 | 950 | 741 | 1031 | | | | | | | |
| 16 | 400 | | | | | | | 1100 | 750 | 1129 | | | | |
| 18 | 450 | | | | | | | 1200 | 784 | 1172 | | | | |
| 20 | 500 | | | | | | | 1250 | 857 | 1293 | | | | |
| Body | FC200 | | | | | FC200 | | | FC200 | | | EN-JGL-200 | | |
| Cap/Cover | C3771BE /FC200 for 2 ^B & over | | | | | FC200 | | | FC200 | | | EN-JGL-200 | | |
| Screen | 304SS(Punched Plate) | | | | | 304SS(Punched Plate) | | | 304SS(Punched Plate) | | | 304SS | | |
| Gasket | T/1995 | | | | | T/1995 | | | Graphite | | | Non asbestos Sheet | | |
| Bolt/Nut | CS | | | | | CS | | | CS | | | CS | | |
| Plug | 304SS | | | | | 304SS | | | 304SS | | | 304SS | | |
| Service Conditions | 120°C Non-shock Water: 1.4MPa, 120°C Water,Oil,Air.: 1.0MPa, 120°C Gas: 0.2MPa, Saturated Steam: 0.7MPa | | | | | | | | | | | | | |
| Reference Page | | | | | | P-T Rating : Page CI10 | | | P-T Rating : Page CI10 | | | P-T Rating : Page CI10 | | |
| Remarks | Screwed Cap up to 1 1/2 ^B | | | | | | | | | | | | | |

**Height for removing the screen





| Type | Y-Strainer | | | | | Y-Strainer | | |
|----------------|---|-----|-----|------|-----|---|------|--|
| Cast Iron |  | | | | |  | | |
| | PN16 | | | | | PN25 | | |
| Fig | EN16FCYM | | | | | (PHOX)EN25FDYBE | | |
| End Connection | EN 1092-2 PN16 RF | | | | | EN 1092-2 PN25 RF | | |
| inch | mm | L | H | H1** | L | H | H1** | |
| 2 | 50 | 250 | 168 | 208 | 216 | 140 | 180 | |
| 2 1/2 | 65 | 285 | 212 | 289 | 241 | 162 | 219 | |
| 3 | 80 | 315 | 242 | 335 | 283 | 184 | 258 | |
| 4 | 100 | 370 | 284 | 388 | 305 | 225 | 339 | |
| 5 | 125 | 420 | 325 | 446 | 381 | 280 | 388 | |
| 6 | 150 | 490 | 370 | 497 | 403 | 318 | 441 | |
| 8 | 200 | 570 | 440 | 589 | 521 | 405 | 606 | |
| 10 | 250 | 680 | 515 | 694 | 635 | 485 | 722 | |
| 12 | 300 | 800 | 600 | 818 | 749 | 580 | 890 | |
| Body | EN-JGL-200 | | | | | EN1563 EN-GJS-450 | | |
| Cap | EN-JGL-200 | | | | | EN1563 EN-GJS-450 | | |
| Screen | 316SS | | | | | 304SS(Punched Plate) | | |
| Gasket | Non asbestos Sheet | | | | | Non-asbestos | | |
| Bolt/Nut | CS | | | | | | | |
| Plug | SS | | | | | 304SS | | |
| Reference Page | P-T Rating : Page CI10 | | | | | P-T Rating : Page CI10 | | |




**Height for removing the screen

| Type | Gate | | | Gate | | | Globe | | | Swing Check | | | |
|---------------------------|---|-----|------|---|-----|------|--|-----|-----|---|-----|-----|---|
| Cast Iron Nylon Lining |  | | |  | | |  | | |  | | | |
| | 5K | | | 10K | | | 10K | | | 10K | | | |
| Fig | 5FCMN | | | 10FCLN | | | 10FCJN | | | 10FCON | | | |
| End Connection | JIS B2239 5K FF | | | JIS B2239 10K FF | | | JIS B2239 10K FF | | | JIS B2239 10K FF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 2 | 50 | | | | 180 | 343 | 170 | 200 | 274 | 180 | 200 | 116 | |
| 2 1/2 | 65 | 170 | 383 | 170 | 190 | 390 | 170 | 220 | 301 | 180 | 220 | 126 | |
| 3 | 80 | 180 | 437 | 170 | 200 | 464 | 200 | 240 | 353 | 225 | 240 | 153 | |
| 4 | 100 | 200 | 534 | 225 | 230 | 548 | 250 | 290 | 403 | 280 | 290 | 170 | |
| 5 | 125 | 220 | 629 | 225 | 250 | 649 | 280 | 360 | 466 | 300 | 360 | 217 | |
| 6 | 150 | 240 | 727 | 250 | 270 | 760 | 300 | 410 | 534 | 350 | 410 | 235 | |
| 8 | 200 | 260 | 920 | 280 | 290 | 957 | 350 | 500 | 620 | 450 | 500 | 273 | |
| 10 | 250 | 300 | 1135 | 350 | 330 | 1169 | 400 | | | | | | |
| 12 | 300 | | | | 350 | 1364 | 450 | | | | | | |
| Body | FC200+Nylon Lining | | | FC200+Nylon Lining | | | FC200+Nylon Lining | | | FC200+Nylon Lining | | | |
| Bonnet/Cap/Cover | FC200+Nylon Lining | | | FC200+Nylon Lining | | | FC200+Nylon Lining | | | FC200+Nylon Lining | | | |
| Stem/Hinge Pin | C3771BD | | | C3771BD | | | C3771BD | | | C3771BD | | | |
| Disc | CAC406 up to 6 ⁵ /FC200 | | | CAC406 up to 6 ⁵ /FC200 | | | CAC406 up to 4 ⁵ /FC200 | | | CAC406 | | | |
| Body/Disc Seat Rings | CAC406 | | | CAC406 | | | CAC406 | | | CAC406 | | | |
| Gland Packing | P/A4531K or P/A4532K | | | P/A4531K or P/A4532K | | | P/A4531K or P/A4532K | | | | | | |
| Gasket | T/1995 | | | T/1995 | | | T/1995 | | | T/1938 | | | |
| Standard/Approval | JIS B2031,JWWA E-236 | | | JIS B2031,JWWA E-236 | | | JIS B2031,JWWA E-236 | | | JIS B2031,JWWA E-236 | | | |
| Service Conditions | 0°C~+60°C, Fresh Water 0.7MPa, Water/Oil 0.5MPa | | | 0°C~+60°C, Fresh Water 1.4MPa, Water/Oil 1.0MPa | | | 0°C~+60°C, Fresh Water 1.4MPa, Water/Oil 1.0MPa | | | 0°C~+60°C, Fresh Water 1.4MPa, Water/Oil 1.0MPa | | | |

| Type | Swing Check | | | Ball Check | | | Y-Strainer | | | |
|---------------------------|---|-----|-----|---|-----|-----|--|-----|-----|------|
| Cast Iron Nylon Lining |  | | |  | | |  | | | |
| | 10K | | | 10K | | | 10K | | | |
| Fig | 10FCON-C | | | 10FCFTN | | | 10FCYN | | | |
| End Connection | JIS B2239 10K FF | | | JIS B2239 10K FF | | | JIS B2239 10K FF | | | |
| inch | mm | L | H | D | L | H | D | L | H | H1** |
| 1 1/2 | 40 | | | | 190 | 101 | | | | |
| 2 | 50 | 200 | 116 | | 200 | 105 | | 230 | 139 | 173 |
| 2 1/2 | 65 | 220 | 126 | | 220 | 127 | | 305 | 210 | 288 |
| 3 | 80 | 240 | 153 | | 240 | 150 | | 360 | 238 | 334 |
| 4 | 100 | 290 | 170 | | 290 | 188 | | 415 | 282 | 387 |
| 5 | 125 | 360 | 217 | | 360 | 235 | | 465 | 325 | 445 |
| 6 | 150 | 410 | 235 | | 410 | 280 | | 515 | 373 | 497 |
| 8 | 200 | 500 | 273 | | | | | 580 | 457 | 622 |
| 10 | 250 | | | | | | | 680 | 536 | 743 |
| Body | FC200+Nylon Lining | | | FC200+Nylon Lining | | | FC200+Nylon Lining | | | |
| Bonnet/Cap/Cover | FC200+Nylon Lining | | | FC200+Nylon Lining | | | FC200+Nylon Lining | | | |
| Stem/Hinge Pin | 304SS | | | | | | | | | |
| Disc/Ball/Screen | CAC406 | | | NBR* | | | 304SS | | | |
| Body/Disc Seat Rings | CAC406 | | | | | | | | | |
| Gland Packing/O ring | | | | NBR* | | | | | | |
| Gasket/O ring | T/1938 | | | NBR* | | | T/1995 | | | |
| Standard/Approval | | | | | | | JWWA Z-52 | | | |
| Service Conditions | 0°C~+60°C, Fresh Water 1.4MPa, Water/Oil 1.0MPa | | | 0°C~+60°C, Fresh Water 0.05~1.4MPa | | | 0°C~+60°C, Fresh Water 1.4MPa, Water/Oil 1.0MPa | | | |
| Reference Page | | | | Features & Pressure Loss: Page CPT21&22 | | | | | | |
| Remarks | Counter Weight | | | *EPDM Option | | | | | | |

**Height for removing the screen

| Type | Ball | | | | Ball | | | | Ball | | | Ball | | |
|--------------------|---|-----|-----|-----|---|-----|------|-----|--|-----|------|---|-----|------|
| Cast Iron |  | | | |  | | | |  | | |  | | |
| | 10K FB | | | | 10K FB | | | | 10K RB | | | 125 FB | | |
| Fig | 10FCT | | | | 10FCTB/G-10FCTB | | | | 10FCTR | | | 125FCTB | | |
| End Connection | BS21 (JIS B0203) | | | | JIS B2239 10K FF | | | | JIS B2239 10K FF | | | ASME B16.1 Cl.125FF | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D |
| 3/8 | 10 | 72 | 71 | 130 | | | | | | | | | | |
| 1/2 | 15 | 80 | 102 | 130 | 110 | 102 | 130 | | | | | | | |
| 3/4 | 20 | 85 | 105 | 130 | 120 | 105 | 130 | | | | | | | |
| 1 | 25 | 95 | 124 | 160 | 130 | 124 | 160 | | | | | | | |
| 1 1/4 | 32 | 120 | 128 | 160 | 140 | 128 | 160 | | | | | | | |
| 1 1/2 | 40 | 120 | 114 | 230 | 165 | 114 | 230 | | | | | | | |
| 2 | 50 | 140 | 121 | 230 | 180 | 121 | 230 | | | | | 178 | 121 | 230 |
| 2 1/2 | 65 | 160 | 154 | 400 | 190 | 154 | 400 | | | | | 190 | 154 | 400 |
| 3 | 80 | 182 | 163 | 400 | 200 | 163 | 400 | | | | | 203 | 163 | 400 |
| 4 | 100 | | | | 230 | 199 | 460 | | | | | 229 | 199 | 460 |
| 5 | 125 | | | | 300 | 219 | 460 | | 250 | 200 | 460 | | | |
| 6 | 150 | | | | 340 | 292 | 1000 | | 270 | 220 | 460 | 394 | 292 | 1000 |
| 8 | 200 | | | | 450 | 352 | 1500 | | 290 | 295 | 1000 | 457 | 352 | 1500 |
| 10 | 250 | | | | 533 | 477 | 500 | 363 | 330 | 355 | 1500 | | | |
| Body & Cap | FC200 | | | | FC200 | | | | FC200 | | | A126 CL. B | | |
| Stem | 403SS | | | | 403SS | | | | 403SS | | | 403SS | | |
| Ball | 304SS/CF8 | | | | 304SS/CF8 | | | | 304SS/CF8 | | | 304SS/CF8 | | |
| Ball Seat | PTFE | | | | PTFE | | | | PTFE | | | PTFE | | |
| Gland Packing | PTFE | | | | PTFE | | | | PTFE | | | PTFE | | |
| Gasket | PTFE | | | | PTFE | | | | PTFE | | | PTFE | | |
| Handle | DI/CS | | | | DI/CS | | | | DI/CS | | | DI/CS | | |
| Bore | Full Bore | | | | Full Bore | | | | Reduced Bore | | | Full Bore | | |
| Service Conditions | 120°C Non-shock Water 1.4MPa, 120°C W.O.G. 1.0MPa, Saturated Steam 0.7MPa | | | | | | | | | | | | | |
| Reference Page | | | | | P-T Rating : Page C113 | | | | P-T Rating : Page C113 | | | P-T Rating : Page C113 | | |
| Remarks | | | | | Gear ope for 10 ⁸ | | | | | | | | | |

| Type | Ball | | | | 3-way, 2-seats, L port Ball | | | | 3-way, 2-seats, L port Ball | | | |
|---------------------------|---|-----|-----|------|---|-----|-----|-----|--|-----|------|-----|
| Cast Iron Nylon Lining |  | | | |  | | | |  | | | |
| | 125 RB | | | | 10K FB | | | | 10K RB | | | |
| Fig | 125FCTR | | | | 10FCTB2L | | | | 10FCTR2L | | | |
| End Connection | ASME B16.1 Cl.125FF | | | | JIS B2239 10K FF | | | | JIS B2239 10K FF | | | |
| inch | mm | L | H | D | L | H | D | L1 | L | H | D | L1 |
| 1 1/2 | 40 | | | | 210 | 114 | 230 | 105 | | | | |
| 2 | 50 | | | | 220 | 123 | 230 | 110 | | | | |
| 2 1/2 | 65 | | | | 250 | 156 | 400 | 125 | | | | |
| 3 | 80 | | | | 260 | 163 | 400 | 130 | | | | |
| 4 | 100 | | | | 330 | 203 | 460 | 165 | | | | |
| 5 | 125 | | | | | | | | 370 | 205 | 460 | 185 |
| 6 | 150 | 267 | 220 | 460 | | | | | 430 | 225 | 460 | 215 |
| 8 | 200 | 292 | 295 | 1000 | | | | | 540 | 295 | 1000 | 270 |
| 10 | 250 | 330 | 355 | 1500 | | | | | | | | |
| Body & Cap | A126 CL. B | | | | FC200 | | | | FC200 | | | |
| Stem | 403SS | | | | 403SS | | | | 403SS | | | |
| Ball | 304SS/CF8 | | | | 304SS/CF8 | | | | 304SS/CF8 | | | |
| Ball Seat | PTFE | | | | PTFE | | | | PTFE | | | |
| Gland Packing | PTFE | | | | PTFE | | | | PTFE | | | |
| Gasket | PTFE | | | | PTFE | | | | PTFE | | | |
| Handle | DI/CS | | | | DI/CS | | | | DI/CS | | | |
| Bore | Reduced Bore | | | | Full Bore | | | | Reduced Bore | | | |
| Reference Page | P-T Rating : Page C113 | | | | P-T Rating : Page C113 Port Orientation : Page TECH1 | | | | P-T Rating : Page C113 Port Orientation : Page TECH1 | | | |

Cast Iron Valves

Conditions of Fluids and Maximum Permissible Pressures

Unit: MPa

| Standards | | 5K | | 10K | | | 10K | |
|--------------------------------------|---|--------------------------|--|--------------------------------|-----------------------------------|---------------------|--|----------------------|
| Nominal Pressure | | JIS B2031 | | JIS B2031 | | | KITZ Standard | |
| Valve Type | | Outside Screw Gate Valve | Outside Screw Gate Valve | Globe Valve, Swing Check Valve | Inside Screw Gate Valve | Valve 350 A or more | FC300 Valve | |
| Disc Seat Structure | | Press-fit Seat | Screw Seat | Screw Seat | | Press-fit Seat | Screw Seat | Press-fit Seat |
| Main Section | | CAC406 | CAC 406 13 Chrome 18-8 Stainless Steel | CAC 406 | 13 Chrome 18-8 Stainless Steel | CAC 406 | CAC 406 13 Chrome 18-8 Stainless Steel | CAC 406 13 Chrome |
| Maximum Permissible Working Pressure | Steady Flow Below 120°C | 0.7 | 1.4 | 1.4 | – | 1.4 | 1.0 | 1.0 |
| | Oil, Pulsating Flow and Water Below 120°C | 0.5 | 1.0 | 1.0 | – | 1.0 | 0.9 | 0.9 |
| | Saturated Steam | 0.2 | 0.7 | 0.7 | – | 0.2 | 0.7 | 0.7 |
| | Gas Below 120°C | 0.2 | 0.2 | 0.2 | – | 0.2 | 0.2 | 0.2 |
| | 120°C | – | – | – | 1.4 | – | – | – |
| | 220°C | – | – | – | 1.0 | – | – | – |

- Use may be prohibited or restricted by the High Pressure Gas Safety Law and other regulations. Use the valve within legal limits.
- Maximum allowable pressure at intermediate temperatures between 120°C and 220°C is based on the proportional interpolation method.

Basic Design Specifications

| Nominal Pressure | JIS5K/10K | Class 125 | 10K |
|------------------------|------------|--------------|------------|
| Face-to-Face Dimension | JIS B 2031 | ASME B 16.10 | KITZ Std. |
| End Flange Dimension | JIS B 2239 | ASME B 16.1 | JIS B 2239 |
| Wall Thickness | JIS B 2031 | KITZ Std. | |

Material Specifications for Grey Iron Casting

| Mechanical Properties | JIS Materials | | |
|--|---------------|-------|-------|
| | FC200 | FC250 | FC300 |
| Tensile Strength (N/mm ²) min. | 200 | 250 | 300 |
| Brinell Hardness (HB) Max. | 235 | 248 | 269 |

| ASTM A126 Class B | Tensile Strength (min) | 31ksi |
|-----------------------------|----------------------------|----------|
| Transverse Test Requirement | Face at Center, Min. | 3,300 lb |
| | Deflection at Center, Min. | 0.12in |

Class 125 Valves Pressure-Temperature Ratings Maximum Allowable Non-Shock Pressure

| Temperature | Class 125 | |
|-------------|-------------|--------------|
| | Size 1 – 12 | Size 14 – 24 |
| °C | bar | |
| -29 to 65 | 13.8 | 10.3 |
| 80 | 13.3 | 9.8 |
| 100 | 12.7 | 9.2 |
| 120 | 12.1 | 8.6 |
| 140 | 11.5 | 8.0 |
| 160 | 10.8 | 7.4 |
| 178* | - | 6.9 |

*178°C to reflect temperature of saturated steam at 8.6 bar.

Simplified Material Indication (as referred to on each page)

Bronze Trim : Iron Body with Bronze Trim

13 Cr. Trim : Iron Body with 13 Cr. Trim

18-8 Trim : Iron Body with 18 Cr.-8 Ni Trim

Certification by JIS Mark

Industrial Standardization Law of Japan provides an effective measure to promote the introduction of high-level quality assurance system of manufacture and processing. Wherever KITZ valves are identified with JIS Mark, it is officially certified that such valves are produced under strict quality assurance procedures and practices to satisfy the designated quality level stably and constantly.

Valve Position Indicators

Valve position indicator is provided on gate valves with inside screw design as illustrated. Opening or closing a valve does not move the vertical position of the stem. Instead, position indicator visually indicates three valve operating positions—fully opened, fully closed, or half opened.



Trim Materials

KITZ cast iron valves are provided with one of three trim materials given in the table below for versatility of service applications.



Color codes are given on a name plate of gate or globe valves and on the cover of swing check valves.

| Trim Material | Color Coding | Suffix of Fig. |
|---------------------------|--------------|----------------|
| Bronze Seats / Brass Stem | None | - |
| 13 Cr. Seats / Stem | Orange | S |
| 18-8 Seats / Stem | Green | U |

Outside Screw (O.S.) Valves and Inside Screw (I.S.) Valves

Outside Screw Gate Valve

Inside Screw Gate Valve

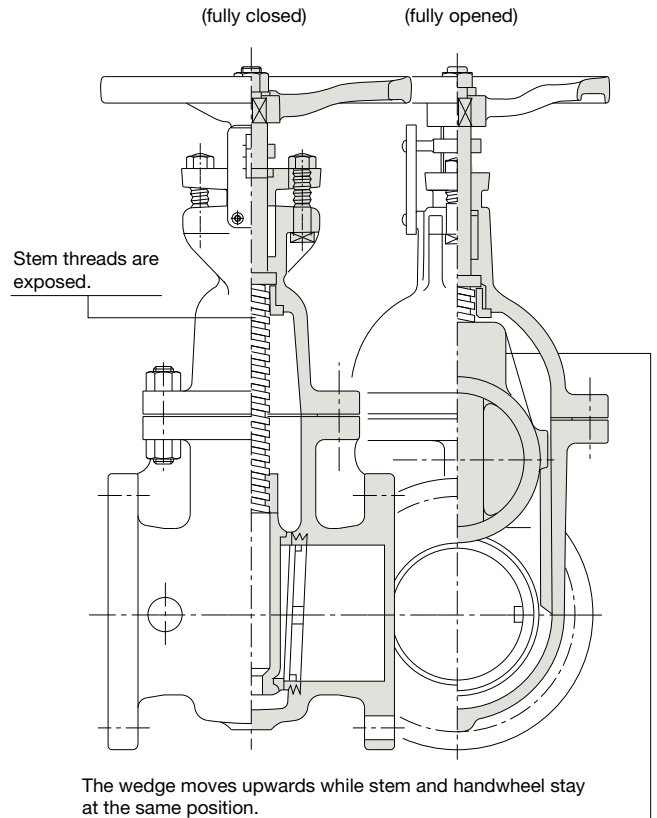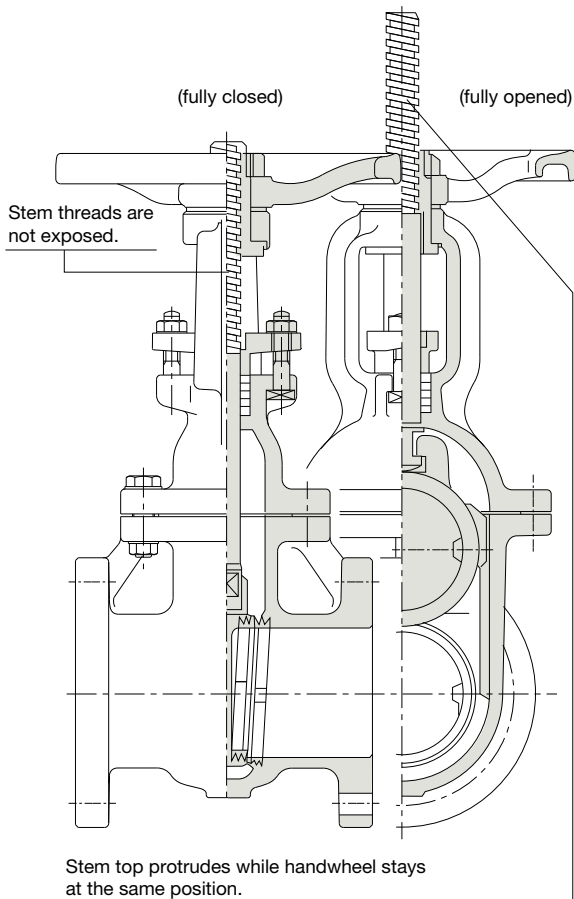

Outside Screw Gate Valves

Stem threads are not exposed to the fluid, and valve opening operation moves the stem upwards while the handwheel stays at the same position. Valve operating position can be visually determined by observing the stem travel. KITZ Fig. FCM, FCL, FCLS, and FCLU are designed this way.

Outside Screw Globe Valves

Stem and handwheel move upwards or downwards at the same time, following valve opening or closing operation. All KITZ globe valves are provided with this design.

Inside Screw Gate Valves

Stem threads are exposed to the fluid. Opening the valve does not make the stem or handwheel move. Thus, the valve operating position is not visible. Position indicator is provided for this reason.


Inside screw gate valves are generally designed shorter than outside screw gate valves and the stem and handwheel always at the same position. For this feature, inside screw gate valves are widely employed for underground installation or service in narrow areas with limited room. KITZ Fig. FCWI and FCHI are designed this way.

Asbestos-free Packings and Gaskets


KITZ has led the industry in employing asbestos-free sealers for all cast iron valves, meeting the requirement of pollution-free valve materials. PTFE-impregnated glass fiber gland packings and compressed glass and aramid fiber gaskets are the standard sealers for KITZ cast iron valves.

Mounting of Seat Rings

In case of KITZ cast iron gate valves, seat rings are mounted on the valve disc by means of either threading or press-fitting. For example, 10K outside screw gate valves are provided with threaded seat rings that are ideal for saturated steam service. Or, 10K inside screw gate valves are provided with mechanically press-fit seat rings by means of a patented special process to suit them also for saturated steam service. All KITZ cast iron globe and check valves are provided with threaded seat rings.



Threaded Seat Ring




Press-fit Seat Ring


Pressure-Temperature Ratings

Cast Iron


■ 150UTB(M)/150UTBT/10/125FCTB(2L) : NPS 1/2^B, 3/4^B
 10/125FCTR(2L) : NPS 1/2^B to 1^B

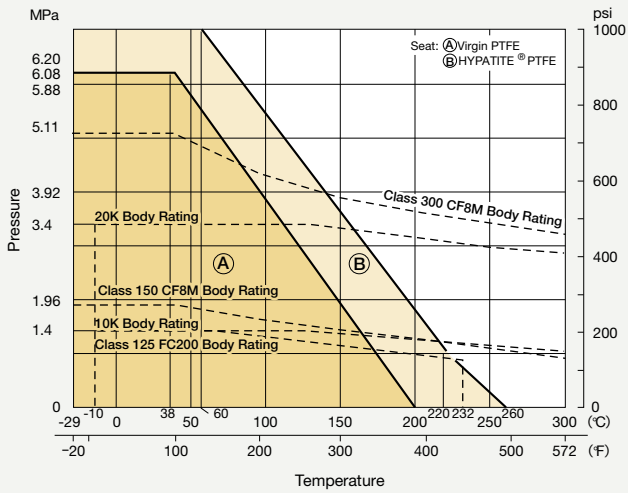


■ 150UTB(M)/150UTBT/10/125FCTB(2L) : NPS 1^B to 2 1/2^B
 10/125FCTR(2L) : NPS 1/2^B to 3^B

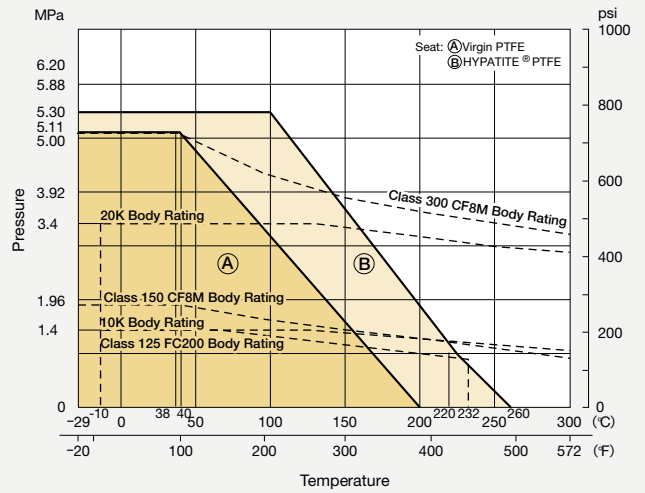


■ 150UTB(M)/150UTBT/10/125FCTB(2L) : NPS 3^B, 4^B
 10/125FCTR(2L) : NPS 4^B, 5^B

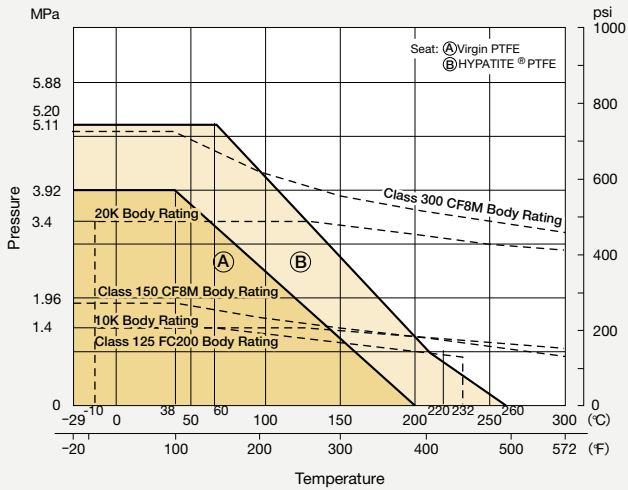

■ 150UTB(M)/150UTBT/10/125FCTB(2L) : NPS 5^B, 6^B
 10/125FCTR(2L) : NPS 6^B, 8^B

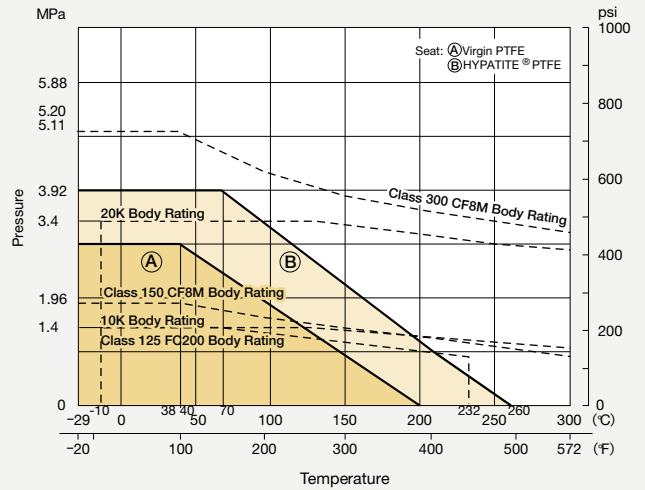


■ 150UTB(M)/150UTBT/10/125FCTB(2L) : NPS 8^B, 10^B
 10/125FCTR(2L) : NPS 10^B, 12^B

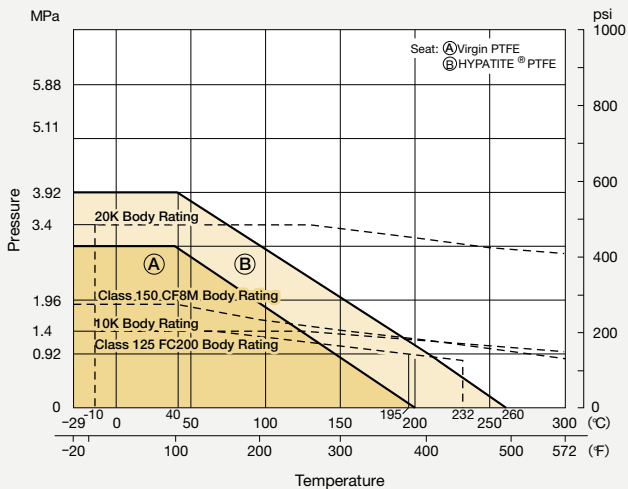

KITZ

GENERAL CATALOG

Ductile Iron

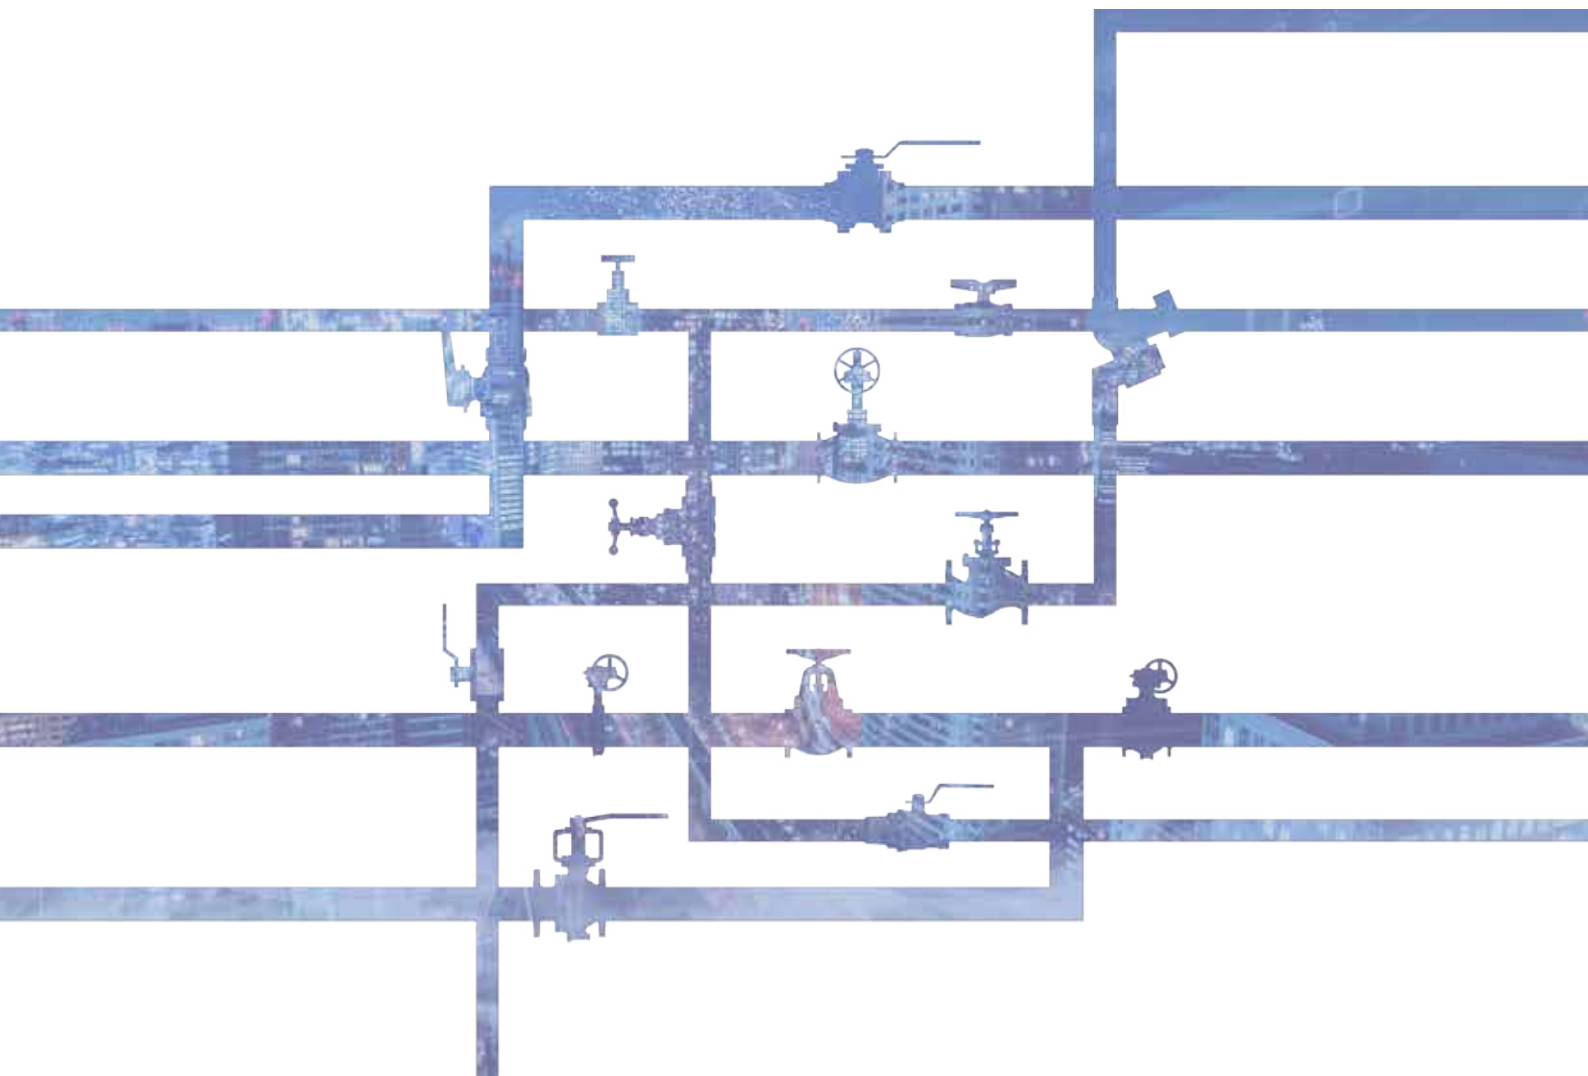

INDEX

Ductile Iron


| Title | Body Material | Type | Class | End Connection* | Features* | Fig | Remarks | Page |
|---------------------|---------------|---|----------------|--|---------------------------|----------------------------------|--------------|--------------------|
| Ductile Iron Valves | DI | Globe | 10K Commercial | TE | SB up to 2" or UB, IS, RS | 10SJ | | DI3 82 |
| | | | | FE/FF | | 10SJBFB | | |
| | | | 10K | TE | UB, IS, RS | 10SP | | DI3 82 |
| | | | | | | 10SPBFB | | |
| | | | | FE/FF | BB, OS&Y, RS | 10SPBAF | Bellows Seal | |
| | | | | | | 10SPBAWF | | |
| | | | 16K | TE | US, IS, RS | (G-)10SPBOF | Bellows Seal | DI4 83 |
| | | | | FE/RF | | 10SPBOWF | | |
| | | | 20K | TE | UB, IS, RS | 10SPNBF | Needle | DI4 83 |
| | | | | | | 16SP | | |
| | | | | FE/RF | BB, OS&Y, RS | (G-)16SPBO | | |
| | | | 150 | TE | UB, IS, RS | 20SY | | DI5 84 |
| | | | | | | 20SYB | | |
| | | | | FE/RF | BB, OS&Y, RS | 20SYBO | | |
| | | | 300 | FE/RF | UB, IS, RS | 20SYBOW | Bellows Seal | |
| | | | | | | 150SPB | | |
| | | | 10K Commercial | TE | SB up to 2" or UB, IS, RS | 150SPBO | | DI5 84 |
| | | | | | | FE/FF | | |
| | | | 20K | FE/RF | BB, OS&Y, RS | 300SYBO | | |
| | | | | | | 10SD | | Soft Seated (PTFE) |
| | | 10K Commercial | TE | SB, IS, RS | 10SDBF | Soft Seated (PTFE), LPG Service | DI6 85 | |
| | | | | | FE/FF | | | 20SDBOW |
| | | 20K | FE/RF | BB, OS&Y, RS | 10SDL | Soft Seated (PTFE) | | |
| | | | | | TE | | 10SDLBF | |
| | | 10K | FE/FF | BB, OS&Y, RS | 20SDL | Soft Seated (PTFE) | | |
| | | | | | TE | | 20SDLB | |
| | | 150 | FE/RF | UB, IS, RS | 20SDLBO | Bellows Seal, Soft Seated (PTFE) | DI6 85 | |
| | | | | | FE/RF | | | 10SPD |
| | | 10K | FE/FF | BB, OS&Y, RS | 10SPDBF | Soft Seated (PTFE) | | |
| | | | | | FE/RF | | 10SPDBOF | |
| | | 20K | FE/RF | BB, OS&Y, RS | 10SPDBOWF | Bellows Seal, Soft Seated (PTFE) | | |
| | | | | | TE | | 150SPDB | |
| | | 150 | FE/RF | UB, IS, RS | 10SYYBF | Soft Seated (PTFE) | DI7 86 | |
| | | | | | FE/FF | | | 10SYYBOF |
| | | 10K | FE/FF | BB, OS&Y, RS | 20SYYB | Y Pattern Globe | | |
| | | | | | FE/RF | | 20SYYBO | |
| | | 20K | FE/RF | BB, OS&Y, RS | 10SMS | | | |
| | | | | | TE | | 10SMAS | |
| | | 10K | FE/FF | BB, IS, RS | 10SMBF | | | |
| | | | | | TE | | 10SMBOF | |
| | | 16K | FE/RF | BB, OS&Y, RS | 16SMS | | DI8 87 | |
| | | | | | TE | | | 16SMB |
| | | 20K | FE/RF | BB, OS&Y, RS | 16SMBO | | | |
| | | | | | TE | | 20SLS | |
| | | 150 | FE/RF | BB, IS, RS | 20SLB | | | |
| | | | | | FE/RF | | 20SLBO | |
| | | 300 | FE/RF | BB, OS&Y, RS | 150SMBO | | | |
| | | | | | FE/FF | | 300SLBO | |
| | | 10K Commercial | TE | SC, Lift | 10SF | | DI9 88 | |
| | | | | | FE/FF | | | 10SFBFB |
| 16K | FE/RF | UC, Lift | 16SF | | | | | |
| | | | TE | | 16SFB | | | |
| 10K Commercial | FE/FF | UC, Lift | 10SN | | | | | |
| | | | TE | | 10SNBF | | | |
| 20K | FE/RF | BC, Swing | 20SN | | | | | |
| | | | FE/FF | | 20SNB | | | |
| 10K Commercial | TE | Split Body, Swing | 10SOZ | Internal Hinge, In line | DI10 89 | | | |
| | | | FE/FF | | | 10SRBF | | |
| 16K | FE/RF | BC, Swing | 16SRB | | | | | |
| | | | TE | | 20SOB | | | |
| 20K | FE/RF | BC, Swing | 150SRB | | | | | |
| | | | FE/FF | | 300SOB | | | |
| 150 | FE/RF | Dual Plate, Built-in by-pass valve, Wafer | 10SWZU | Available to install low & high torque spring depending on fluid conditions. | | | | |
| | | | FE/FF | | 20SWZ | | | |
| 10K | FE/FF | UB, IS, RS, Stop Check | 20SWZU | | | | | |
| | | | FE/RF | | 10SYFBF | | | |
| 20K | FE/RF | BB, OS&Y, RS, Stop Check | 10SPFBOF | | | | | |
| | | | FE/FF | | 20SYFB | | | |
| 10K | FE/FF | UB, IS, RS, Stop Check | 20SYFBO | | | | | |
| | | | FE/RF | | 20SYFBO | | | |
| 20K | FE/RF | BB, OS&Y, RS, Stop Check | 20SND | Soft Seated (PTFE), LPG Service | | | | |
| | | | FE/FF | | 20SODB | | | |
| 10K Commercial | TE | SC up to 2" or BC | 20STL | Gas Service | DI11 90 | | | |
| | | | FE/FF | | | 10FDY | | |
| 16K | FE/RF | SC up to 1 1/2" or BC | 10FDYBF | Y Pattern, Screen: Punched Stainless Steel Plate | | | | |
| | | | TE | | 16FDY | | | |
| 20K | FE/RF | BC | 16FDYB | Y Pattern, Screen: 40 mesh wire cloth | | | | |
| | | | FE/FF | | 20FDY | | | |
| Type 400 | TE | RB, Split Body | 20FDYB | | | | | |
| | | | FE/RF | | 20ST | | | |
| 20K | FE/RF | RB, Split Body, Side Entry | 10STB | | | | | |
| | | | FE/FF | | 10STLBF | | | |
| 10K | FE/FF | FB, Split Body, Side Entry | (G-)20STB | Gas Service | | | | |
| | | | FE/RF | | 20STLB | | | |
| 20K | FE/RF | FB, Split Body, Side Entry | 10STB4LAF/TAF | Gas Service | | | | |
| | | | FE/FF | | 10STR4LAF/TAF | | | |
| 10K | FE/FF | FB, 3-Way 4-Seat | 10STB4LAF/TAF | | | | | |
| | | | FE/RF | | 10STR4LAF/TAF | | | |

* (Abbreviation) TE: Threaded Ends, FE: Flanged Ends, RF: Raised Face Ends
 SB: Screwed Bonnet, UB: Union bonnet, IS: Inside screw, RS: Rising Stem, FB: Full Bore, RB: Reduced Bore

PRODUCT CODING

Ductile Iron Valves

(Note: Some products do not follow this coding system.)



① Valve Operation

- None Handwheel or Lever
- G Gear

② Pressure Class

- 10 10K
- 16 16K
- 20 20K
- 150 Class 150*
- 300 Class 300*

③ Symbol of Shell Material

- S Ductile Iron
- FD Ductile Iron (Strainer)

④ Valve Type

- M or L Gate
- MS or LS Gate (Disc: 13Cr)
- J, P or Y Globe
- PD or D Soft Seated Globe
- DL Soft Seated Globe (LP Service)
- PN Needle
- YY Y Pattern Globe
- F or N Lift Check
- ND Soft Seated Lift Check
- R or O Swing Check
- OD Soft Seated Swing Check
- OZ In Line Swing Check
- WZ Wafer Check (Copper Disc)
- WZU Wafer Check (304SS Disc)
- YF Stop Check
- Y Strainer (Note: FD of ③)
- T Ball Valve (Threaded)
- TB Ball Valve (Flanged)

⑤ End Connection

- None Threaded Ends
- S Threaded Ends
- B Flanged Ends





⑥ Valve Construction





- None Inside Screw
- A BB, IS
- O BB, OS&Y
- W Bellows Seal





⑦ Surface of End Flange





- None Raised Face*
- F Flat Face

* Pipe connection dimensions shall be indicated in millimeters converted from dimensions in inches according to ASME B16.5.

| Type | Globe | | | | | Globe | | | | | Globe | | | | | Globe | | | | |
|--------------------|---|-----|-----|-----|--|---|-----|-----|--|-----|--|-----|--|-----|-----|---|--|--|--|--|
| Ductile Iron |  | | | | |  | | | | |  | | | | |  | | | | |
| Fig | 10SJ | | | | | 10SJBF | | | | | 10SP | | | | | 10SPBF | | | | |
| End Connection | BS21 (JIS B0203) | | | | | JIS B2239 10K FF | | | | | BS21 (JIS B0203) | | | | | JIS B2239 10K FF | | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | L | H | D | | | | |
| 1/4 | 8 | 50 | 108 | 60 | | | | | | 64 | 107 | 60 | | 108 | 107 | 60 | | | | |
| 3/8 | 10 | 55 | 108 | 60 | | 85 | 108 | 60 | | 64 | 107 | 60 | | 108 | 107 | 60 | | | | |
| 1/2 | 15 | 65 | 122 | 70 | | 85 | 123 | 70 | | 70 | 125 | 80 | | 108 | 124 | 80 | | | | |
| 3/4 | 20 | 80 | 124 | 80 | | 95 | 125 | 80 | | 80 | 125 | 80 | | 117 | 125 | 80 | | | | |
| 1 | 25 | 90 | 146 | 90 | | 110 | 147 | 90 | | 90 | 145 | 100 | | 127 | 147 | 100 | | | | |
| 1 1/4 | 32 | 105 | 161 | 100 | | 130 | 161 | 100 | | 110 | 162 | 115 | | 140 | 162 | 115 | | | | |
| 1 1/2 | 40 | 120 | 181 | 115 | | 150 | 181 | 115 | | 120 | 180 | 115 | | 165 | 180 | 115 | | | | |
| 2 | 50 | 140 | 198 | 135 | | 180 | 198 | 135 | | 140 | 198 | 135 | | 203 | 198 | 135 | | | | |
| 2 1/2 | 65 | 180 | 256 | 180 | | 210 | 256 | 180 | | | | | | | | | | | | |
| 3 | 80 | 200 | 286 | 225 | | 240 | 276 | 225 | | | | | | | | | | | | |
| Body/Bonnet | FCD-S | | | | | FCD-S | | | | | FCD-S | | | | | FCD-S | | | | |
| Stem | 420J2 | | | | | 420J2 | | | | | 420J2 | | | | | 420J2 | | | | |
| Disc | 403SS | | | | | 403SS | | | | | 403SS | | | | | 403SS | | | | |
| Gland Packing | T/#2200K | | | | | T/#2200K | | | | | P/#6118 | | | | | P/#6118 | | | | |
| Gasket | None or P/#6633 | | | | | None or P/#6633 | | | | | C1100P-0 (incl. Cu) | | | | | C1100P-0 (incl. Cu) | | | | |
| Seat Rings (S/D) | 403SS/- | | | | | 403SS/- | | | | | 403SS/- | | | | | 403SS/- | | | | |
| Service Conditions | 120°C Static Water 1.4MPa, 220°C Steam, Air, Gas, Oil 1.0MPa | | | | | 120°C Static Water 1.4MPa, 220°C Steam, Air, Gas, Oil 1.0MPa | | | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | | |
| Remarks | SB up to 2 ^B , UB 21/2 ^B & over | | | | | SB up to 2 ^B , UB 21/2 ^B & over | | | | | | | | | | | | | | |

| Type | Globe | | | | | Bellows Seal Globe | | | | | Globe | | | | | Bellows Seal Globe | | | | |
|--------------------|---|-----|-------|-----|--|---|-----|-----|--|-----|--|-----|--|-----|-----|---|-----|--|--|--|
| Ductile Iron |  | | | | |  | | | | |  | | | | |  | | | | |
| Fig | 10SPBAF | | | | | 10SPBAWF | | | | | 10SPBOF/G-10SPBOF* | | | | | 10SPBOWF | | | | |
| End Connection | JIS B2239 10K FF | | | | | JIS B2239 10K FF | | | | | JIS B2239 10K FF | | | | | JIS B2239 10K FF | | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | B | L | H | D | | | |
| 1/2 | 15 | 108 | 123.5 | 80 | | 108 | 166 | 80 | | | | | | | | | | | | |
| 3/4 | 20 | 117 | 124 | 80 | | 117 | 167 | 80 | | | | | | | | | | | | |
| 1 | 25 | 127 | 146 | 100 | | 127 | 188 | 80 | | | | | | | | | | | | |
| 1 1/4 | 32 | 140 | 161.5 | 115 | | 140 | 243 | 100 | | | | | | | | | | | | |
| 1 1/2 | 40 | 165 | 179 | 115 | | 165 | 243 | 100 | | | | | | | | | | | | |
| 2 | 50 | 203 | 197.5 | 135 | | | | | | 203 | 308 | 200 | | | 203 | 298 | 200 | | | |
| 2 1/2 | 65 | | | | | | | | | 216 | 311 | 225 | | | 216 | 302 | 225 | | | |
| 3 | 80 | | | | | | | | | 241 | 352 | 250 | | | 241 | 343 | 250 | | | |
| 4 | 100 | | | | | | | | | 292 | 371 | 250 | | | 292 | 354 | 250 | | | |
| 5 | 125 | | | | | | | | | 356 | 459 | 300 | | | 356 | 443 | 300 | | | |
| 6 | 150 | | | | | | | | | 406 | 526 | 350 | | | 406 | 502 | 350 | | | |
| 8 | 200 | | | | | | | | | 495 | 589 | 400 | | | 495 | 749 | 450 | | | |
| 10 | 250 | | | | | | | | | 622 | 879 | 360 | | 245 | | | | | | |
| 12 | 300 | | | | | | | | | 698 | 943 | 360 | | 245 | | | | | | |
| Body/Bonnet | FCD-S | | | | | FCD-S | | | | | FCD-S | | | | | FCD-S | | | | |
| Stem | 420J2 | | | | | 420J2 | | | | | 403SS | | | | | 403SS | | | | |
| Disc/Bellows | 403SS | | | | | 403SS/316LSS | | | | | FCD-S or 403SS | | | | | 304SS+HF/316LSS | | | | |
| Gland Packing | P/#6118 | | | | | P/#6118 | | | | | P/#6118 | | | | | P/#6527 | | | | |
| Gasket | P/#6633 | | | | | P/#6633 | | | | | P/#6633 | | | | | P/#6633 | | | | |
| Seat Rings (S/D) | 403SS/- | | | | | 403SS/- | | | | | 403SS/403SS | | | | | 304SS+HF or 403SS+HF | | | | |
| Service Conditions | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | | |
| Reference Page | | | | | | Features: Page DI17 | | | | | | | | | | Features: Page DI17 | | | | |
| Remarks | | | | | | | | | | | *Gear: 10 ^B & over | | | | | HF: Hard Face with Co-Cr-W Alloy | | | | |

| Type | Needle | | | | Globe | | | Globe | | | Globe | | | |
|--------------------|---|-----|-----|-----|---|-----|-----|--|-----|-----|---|-----|-----|-----|
| Ductile Iron |  | | | |  | | |  | | |  | | | |
| Fig | 10SPNBF | | | | 16SP | | | 16SPB | | | 16SPBO/G-16SPBO* | | | |
| End Connection | JIS B2239 10K FF | | | | BS21 (JIS B0203) | | | JIS B2239 16K RF | | | JIS B2239 16K RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | B |
| 3/8 | 10 | 108 | 109 | 60 | 64 | 108 | 60 | 108 | 111 | 60 | | | | |
| 1/2 | 15 | 108 | 125 | 80 | 70 | 124 | 80 | 108 | 122 | 80 | | | | |
| 3/4 | 20 | 117 | 125 | 80 | 85 | 125 | 80 | 117 | 128 | 80 | | | | |
| 1 | 25 | 127 | 148 | 100 | 95 | 147 | 100 | 127 | 146 | 100 | | | | |
| 1 1/4 | 32 | 0 | 0 | 0 | 110 | 162 | 115 | 140 | 165 | 115 | | | | |
| 1 1/2 | 40 | 165 | 181 | 115 | 125 | 180 | 115 | 165 | 182 | 115 | | | | |
| 2 | 50 | 203 | 199 | 135 | 145 | 198 | 135 | 203 | 198 | 135 | 203 | 308 | 200 | |
| 2 1/2 | 65 | | | | | | | | | | 216 | 311 | 225 | |
| 3 | 80 | | | | | | | | | | 241 | 352 | 250 | |
| 4 | 100 | | | | | | | | | | 292 | 371 | 250 | |
| 5 | 125 | | | | | | | | | | 356 | 459 | 300 | |
| 6 | 150 | | | | | | | | | | 406 | 526 | 350 | |
| 8 | 200 | | | | | | | | | | 495 | 589 | 400 | |
| 10 | 250 | | | | | | | | | | 622 | 880 | 360 | 244 |
| 12 | 300 | | | | | | | | | | 698 | 943 | 360 | 244 |
| Body/Bonnet | FCD-S | | | | FCD-S | | | FCD-S | | | FCD-S | | | |
| Stem | 420J2 | | | | 420J2 | | | 420J2 | | | 403SS | | | |
| Disc/Bellows | 403SS | | | | 403SS | | | 403SS | | | FCD-S or 403SS | | | |
| Gland Packing | P/#6118 | | | | T/#2230K | | | T/#2230K | | | P/#6118 | | | |
| Gasket | P/#6633 | | | | C1100P-0 (incl. Cu) | | | C1100P-0 (incl. Cu) | | | P/#6633 | | | |
| Seat Rings (S/D) | 403SS/- | | | | 403SS/- | | | 403SS/- | | | 403SS/403SS | | | |
| Service Conditions | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | | 120°C Static Water 2.2MPa, 220°C Steam, Air, Gas, Oil 2.0MPa | | | 120°C Static Water 2.2MPa, 220°C Steam, Air, Gas, Oil 2.0MPa | | | 120°C Static Water 2.2MPa, 220°C Steam, Air, Gas, Oil 2.0MPa | | | |
| Reference Page | Features: Page D117 | | | | | | | | | | | | | |
| Remarks | | | | | | | | | | | *Gear: 10 ^B & over | | | |

| Type | Globe | | | | Globe | | | Globe | | | Bellows Seal Globe | | |
|--------------------|---|-----|-----|-----|---|-----|-----|--|-----|-----|---|-----|-----|
| Ductile Iron |  | | | |  | | |  | | |  | | |
| Fig | 20SY | | | | 20SYB | | | 20SYBO | | | 20SYBOW | | |
| End Connection | BS21 (JIS B0203) | | | | JIS B2239 20K RF | | | JIS B2239 20K RF | | | JIS B2239 20K RF | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 3/8 | 10 | 75 | 136 | 70 | 110 | 136 | 70 | | | | 110 | 184 | 90 |
| 1/2 | 15 | 78 | 138 | 80 | 110 | 138 | 80 | | | | 120 | 184 | 90 |
| 3/4 | 20 | 91 | 157 | 100 | 120 | 157 | 100 | | | | 130 | 190 | 100 |
| 1 | 25 | 105 | 180 | 115 | 130 | 178 | 115 | | | | 160 | 238 | 140 |
| 1 1/4 | 32 | 122 | 205 | 135 | 160 | 202 | 135 | | | | 180 | 238 | 140 |
| 1 1/2 | 40 | 135 | 210 | 135 | 180 | 210 | 135 | | | | 230 | 271 | 160 |
| 2 | 50 | 160 | 240 | 180 | 230 | 239 | 180 | 267 | 296 | 225 | 292 | 285 | 180 |
| 2 1/2 | 65 | | | | | | | 292 | 343 | 250 | 318 | 395 | 250 |
| 3 | 80 | | | | | | | 356 | 452 | 300 | 400 | 529 | 350 |
| 4 | 100 | | | | | | | 444 | 601 | 400 | 559 | 749 | 450 |
| 5 | 125 | | | | | | | | | | | | |
| 6 | 150 | | | | | | | | | | | | |
| 8 | 200 | | | | | | | | | | | | |
| Body/Bonnet | FCD-S | | | | FCD-S | | | FCD-S | | | FCD-S | | |
| Stem | 420J2 | | | | 420J2 | | | 403SS | | | 403SS | | |
| Disc/Bellows | 403SS+HF | | | | 403SS+HF | | | A105+HF | | | 304SS+HF/316LSS | | |
| Gland Packing | P/#6118 | | | | P/#6118 | | | P/#6118 | | | P/#6527 | | |
| Gasket | C1100P-0 (incl. Cu) | | | | C1100P-0 (incl. Cu) | | | P/#6633 | | | P/#6633 | | |
| Seat Rings (S/D) | 304SS+HF/- | | | | 304SS+HF/- | | | A105+HF or 403SS+HF/- | | | 304SS+HF or 403SS+HF/- | | |
| Service Conditions | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | 120°C Static Water 2.8MPa, 350°C Steam, Air, Gas, Oil 2.0MPa | | |
| Reference Page | | | | | | | | | | | Features: Page D117 | | |
| Remarks | HF: Hard Face with Co-Cr-W Alloy | | | | HF: Hard Face with Co-Cr-W Alloy | | | HF: Hard Face with Co-Cr-W Alloy | | | HF: Hard Face with Co-Cr-W Alloy | | |

| Type | Globe | | | | | Globe | | | | | Globe | | | | | Globe | | | | | |
|--------------------|--|-----|-----|-----|--|--|-----|-----|--|-----|--|-----|--|-----|-----|--|--|---|---|---|--|
| Ductile Iron | | | | | | | | | | | | | | | | | | | | | |
| Fig | 150SPB | | | | | 150SPBO | | | | | 300SYB | | | | | 300SYBO | | | | | |
| End Connection | ASME B16.5 CL150 RF | | | | | ASME B16.5 CL150 RF | | | | | ASME B16.5 CL300 RF | | | | | ASME B16.5 CL300 RF | | | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | L | H | D | | L | H | D | |
| 1/2 | 15 | 108 | 122 | 80 | | | | | | 110 | 138 | 80 | | | | | | | | | |
| 3/4 | 20 | 117 | 128 | 80 | | | | | | 120 | 157 | 100 | | | | | | | | | |
| 1 | 25 | 127 | 146 | 100 | | | | | | 130 | 178 | 115 | | | | | | | | | |
| 1 1/4 | 32 | 140 | 165 | 115 | | | | | | 160 | 202 | 135 | | | | | | | | | |
| 1 1/2 | 40 | 165 | 179 | 115 | | | | | | 180 | 210 | 135 | | | | | | | | | |
| 2 | 50 | 203 | 198 | 135 | | 203 | 308 | 200 | | 230 | 239 | 180 | | 267 | 296 | 225 | | | | | |
| 2 1/2 | 65 | | | | | 216 | 311 | 225 | | | | | | 292 | 341 | 250 | | | | | |
| 3 | 80 | | | | | 241 | 352 | 250 | | | | | | 318 | 372 | 250 | | | | | |
| 4 | 100 | | | | | 292 | 371 | 250 | | | | | | 356 | 450 | 300 | | | | | |
| 5 | 125 | | | | | 356 | 459 | 300 | | | | | | 400 | 535 | 350 | | | | | |
| 6 | 150 | | | | | 406 | 526 | 350 | | | | | | 444 | 601 | 400 | | | | | |
| 8 | 200 | | | | | 495 | 588 | 400 | | | | | | 559 | 701 | 560 | | | | | |
| Body/Bonnet | FCD-S | | | | | FCD-S | | | | | FCD-S | | | | | FCD-S | | | | | |
| Stem | 420J2 | | | | | 403SS | | | | | 420J2 | | | | | 403SS | | | | | |
| Disc/Bellows | 403SS | | | | | FCD-S or 403SS | | | | | 403SS+HF | | | | | A105+HF | | | | | |
| Gland Packing | P/#6118 | | | | | P/#6118 | | | | | P/#6118 | | | | | P/#6118 | | | | | |
| Gasket | C1100P-0 (incl. Cu) | | | | | P/#6633 | | | | | C1100P-0 (incl. Cu) | | | | | P/#6633 | | | | | |
| Seat Rings (S/D) | 403SS/- | | | | | 403SS/403SS | | | | | 304SS+HF/- | | | | | A105+HF or 403SS+HF/- | | | | | |
| Service Conditions | -5~38°C W.O.G. 1.73MPa, 149°C W.O.G. 1.48MPa, 260°C W.O.G. 1.18MPa, 343°C W.O.G. 0.86MPa | | | | | -5~38°C W.O.G. 1.73MPa, 149°C W.O.G. 1.48MPa, 260°C W.O.G. 1.18MPa, 343°C W.O.G. 0.86MPa | | | | | -5~38°C W.O.G. 2.94MPa, 149°C W.O.G. 2.60MPa, 260°C W.O.G. 2.28MPa, 350°C W.O.G. 2.04MPa | | | | | -5~38°C W.O.G. 2.94MPa, 149°C W.O.G. 2.60MPa, 260°C W.O.G. 2.28MPa, 350°C W.O.G. 2.04MPa | | | | | |
| Remarks | F-to-F: ASME B16.10 | | | | | F-to-F: ASME B16.10 | | | | | F-to-F: ASME B16.10 HF: Hard Face with Co-Cr-W Alloy | | | | | F-to-F: ASME B16.10 HF: Hard Face with Co-Cr-W Alloy | | | | | |













| Type | Globe | | | | | Globe | | | | | Bellows Seal Globe | | | | | Globe | | | | |
|--------------------|--|-----|-----|-----|--|--|-----|-----|--|-----|--|-----|--|-----|-----|---------------------------------|--|---|---|---|
| Ductile Iron | | | | | | | | | | | | | | | | | | | | |
| Fig | 10SD | | | | | 10SDBF | | | | | 20SDBOW | | | | | 10SDL | | | | |
| End Connection | BS21 (JIS B0203) | | | | | JIS B2239 10K FF | | | | | JIS B2239 20K RF | | | | | BS21 (JIS B0203) | | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | L | H | D | | L | H | D |
| 1/4 | 8 | 50 | 108 | 60 | | | | | | | | | | 55 | 112 | 55 | | | | |
| 3/8 | 10 | 55 | 108 | 60 | | 85 | 108 | 60 | | | | | | 65 | 122 | 60 | | | | |
| 1/2 | 15 | 65 | 123 | 70 | | 85 | 122 | 70 | | 110 | 184 | 90 | | 80 | 130 | 70 | | | | |
| 3/4 | 20 | 80 | 123 | 80 | | 95 | 124 | 80 | | 120 | 184 | 90 | | 90 | 149 | 80 | | | | |
| 1 | 25 | 90 | 144 | 90 | | 110 | 146 | 90 | | 130 | 190 | 100 | | 105 | 169 | 90 | | | | |
| 1 1/4 | 32 | 105 | 159 | 100 | | 130 | 161 | 100 | | 160 | 238 | 140 | | 120 | 187 | 100 | | | | |
| 1 1/2 | 40 | 120 | 178 | 115 | | 150 | 181 | 115 | | 180 | 238 | 140 | | 140 | 205 | 115 | | | | |
| 2 | 50 | 140 | 197 | 135 | | 180 | 198 | 135 | | 230 | 271 | 160 | | | | | | | | |
| 2 1/2 | 65 | 180 | 262 | 180 | | 210 | 268 | 180 | | 292 | 285 | 180 | | | | | | | | |
| 3 | 80 | 200 | 295 | 225 | | 240 | 290 | 225 | | 318 | 395 | 250 | | | | | | | | |
| 4 | 100 | | | | | | | | | 356 | 432 | 300 | | | | | | | | |
| 5 | 125 | | | | | | | | | 400 | 529 | 350 | | | | | | | | |
| 6 | 150 | | | | | | | | | 444 | 586 | 400 | | | | | | | | |
| 8 | 200 | | | | | | | | | 559 | 749 | 450 | | | | | | | | |
| Body/Bonnet | FCD-S | | | | | FCD-S | | | | | FCD-S | | | | | FCD-S | | | | |
| Stem | 420J2 | | | | | 420J2 | | | | | 403SS | | | | | 420J2 | | | | |
| Disc | G/F PTFE | | | | | G/F PTFE | | | | | G/F PTFE | | | | | G/F PTFE | | | | |
| Gland Packing | T/#2200K | | | | | T/#2200K | | | | | P/#6527 | | | | | NBR (V/#2631) | | | | |
| Gasket | C1100P-0 (incl. Cu)/P/#6633 | | | | | C1100P-0 (incl. Cu)/P/#6633 | | | | | P/#6633 | | | | | C1100P-0 (incl. Cu) | | | | |
| Seat Rings (S/D) | 403SS/- | | | | | 403SS/- | | | | | 304SS or 403SS/- | | | | | 403SS/- | | | | |
| Service Conditions | 120°C Static Water 1.4MPa, 180°C Steam, Air, Gas, Oil 1.0MPa | | | | | 120°C Static Water 1.4MPa, 180°C Steam, Air, Gas, Oil 1.0MPa | | | | | 120°C Static Water 2.5MPa, 180°C Steam, Air, Gas, Oil 2.0MPa | | | | | LPG at Room Temperature 0.20MPa | | | | |
| Reference Page | | | | | | | | | | | Features: Page DI17 | | | | | | | | | |
| Remarks | SB up to 2 ³ , UB 21/2 ⁸ & over | | | | | | | | | | HF: Hard Face with Co-Cr-W Alloy | | | | | LPG Service | | | | |













| Type | Globe | | | | | Globe | | | Globe | | | Globe | | |
|--------------------|---------------------------------|-----|-----|-----|-----|------------------|-----|-----|------------------|-----|-----|------------------|-----|--|
| Ductile Iron | | | | | | | | | | | | | | |
| Fig | 10SDLBF | | | | | 20SDL | | | 20SDLB | | | 20SDLBO | | |
| End Connection | JIS B2239 10K FF | | | | | BS21 (JIS B0203) | | | JIS B2239 20K RF | | | JIS B2239 20K RF | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | |
| 3/8 | 10 | 85 | 108 | 55 | 75 | 129 | 70 | | | | | | | |
| 1/2 | 15 | 85 | 122 | 60 | 78 | 129 | 70 | 110 | 128 | 70 | | | | |
| 3/4 | 20 | 95 | 122 | 70 | 91 | 147 | 90 | 120 | 147 | 90 | | | | |
| 1 | 25 | 110 | 145 | 80 | 105 | 168 | 100 | 130 | 168 | 100 | | | | |
| 1 1/4 | 32 | 130 | 160 | 90 | 122 | 193 | 115 | 160 | 192 | 115 | | | | |
| 1 1/2 | 40 | 150 | 179 | 100 | 135 | 200 | 135 | 180 | 201 | 135 | | | | |
| 2 | 50 | 180 | 198 | 115 | 160 | 235 | 155 | 230 | 237 | 155 | | | | |
| 2 1/2 | 65 | | | | | | | | | | 292 | 337 | 250 | |
| 3 | 80 | | | | | | | | | | 318 | 351 | 250 | |
| 4 | 100 | | | | | | | | | | 356 | 439 | 300 | |
| 6 | 150 | | | | | | | | | | 444 | 600 | 400 | |
| 8 | 200 | | | | | | | | | | 559 | 688 | 560 | |
| Body/Bonnet | FCD-S | | | | | FCD-S | | | FCD-S | | | FCD-S | | |
| Stem | 420J2 | | | | | 420J2 | | | 420J2 | | | 403SS | | |
| Disc | G/F PTFE | | | | | PTFE | | | PTFE | | | PTFE | | |
| Gland Packing | NBR (V/#2631) | | | | | NBR | | | NBR | | | NBR | | |
| Gasket | C1100P-0 (incl. Cu) | | | | | P/#6633 | | | P/#6633 | | | P/#6633 | | |
| Seat Rings (S/D) | 403SS/- | | | | | 304SS/- | | | 304SS/- | | | 403SS/- | | |
| Service Conditions | LPG at Room Temperature 0.20MPa | | | | | 80°C gas 2.4MPa | | | 80°C gas 2.4MPa | | | 80°C gas 2.4MPa | | |
| Remarks | LPG Service | | | | | LPG Service | | | LPG Service | | | LPG Service | | |





| Type | Globe | | | | | Globe | | | Globe | | | Bellows Seal Globe | | |
|--------------------|--|-----|-----|-----|-----|--|-----|-----|--|-----|-----|--|-----|--|
| Ductile Iron | | | | | | | | | | | | | | |
| Fig | 10SPD | | | | | 10SPDBF | | | 10SPDBOF | | | 10SPDBOWF | | |
| End Connection | BS21 (JIS B0203) | | | | | JIS B2239 10K FF | | | JIS B2239 10K FF | | | JIS B2239 10K FF | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | |
| 1/2 | 15 | 70 | 125 | 80 | 108 | 125 | 80 | | | | 108 | 184 | 90 | |
| 3/4 | 20 | 80 | 125 | 80 | 117 | 125 | 80 | | | | 117 | 184 | 90 | |
| 1 | 25 | 90 | 146 | 100 | 127 | 145 | 100 | | | | 127 | 190 | 100 | |
| 1 1/4 | 32 | 110 | 162 | 115 | 140 | 162 | 115 | | | | 140 | 238 | 140 | |
| 1 1/2 | 40 | 120 | 180 | 115 | 165 | 180 | 115 | | | | 165 | 238 | 140 | |
| 2 | 50 | 140 | 198 | 135 | 203 | 198 | 135 | 203 | 308 | 200 | 203 | 271 | 160 | |
| 2 1/2 | 65 | | | | | | | 216 | 311 | 225 | 216 | 305 | 180 | |
| 3 | 80 | | | | | | | 241 | 352 | 250 | 241 | 395 | 250 | |
| 4 | 100 | | | | | | | 292 | 371 | 250 | 292 | 432 | 300 | |
| 5 | 125 | | | | | | | 356 | 459 | 300 | 356 | 529 | 350 | |
| 6 | 150 | | | | | | | 406 | 518 | 350 | 406 | 586 | 400 | |
| 8 | 200 | | | | | | | 495 | 581 | 400 | 495 | 749 | 450 | |
| Body/Bonnet | FCD-S | | | | | FCD-S | | | FCD-S | | | FCD-S | | |
| Stem | 420J2 | | | | | 420J2 | | | 403SS | | | 403SS | | |
| Disc/Bellows | G/F PTFE | | | | | G/F PTFE | | | G/F PTFE | | | G/F PTFE/316LSS | | |
| Gland Packing | P/#6118 | | | | | P/#6118 | | | P/#6118 | | | P/#6527 | | |
| Gasket | C1100P-0 (incl. Cu) | | | | | C1100P-0 (incl. Cu) | | | P/#6633 | | | P/#6633 | | |
| Seat Rings (S/D) | 403SS/- | | | | | 403SS/- | | | 403SS/- | | | 304SS or 403SS/- | | |
| Service Conditions | 120°C Static Water 1.4MPa, 180°C Steam, Air, Gas, Oil 1.0MPa | | | | | 120°C Static Water 1.4MPa, 180°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 1.4MPa, 180°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 1.4MPa, 180°C Steam, Air, Gas, Oil 1.0MPa | | |
| Reference Page | | | | | | | | | | | | Features: Page D117 | | |





| Type | Globe | | | | | Y Globe | | | Y Globe | | | Y Globe | | |
|--------------------|--|-----|-----|-----|--|--|-------|-----|--|-------|-----|--|-------|-----|
| Ductile Iron | | | | | | | | | | | | | | |
| Fig | 150SPDB | | | | | 10SYYBF | | | 10SYYBOF | | | 20SYYB | | |
| End Connection | ASME B16.5 CL150 RF | | | | | JIS B2239 10K FF | | | JIS B2239 10K FF | | | JIS B2239 20K RF | | |
| inch | mm | L | H | D | | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 108 | 127 | 70 | | | | | | | | | | |
| 3/4 | 20 | 117 | 135 | 70 | | | | | | | | | | |
| 1 | 25 | 127 | 155 | 90 | | 180 | 191.5 | 115 | | | | 180 | 191.5 | 115 |
| 1 1/4 | 32 | 140 | 172 | 100 | | | | | | | | | | |
| 1 1/2 | 40 | 165 | 193 | 115 | | 240 | 311 | 135 | | | | 240 | 311 | 135 |
| 2 | 50 | 203 | 208 | 135 | | | | | 280 | 311 | 225 | | | |
| 2 1/2 | 65 | | | | | | | | 315 | 357.5 | 250 | | | |
| 3 | 80 | | | | | | | | 350 | 392 | 250 | | | |
| Body/Bonnet | FCD-S | | | | | FCD-S | | | FCD-S | | | FCD-S | | |
| Stem | 420J2 | | | | | 420J2 | | | 403SS | | | 420J2 | | |
| Disc/Bellows | G/F PTFE | | | | | 403SS+HF | | | A105+HF | | | 403SS+HF | | |
| Gland Packing | P/#6118 | | | | | P/#6118 | | | P/#6118 | | | P/#6118 | | |
| Gasket | C1100P-0 (incl. Cu) | | | | | P/#6633 | | | P/#6633 | | | P/#6633 | | |
| Seat Rings (S/D) | 403SS/- | | | | | 304SS+HF/- | | | 403SS+HF/- | | | 304SS+HF/- | | |
| Service Conditions | -5~38°C W.O.G. 1.73MPa, 149°C W.O.G. 1.48MPa, 180°C W.O.G. 1.18MPa | | | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | |
| Remarks | | | | | | HF: Hard Face with Co-Cr-W Alloy | | | HF: Hard Face with Co-Cr-W Alloy | | | HF: Hard Face with Co-Cr-W Alloy | | |

| Type | Y Globe | | | | | Gate | | | Gate | | | Gate | | |
|--------------------|--|-----|-------|-----|--|--|-----|-----|--|-------|-----|--|-----|-----|
| Ductile Iron | | | | | | | | | | | | | | |
| Fig | 20SYYBO | | | | | 10SMS | | | 10SMAS | | | 10SMBF | | |
| End Connection | JIS B2239 20K RF | | | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | JIS B2239 10K FF | | |
| inch | mm | L | H | D | | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | | | | | 60 | 150 | 60 | 65 | 161 | 70 | 90 | 161 | 70 |
| 3/4 | 20 | | | | | 70 | 170 | 70 | 75 | 162 | 70 | 100 | 162 | 70 |
| 1 | 25 | | | | | 75 | 197 | 80 | 80 | 184.5 | 80 | 110 | 185 | 80 |
| 1 1/4 | 32 | | | | | 85 | 232 | 90 | 90 | 215 | 90 | 120 | 216 | 90 |
| 1 1/2 | 40 | | | | | 95 | 274 | 100 | 100 | 250 | 110 | 130 | 251 | 100 |
| 2 | 50 | 280 | 311 | 225 | | 105 | 316 | 115 | 110 | 285 | 115 | 140 | 285 | 115 |
| 2 1/2 | 65 | 315 | 357.5 | 250 | | | | | | | | | | |
| 3 | 80 | 350 | 392 | 250 | | | | | | | | | | |
| Body/Bonnet | FCD-S | | | | | FCD-S | | | FCD-S | | | FCD-S | | |
| Stem | 403SS | | | | | 420J2 | | | 420J2 | | | 420J2 | | |
| Disc/Bellows | A105+HF | | | | | SCS1 | | | SCS1 | | | SCS1 | | |
| Gland Packing | P/#6118 | | | | | T/#2200K | | | P/#6118 | | | P/#6118 | | |
| Gasket | P/#6633 | | | | | 403SS/- | | | P/#6633 | | | P/#6633 | | |
| Seat Rings (S/D) | 403SS+HF/- | | | | | 403SS/- | | | 403SS/- | | | 403SS/- | | |
| Service Conditions | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | | | 120°C Static Water 1.4MPa, 220°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | |
| Remarks | HF: Hard Face with Co-Cr-W Alloy | | | | | | | | | | | | | |

| Type | Gate | | | Gate | | | Gate | | | Gate | | | |
|--------------------|---|---|---|---|---|---|---|--|---|---|---|---|-----|
| Ductile Iron |  |  |  |  |  |  |  |  |  |  |  |  | |
| Fig | 10SMBOF | | | 16SMS | | | 16SMB | | | 16SMBO | | | |
| End Connection | JIS B2239 10K FF | | | BS21 (JIS B0203) | | | JIS B2239 16K RF | | | JIS B2239 16K RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | | | | 65 | 163 | 70 | 108 | 163 | 70 | | | |
| 3/4 | 20 | | | | 75 | 182 | 80 | 117 | 164 | 70 | | | |
| 1 | 25 | | | | 80 | 212 | 90 | 127 | 187 | 80 | | | |
| 1 1/4 | 32 | | | | 90 | 245 | 100 | 140 | 219 | 90 | | | |
| 1 1/2 | 40 | 165 | 301 | 160 | 100 | 285 | 115 | 165 | 253 | 100 | 165 | 301 | 160 |
| 2 | 50 | 178 | 352 | 200 | 110 | 330 | 135 | 178 | 285 | 115 | 178 | 352 | 200 |
| 2 1/2 | 65 | 190 | 410 | 200 | | | | | | | 190 | 410 | 200 |
| 3 | 80 | 203 | 479 | 250 | | | | | | | 203 | 479 | 250 |
| 4 | 100 | 229 | 566 | 250 | | | | | | | 229 | 566 | 250 |
| 5 | 125 | 254 | 668 | 300 | | | | | | | 254 | 668 | 300 |
| 6 | 150 | 267 | 780 | 300 | | | | | | | 267 | 780 | 300 |
| 8 | 200 | 292 | 970 | 350 | | | | | | | 292 | 970 | 350 |
| 10 | 250 | 330 | 1181 | 400 | | | | | | | 330 | 1181 | 400 |
| 12 | 300 | 356 | 1404 | 450 | | | | | | | 356 | 1404 | 450 |
| 14 | 350 | 381 | 1538 | 500 | | | | | | | | | |
| 16 | 400 | 406 | 1702 | 600 | | | | | | | | | |
| 18 | 450 | 432 | 1538 | 500 | | | | | | | | | |
| 20 | 500 | 457 | 1702 | 600 | | | | | | | | | |
| Body/Bonnet | FCD-S | | | FCD-S | | | FCD-S | | | FCD-S | | | |
| Stem | 403SS or F6a Cl.2 | | | 420J2 | | | 420J2 | | | 403SS | | | |
| Disc | SCS1 or 403SS or CS+13Cr | | | SCS1 | | | SCS1 | | | SCS1 or 403SS or CS+13Cr | | | |
| Gland Packing | P/#6118 | | | T/#2230K | | | T/#2230K | | | P/#6118 | | | |
| Gasket | P/#6633 | | | C1100P-0 (incl. Cu) | | | C1100P-0 (incl. Cu) | | | P/#6633 | | | |
| Seat Rings (S/D) | 403SS | | | 403SS | | | 403SS | | | 403SS | | | |
| Service Conditions | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 2.2MPa, 220°C Steam, Air, Gas, Oil 2.0MPa | | | 120°C Static Water 2.2MPa, 220°C Steam, Air, Gas, Oil 2.0MPa | | | 120°C Static Water 2.2MPa, 220°C Steam, Air, Gas, Oil 2.0MPa | | | |





| Type | Gate | | | Gate | | | Gate | | | Gate | | | |
|--------------------|---|---|---|---|---|---|---|--|---|--|---|---|-----|
| Ductile Iron |  |  |  |  |  |  |  |  |  |  |  |  | |
| Fig | 20SLS | | | 20SLB | | | 20SLBO | | | 150SMBO | | | |
| End Connection | BS21 (JIS B0203) | | | JIS B2239 20K RF | | | JIS B2239 20K RF | | | ASME B16.5 CL150 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 70 | 175 | 90 | 108 | 176 | 90 | | | | | | |
| 3/4 | 20 | 75 | 177 | 90 | 117 | 177 | 90 | | | | | | |
| 1 | 25 | 85 | 214 | 100 | 127 | 214 | 100 | | | | | | |
| 1 1/4 | 32 | 95 | 241 | 115 | 140 | 242 | 115 | | | | | | |
| 1 1/2 | 40 | 105 | 277 | 135 | 165 | 277 | 135 | 190 | 326 | 160 | 165 | 301 | 160 |
| 2 | 50 | 115 | 301 | 135 | | | | 216 | 402 | 200 | 178 | 352 | 200 |
| 2 1/2 | 65 | | | | | | | 241 | 456 | 200 | 190 | 410 | 200 |
| 3 | 80 | | | | | | | 283 | 518 | 250 | 203 | 479 | 250 |
| 4 | 100 | | | | | | | 305 | 599 | 250 | 229 | 566 | 250 |
| 5 | 125 | | | | | | | 381 | 725 | 300 | 254 | 668 | 300 |
| 6 | 150 | | | | | | | 403 | 847 | 350 | 267 | 780 | 300 |
| 8 | 200 | | | | | | | 419 | 1076 | 400 | 292 | 970 | 350 |
| 10 | 250 | | | | | | | 457 | 1239 | 450 | 330 | 1181 | 400 |
| 12 | 300 | | | | | | | 502 | 1448 | 500 | 356 | 1404 | 450 |
| Body/Bonnet | FCD-S | | | FCD-S | | | FCD-S | | | FCD-S | | | |
| Stem | 420J2 | | | 420J2 | | | 403SS/- | | | 403SS | | | |
| Disc/Bellows | SCS1 | | | SCS1 | | | SCS1 or 403SS or CS+13Cr | | | SCS1 or 403SS or CS+13Cr | | | |
| Gland Packing | P/#6118 | | | P/#6118 | | | P/#6118 | | | P/#6118 | | | |
| Gasket | P/#6633 | | | P/#6633 | | | P/#6633 | | | P/#6633 | | | |
| Seat Rings (S/D) | 403SS/- | | | 403SS/- | | | 403SS/- | | | 403SS/- | | | |
| Service Conditions | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | -5~38°C W.O.G. 1.73MPa, 149°C W.O.G. 1.48MPa, 260°C W.O.G. 1.18MPa, 343°C W.O.G. 0.86MPa | | | |





| Type | Gate | | | Lift Check | | | Lift Check | | | Lift Check | | | |
|--------------------|--|-----|------|---|-----|----|--|-----|----|---|-----|----|---|
| Ductile Iron |  | | |  | | |  | | |  | | | |
| Fig | 300SLBO | | | 10SF | | | 10SFBF | | | 16SF | | | |
| End Connection | ASME B16.5 CL300 RF | | | BS21 (JIS B0203) | | | JIS B2239 10K FF | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | | | | 65 | 39 | | 85 | 39 | | 70 | 50 | |
| 3/4 | 20 | | | | 80 | 42 | | 95 | 42 | | 85 | 53 | |
| 1 | 25 | | | | 90 | 48 | | 110 | 49 | | 95 | 61 | |
| 1 1/4 | 32 | | | | 105 | 56 | | 130 | 56 | | 110 | 69 | |
| 1 1/2 | 40 | | | | 120 | 65 | | 150 | 65 | | 125 | 75 | |
| 2 | 50 | 216 | 407 | 200 | 140 | 73 | | 180 | 74 | | 145 | 87 | |
| 2 1/2 | 65 | 241 | 462 | 200 | | | | | | | | | |
| 3 | 80 | 283 | 522 | 250 | | | | | | | | | |
| 4 | 100 | 305 | 599 | 250 | | | | | | | | | |
| 5 | 125 | 381 | 725 | 300 | | | | | | | | | |
| 6 | 150 | 403 | 847 | 350 | | | | | | | | | |
| 8 | 200 | 419 | 1076 | 400 | | | | | | | | | |
| 10 | 250 | 457 | 1240 | 450 | | | | | | | | | |
| 12 | 300 | 502 | 1448 | 500 | | | | | | | | | |
| Body/Bonnet | FCD-S | | | FCD-S/SCS1 | | | FCD-S/SCS1 | | | FCD-S/304SS | | | |
| Stem | 403SS/- | | | | | | | | | | | | |
| Disc/Bellows | 403SS or CS+13Cr | | | SCS1 | | | SCS1 | | | SCS1 | | | |
| Gland Packing | P/#6118 | | | | | | | | | | | | |
| Gasket | P/#6633 | | | | | | | | | C1100P-0 (incl. Cu) | | | |
| Seat Rings (S/D) | 403SS/- | | | 403SS/- | | | 403SS/- | | | 403SS/- | | | |
| Service Conditions | -5~38°C W.O.G. 2.94MPa, 149°C W.O.G. 2.60MPa, 260°C W.O.G. 2.28MPa, 350°C W.O.G. 2.04MPa | | | 120°C Static Water 1.4MPa, 220°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 1.4MPa, 220°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 2.2MPa, 220°C Steam, Air, Gas, Oil 2.0MPa | | | |

| Type | Lift Check | | | Lift Check | | | Lift Check | | | Lift Check | | | |
|--------------------|---|-----|----|---|-----|----|--|-----|----|---|-----|----|---|
| Ductile Iron |  | | |  | | |  | | |  | | | |
| Fig | 16SFB | | | 10SN | | | 10SNBF | | | 20SN | | | |
| End Connection | JIS B2239 16K RF | | | BS21 (JIS B0203) | | | JIS B2239 10K FF | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 108 | 50 | | 70 | 48 | | 108 | 49 | | 78 | 56 | |
| 3/4 | 20 | 117 | 53 | | 80 | 51 | | 117 | 52 | | 91 | 60 | |
| 1 | 25 | 127 | 61 | | 90 | 60 | | 127 | 60 | | 105 | 68 | |
| 1 1/4 | 32 | 140 | 69 | | 110 | 67 | | 140 | 68 | | 122 | 80 | |
| 1 1/2 | 40 | 165 | 75 | | 120 | 73 | | 165 | 74 | | 135 | 85 | |
| 2 | 50 | 203 | 87 | | 140 | 85 | | 203 | 86 | | 160 | 99 | |
| Body/Bonnet | FCD-S/304SS | | | FCD-S/304SS | | | FCD-S/304SS | | | FCD-S/SCS1 | | | |
| Disc/Bellows | SCS1 | | | SCS1 | | | SCS1 | | | SCS13A+HF | | | |
| Gasket | C1100P-0 (incl. Cu) | | | C1100P-0 (incl. Cu) | | | C1100P-0 (incl. Cu) | | | P/#6633 | | | |
| Seat Rings (S/D) | 403SS/- | | | 403SS/- | | | 403SS/- | | | SCS13A+HF/- | | | |
| Service Conditions | 120°C Static Water 2.2MPa, 220°C Steam, Air, Gas, Oil 2.0MPa | | | 120°C Static Water 1.4MPa, 220°C Steam, Air, Gas, Oil 1.2MPa | | | 120°C Static Water 1.4MPa, 220°C Steam, Air, Gas, Oil 1.2MPa | | | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | |
| Remarks | | | | | | | | | | HF: Hard Face with Co-Cr-W Alloy | | | |

| Type | Lift Check | | | | Swing Check | | | Swing Check | | | Swing Check | | |
|--------------------|--|-----|----|---|--|------|---|--|-----|---|--|-----|---|
| Ductile Iron | | | | | | | | | | | | | |
| Fig | 20SNB | | | | 10SOZ | | | 10SRBF | | | 16SRB | | |
| End Connection | JIS B2239 20K RF | | | | BS21 (JIS B0203) | | | JIS B2239 10K FF | | | JIS B2239 16K RF | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 110 | 56 | | 65 | 21.5 | | | | | | | |
| 3/4 | 20 | 120 | 60 | | 80 | 24.5 | | | | | | | |
| 1 | 25 | 130 | 68 | | 90 | 29 | | | | | | | |
| 1 1/4 | 32 | 160 | 80 | | 105 | 35 | | | | | | | |
| 1 1/2 | 40 | 180 | 85 | | 120 | 41.5 | | 165 | 118 | | | | |
| 2 | 50 | 230 | 99 | | 140 | 48.5 | | 203 | 123 | | 203 | 125 | |
| 2 1/2 | 65 | | | | | | | 216 | 133 | | 216 | 136 | |
| 3 | 80 | | | | | | | 241 | 154 | | 241 | 153 | |
| 4 | 100 | | | | | | | 292 | 168 | | 292 | 171 | |
| 5 | 125 | | | | | | | 330 | 196 | | 330 | 201 | |
| 6 | 150 | | | | | | | 356 | 214 | | 356 | 219 | |
| 8 | 200 | | | | | | | 495 | 256 | | 495 | 264 | |
| 10 | 250 | | | | | | | 622 | 311 | | 622 | 320 | |
| 12 | 300 | | | | | | | 698 | 351 | | 698 | 359 | |
| Body/Bonnet Stem | FCD-S/SCS1 | | | | FCD-S/SCS13A | | | FCD-S | | | FCD-S | | |
| Disc/Bellows | SCS13A+HF | | | | 304SS(SCS13A) | | | 403SS/- | | | 403SS/- | | |
| Gasket | P/#6633 | | | | 304SS or SCS13A | | | 403SS or SCPH2+13Cr | | | 403SS or SCPH2+13Cr | | |
| Seat Rings (S/D) | SCS13A+HF/- | | | | | | | 403SS/- | | | 403SS/- | | |
| Service Conditions | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | | 120°C Static Water 1.4MPa, 220°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 2.2MPa, 220°C Steam, Air, Gas, Oil 2.0MPa | | |
| Reference Page | | | | | Features: Page DI16 | | | | | | | | |
| Remarks | HF: Hard Face with Co-Cr-W Alloy | | | | Internal Hinge Pin | | | | | | | | |

| Type | Swing Check | | | | Swing Check | | | Swing Check | | | Wafer Check | | |
|--------------------|--|-----|-----|---|--|-----|---|--|-----|---|--|-----|----|
| Ductile Iron | | | | | | | | | | | | | |
| Fig | 20SOB | | | | 150SRB | | | 300SOB | | | 10SWZU | | |
| End Connection | JIS B2239 20K RF | | | | ASME B16.5 CL150 RF | | | ASME B16.5 CL300 RF | | | Wafer (JIS 10K) | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1 1/2 | 40 | | | | 165 | 115 | | | | | 56 | 162 | 70 |
| 2 | 50 | 267 | 133 | | 203 | 125 | | 267 | 133 | | 56 | 168 | 70 |
| 2 1/2 | 65 | 292 | 143 | | 216 | 136 | | 292 | 143 | | 59 | 175 | 70 |
| 3 | 80 | 318 | 158 | | 241 | 153 | | 318 | 158 | | 66 | 187 | 70 |
| 4 | 100 | 356 | 186 | | 292 | 171 | | 356 | 186 | | 72 | 201 | 70 |
| 5 | 125 | 400 | 218 | | 330 | 206 | | 400 | 218 | | 78 | 221 | 80 |
| 6 | 150 | 444 | 238 | | 356 | 224 | | 444 | 238 | | 96 | 248 | 80 |
| 8 | 200 | 533 | 278 | | 495 | 264 | | 533 | 278 | | 109 | 299 | 90 |
| 10 | 250 | 622 | 335 | | 622 | 325 | | 622 | 335 | | 145 | 328 | 90 |
| 12 | 300 | 711 | 370 | | 698 | 364 | | 711 | 370 | | 184 | 337 | 90 |
| 14 | 350 | | | | | | | | | | 191 | 367 | 90 |
| 16 | 400 | | | | | | | | | | 204 | 395 | 90 |
| 18 | 450 | | | | | | | | | | | | |
| Body/Cover/Cap | FCD-S | | | | FCD-S | | | FCD-S | | | FCD-S+NBR | | |
| Hinge Pin/Spring | 403SS/- | | | | 403SS/- | | | 403SS/- | | | 304SS | | |
| Disc | 403SS or SCPH2+13Cr | | | | 403SS or SCPH2+13Cr | | | 403SS or SCPH2+13Cr | | | CF8 or 403SS | | |
| Gland Packing | | | | | T/#2200K | | | | | | | | |
| Gasket | P/#6633 | | | | P/#6633 | | | P/#6633 | | | | | |
| Seat Rings (S/D) | 403SS/- | | | | 403SS/- | | | 403SS/- | | | | | |
| Service Conditions | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | | -5~38°C W.O.G. 1.73MPa, 149°C W.O.G. 1.48MPa, 260°C W.O.G. 1.18MPa, 343°C W.O.G. 0.86MPa | | | -5~38°C W.O.G. 2.94MPa, 149°C W.O.G. 2.60MPa, 260°C W.O.G. 2.28MPa, 350°C W.O.G. 2.04MPa | | | 0°C~+80°C 1.4MPa | | |
| Reference Page | | | | | | | | | | | Features: Page BR35 | | |
| Remarks | | | | | | | | | | | Built-in Bypass Valve, Dual Plate Type | | |

| Type | Wafer Check | | | Wafer Check | | | Stop Check | | | Stop Check | | | |
|--------------------|---|-----|-----|---|-----|-----|--|-----|-----|---|-----|-----|-----|
| Ductile Iron |  | | |  | | |  | | |  | | | |
| Fig | 20SWZ | | | 20SWZU | | | 10SYFBF | | | 10SPFBOF | | | |
| End Connection | Wafer (JIS 20K) | | | Wafer (JIS 20K) | | | JIS B2239 10K FF | | | JIS B2239 10K FF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | | | | | | | 110 | 137 | 80 | | | |
| 3/4 | 20 | | | | | | | 120 | 154 | 100 | | | |
| 1 | 25 | | | | | | | 130 | 178 | 115 | | | |
| 1 1/2 | 40 | 54 | 128 | 55 | | | | 180 | 207 | 135 | | | |
| 2 | 50 | 56 | 133 | 60 | 56 | 146 | 60 | 230 | 226 | 180 | | | |
| 2 1/2 | 65 | 60 | 150 | 70 | 60 | 168 | 70 | | | | 216 | 338 | 225 |
| 3 | 80 | 67 | 156 | 70 | 67 | 174 | 70 | | | | 241 | 370 | 250 |
| 4 | 100 | 68 | 169 | 70 | 68 | 187 | 70 | | | | | | |
| 5 | 125 | 83 | 183 | 70 | 83 | 201 | 70 | | | | | | |
| 6 | 150 | 95 | 216 | 80 | 95 | 219 | 80 | | | | | | |
| 8 | 200 | 127 | 243 | 80 | 127 | 247 | 80 | | | | | | |
| 10 | 250 | 140 | 290 | 90 | 140 | 297 | 90 | | | | | | |
| 12 | 300 | 181 | 315 | 90 | 181 | 324 | 90 | | | | | | |
| 14 | 350 | 184 | 330 | 90 | 184 | 337 | 90 | | | | | | |
| 16 | 400 | 191 | 355 | 90 | 191 | 365 | 90 | | | | | | |
| 18 | 450 | 204 | 388 | 90 | 204 | 394 | 90 | | | | | | |
| Body/Cover/Cap | FCD-S+NBR | | | FCD-S+NBR | | | FCD-S | | | FCD-S | | | |
| Hinge Pin/Spring | 304SS | | | SUS420J2/304SS/304SS | | | 420J2 | | | 403SS | | | |
| Disc | CAC406 or C3531 | | | CF8 or 403SS | | | 403SS+HF | | | 304SS+HF | | | |
| Gland Packing | T/#2996NATK | | | T/#2200K | | | P/#6118 | | | P/#6118 | | | |
| Gasket | | | | | | | P/#6633 | | | P/#6633 | | | |
| Seat Rings (S/D) | | | | | | | 304SS+HF/- | | | A105+HF/- | | | |
| Service Conditions | 0°C~+80°C 2.8MPa | | | 80°C Static Water 2.8MPa, 80°C W.O.G. 2.0MPa | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 1.4MPa, 300°C Steam, Air, Gas, Oil 1.0MPa | | | |
| Reference Page | Features: Page BR35 | | | Features: Page BR35 | | | Features: Page DI16 | | | Features: Page DI16 | | | |
| Remarks | Built-in Bypass Valve, Dual Plate Type | | | Built-in Bypass Valve Dual Plate Type | | | HF: Hard Face with Co-Cr-W Alloy | | | HF: Hard Face with Co-Cr-W Alloy | | | |





| Type | Stop Check | | | Stop Check | | | Lift Check | | | Swing Check | | | |
|--------------------|---|-----|-----|---|-----|-----|--|-----|----|---|-----|-----|---|
| Ductile Iron |  | | |  | | |  | | |  | | | |
| Fig | 20SYFB | | | 20SYFBO | | | 20SNDB | | | 20SODB | | | |
| End Connection | JIS B2239 20K RF | | | JIS B2239 20K RF | | | JIS B2239 20K RF | | | JIS B2239 20K RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 110 | 137 | 80 | | | | 110 | 56 | | | | |
| 3/4 | 20 | 120 | 154 | 100 | | | | 120 | 60 | | | | |
| 1 | 25 | 130 | 178 | 115 | | | | 130 | 68 | | | | |
| 1 1/4 | 32 | | | | | | | 160 | 80 | | | | |
| 1 1/2 | 40 | 180 | 207 | 135 | | | | 180 | 85 | | | | |
| 2 | 50 | 230 | 226 | 180 | | | | 230 | 99 | | 267 | 135 | |
| 2 1/2 | 65 | | | | 292 | 338 | 250 | | | | 292 | 145 | |
| 3 | 80 | | | | 318 | 370 | 250 | | | | 318 | 160 | |
| 4 | 100 | | | | | | | | | | 356 | 185 | |
| 6 | 150 | | | | | | | | | | 444 | 240 | |
| 8 | 200 | | | | | | | | | | 533 | 280 | |
| Body/Cover/Cap | FCD-S | | | FCD-S | | | FCD-S/SCS1 | | | FCD-S/S25C or FCD-S | | | |
| Hinge Pin/Spring | 420J2 | | | 403SS | | | 403SS | | | 403SS | | | |
| Disc | 403SS+HF | | | 403SS+HF | | | PTFE | | | PTFE | | | |
| Gland Packing | P/#6118 | | | P/#6118 | | | P/#6118 | | | P/#6118 | | | |
| Gasket | P/#6633 | | | P/#6633 | | | P/#6633 | | | P/#6633 | | | |
| Seat Rings (S/D) | 304SS+HF/- | | | A105+HF/- | | | 304SS/- | | | 403SS/- | | | |
| Service Conditions | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | LPG at Room Temperature 0.20MPa | | | LPG at Room Temperature 0.20MPa | | | |
| Reference Page | Features: Page DI16 | | | Features: Page DI16 | | | Features: Page DI16 | | | Features: Page DI16 | | | |
| Remarks | HF: Hard Face with Co-Cr-W Alloy | | | HF: Hard Face with Co-Cr-W Alloy | | | Gas Service | | | Gas Service | | | |





| Type | Strainer | | | | | Strainer | | | Strainer | | | Strainer | | |
|--------------------|--|-----|-----|-----|-----|--|-----|-----|--|-----|-----|--|-----|-----|
| Ductile Iron | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| Fig | 10FDY | | | | | 10FDYBF | | | 16FDY | | | 16FDYB | | |
| End Connection | BS21 (JIS B0203) | | | | | JIS B2239 10K FF | | | BS21 (JIS B0203) | | | JIS B2239 16K RF | | |
| inch | mm | L | H | H1* | | L | H | H1* | L | H | H1* | L | H | H1* |
| 1/4 | 8 | 65 | 45 | 63 | | | | | | | | | | |
| 3/8 | 10 | 70 | 45 | 63 | | | | | | | | | | |
| 1/2 | 15 | 85 | 57 | 81 | 125 | 57 | 81 | 85 | 57 | 81 | 125 | 57 | 81 | |
| 3/4 | 20 | 100 | 62 | 90 | 140 | 62 | 90 | 100 | 63 | 90 | 140 | 63 | 90 | |
| 1 | 25 | 115 | 74 | 111 | 150 | 77 | 114 | 115 | 74 | 111 | 150 | 77 | 114 | |
| 1 1/4 | 32 | 135 | 86 | 130 | 170 | 90 | 134 | 135 | 86 | 131 | 170 | 90 | 134 | |
| 1 1/2 | 40 | 150 | 96 | 141 | 190 | 100 | 145 | 150 | 96 | 141 | 190 | 100 | 145 | |
| 2 | 50 | 180 | 112 | 168 | 230 | 137 | 173 | 180 | 111 | 168 | 250 | 158 | 207 | |
| 2 1/2 | 65 | 220 | 190 | 271 | 305 | 207 | 289 | | | | 305 | 208 | 289 | |
| 3 | 80 | 250 | 214 | 310 | 360 | 237 | 334 | | | | 360 | 238 | 334 | |
| 4 | 100 | | | | 415 | 279 | 387 | | | | 415 | 284 | 387 | |
| 5 | 125 | | | | 465 | 321 | 446 | | | | 465 | 324 | 446 | |
| 6 | 150 | | | | 515 | 367 | 497 | | | | 515 | 369 | 497 | |
| 8 | 200 | | | | 580 | 461 | 631 | | | | 580 | 461 | 631 | |
| 10 | 250 | | | | 680 | 534 | 745 | | | | 680 | 534 | 745 | |
| 12 | 300 | | | | 800 | 623 | 874 | | | | 800 | 623 | 879 | |
| Body/Bonnet/Cap | FCD-S/C3771 or FCD-S | | | | | FCD-S/C3771 or FCD-S | | | FCD-S/C3771 or FCD-S | | | FCD-S/C3771 or FCD-S | | |
| Disc/Screen | 304SS(Punched Plate) | | | | | 304SS(Punched Plate) | | | 304SS(Punched Plate) | | | 304SS(Punched Plate) | | |
| Gasket | P/#5650 or P/#6633 | | | | | P/#6633 or P/#5650 | | | P/#5650 | | | P/#6633 or P/#5650 | | |
| Service Conditions | 120°C Static Water 1.4MPa, 220°C Steam, Air, Gas, Oil 1.0MPa | | | | | 120°C Static Water 1.4MPa, 220°C Steam, Air, Gas, Oil 1.0MPa | | | 120°C Static Water 2.2MPa, 220°C Steam, Air, Gas, Oil 2.0MPa | | | 120°C Static Water 2.2MPa, 220°C Steam, Air, Gas, Oil 2.0MPa | | |
| Remarks | BC: 21/2 ⁸ & above | | | | | BC: 2 ⁸ & above | | | | | | BC: 2 ⁸ & above | | |

*Height for removing the screen

| Type | Strainer | | | | | Strainer | | | Ball | | | Ball | | |
|--------------------|--|-----|-----|-----|-----|--|-----|-----|---|-----|-----|--|-----|---|
| Ductile Iron | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| Fig | 20FDY | | | | | 20FDYB | | | STZ | | | 20ST | | |
| End Connection | BS21 (JIS B0203) | | | | | JIS B2239 20K RF | | | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | |
| inch | mm | L | H | H1* | | L | H | H1* | L | H | D | L | H | D |
| 1/4 | 8 | | | | | | | | 46 | 37 | 80 | | | |
| 3/8 | 10 | 80 | 63 | 76 | 120 | 63 | 76 | 51 | 37 | 80 | | | | |
| 1/2 | 15 | 85 | 63 | 76 | 125 | 63 | 76 | 57 | 41 | 100 | 75 | 106 | 130 | |
| 3/4 | 20 | 100 | 70 | 86 | 140 | 71 | 86 | 65 | 46 | 130 | 80 | 106 | 130 | |
| 1 | 25 | 115 | 82 | 103 | 160 | 85 | 105 | 76 | 49 | 130 | 90 | 107 | 130 | |
| 1 1/4 | 32 | 135 | 117 | 122 | 185 | 120 | 126 | 86 | 56 | 130 | 105 | 129 | 160 | |
| 1 1/2 | 40 | 150 | 128 | 135 | 200 | 132 | 138 | 95 | 61 | 130 | 115 | 133 | 160 | |
| 2 | 50 | 180 | 153 | 161 | 250 | 164 | 172 | 115 | 68 | 150 | 130 | 114 | 230 | |
| 2 1/2 | 65 | | | | 305 | 221 | 298 | | | | | | | |
| 3 | 80 | | | | 360 | 252 | 344 | | | | | | | |
| 4 | 100 | | | | 415 | 292 | 397 | | | | | | | |
| 5 | 125 | | | | 465 | 333 | 456 | | | | | | | |
| 6 | 150 | | | | 515 | 380 | 506 | | | | | | | |
| 8 | 200 | | | | 620 | 441 | 610 | | | | | | | |
| 10 | 250 | | | | 760 | 548 | 763 | | | | | | | |
| 12 | 300 | | | | 870 | 655 | 916 | | | | | | | |
| Body/Bonnet/Cap | FCD-S/FCD-S | | | | | FCD-S/FCD-S | | | FCD-S | | | FCD-S | | |
| Stem | | | | | | | | | C3531 + Ni-Cr plating | | | 403SS | | |
| Ball/Screen | 304SS | | | | | 304SS | | | C3771 + Ni-Cr plating | | | CF8/304SS | | |
| Ball Seat | | | | | | | | | G/F PTFE | | | HYPATITE [®] PTFE | | |
| Gland Packing | | | | | | | | | PTFE | | | PTFE | | |
| Gasket | P/#6633 | | | | | P/#6633 | | | PTFE | | | PTFE | | |
| Handle | | | | | | | | | SS430 | | | DI | | |
| Bore | | | | | | | | | Reduced Bore | | | Reduced Bore | | |
| Service Conditions | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | | | 120°C Static Water 2.8MPa, 220°C Steam, Air, Gas, Oil 2.5MPa | | | W.O.G. at Room Temperature 2.75MPa, Saturated Steam 0.98MPa | | | 110°C W.O.G. 2.8MPa, 140°C W.O.G. 2.0MPa | | |
| Remarks | 40-mesh | | | | | 40-mesh | | | | | | | | |

*Height for removing the screen

| Type | Ball | | | | Ball | | | Ball | | | Ball | | |
|----------------------|---|-----|-----|-----|---|-----|------|--|-----|------|---|-----|------|
| Ductile Iron |  | | | |  | | |  | | |  | | |
| Fig | 20STL | | | | 10STBF | | | 10STLBF | | | 20STB | | |
| End Connection | BS21 (JIS B0203) | | | | JIS B2239 10K FF | | | JIS B2239 10K FF | | | JIS B2239 20K RF | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 75 | 106 | 130 | 108 | 106 | 130 | 108 | 106 | 130 | 140 | 106 | 130 |
| 3/4 | 20 | 80 | 106 | 130 | 117 | 109 | 130 | 117 | 109 | 130 | 152 | 109 | 130 |
| 1 | 25 | 90 | 107 | 130 | 127 | 129 | 160 | 127 | 129 | 160 | 165 | 130 | 160 |
| 1 1/4 | 32 | 105 | 129 | 160 | 140 | 132 | 160 | 140 | 132 | 160 | 178 | 135 | 160 |
| 1 1/2 | 40 | 115 | 133 | 160 | 165 | 114 | 230 | 165 | 114 | 230 | 190 | 115 | 230 |
| 2 | 50 | 130 | 114 | 230 | 178 | 121 | 230 | 178 | 121 | 230 | 216 | 120 | 230 |
| 2 1/2 | 65 | | | | 190 | 154 | 400 | 190 | 154 | 400 | 241 | 153 | 400 |
| 3 | 80 | 180 | 154 | 400 | 203 | 163 | 400 | 203 | 163 | 400 | 283 | 162 | 400 |
| 4 | 100 | | | | 229 | 199 | 460 | 229 | 199 | 460 | 305 | 241 | 750 |
| 5 | 125 | | | | 356 | 219 | 460 | 356 | 219 | 460 | | | |
| 6 | 150 | | | | 394 | 292 | 1000 | 394 | 293 | 1000 | 403 | 293 | 1000 |
| 8 | 200 | | | | 457 | 352 | 1500 | 457 | 352 | 1500 | 502 | 352 | 1500 |
| Body & Cap | FCD-S | | | | FCD-S | | | FCD-S | | | FCD-S | | |
| Stem | 403SS | | | | 403SS | | | 403SS | | | 403SS | | |
| Ball | CF8/304SS | | | | CF8/304SS | | | CF8/304SS | | | CF8/304SS | | |
| Ball Seat | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | |
| Gland Packing/O ring | PTFE + NBR | | | | PTFE | | | PTFE + NBR | | | PTFE | | |
| Gasket | PTFE | | | | PTFE | | | PTFE | | | PTFE | | |
| Handle | DI | | | | DI/CS | | | DI/CS | | | DI/CS | | |
| Bore | Reduced Bore | | | | Full Bore | | | Full Bore | | | Full Bore | | |
| Service Conditions | 80°C Gas. 2.4MPa | | | | 120°C W.O.G. 1.4MPa, 160°C W.O.G. 1.0MPa for up to 4 ⁹ , 140°C W.O.G. 1.0MPa for 5 ⁹ & over | | | 80°C Gas. 1.18MPa | | | 250°C W.O.G. 2.8MPa | | |
| Remarks | Gas Service | | | | | | | Gas Service | | | | | |
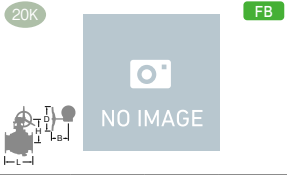
| Type | Ball | | | | Ball | | | 3-Way, 4-Seats, L/T Port Ball | | | | 3-Way, 4-Seats, L/T Port Ball | | | | |
|----------------------|---|-----|-----|-----|---|-----|-----|--|-----|-----|------|---|-----|-----|------|-----|
| Ductile Iron |  | | | |  | | |  | | | |  | | | | |
| Fig | G-20STB | | | | 20STLB | | | 10STB4LAF/10STB4TAF | | | | 10STR4LAF/10STR4TAF | | | | |
| End Connection | JIS B2239 20K RF | | | | JIS B2239 20K RF | | | JIS B2239 10K FF | | | | JIS B2239 10K FF | | | | |
| inch | mm | L | H | D | B | L | H | D | L | H | D | L1 | L | H | D | L1 |
| 1/2 | 15 | | | | | 140 | 106 | 130 | | | | | | | | |
| 3/4 | 20 | | | | | 152 | 109 | 130 | | | | | | | | |
| 1 | 25 | | | | | 165 | 130 | 160 | | | | | | | | |
| 1 1/4 | 32 | | | | | 178 | 135 | 160 | | | | | | | | |
| 1 1/2 | 40 | | | | | 190 | 115 | 230 | 180 | 143 | 400 | 90 | | | | |
| 2 | 50 | | | | | 216 | 120 | 230 | 200 | 152 | 400 | 100 | | | | |
| 2 1/2 | 65 | | | | | 241 | 153 | 400 | 240 | 183 | 460 | 120 | | | | |
| 3 | 80 | | | | | 283 | 162 | 400 | 260 | 190 | 460 | 130 | | | | |
| 4 | 100 | | | | | 305 | 241 | 750 | 330 | 259 | 1000 | 165 | | | | |
| 5 | 125 | | | | | | | | | | | | 340 | 267 | 1000 | 170 |
| 6 | 150 | 403 | 337 | 310 | 165 | 403 | 293 | 1000 | | | | | 400 | 289 | 1000 | 200 |
| 8 | 200 | 502 | 414 | 360 | 210 | 502 | 352 | 1500 | | | | | 450 | 334 | 1500 | 225 |
| Body & Cap | FCD-S | | | | FCD-S | | | FCD-S | | | | FCD-S | | | | |
| Stem | 403SS | | | | 403SS | | | 304SS | | | | 304SS | | | | |
| Ball | CF8/304SS | | | | CF8/304SS | | | CF8 | | | | CF8 | | | | |
| Ball Seat | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | | |
| Gland Packing/O ring | PTFE | | | | PTFE + NBR | | | PTFE | | | | PTFE | | | | |
| Gasket | PTFE | | | | PTFE | | | PTFE | | | | PTFE | | | | |
| Handle | DI | | | | DI/CS | | | DI/CS | | | | DI/CS | | | | |
| Bore | Full Bore | | | | Full Bore | | | Full Bore | | | | Reduced Bore | | | | |
| Service Conditions | 250°C W.O.G. 2.8MPa | | | | 80°C Gas. 2.4MPa | | | 120°C W.O.G. 1.0MPa, 150°C W.O.G. 0.4MPa | | | | 120°C W.O.G. 1.0MPa, 150°C W.O.G. 0.4MPa | | | | |
| Reference Page | | | | | | | | Port Orientation: Page TECH1 | | | | Port Orientation: Page TECH1 | | | | |
| Remarks | Gear Operated | | | | Gas Service | | | 3-Way, 4-Seated, L- or T-Port | | | | 3-Way, 4-Seated, L- or T-Port | | | | |

What is Ductile Iron ?


Gray iron, ductile iron, and malleable iron are the three kinds of iron used for valve construction. Unlike gray iron, which has thin, flake-like molecular formations, the metallic structures of both ductile and malleable iron contain nodular graphite. (Refer to the microscopic views shown here.) Ductile and malleable iron have superior mechanical properties compared to gray iron. They have properties almost equivalent to cast steel, which is an expensive material for industrial valves. Furthermore, their superior casting characteristics and ease of machining help to increase their suitability as a valve material.

Ductile iron outperforms malleable iron owing to its better mechanical characteristics for building the valve body, which is a kind of pressure-containing device. For example, ductile iron has a 20% higher tensile strength and 70% to 80% better elongation than malleable iron. This difference is attributed to the different formation processes of nodulated graphite molecules.


KITZ ductile iron valves are made of JIS FCD-S or ASTM A395 ductile iron. The history of the introduction of ductile iron valves on the market is rather short; however, their demand is steadily increasing owing to their economic advantage as well as the fact that their wide range of service applications is comparable to that of cast steel valves.

This catalog serves to provide the design specifications, construction materials, and external dimensions of the following ductile iron valves and strainers manufactured by KITZ Corporation :

- JIS 10K, 16K, and 20K Gate, Globe, and Check Valves
- JIS 10K and 20K Ball Valves
- JIS 10K, 16K, and 20K Strainers
- ASME 150 and 300 Gate, Globe, and Check Valves

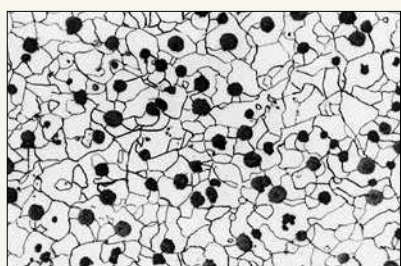

Ductile Iron

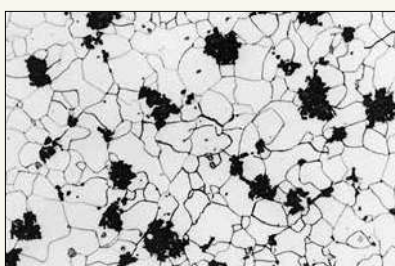

Malleable Iron



Gray Iron

Service Recommendation

For achieving higher mechanical shock resistance under high or low temperature and for achieving better tensile strength and elongation characteristics than those of ordinary gray iron valves, the use of ductile iron valves is highly recommended for the following services, sometimes, in place of cast:

- Piping for steam supply
- Air-conditioning and heating systems
- High-pressure gaseous service in general
- Piping for poisonous gas service

The range of high-pressure gaseous service for iron valves is specified by the Ministry of Economy, Trade and Industry of Japan as follows :

| Valve Material | Poisonous Gas* | Inflammable Gas | Other Gas |
|---------------------------|-----------------|------------------------------------|-----------------------------------|
| Ductile Iron (JIS FCD-S) | | 2.4 MPa maximum -5°C to + 350°C | |
| Ductile Iron (JIS FCD400) | not recommended | 1.6 MPa maximum 0°C to + 250°C | |
| Gray Iron (JIS FC200) | not recommended | | 0.2 MPa maximum 0°C to + 250°C |

*Phosgene and hydrogen cyanide are excluded.

Material Specifications of JIS FCD-S

1. Chemical Composites:

Carbon : 3.00% minimum
 Phosphor : 0.08% maximum
 Silicon : 2.50% maximum; however, 0.08% may be added for every decrease of 0.01% phosphor within the total maximum of 2.75%


2. Mechanical Properties:

Tensile Strength : 412 N/mm² (42 kgf/mm²) minimum
 Yield Strength : 275 N/mm² (28 kgf/mm²) minimum
 Elongation : 18% minimum
 Brinell Hardness : 143 to 187
 Charpy Impact Value :
 a) for Ambient Temperature Service;
 17 N·m/cm² (1.7 kgf·m/cm²) minimum in an average of three test pieces.
 15 N·m/cm² (1.5 kgf·m/cm²) minimum for the lowest impact value.
 b) for -10°C or lower temperature service;
 15.3 N·m/cm² (1.53 kgf·m/cm²) minimum in an average of three test pieces.
 13.3 N·m/cm² (1.33 kgf·m/cm²) minimum for the lowest impact value.


Ductile Iron

Compared Mechanical Properties of JIS Materials


Tensile Strength

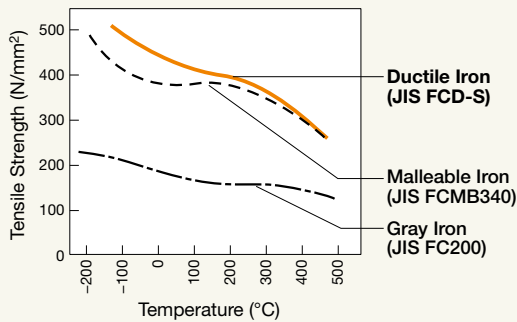


Elongation

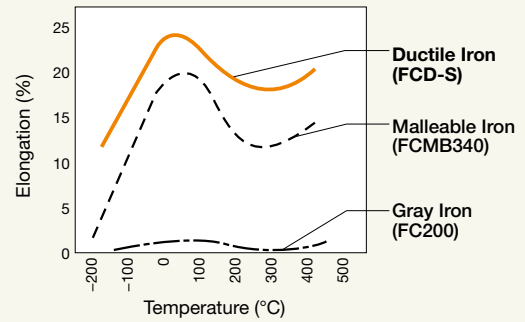

Charpy Impact Value

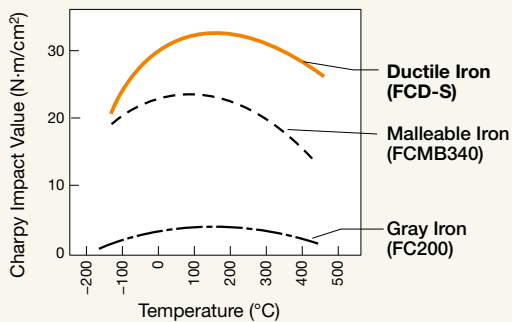

Yield Strength

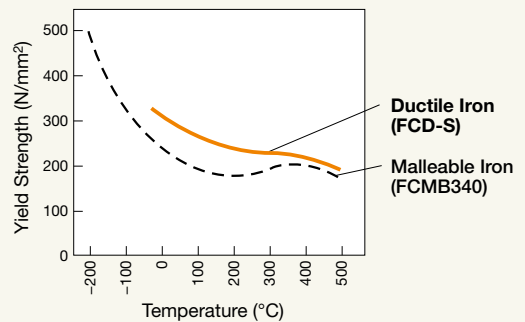

Design Specifications (Please refer to our website (www.kitz.co.jp) or contact KITZ for details.)

| Class | JIS 10K/16K/20K | ASME 150/300 |
|------------------------|--|--------------|
| Face to Face Dimension | JIS B 2011, B 2002, or KITZ Std. | ASME B16. 10 |
| End to End Dimension | JIS B 2051 or KITZ Std. | — |
| End Flange Dimension | JIS B 2239 | ASME B16. 5 |
| End Thread Dimension | JIS B 0203 | — |
| Shell Wall Thickness | KITZ Standard, unless otherwise indicated on the following pages | |

Uniquely Designed Swing Check Valve: Fig. 10SOZ

Features:


Valve Mounting Orientation : Horizontal and Vertical

Plumbing workability is good

Very compact compared to conventional products

Thermal insulation construction is easy

By having internal hinge pin construction, risks in external leakage is only in body/cap connection.

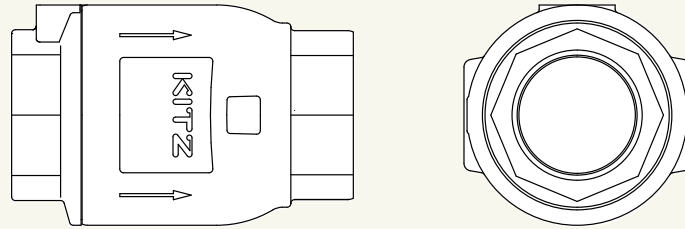


Stop Check Valves: Fig 10SYFBF, 10SPFBOF, 20SYFB, 20SYFBO

Stop check valve is combination of lift check valve and globe valve.

It has a stem in which, when closed prevents disc from coming of the seat and provides tight shutoff (similar to a globe valve).


When stem operates to open position, valve operates as a check valve.

Stem is not connected to the disc and functions to close the valve tightly or to limit travel of the disc in open direction.

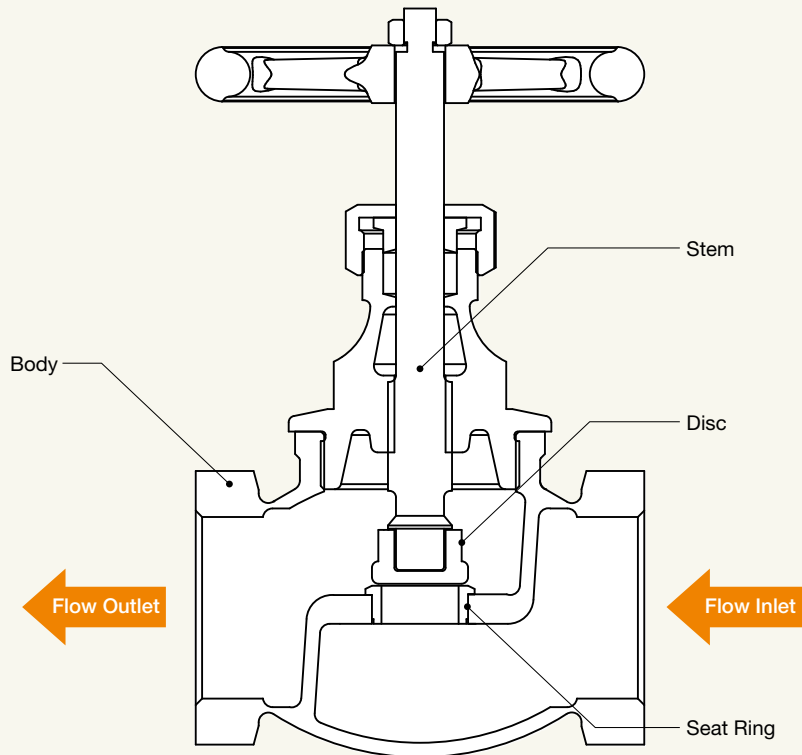


Needle Valve: Fig 10SPNBF

Difference between a needle valve (Fig-1 or Fig-2) and a globe valve (Fig-3) varies in shape of disc as below.

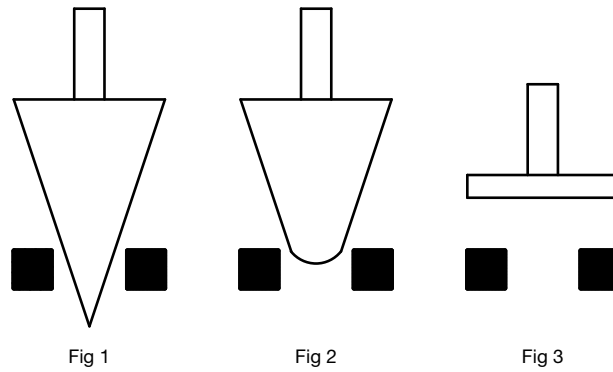

The big difference in needle valve and general globe valve is in flow characteristic. Needle valve is linear characteristic and general globe valve is on-off characteristic. Flow control is better but pressure loss is larger when fully open.

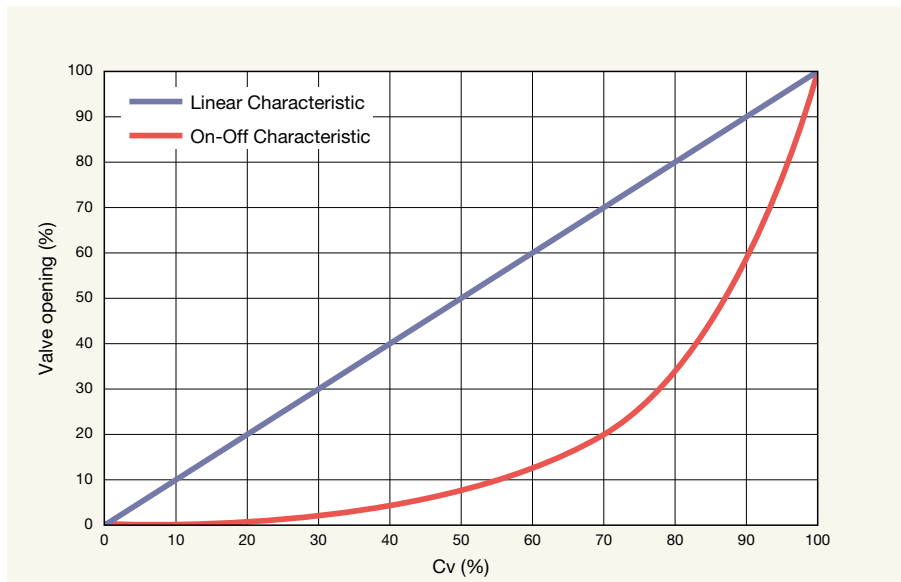

Bellows Seal Globe Valves: 10SPBAWF, 10SPBOWF, 20SYBOW, 20SDBOW, 10SPDBOWF*


Bellow seal valve is a valve with bellows as stem seal and parts. It is often used for high vacuum or nuclear power industry, where strict stem seal is required. Bellows removes influences which changes back pressure that allows valve to protect spring and other internal structure from corrosion and leak flow medium. Substituting stuffing box, bellows is welded with a cover and/or other parts by roll welding or argon arc welding.

* 10/20/150/300UPAW(M), 10/150YPDAW(M)

KITZ

GENERAL CATALOG

Butterfly Valves

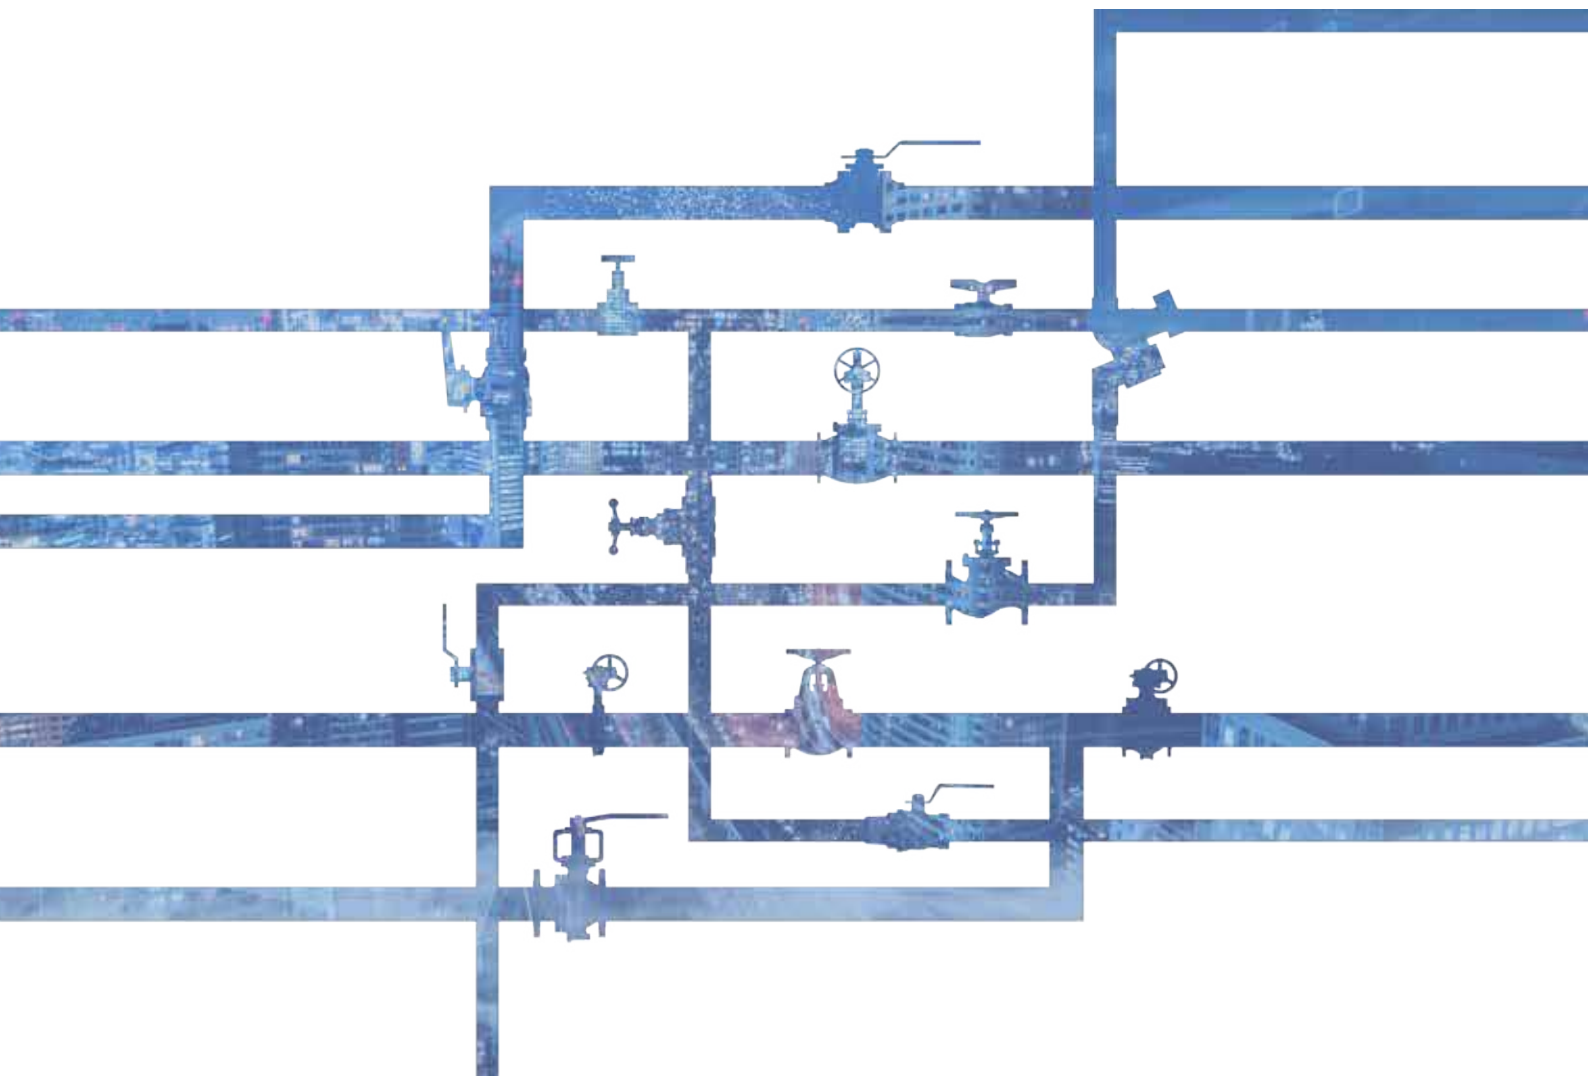

INDEX

| Title | Body Material | Type | Class | End Connection | Features | Size Range | Fig | Page | | | | |
|---|---|---------------------------|---------------|---|---|---|----------------------------------|---|--|--|---|--------------------------|
| Butterfly XJ Series | Al | Concentric | 10K | Wafer | Long Neck (Dew Condensation Prevention) | 11/2 ^B - 8 ^B 11/2 ^B - 12 ^B | 10XJME G-10XJME | 10XJMF G-10XJMF | BFV9 106 | | | |
| | | | | | Short Neck | 11/2 ^B - 6 ^B 11/2 ^B - 12 ^B | 10XJSME G-10XJSME | | | | | |
| | | | | | Long Neck (Dew Condensation Prevention) | 11/2 ^B - 6 ^B 11/2 ^B - 8 ^B | 10XJPE G-10XJPE | | | | | |
| | | | | | Short Neck | 11/2 ^B - 6 ^B 11/2 ^B - 8 ^B | 10XJSPE G-10XJSPE | | | | | |
| | | | | | | 10K/150 | | Long Neck (Dew Condensation Prevention) | 11/2 ^B - 8 ^B 11/2 ^B - 12 ^B 2 ^B - 8 ^B 2 ^B - 12 ^B | 10XJMEA G-10XJMEA PN16XJME G-PN16XJME | | BFV10 107 |
| | | | | | EN PN16 | | | | | | | |
| | | | DJ/DJL Series | | Concentric | 10K | Wafer | | 2 ^B - 6 ^B 2 ^B - 24 ^B 11/2 ^B - 6 ^B 11/2 ^B - 32 ^B | 10DJ(E) G-10DJ(E) 10DJU(E) G-10DJU(E) | 10DJM(E) G-10DJM(E) | BFV11 108 |
| | | | | | | | | Long Neck (Dew Condensation Prevention) | 2 ^B - 24 ^B | G-10DJKUE | | |
| | | | | | | | | | 2 ^B - 24 ^B 11/2 ^B - 24 ^B | VG-10DJ(E) VG-10DJU(E) | VG-10DJM(E) | |
| | | | | | | | | | 2 ^B - 6 ^B 2 ^B - 24 ^B 11/2 ^B - 6 ^B 11/2 ^B - 24 ^B | 16DJ(E) G-16DJ(E) 16DJU(E) G-16DJU(E) | 16DJM(E) G-16DJM(E) | |
| Long Neck (Dew Condensation Prevention) | 2 ^B - 24 ^B | G-16DJKUE | | | | | | | | | | |
| | 2 ^B - 24 ^B 11/2 ^B - 24 ^B | VG-16DJ(E) VG-16DJU(E) | | | | | | VG-16DJM(E) | | | | |
| | | 20K | | | | | | 2 ^B - 6 ^B 2 ^B - 24 ^B | 20DJUE G-20DJUE | 20DJME G-20DJME | BFV13 110 | |
| | | | | | | Long Neck (Dew Condensation Prevention) | 2 ^B - 12 ^B | G-20DJKUE | | | | |
| SA Series | | | | | | 10K 16K | Wafer & FE/FF | | 26 ^B - 48 ^B 26 ^B - 40 ^B | G-10SAUE G-16SAUE | | |
| EJ Series | | | | | | EN PN10 | | | 2 ^B - 8 ^B 10 ^B - 12 ^B | PN10EJMW G-PN10EJMW | PN10EJMQ G-PN10EJMQ PN10EJMF G-PN10EJMF | BFV14 111 |
| DJ/DJL Series | DI (CI for 10DJ 14 ^B to 24 ^B) | Concentric | | | | EN PN16 | Wafer | | 2 ^B - 8 ^B 2 ^B - 24 ^B 2 ^B - 8 ^B 2 ^B - 24 ^B | PN16DJ(E) G-PN16DJ(E) PN16DJM(E) G-PN16DJM(E) | PN16DJU(E) G-PN16DJU(E) | BFV15 112 |
| | | | | | | | | | 2 ^B - 8 ^B 2 ^B - 8 ^B | PN16DJSM(E) G-PN16DJSM(E) | | |
| | | | | 2 ^B - 8 ^B 2 ^B - 24 ^B | PN16DJLM(E) G-PN16DJLM(E) | | | | | | | |
| | | | | 2 ^B - 6 ^B 2 ^B - 12 ^B | PN25DJE G-PN25DJE | | | | | | | |
| | | | | | EN PN25 | Wafer | | 2 ^B - 6 ^B 2 ^B - 12 ^B | PN25DJUE G-PN25DJUE | | BFV16 113 | |
| | | | | | | Lugged | | 2 ^B - 6 ^B 2 ^B - 12 ^B | PN25DJLE G-PN25DJLE | PN25DJLUE G-PN25DJLUE | | |
| | | | BV13F (FSK) | | | EN PN16 | Double Flanged | | 28 ^B - 48 ^B | G-PN16SFKBV13FUE | | |
| | | | DJ/DJL Series | | Concentric | 150 | Wafer | | 2 ^B - 8 ^B 2 ^B - 24 ^B | 150DJH(E) G-150DJH(E) | | BFV17 114 |
| | | | | | | | | | 2 ^B - 8 ^B 2 ^B - 24 ^B | 150DJLH(E) G-150DJLH(E) | | |
| | | | | | | | | 250 | Wafer | | 2 ^B - 8 ^B 2 ^B - 12 ^B | 250DJM(E) G-250DJM(E) |
| | | 150 | | | | | | 14 ^B - 24 ^B | G-150DJM(E) | | | |
| | | 250 | | | | | | 2 ^B - 8 ^B 2 ^B - 12 ^B | 250DJLM(E) G-250DJLM(E) | | | |
| | | 150 | | | | Lugged | | 14 ^B - 24 ^B | G-150DJLM(E) | | | |
| | | 200 | | | | Wafer | | 2 ^B - 8 ^B 2 ^B - 12 ^B | 200DJA(E) G-200DJA(E) | | BFV18 115 | |
| | | 150 | | | | | | 14 ^B - 24 ^B | G-150DJA(E) | | | |
| | | 200 | | | | Lugged | | 2 ^B - 8 ^B 2 ^B - 12 ^B | 200DJLA(E) G-200DJLA(E) | | | |
| | | 150 | | | | | | 14 ^B - 24 ^B | G-150DJLA(E) | | | |
| | | 250 | | | | Wafer | | 2 ^B - 8 ^B 2 ^B - 12 ^B | 250DJA(E) G-250DJA(E) | | BFV19 116 | |
| | | 250 | | | | | Lugged | | 2 ^B - 8 ^B 2 ^B - 12 ^B | 250DJLA(E) G-250DJLA(E) | | |
| DJF Series | | | 10K 16K | FE/FF | | 4 ^B - 24 ^B | G-10DJFU(E) G-16DJFU(E) | | | | | |
| FJ Series | | | 10K | Wafer | FKM Seat | 2 ^B - 6 ^B 2 ^B - 24 ^B | 10FJUF G-10FJUF | | | | | |

Butterfly Valves

BFV


| Title | Body Material | Type | Class | End Connection | Features | Size Range | Fig | Page | |
|--|--|--------------------------------|-----------|--------------------------|---|---|---|---|---------------------|
| NFJ Series | DI (CI for 10DJ 14 ^a to 24 ^b) | Concentric | 10K | Wafer | Nylon 11 Lined | 2 ^b - 6 ^b 2 ^b - 12 ^b 2 ^b - 12 ^b | 10NFJUE(W) G-10NFJUE(W) VG-10NFJUE(W) | 10NFJNE(W) G-10NFJNE(W) VG-10NFJNE(W) | BFV20 117 |
| LJ Series | | | | | PFA Lined | 2 ^b - 6 ^b 2 ^b - 24 ^b | 10LJF G-10LJF | | |
| HDRJ Series (THROTTROL) | | | | | High Rangeability, THROTTROL | 2 ^b - 12 ^b | G-10HRDJUE G-20HRDJUE | | |
| UB Series | SS | Double Eccentric | 10K | Wafer | PTFE Seat, Uni Direction | 11/2 ^b - 6 ^b 11/2 ^b - 24 ^b | 10UB GL-10UB | 10UBM GL-10UBM | BFV21 118 |
| | | | 16K | | | 11/2 ^b - 6 ^b 11/2 ^b - 24 ^b | 16UB GL-16UB | | |
| | | | 150 | | | 11/2 ^b - 6 ^b 11/2 ^b - 24 ^b | 16UBM GL-16UBM | BFV22 119 | |
| | | | 10K | | | 11/2 ^b - 6 ^b 11/2 ^b - 24 ^b | 150UB GL-150UB | | 150UBM GL-150UBM |
| HB Series | SS | Double Eccentric | 20K | Wafer | RPTFE (C/F PTFE) Seat, Bi Direction | 11/2 ^b - 6 ^b 11/2 ^b - 12 ^b | 10UHB G-10UHB | BFV23 120 | |
| | | | 150 | | | 11/2 ^b - 6 ^b 11/2 ^b - 12 ^b | 20UHB G-20UHB | | |
| | | | 10K | | | 11/2 ^b - 6 ^b 11/2 ^b - 12 ^b | 150UHB G-150UHB | | |
| | DI | | 16K | | | 2 ^b - 6 ^b 2 ^b - 14 ^b | 10SHB G-10SHB | | |
| | | | 150 | | | 2 ^b - 6 ^b 2 ^b - 14 ^b | 16SHB G-16SHB | 150SHB G-150SHB | |
| CPD Series CPC Series CPT Series | SS or CS | Double Eccentric Triple Ecc | 150 - 900 | Wafer or Lugged or FE | API 609, PTFE or Rubber or Metal or Laminated | 2 ^b - 24 ^b | <input type="checkbox"/> <input type="checkbox"/> CPD <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> CPL <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> CPT <input type="checkbox"/> <input type="checkbox"/> | BFV24 121 | |
| HBS | CS | Double Ecc | 300 | Lugged | API 609, PTFE, Bi Direction, Dead End Service | 2-1/2 ^b - 5 ^b 6 ^b - 8 ^b | 300SCHBSL G-300SCHBSL | | |
| GE | DI | Concentric | | Grooved | Nylon Lined, Chlorine-Resistant Seat | 2 ^b - 6 ^b 2 ^b - 12 ^b | 300SGECE G-300SGECE | | |
| DRAIN Series | DI | Concentric | 7.5K | FE | Eccentric Valve for Swage | 3 ^b - 12 ^b | G-7.5SVB | BFV25 122 | |
| | | | 10K | | | | G-10SVB | | |
| | | | 7.5K | | | | G-7.5SGBFS | | |
| | | | 10K | | | | G-10SGBFS | | |
| DAMPER | CI | Concentric | 10K | Wafer | Metal Seat | 2 ^b - 12 ^b | 10D GL-10D | | |
| | | | | | | | 10A GL-10A | | |
| | | | | | | | FV UV | | |
| Mini Butterfly | BC SS | | 7.5K | TE | W-NBR Seat | 1/2 ^b - 2 ^b | | BFV26 123 | |

* (Abbreviation) FE: Flanged Ends, FF: Flat face Ends, TE: Threaded Ends

PRODUCT CODING

Butterfly Valves

(Note: Some products do not follow this coding system.)



1 Valve Operation

None Handwheel or Lever
 G, G Ior VG Gear

2 Pressure Class

7.5 7.5K
 10 10K
 16 16K
 20 20K
 PN10 EN PN10
 PN16 EN PN16
 PN25 EN PN25
 150 Class 150
 200 Class 200
 250 Class 250
 300 Class 300

3 Series

XJ
 DJ/DJK/DJL/DJF/SA
 EJ
 FJ
 NFJ
 LJ
 HRDJ
 SHB
 UB
 UHB
 SVB/SGBFS
 D/A
 FV/UV

5 Disc Material

None Ductile Iron (Ni Plated)
 304SS+Cr Plating for UB/UHB/SHB
 U 304SS
 M 316SS
 H 316SS Including Stem
 P 304SS+PPS
 A Aluminum Bronze

6 Seat Material


None NBR
 E EPDM
 W White EPDM
 F FKM
 Q VMQ (Silicon Rubber)

4 End Connection

None Wafer
 S Semi-Lugged
 L Lugged
 F Double Flanged

Butterfly Valves (CPD/CPT/CPC Series)

Please contact KITZ representative for details.



1 Valve Operation

None Lever
 G Gear
 E Electric Actuator
 Y, YS Pneumatic Actuator

2 Class

150, 300, 10-30K, PN10-40 For CPD
 30K For CPC
 150-2500, 10-40K, PN10-40 For CPT

3 Symbol of Shell Material

SC Carbon Steel
 U Stainless Steel

4 Series

CPD CPD Series/ Double Eccentric
 CPC CPC Series/ Double Eccentric
 CPT CPT Series/ Tripple Eccentric

5 End Connection

None (or 924) ... Wafer
 L (or 925) Lugged
 F (or 926) Double Flanged

6 Seat Material

"For CPD/CPC Series of ④"
 None (or ST) PTFE
 H (ot FM) Metal
 FS (or TF) PTFE + Metal
 RN (or RS) NBR
 RE (or RS) EPDM
 RF (or RS) FKM
 "For CPT Series of ④"
 None (or TE) Laminate (Metal + Graphite or PTFE)
 H (or TE) Metal

7 Shell Material

For U of ③
 None CF8
 M CF8M
 For SC of ③
 None WCB
 BL LCB
 CL LCC

<Other Information>

Production Size Up to 160^B (4000^A)
 Standard API/JIS/ASME/DIN/AWWA/ISO/BS
 Approval PED/CE
 API 607 Fire Safe Shell MESC 77/300 "TAT"
 API 609 Category A/B SIL III
 OHSAS 18001 UL

Design Specification

Butterfly Valves

| Series | Fig | Seat | Service Temp Range (EPDM: Not Frozen) | Continuous Service Temp (Not Frozen) | Valve Design | Face to Face Dimension | Coupling Flange | Remarks |
|---------------|-------------------------------|---------------------------|--|---|-------------------------------------|--|---|---|
| XJ | 10XJME 10XJMEA PN16XJME | EPDM | -20°C to +120°C | -20°C to +100°C | | API609 Category A, EN558 Basic Series 20, ISO5752-20, JIS B2002(2032) 46 Series | JIS B2220/2239 10K ASME Class 150, JIS B2220/2239 10K *1 EN1092 PN16 *2 | ISO 5211/*1 With Centering Sleeves |
| DJ/DJL | DJ/DJL DJE/DJLE | NBR EPDM | 0°C to +70°C -20°C to +120°C | -10°C to +100°C | API609, MSS SP-67, EN593, JIS B2032 | API609 Category A, MSS SP-67 W-1(2 ^B -14 ^B)W-2(16 ^B -24 ^B), EN558 Basic Series 20, ISO5752-20, JIS B2002(2032) 46 Series | ASME class 150/200/250, JIS B2220/2239 10K/16K/20K, EN1092 PN10/16/25, BS 10(AS 2129) Table D&E | ISO 5211 / 2 ^B to 12 ^B : Molded-in (Bonded) Seat, Other Sizes: Replaceable Seat |
| SA | SAUE | EPDM | -20°C to +120°C | 0°C to +100°C | | JIS B2002(2032) 46 Series, 1100A: KITZ Standard | JIS B2239 10K/16K | Flanged Ends |
| DJF | DJFU DJFUE | NBR EPDM*2 | 0°C to +70°C -20°C to +120°C | -10°C to +100°C | JIS B2032 | JIS B2002(2032) 123 Series except 4 ^B of 10K/16K & 8 ^B /12 ^B /14 ^B /16 ^B of 16K | JIS B2220 10K/16K | *2 Dead End Service: 0°C to +90°C |
| FJ | FJUF | FKM | 5°C to +90°C | | | JIS B2002(2032) 46 Series | JIS B2220 10K | ISO 5211 |
| NFJ | NFJUE/W NFJNE/W | EPDM or W-NBR | 0°C to +60°C 0°C to +40°C | | | JIS B2002(2032) 46 Series | JIS B2220 5K/10K | ISO 5211 |
| EJ | EJMW EJMQ EJMF | W-NBR VMQ FKM | 0°C to +80°C -10°C to +180°C 0°C to +130°C | | EN593 | API609, EN558 Basic Series 20, ISO5752-20, JIS B2002(2032) 46 Series | ASME Class 125/150, EN1092 PN10/16, BS 10(AS 2129) Table E | ISO 5211 |
| LJ | LJF | PFA | -10°C to +150°C | | | API609 cat. A, EN558 Basic Series 20, ISO5752-20, JIS B2002(2032) 46 Series | JIS B2220/2239 10K (ASME Class 150: Option) | ISO 5211 |
| UB | UB UB | PTFE C/F PTFE | -29°C to +160°C -29°C to +200°C | | Wall Thickness ASME B16.34 | Up to 6 ^B : ISO 5752 Short/ JIS B2002 46 Series, 8 ^B & Above: ISO 5752 Medium/ JIS B2002 47 Series | ASME Class 150, JIS B2220 10K/16K | Uni Direction, Double Offset |
| HB | SHB UHB | C/F PTFE C/F PTFE | -10°C to +200°C -29°C to +200°C | | | JIS B2002(2032) 46 Series | ASME Class 150, JIS B2220 10K/16K/20K ASME Class 150, JIS B2220 5K/10K/16K/20K | Bi-Directional, Double Offset, ISO5211 |
| HRDJ | HJDJUE | EPDM | -20°C to +120°C | 0°C to +100°C | | JIS B2002(2032) 46 Series | JIS B2220 5K/10K/16K/20K | 160:1 of Rangeability, Equal % Flow, Tight Shut Off, Preventing Erosion by Jet Flow |
| D/A | D/A | Metal | 0°C to +230°C | | | KITZ Standard | JIS B2220 5K/10K | |
| FV/UV | FV/UV | 304+W NBR | 0°C to +70°C | | | KITZ Standard | - | |
| CPD | | Metal or RTFE or NBR/EPDM | | | API609 Double Offset | API 609 Category B, ISO5752-13 | | Wafer, Lugged, Double Flanged |
| CPC (JIS 30K) | | NBR or EPDM | | | API609 Double Offset | AWWA etc | | CF8/CF8M, WCB/LCB/LCC |
| CPT | | Laminate or Metal | | | API609 Triple Offset | | | |
| Drain | G-7.5/10SVB G-7.5/10SGBFS | | | | | JIS B2062 JWWA B138 | | End Flange: JIS G5527 End Flange: JWWA B138 |

Corrosion Resistant Levels for Disc and Seat Materials Against Fluid

Table below indicates applicable fluids represented against each disc/rubber seat material. Please refer to 'Cautions' in 'Product Selection' of 'Cautions for Handling' at the end of this material for other cautions. Also, contact KITZ representative for any other queries. Temperature and operational conditions may cause differences.

| Fluid | Material | Wetted Part Materials (Disc or Body Material for UB/HB/FV/UV) | | | | Seat Material | | | |
|----------------------------------|----------|--|--------------------|------------------|----------|-----------------|-------------------|----------------|-----|
| | | FCD450 | SCS13A | SCS14A | C37771BE | NBR W-NBR | EPDM* | PTFE | PFA |
| Sulfurous Acid | | × | ○ | ○ | × | △ | △ | ◎ | ◎ |
| Ammonia (Anhydrous Liquid) | | ○ | ◎ | ◎ | × | △ | ○ | ◎ | ◎ |
| Ammonia (Solution) | | ○ | ◎ | ◎ | × | ○ | ○ | ◎ | ◎ |
| Ethane | | ○ | ○ | ○ | — | ◎ | × | ◎ | ◎ |
| Ethyl Alcohol | | ○ | ◎ | ◎ | ○ | ○ | ◎ | ◎ | ◎ |
| Hydrochloric Acid | | × | × | × | × | △ | ○ | ◎ | ◎ |
| Sea Water | | × | ○ | ○ | △ | ◎ | ◎ | ◎ | ◎ |
| Gasoline (Refined/Unleaded) | | ○ | ◎ | ◎ | ◎ | △ | × | ◎ | ◎ |
| Air | | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ |
| Mineral Oil | | ○ | ◎ | ◎ | ○ | ◎ | × | ◎ | ◎ |
| Heavy Oil (A,B,C) | | △ | ◎ | ◎ | — | × | × | ◎ | ◎ |
| Acetic Acid (10%) | | △ | ◎ | ◎ | × | × | ○ | ◎ | ◎ |
| Oxygen (Cold) | | ○ | ◎ | ◎ | ◎ | ○ | ○ | ◎ | ◎ |
| Lubricating Oil (Petroleum Base) | | ◎ | ◎ | ◎ | ○ | ◎ | × | ◎ | ◎ |
| Vegetable Oil | | △ | ◎ | ◎ | — | ◎ | △ | ◎ | ◎ |
| Steam (100°C) | | ◎ | ◎ | ◎ | ◎ | × | ○ | ◎ | ◎ |
| Hydrogen Gas (Cold) | | ○ | ◎ | ◎ | — | ○ | ○ | ◎ | ◎ |
| Petroleum Oil (Refined) | | — | ◎ | ◎ | — | ○ | × | ◎ | ◎ |
| Soybean Oil | | △ | ◎ | ◎ | ○ | ◎ | △ | ◎ | ◎ |
| Carbonic Acid | | × | ○ | ○ | — | ○ | ○ | ◎ | ◎ |
| Calcium Carbonate | | × | ○ | ○ | △ | ◎ | ◎ | ◎ | ◎ |
| Natural Gas | | ◎ | ◎ | ◎ | — | ○ | × | ◎ | ◎ |
| Animal Fat | | ◎ | ◎ | ◎ | — | ◎ | × | ◎ | ◎ |
| Propane Gas | | ○ | ○ | ◎ | — | ◎ | × | ◎ | ◎ |
| Water (Fresh ≤ 40°C) | | △ | ◎ | ◎ | ◎ | ○ | ◎ | ◎ | ◎ |
| Water (Hot ≤ 40-100°C) | | △ | ◎ | ◎ | ◎ | × | ○ | ◎ | ◎ |
| Methyl Alcohol | | ○ | ◎ | ◎ | ○ | ○ | ◎ | ◎ | ◎ |
| Sulfuric Acid (7%) | | × | △ | ○ | — | ○ | ○ | ◎ | ◎ |
| Sulfuric Acid (20%) | | × | × | × | △ | × | ○ | ◎ | ◎ |
| Sulfuric Acid (≥ 50%) | | × | × | × | × | × | ○ | ◎ | ◎ |
| Ammonium Sulfate | | △ | ○ | ○ | — | ◎ | ◎ | ◎ | ◎ |
| Products | | DJ·DJL | DJ·DJL· UB·HRDJ | XJ·DJ· DJL·UV | FV | DJ·DJL FV·UV | XJ·DJ·DJL HRDJ | UB·SHB· UHB | LJ |

◎=Excellent ○=Good △=Less Recommended ×=Not Recommended —=Contact KITZ representative for details

* EPDM is not applicable for oil.

Differential Pressure Control Allowance and Differential Pressure Control Ratio


| Structure | Nominal Diameter | | Differential Pressure Control Allowance (kPa) | | Differential Pressure Control Ratio |
|----------------------------|------------------|-----------|---|-----|-------------------------------------|
| | NPS | DN | Fluid | Gas | |
| Rubber Sheet | 2 ~ 8 | 50 ~ 200 | 200 | 100 | 0.30 |
| | 10 ~ 12 | 250 ~ 300 | 150 | 100 | 0.25 |
| | 14 ~ 24 | 350 ~ 600 | 100 | 50 | 0.20 |
| PTFE Sheet (for UB Series) | 2 ~ 24 | 50 ~ 600 | 300 | 200 | 0.30 |
| Damper | 2 ~ 24 | 50 ~ 300 | — | 30 | 0.10 |

[Note]


- In the event of using the product at service conditions exceeding values of table above, kindly contact KITZ representative.
- Differential Pressure is pressure differences between primary side pressure and secondary side pressure. ($\Delta P = p_1 - p_2$)
- Pressure difference is represented by the values of differences in pressure divided by pressure of primary side. (absolute pressure)

Bolt/Nut

Hexagon Head Bolt + Hexagon Nut



*Size 24~32" require Additional Hexagon Head Bolts.




Hexagon Head Bolt + Hexagon Nut for XJ Series/DJ Series/HRDJ Series

(mm)

| Flange | | ASME Class 150/200/250 | | | PN6 | | | EN PN10 | | | EN PN16 | | | EN PN25 | | | BS 10 Table E | | | JIS 10K | | | JIS 16K/20K | | | | |
|--------|-----|------------------------|-------------|--------|------|-----|--------|---------|-----|--------|---------|-----|--------|---------|-----|--------|---------------|-----|--------|---------|-----|--------|-------------|---------|---------|--------|----|
| NPS | DN | Size | L (inch/mm) | Number | Size | L | Number | Size | L | Number | Size | L | Number | Size | L | Number | Size | L | Number | Size | L | Number | Size | L (16K) | L (20K) | Number | |
| 1 1/2 | 40 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | M16 | 85 | 4 | - | - | - | - | |
| 2 | 50 | 5/8 | 4.25 | 108 | 4 | M12 | 90 | 4 | M16 | 105 | 4 | M16 | 105 | 4 | M16 | 110 | 4 | 5/8 | 95 | 4 | M16 | 95 | 4 | M16 | 95 | 100 | 8 |
| 2 1/2 | 65 | 5/8 | 4.75 | 121 | 4 | M12 | 90 | 4 | M16 | 105 | 4 | M16 | 105 | 4 | M16 | 115 | 8 | 5/8 | 100 | 4 | M16 | 105 | 4 | M16 | 105 | 105 | 8 |
| 3 | 80 | 5/8 | 4.75 | 121 | 4 | M16 | 100 | 4 | M16 | 105 | 8 | M16 | 105 | 8 | M16 | 120 | 8 | 5/8 | 100 | 4 | M16 | 105 | 8 | M20 | 110 | 115 | 8 |
| 4 | 100 | 5/8 | 5.00 | 127 | 8 | M16 | 110 | 4 | M16 | 115 | 8 | M16 | 115 | 8 | M20 | 130 | 8 | 5/8 | 110 | 8 | M16 | 110 | 8 | M20 | 120 | 125 | 8 |
| 5 | 125 | 3/4 | 5.25 | 133 | 8 | M16 | 115 | 8 | M16 | 115 | 8 | M16 | 115 | 8 | M24 | 140 | 8 | 5/8 | 115 | 8 | M20 | 120 | 8 | M22 | 125 | 140 | 8 |
| 6 | 150 | 3/4 | 5.50 | 140 | 8 | M16 | 115 | 8 | M20 | 120 | 8 | M20 | 120 | 8 | M24 | 145 | 8 | 3/4 | 115 | 8 | M20 | 125 | 8 | M22 | 130 | 140 | 12 |
| 8 | 200 | 3/4 | 5.75 | 146 | 8 | M16 | 125 | 8 | M20 | 130 | 8 | M20 | 130 | 12 | M24 | 150 | 12 | 3/4 | 125 | 8 | M20 | 130 | 12 | M22 | 140 | 150 | 12 |
| 10 | 250 | 7/8 | 6.50 | 165 | 12 | M16 | 135 | 12 | M20 | 140 | 12 | M24 | 150 | 12 | M27 | 170 | 12 | 3/4 | 140 | 12 | M22 | 150 | 12 | M24 | 150 | 170 | 12 |
| 12 | 300 | 7/8 | 7.00 | 178 | 12 | M20 | 150 | 12 | M20 | 155 | 12 | M24 | 160 | 12 | M27 | 180 | 16 | 7/8 | 160 | 12 | M22 | 160 | 16 | M24 | 170 | 180 | 16 |
| 14 | 350 | 1 | 7.50 | 191 | 12 | - | - | - | M20 | 155 | 16 | M24 | 170 | 16 | - | - | - | - | - | - | M22 | 160 | 16 | - | 180 | 190 | 16 |
| 16 | 400 | 1 | 8.50 | 216 | 16 | - | - | - | - | - | - | M27 | 200 | 16 | - | - | - | - | - | - | M24 | 190 | 16 | - | 210 | 230 | 16 |
| 18 | 450 | 1 1/8 | 9.25 | 235 | 16 | - | - | - | - | - | - | M27 | 210 | 20 | - | - | - | - | - | - | M24 | 210 | 20 | - | 230 | 245 | 20 |
| 20 | 500 | 1 1/8 | 10.25 | 260 | 20 | - | - | - | - | - | - | M30 | 230 | 20 | - | - | - | - | - | - | M24 | 220 | 20 | - | 250 | 260 | 20 |
| 22 | 550 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | M30 | 260 | 20 | - | 290 | 300 | 20 |
| 24 | 600 | 1 1/4 | 11.75 | 298 | 20 | - | - | - | - | - | - | M33 | 270 | 20 | - | - | - | - | - | - | M30 | 260 | 20 | - | 290 | 300 | 20 |
| | | | | | | | | | | | | | | | | | | | | | | 70* | 8* | - | 90* | 100* | 8* |
| 26 | 650 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | M30 | 270 | 16 | - | - | - | - |
| | | | | | | | | | | | | | | | | | | | | | | 65* | 16* | - | - | - | - |
| 28 | 700 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | M30 | 270 | 16 | - | - | - | - |
| | | | | | | | | | | | | | | | | | | | | | | 70* | 16* | - | - | - | - |
| 30 | 750 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | M30 | 300 | 16 | - | - | - | - |
| | | | | | | | | | | | | | | | | | | | | | | 70* | 16* | - | - | - | - |
| 32 | 800 | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | M30 | 300 | 20 | - | - | - | - |
| | | | | | | | | | | | | | | | | | | | | | | 70* | 16* | - | - | - | - |

BFV Butterfly Valves

Hexagon Head Bolts.




Lugged Type

Hexagon Head Bolt for DJL

(mm)

| Flange | | ASME Class 150/200/250 | | | | EN PN10 | | | EN PN16 | | | EN PN25 | | | |
|--------|-----|------------------------|-------------|-----|--------|---------|----|--------|---------|----|--------|---------|-------|---------|--------|
| NPS | DN | Size | L (inch/mm) | | Number | Size | L | Number | Size | L | Number | Size | Steel | Ductile | Number |
| | | | | | | | | | | | | | | | L |
| 2 | 50 | 5/8 | 1.375 | 35 | 8 | M16 | 38 | 8 | M16 | 38 | 8 | M16 | 40 | | 8 |
| 2 1/2 | 65 | 5/8 | 1.500 | 38 | 8 | M16 | 40 | 8 | M16 | 40 | 8 | M16 | 40 | | 16 |
| 3 | 80 | 5/8 | 1.625 | 41 | 8 | M16 | 40 | 16 | M16 | 40 | 16 | M16 | 45 | 40 | 16 |
| 4 | 100 | 5/8 | 1.875 | 48 | 16 | M16 | 40 | 16 | M16 | 40 | 16 | M20 | 45 | 40 | 16 |
| 5 | 125 | 3/4 | 1.875 | 48 | 16 | M16 | 40 | 16 | M16 | 40 | 16 | M24 | 50 | 45 | 16 |
| 6 | 150 | 3/4 | 2.000 | 51 | 16 | M20 | 45 | 16 | M20 | 45 | 16 | M24 | 50 | 45 | 16 |
| 8 | 200 | 3/4 | 2.125 | 54 | 16 | - | - | - | M20 | 45 | 24 | M24 | 55 | 50 | 24 |
| 10 | 250 | 7/8 | 2.375 | 60 | 24 | - | - | - | M24 | 53 | 24 | M27 | 60 | 55 | 24 |
| 12 | 300 | 7/8 | 2.625 | 67 | 24 | - | - | - | M24 | 60 | 24 | M27 | 65 | 60 | 32 |
| 14 | 350 | 1 | 2.750 | 70 | 24 | - | - | - | M24 | 60 | 32 | - | - | - | - |
| 16 | 400 | 1 | 3.000 | 76 | 32 | - | - | - | M27 | 70 | 32 | - | - | - | - |
| 18 | 450 | 1 1/8 | 3.375 | 86 | 32 | - | - | - | M27 | 75 | 40 | - | - | - | - |
| 20 | 500 | 1 1/8 | 3.500 | 89 | 40 | - | - | - | M30 | 80 | 40 | - | - | - | - |
| 24 | 600 | 1 1/4 | 4.000 | 102 | 40 | - | - | - | M33 | 90 | 40 | - | - | - | - |



Hexagon Head Bolt + Hexagon Nut for LJ Series

(mm)

| Flange | | JIS 10K | | | |
|--------|-----|---------|-----|----|--------|
| DN | NPS | Size | L | B | Number |
| 50 | 2 | M16 | 90 | 38 | 4 |
| 65 | 2½ | M16 | 105 | 38 | 4 |
| 80 | 3 | M16 | 105 | 38 | 4 |
| 100 | 4 | M16 | 105 | 38 | 8 |
| 125 | 5 | M20 | 120 | 46 | 8 |
| 150 | 6 | M20 | 130 | 52 | 8 |
| 200 | 8 | M20 | 150 | 52 | 8 |
| 250 | 10 | M22 | 160 | 56 | 12 |
| 300 | 12 | M22 | 170 | 56 | 12 |

Hexagon Head Bolt + Hexagon Nut for UB Series

(mm)

| Flange | | JIS 10K | | | | JIS 16K | | | | ASME Class 150 | | | |
|--------|-----|---------|-----|----|--------|---------|-----|----|--------|----------------|-----|----|--------|
| DN | NPS | Size | L | B | Number | Size | L | B | Number | Size | L | B | Number |
| 40 | 1½ | M16 | 90 | 38 | 4 | M16 | 90 | 38 | 4 | ½ | 90 | 38 | 4 |
| 50 | 2 | M16 | 100 | 38 | 4 | M16 | 100 | 38 | 4 | ⅝ | 105 | 38 | 4 |
| 65 | 2½ | M16 | 110 | 38 | 4 | M16 | 110 | 38 | 4 | ⅝ | 110 | 38 | 4 |
| 80 | 3 | M16 | 110 | 38 | 8 | M20 | 120 | 46 | 8 | ⅝ | 115 | 38 | 4 |
| 100 | 4 | M16 | 115 | 38 | 8 | M20 | 130 | 52 | 8 | ⅝ | 130 | 44 | 8 |
| 125 | 5 | M20 | 130 | 52 | 8 | M22 | 130 | 56 | 8 | ¾ | 140 | 52 | 8 |
| 150 | 6 | M20 | 130 | 52 | 8 | M22 | 140 | 56 | 8 | ¾ | 140 | 52 | 8 |
| 200 | 8 | M20 | 150 | 52 | 12 | M22 | 160 | 56 | 12 | ¾ | 160 | 52 | 8 |
| 250 | 10 | M22 | 160 | 56 | 12 | M24 | 170 | 60 | 12 | ⅞ | 180 | 56 | 12 |
| 300 | 12 | M22 | 170 | 56 | 16 | M24 | 180 | 60 | 16 | ⅞ | 190 | 56 | 12 |

* Sizes apply to both hexagon bolt with nut and hexagon head bolt. (set bolt)

Hexagon Head Bolt + Hexagon Nut for UB Series

(mm)

| Flange | | JIS 10K | | | | JIS 16K/20K | | | | ASME Class 150 | | | |
|--------|-----|---------|-----|----|--------|-------------|-----|----|--------|----------------|-----|----|--------|
| DN | NPS | Size | L | B | Number | Size | L | B | Number | Size | L | B | Number |
| 40 | 1½ | M16 | 90 | 38 | 4 | M16 | 90 | 38 | 4 | ½ | 90 | 38 | 4 |
| 50 | 2 | M16 | 110 | 40 | 4 | M16 | 110 | 40 | 8 | ⅝ | 110 | 35 | 4 |
| 65 | 2½ | M16 | 115 | 35 | 4 | M16 | 115 | 35 | 8 | ⅝ | 120 | 35 | 4 |
| 80 | 3 | M16 | 115 | 35 | 8 | M20 | 125 | 40 | 8 | ⅝ | 125 | 35 | 4 |
| 100 | 4 | M16 | 120 | 35 | 8 | M20 | 135 | 40 | 8 | ⅝ | 130 | 35 | 8 |
| 125 | 5 | M20 | 135 | 40 | 8 | M22 | 140 | 45 | 8 | ¾ | 140 | 40 | 8 |
| 150 | 6 | M20 | 140 | 45 | 8 | M22 | 145 | 45 | 12 | ¾ | 140 | 40 | 8 |
| 200 | 8 | M20 | 145 | 45 | 12 | M22 | 155 | 45 | 12 | ¾ | 150 | 40 | 8 |
| 250 | 10 | M22 | 155 | 40 | 12 | M24 | 170 | 50 | 12 | ⅞ | 165 | 40 | 12 |
| 300 | 12 | M22 | 165 | 40 | 16 | M24 | 180 | 45 | 16 | ⅞ | 180 | 45 | 12 |

* Sizes apply to both hexagon bolt with nut and hexagon head bolt. (set bolt)

Hexagon Head Bolt + Hexagon Nut for D/A Type Damper

(mm)

| Flange | | JIS 5K | | | | JIS 10K | | | |
|--------|-----|--------|-----|----|--------|---------|-----|----|--------|
| DN | NPS | Size | L | B | Number | Size | L | B | Number |
| 50 | 2 | M12 | 90 | 30 | 4 | M16 | 100 | 38 | 4 |
| 65 | 2½ | M12 | 100 | 30 | 4 | M16 | 110 | 38 | 4 |
| 80 | 3 | M16 | 110 | 38 | 8 | M16 | 120 | 38 | 8 |
| 100 | 4 | M16 | 120 | 38 | 8 | M16 | 130 | 38 | 8 |
| 125 | 5 | M16 | 130 | 38 | 8 | M20 | 140 | 52 | 8 |
| 150 | 6 | M16 | 140 | 38 | 8 | M20 | 150 | 52 | 8 |
| 200 | 8 | M20 | 150 | 52 | 12 | M20 | 160 | 52 | 12 |
| 250 | 10 | M20 | 170 | 52 | 12 | M22 | 180 | 56 | 12 |
| 300 | 12 | M20 | 180 | 52 | 16 | M22 | 190 | 56 | 16 |

* Above bolt sizes are for UB Series and D/A Type Damper with gasket of 3mm.

Pipe

When butterfly valve is being opened, movement of disc may be interrupted by pipe internals, where butterfly valve is connected to welded pipe flange in illustration on the right. Use of pipes indicated in the table on the right is recommended. Valve-to-Flange centering must be done accurately when installing valve to pipeline.

Double Welding

| Valve Series | XJ Series | | | DJ Series | | | UB Series | | | HB Series | | | D/A Damper | | | LJ Series | | | | |
|--------------|-----------|-----|-----|-----------|----|-----|-----------|----|-----|-----------|----|-----|------------|----|-----|-----------|-----|-----|----------|--|
| | DN | NPS | SGP | Schedule | | SGP | Schedule | | 10S | Schedule | | SGP | Schedule | | SGP | Schedule | | SGP | Schedule | |
| | | | | 20 | 40 | | 20 | 40 | | 20 | 40 | | 20 | 40 | | 40 | 40S | | | |
| 40 | 1 1/2 | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | — | — | — | — | — | — | |
| 50 | 2 | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | — | — | — | — | — | — | |
| 65 | 2 1/2 | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | — | — | — | — | — | — | |
| 80 | 3 | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | — | — | — | — | — | — | |
| 100 | 4 | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | — | — | — | — | — | — | |
| 125 | 5 | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | — | — | — | — | — | — | |
| 150 | 6 | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | — | — | — | — | — | — | |
| 200 | 8 | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | — | — | — | — | — | — | |
| 250 | 10 | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | — | — | — | — | — | — | |
| 300 | 12 | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | — | — | — | — | — | — | |
| 350 | 14 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| 400 | 16 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| 450 | 18 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| 500 | 20 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| 550 | 22 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| 600 | 24 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | |

Single Welding/TS Flange

| Valve Series | XJ Series | | | DJ Series | | | UB Series | | | HB Series | | | D/A Damper | | | | | | |
|--------------|-----------|-----|-----|-----------|----|----|-----------|----|-----|-----------|----|----|------------|----------|----|----|-----|----------|---|
| | DN | NPS | SGP | Schedule | | TS | Schedule | | 10S | Schedule | | TS | SGP | Schedule | | TS | SGP | Schedule | |
| | | | | 20 | 40 | | 20 | 40 | | 20 | 40 | | | 20 | 40 | | | | |
| 40 | 1 1/2 | ● | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | ● | — | — | — | — |
| 50 | 2 | ● | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | ● | — | — | — | — |
| 65 | 2 1/2 | ● | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | ● | — | — | — | — |
| 80 | 3 | ● | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | ● | — | — | — | — |
| 100 | 4 | ● | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | ● | — | — | — | — |
| 125 | 5 | ● | ● | ● | ● | ● | — | ● | ● | ● | ● | ● | ● | ● | ● | — | — | — | — |
| 150 | 6 | ● | ● | ● | ● | × | — | ● | ● | ● | × | ● | ● | ● | ● | — | — | — | — |
| 200 | 8 | ● | ● | ● | ● | × | — | ● | ● | ● | × | ● | ● | ● | ● | — | — | — | — |
| 250 | 10 | ● | ● | ● | ● | × | — | ● | ● | ● | × | ● | ● | ● | ● | — | — | — | × |
| 300 | 12 | ● | ● | ● | ● | × | — | ● | ● | ● | × | ● | ● | ● | ● | — | — | — | × |
| 350 | 14 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | × |
| 400 | 16 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | ● |
| 450 | 18 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | ● |
| 500 | 20 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | ● |
| 550 | 22 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | ● |
| 600 | 24 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | ● |

Sizes of Lined Steel Pipes

In case of connecting to vinyl chloride line steel pipes, size of flange must be larger than the minimum inside diameter in table below. When connecting to pulverulent polyethelene line pipes, no special care is required.

Unit: mm

| Valve Series | Size | DN | NPS | | | | | | | | | | | | | | | | |
|--------------|------|----|-------|----|-------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|
| | | | 1 1/2 | 2 | 2 1/2 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | |
| XJ Series | | | 28 | 41 | 57 | 71 | 93 | 117 | 142 | 193 | 244 | 292 | — | — | — | — | — | — | |
| DJ Series | | | 28 | 32 | 52 | 75 | 92 | 118 | 145 | 195 | 244 | 292 | 332 | 379 | 427 | 473 | 513 | 566 | |
| UB Series | | | — | 33 | 57 | 71 | 88 | 118 | 140 | 190 | 239 | 281 | 327 | 373 | 424 | 471 | — | 567 | |
| HB Series | | | 30 | 44 | 56 | 77 | 97 | 123 | 146 | 200 | 245 | 295 | — | — | — | — | — | — | |
| D/A Damper | | | — | 36 | 53 | 69 | 86 | 119 | 139 | 190 | 240 | 288 | — | — | — | — | — | — | |

Note: When connecting a pipe with diameter smaller than the values in table above may cause interference of the pipe and disc.


Indicator

When insulating a valve with a gear unit, in order to display open degree outside of insulation material, optional component to extend the indicator is required.

| Size | Valve Series | | G-10XJ | G-10DJ | G-16DJ | G-20DJ | GL-10/16/150 UB | G-10/16/150 HB | G-10HRDJ | G-10LJF |
|------|--------------|-----|--------|--------|--------|--------|-----------------|----------------|----------|---------|
| | DN | NPS | | | | | | | | |
| 40 | 1 1/2 | | | | — | | | | | — |
| 50 | 2 | | | | | | | | | |
| 65 | 2 1/2 | | | | | | | | | |
| 80 | 3 | | | | | | | | | |
| 100 | 4 | | | | | | | | | |
| 125 | 5 | | | | | | | | | |
| 150 | 6 | | | | | | | | | |
| 200 | 8 | | | | | | | | | |
| 250 | 10 | | | | | | | | | |
| 300 | 12 | | | | | | | | | |
| 350 | 14 | | | | | | | | | |
| 400 | 16 | | | | | | | | | |
| 450 | 18 | | | | | | | | | |
| 500 | 20 | | | | | | | | | |
| 550 | 22 | | | | | | | | | |
| 600 | 24 | | | | | | | | | |



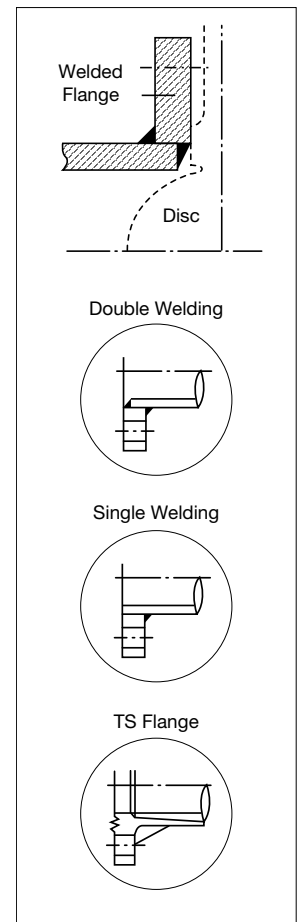

*1 Contact KITZ representative for products with material/paint/connection option for indicator mounting on G-10DJ Series. OS SET2CJ may be selected.





*2 Contact KITZ representative for products with material/paint/connection option for indicator mounting on G-10DJ Series. OS SET2 may be selected.



| Type | XJ Series | | | | XJ Series | | | | XJ Series | | | XJ Series | | | |
|---------------------------|--|----|-----|-----|--|-----|-----|-----|---|-----|-----|---|-----|-----|-----|
| Butterfly Valve | | | | | | | | | | | | | | | |
| Fig | 10XJME | | | | G-10XJME | | | | 10XJMF | | | G-10XJMF | | | |
| End Connection | Wafer (JIS 5K/10K) | | | | Wafer (JIS 5K/10K) | | | | Wafer (JIS 5K/10K) | | | Wafer (JIS 5K/10K) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | B |
| 11/2 | 40 | 33 | 172 | 180 | 33 | 175 | 80 | 122 | | | | | | | |
| 2 | 50 | 43 | 176 | 180 | 43 | 179 | 80 | 122 | 43 | 176 | 180 | 43 | 179 | 80 | 122 |
| 2 1/2 | 65 | 46 | 185 | 180 | 46 | 188 | 80 | 122 | 46 | 185 | 180 | 46 | 188 | 80 | 122 |
| 3 | 80 | 46 | 193 | 180 | 46 | 196 | 80 | 122 | 46 | 193 | 180 | 46 | 196 | 80 | 122 |
| 4 | 100 | 52 | 204 | 180 | 52 | 223 | 110 | 135 | 52 | 204 | 180 | 52 | 223 | 110 | 135 |
| 5 | 125 | 56 | 249 | 230 | 56 | 258 | 110 | 150 | 56 | 249 | 230 | 56 | 258 | 110 | 150 |
| 6 | 150 | 56 | 261 | 230 | 56 | 270 | 110 | 150 | 56 | 261 | 230 | 56 | 270 | 110 | 150 |
| 8 | 200 | 60 | 281 | 350 | 60 | 311 | 170 | 180 | 60 | 281 | 350 | 60 | 311 | 170 | 180 |
| 10 | 250 | | | | 68 | 405 | 170 | 180 | | | | | | | |
| 12 | 300 | | | | 78 | 430 | 170 | 180 | | | | | | | |
| Body | ADC12(ASTM B85-84-383.0) | | | | ADC12(ASTM B85-84-383.0) | | | | ADC12(ASTM B85-84-383.0) | | | ADC12(ASTM B85-84-383.0) | | | |
| Neck | 304SS | | | | 304SS | | | | 304SS | | | 304SS | | | |
| Stem/Bottom Stem | 410SS | | | | 410SS | | | | 410SS | | | 410SS | | | |
| Disc | CF8M | | | | CF8M | | | | CF8M | | | CF8M | | | |
| O ring | EPDM | | | | EPDM | | | | EPDM | | | EPDM | | | |
| Rubber Seat | EPDM | | | | EPDM | | | | FKM | | | FKM | | | |
| Features | Dew Condensation Prevention | | | | Dew Condensation Prevention | | | | Dew Condensation Prevention | | | Dew Condensation Prevention | | | |
| Service Temperature Range | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | 0°C~+90°C 1.0MPa | | | 0°C~+90°C 1.0MPa | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | |

| Type | XJ Series | | | | XJ Series | | | | XJ Series | | | XJ Series | | | |
|---------------------------|--|----|-----|-----|--|-----|-----|-----|--|-----|-----|--|-----|-----|-----|
| Butterfly Valve | | | | | | | | | | | | | | | |
| Fig | 10XJSME | | | | G-10XJSME | | | | 10XJPE | | | G-10XJPE | | | |
| End Connection | Wafer (JIS 5K/10K) | | | | Wafer (JIS 5K/10K) | | | | Wafer (JIS 5K/10K) | | | Wafer (JIS 5K/10K) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | B |
| 11/2 | 40 | 33 | 137 | 180 | 33 | 140 | 80 | 122 | 33 | 172 | 180 | 33 | 175 | 80 | 122 |
| 2 | 50 | 43 | 139 | 180 | 43 | 142 | 80 | 122 | 43 | 176 | 180 | 43 | 179 | 80 | 122 |
| 2 1/2 | 65 | 46 | 147 | 180 | 46 | 150 | 80 | 122 | 46 | 185 | 180 | 46 | 188 | 80 | 122 |
| 3 | 80 | 46 | 156 | 180 | 46 | 159 | 80 | 122 | 46 | 193 | 180 | 46 | 196 | 80 | 122 |
| 4 | 100 | 52 | 167 | 180 | 52 | 186 | 110 | 135 | 52 | 204 | 180 | 52 | 223 | 110 | 135 |
| 5 | 125 | 56 | 205 | 230 | 56 | 214 | 110 | 150 | 56 | 249 | 230 | 56 | 258 | 110 | 150 |
| 6 | 150 | 56 | 217 | 230 | 56 | 226 | 110 | 150 | 56 | 261 | 230 | 56 | 270 | 110 | 150 |
| 8 | 200 | | | | 60 | 267 | 170 | 180 | | | | 60 | 311 | 170 | 180 |
| 10 | 250 | | | | 68 | 317 | 170 | 180 | | | | | | | |
| 12 | 300 | | | | 78 | 342 | 170 | 180 | | | | | | | |
| Body | ADC12(ASTM B85-84-383.0) | | | | ADC12(ASTM B85-84-383.0) | | | | ADC12(ASTM B85-84-383.0) | | | ADC12(ASTM B85-84-383.0) | | | |
| Neck | 304SS | | | | 304SS | | | | 304SS | | | 304SS | | | |
| Stem/Bottom Stem | 410SS | | | | 410SS | | | | 410SS | | | 410SS | | | |
| Disc | CF8M | | | | CF8M | | | | CF8+PPS | | | CF8+PPS | | | |
| O ring | EPDM | | | | EPDM | | | | EPDM | | | EPDM | | | |
| Rubber Seat | EPDM | | | | EPDM | | | | EPDM | | | EPDM | | | |
| Features | Dew Condensation Prevention | | | | Dew Condensation Prevention | | | | Dew Condensation Prevention | | | Dew Condensation Prevention | | | |
| Service Temperature Range | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | |

| Type | XJ Series | | | | XJ Series | | | | XJ Series | | | XJ Series | | | |
|---------------------------|---|----|-----|-----|---|-----|-----|-----|--|-----|-----|---|-----|-----|-----|
| Butterfly Valve |  | | | |  | | | |  | | |  | | | |
| Fig | 10XJSPE | | | | G-10XJSPE | | | | 10XJMEA | | | G-10XJMEA | | | |
| End Connection | Wafer (JIS 5K/10K) | | | | Wafer (JIS 5K/10K) | | | | Wafer (5/10K,125/150) | | | Wafer (5/10K,125/150) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | B |
| 11/2 | 40 | 33 | 137 | 180 | 33 | 140 | 80 | 122 | 33 | 172 | 180 | 33 | 175 | 80 | 122 |
| 2 | 50 | 43 | 139 | 180 | 43 | 142 | 80 | 122 | 43 | 176 | 180 | 43 | 179 | 80 | 122 |
| 2 1/2 | 65 | 46 | 147 | 180 | 46 | 150 | 80 | 122 | 46 | 185 | 180 | 46 | 188 | 80 | 122 |
| 3 | 80 | 46 | 156 | 180 | 46 | 159 | 80 | 122 | 46 | 193 | 180 | 46 | 196 | 80 | 122 |
| 4 | 100 | 52 | 167 | 180 | 52 | 186 | 110 | 135 | 52 | 204 | 180 | 52 | 223 | 110 | 135 |
| 5 | 125 | 56 | 205 | 230 | 56 | 214 | 110 | 150 | 56 | 249 | 230 | 56 | 258 | 110 | 150 |
| 6 | 150 | 56 | 217 | 230 | 56 | 226 | 110 | 150 | 56 | 261 | 230 | 56 | 270 | 110 | 150 |
| 8 | 200 | | | | 60 | 267 | 170 | 180 | 60 | 281 | 350 | 60 | 311 | 170 | 180 |
| 10 | 250 | | | | | | | | | | | 68 | 405 | 170 | 180 |
| 12 | 300 | | | | | | | | | | | 78 | 430 | 170 | 180 |
| Body | ADC12(ASTM B85-84-383.0) | | | | ADC12(ASTM B85-84-383.0) | | | | ADC12(ASTM B85-84-383.0) | | | ADC12(ASTM B85-84-383.0) | | | |
| Neck | 304SS | | | | 304SS | | | | 304SS | | | 304SS | | | |
| Stem/Bottom Stem | 410SS | | | | 410SS | | | | 410SS | | | 410SS | | | |
| Disc | CF8+PPS | | | | CF8+PPS | | | | CF8M | | | CF8M | | | |
| O ring | EPDM | | | | EPDM | | | | EPDM | | | EPDM | | | |
| Rubber Seat | EPDM | | | | EPDM | | | | EPDM | | | EPDM | | | |
| Features | Dew Condensation Prevention | | | | Dew Condensation Prevention | | | | Dew Condensation Prevention | | | Dew Condensation Prevention | | | |
| Service Temperature Range | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | |

| Type | XJ Series | | | | XJ Series | | | | DJ Series | | | DJ Series | | | |
|---------------------------|---|----|-----|-----|---|-----|-----|-----|--|-----|-----|---|-----|-----|-----|
| Butterfly Valve |  | | | |  | | | |  | | |  | | | |
| Fig | PN16XJME | | | | G-PN16XJME | | | | 10DJ(E) | | | G-10DJ(E) | | | |
| End Connection | Wafer (EN 1092 PN16) | | | | Wafer (EN 1092 PN16) | | | | Wafer (JIS 10K) | | | Wafer (JIS 10K) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | B |
| 2 | 50 | 43 | 176 | 180 | 43 | 179 | 80 | 122 | 43 | 189 | 180 | 43 | 194 | 80 | 122 |
| 2 1/2 | 65 | 46 | 185 | 180 | 46 | 188 | 80 | 122 | 46 | 199 | 180 | 46 | 202 | 80 | 122 |
| 3 | 80 | 46 | 193 | 180 | 46 | 212 | 80 | 122 | 46 | 217 | 180 | 46 | 236 | 110 | 135 |
| 4 | 100 | 52 | 204 | 180 | 52 | 223 | 110 | 135 | 52 | 227 | 180 | 52 | 246 | 110 | 135 |
| 5 | 125 | 56 | 249 | 230 | 56 | 258 | 110 | 150 | 56 | 265 | 230 | 56 | 274 | 110 | 150 |
| 6 | 150 | 56 | 261 | 230 | 56 | 270 | 110 | 150 | 56 | 277 | 230 | 56 | 286 | 110 | 150 |
| 8 | 200 | 60 | 281 | 350 | 60 | 311 | 170 | 180 | | | | 60 | 325 | 170 | 180 |
| 10 | 250 | | | | 68 | 405 | 170 | 180 | | | | 68 | 381 | 250 | 250 |
| 12 | 300 | | | | 78 | 430 | 170 | 180 | | | | 78 | 406 | 250 | 250 |
| 14 | 350 | | | | | | | | | | | 78 | 445 | 310 | 220 |
| 16 | 400 | | | | | | | | | | | 102 | 500 | 310 | 220 |
| 18 | 450 | | | | | | | | | | | 114 | 524 | 310 | 220 |
| 20 | 500 | | | | | | | | | | | 127 | 589 | 360 | 350 |
| 24 | 600 | | | | | | | | | | | 154 | 637 | 360 | 350 |
| Body | ADC12(ASTM B85-84-383.0) | | | | ADC12(ASTM B85-84-383.0) | | | | FCD450-10(ASTM A536)* | | | FCD450-10(ASTM A536)* | | | |
| Neck | 304SS | | | | 304SS | | | | | | | | | | |
| Stem/Bottom Stem | 410SS | | | | 410SS | | | | 410SS | | | 410SS | | | |
| Disc | CF8M | | | | CF8M | | | | DI+ENP | | | DI+ENP | | | |
| O ring | EPDM | | | | EPDM | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Rubber Seat | EPDM | | | | EPDM | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Features | Dew Condensation Prevention | | | | Dew Condensation Prevention | | | | Dew Condensation Prevention | | | Dew Condensation Prevention | | | |
| Service Temperature Range | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | -20°C~+120°C 1.0MPa (Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV28 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | |
| Remarks | | | | | | | | | | | | *CI: 14° & above | | | |

| Type | DJ Series | | | | | DJ Series | | | | DJ Series | | | DJ Series | | | |
|---------------------------|--|----|-----|-----|--|--|-----|-----|-----|--|-----|-----|--|-----|-----|-----|
| Butterfly Valve | | | | | | | | | | | | | | | | |
| Fig | 10DJU(E) | | | | | G-10DJU(E) | | | | 10DJM(E) | | | G-10DJM(E) | | | |
| End Connection | Wafer (JIS 10K) | | | | | Wafer (JIS 10K) | | | | Wafer (JIS 10K) | | | Wafer (JIS 10K) | | | |
| inch | mm | L | H | D | | L | H | D | B | L | H | D | L | H | D | B |
| 11/2 | 40 | 33 | 172 | 180 | | 33 | 172 | 80 | 122 | 33 | 172 | 180 | 33 | 172 | 80 | 122 |
| 2 | 50 | 43 | 189 | 180 | | 43 | 194 | 80 | 122 | 43 | 189 | 180 | 43 | 194 | 80 | 122 |
| 2 1/2 | 65 | 46 | 199 | 180 | | 46 | 202 | 80 | 122 | 46 | 199 | 180 | 46 | 202 | 80 | 122 |
| 3 | 80 | 46 | 217 | 180 | | 46 | 236 | 110 | 135 | 46 | 217 | 180 | 46 | 236 | 110 | 135 |
| 4 | 100 | 52 | 227 | 180 | | 52 | 246 | 110 | 135 | 52 | 227 | 180 | 52 | 246 | 110 | 135 |
| 5 | 125 | 56 | 265 | 230 | | 56 | 274 | 110 | 150 | 56 | 265 | 230 | 56 | 274 | 110 | 150 |
| 6 | 150 | 56 | 277 | 230 | | 56 | 286 | 110 | 150 | 56 | 277 | 230 | 56 | 286 | 110 | 150 |
| 8 | 200 | | | | | 60 | 325 | 170 | 180 | | | | 60 | 325 | 170 | 180 |
| 10 | 250 | | | | | 68 | 381 | 250 | 250 | | | | 68 | 381 | 250 | 250 |
| 12 | 300 | | | | | 78 | 406 | 250 | 250 | | | | 78 | 406 | 250 | 250 |
| 14 | 350 | | | | | 78 | 445 | 310 | 220 | | | | 78 | 445 | 310 | 220 |
| 16 | 400 | | | | | 102 | 500 | 310 | 220 | | | | 102 | 500 | 310 | 220 |
| 18 | 450 | | | | | 114 | 524 | 310 | 220 | | | | 114 | 524 | 310 | 220 |
| 20 | 500 | | | | | 127 | 589 | 360 | 350 | | | | 127 | 589 | 360 | 350 |
| 22 | 550 | | | | | 154 | 612 | 360 | 350 | | | | 154 | 612 | 360 | 350 |
| 24 | 600 | | | | | 154 | 637 | 360 | 350 | | | | 154 | 637 | 360 | 350 |
| 26 | 650 | | | | | 165 | 710 | 600 | 413 | | | | 165 | 710 | 600 | 413 |
| 28 | 700 | | | | | 165 | 735 | 600 | 413 | | | | 165 | 735 | 600 | 413 |
| 30 | 750 | | | | | 190 | 836 | 500 | 365 | | | | 190 | 836 | 500 | 365 |
| 32 | 800 | | | | | 190 | 862 | 500 | 365 | | | | 190 | 862 | 500 | 365 |
| Body | FCD450-10(ASM A536) | | | | | FCD450-10(ASM A536)* | | | | FCD450-10(ASM A536) | | | FCD450-10(ASM A536)* | | | |
| Stem/Bottom Stem | 410SS | | | | | 410SS/420J2 for 14 ^B & over | | | | 410SS | | | 410SS/420J2 for 14 ^B & over | | | |
| Disc | CF8 | | | | | CF8 | | | | CF8M | | | CF8M | | | |
| O ring | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Rubber Seat | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Service Temperature Range | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | |
| Remarks | | | | | | *CI: 14 ^B & above | | | | | | | *CI: 14 ^B & above | | | |









| Type | DJK Series | | | | | DJ Series | | | | DJ Series | | | DJ Series | | | |
|---------------------------|--|-----|-----|-----|-----|--|-----|-----|--|--|-----|-----|--|-----|-----|--|
| Butterfly Valve | | | | | | | | | | | | | | | | |
| Fig | G-10DJKUE | | | | | VG-10DJ(E) | | | | VG-10DJU(E) | | | VG-10DJM(E) | | | |
| End Connection | Wafer (JIS 10K) | | | | | Wafer (JIS 10K) | | | | Wafer (JIS 10K) | | | Wafer (JIS 10K) | | | |
| inch | mm | L | H | D | B | L | H | D | | L | H | D | L | H | D | |
| 11/2 | 40 | | | | | | | | | 33 | 251 | 110 | 33 | 251 | 110 | |
| 2 | 50 | 43 | 220 | 110 | 135 | 43 | 270 | 110 | | 43 | 270 | 110 | 43 | 270 | 110 | |
| 2 1/2 | 65 | 46 | 228 | 110 | 135 | 46 | 278 | 110 | | 46 | 278 | 110 | 46 | 278 | 110 | |
| 3 | 80 | 46 | 248 | 110 | 135 | 46 | 285 | 110 | | 46 | 285 | 110 | 46 | 285 | 110 | |
| 4 | 100 | 52 | 258 | 110 | 135 | 52 | 295 | 110 | | 52 | 295 | 110 | 52 | 295 | 110 | |
| 5 | 125 | 56 | 286 | 110 | 150 | 56 | 325 | 170 | | 56 | 325 | 170 | 56 | 325 | 170 | |
| 6 | 150 | 56 | 298 | 110 | 150 | 56 | 337 | 170 | | 56 | 337 | 170 | 56 | 337 | 170 | |
| 8 | 200 | 60 | 409 | 170 | 180 | 60 | 404 | 200 | | 60 | 404 | 200 | 60 | 404 | 200 | |
| 10 | 250 | 68 | 477 | 250 | 250 | 68 | 461 | 310 | | 68 | 461 | 310 | 68 | 461 | 310 | |
| 12 | 300 | 78 | 502 | 250 | 250 | 78 | 486 | 310 | | 78 | 486 | 310 | 78 | 486 | 310 | |
| 14 | 350 | 78 | 571 | 310 | 220 | 78 | 569 | 360 | | 78 | 569 | 360 | 78 | 569 | 360 | |
| 16 | 400 | 102 | 626 | 310 | 220 | 102 | 624 | 360 | | 102 | 624 | 360 | 102 | 624 | 360 | |
| 18 | 450 | 114 | 650 | 310 | 220 | 114 | 648 | 360 | | 114 | 648 | 360 | 114 | 648 | 360 | |
| 20 | 500 | 127 | 745 | 360 | 350 | 127 | 741 | 500 | | 127 | 741 | 500 | 127 | 741 | 500 | |
| 24 | 600 | 154 | 793 | 360 | 350 | 154 | 789 | 500 | | 154 | 789 | 500 | 154 | 789 | 500 | |
| Body | FCD450-10(ASM A536)* | | | | | FCD450-10(ASM A536)* | | | | FCD450-10(ASM A536)* | | | FCD450-10(ASM A536)* | | | |
| Bracket/Stand | PP up to 6 ^B /CF8 for 8 ^B & above | | | | | | | | | | | | | | | |
| Stem/Bottom Stem | 410SS/420J2 for 14 ^B & over | | | | | 410SS/420J2 for 14 ^B & over | | | | 410SS/420J2 for 14 ^B & over | | | 410SS/420J2 for 14 ^B & over | | | |
| Disc | CF8 | | | | | DI+ENP | | | | CF8 | | | CF8M | | | |
| O ring | EPDM | | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Rubber Seat | EPDM | | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Service Temperature Range | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | |
| Remarks | *CI: 14 ^B & above PP: Polypropylene | | | | | *CI: 14 ^B & above | | | | *CI: 14 ^B & above | | | *CI: 14 ^B & above | | | |

| Type | DJ Series | | | | | DJ Series | | | | | DJ Series | | | | | DJ Series | | | | | |
|---------------------------|---|-----------------|-----|-----|--|---|-----------------|-----|-----|----|---|-----------------|--|-----|-----|---|-----------------|--|--|--|--|
| Butterfly Valve | | | | | | | | | | | | | | | | | | | | | |
| | 16DJ(E) | | | | | G-16DJ(E) | | | | | 16DJU(E) | | | | | G-16DJU(E) | | | | | |
| End Connection | | Wafer (JIS 16K) | | | | | Wafer (JIS 16K) | | | | | Wafer (JIS 16K) | | | | | Wafer (JIS 16K) | | | | |
| inch | mm | L | H | D | | L | H | D | B | L | H | D | | L | H | D | B | | | | |
| 2 | 50 | 43 | 191 | 180 | | 43 | 194 | 80 | 122 | 43 | 191 | 180 | | 43 | 194 | 80 | 122 | | | | |
| 2 1/2 | 65 | 46 | 199 | 180 | | 46 | 202 | 80 | 122 | 46 | 199 | 180 | | 46 | 202 | 80 | 122 | | | | |
| 3 | 80 | 46 | 217 | 180 | | 46 | 236 | 110 | 135 | 46 | 217 | 180 | | 46 | 236 | 110 | 135 | | | | |
| 4 | 100 | 52 | 227 | 180 | | 52 | 246 | 110 | 135 | 52 | 227 | 180 | | 52 | 246 | 110 | 135 | | | | |
| 5 | 125 | 56 | 265 | 230 | | 56 | 274 | 110 | 150 | 56 | 265 | 230 | | 56 | 274 | 110 | 150 | | | | |
| 6 | 150 | 56 | 277 | 230 | | 56 | 286 | 110 | 150 | 56 | 277 | 230 | | 56 | 286 | 110 | 150 | | | | |
| 8 | 200 | | | | | 60 | 325 | 170 | 180 | | | | | 60 | 325 | 170 | 180 | | | | |
| 10 | 250 | | | | | 68 | 381 | 250 | 250 | | | | | 68 | 381 | 250 | 250 | | | | |
| 12 | 300 | | | | | 78 | 406 | 250 | 250 | | | | | 78 | 406 | 250 | 250 | | | | |
| 14 | 350 | | | | | 78 | 445 | 310 | 220 | | | | | 78 | 461 | 360 | 350 | | | | |
| 16 | 400 | | | | | 102 | 500 | 310 | 220 | | | | | 102 | 516 | 360 | 350 | | | | |
| 18 | 450 | | | | | 114 | 524 | 310 | 220 | | | | | 114 | 540 | 360 | 350 | | | | |
| 20 | 500 | | | | | 127 | 589 | 360 | 350 | | | | | 127 | 623 | 500 | 400 | | | | |
| 22 | 550 | | | | | | | | | | | | | 154 | 646 | 500 | 400 | | | | |
| 24 | 600 | | | | | 154 | 637 | 360 | 350 | | | | | 154 | 671 | 500 | 400 | | | | |
| Body | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | |
| Stem/Bottom Stem | 410SS | | | | | 410SS/420J2 | | | | | 410SS | | | | | 410SS/420J2 | | | | | |
| Disc | DI+ENP | | | | | DI+ENP | | | | | CF8 | | | | | CF8 | | | | | |
| O ring | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | |
| Rubber Seat | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | |
| Service Temperature Range | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | |

| Type | DJ Series | | | | | DJ Series | | | | | DJK Series | | | | | DJ Series | | | |
|---------------------------|---|-----------------|-----|-----|--|---|-----------------|-----|-----|-----|---|-----------------|-----|-----|-----|---|-----------------|--|--|
| Butterfly Valve | | | | | | | | | | | | | | | | | | | |
| | 16DJM(E) | | | | | G-16DJM(E) | | | | | G-16DJKUE | | | | | VG-16DJ(E) | | | |
| End Connection | | Wafer (JIS 16K) | | | | | Wafer (JIS 16K) | | | | | Wafer (JIS 16K) | | | | | Wafer (JIS 16K) | | |
| inch | mm | L | H | D | | L | H | D | B | L | H | D | B | L | H | D | | | |
| 2 | 50 | 43 | 191 | 180 | | 43 | 194 | 80 | 122 | 43 | 220 | 110 | 135 | 43 | 270 | 110 | | | |
| 2 1/2 | 65 | 46 | 199 | 180 | | 46 | 202 | 80 | 122 | 46 | 228 | 110 | 135 | 46 | 278 | 110 | | | |
| 3 | 80 | 46 | 217 | 180 | | 46 | 236 | 110 | 135 | 46 | 248 | 110 | 135 | 46 | 285 | 110 | | | |
| 4 | 100 | 52 | 227 | 180 | | 52 | 246 | 110 | 135 | 52 | 258 | 110 | 135 | 52 | 295 | 110 | | | |
| 5 | 125 | 56 | 265 | 230 | | 56 | 274 | 110 | 150 | 56 | 286 | 110 | 150 | 56 | 325 | 170 | | | |
| 6 | 150 | 56 | 277 | 230 | | 56 | 286 | 110 | 150 | 56 | 298 | 110 | 150 | 56 | 337 | 170 | | | |
| 8 | 200 | | | | | 60 | 325 | 170 | 180 | 60 | 409 | 170 | 180 | 60 | 404 | 200 | | | |
| 10 | 250 | | | | | 68 | 381 | 250 | 250 | 68 | 477 | 250 | 250 | 68 | 461 | 310 | | | |
| 12 | 300 | | | | | 78 | 406 | 250 | 250 | 78 | 502 | 250 | 250 | 78 | 486 | 310 | | | |
| 14 | 350 | | | | | 78 | 461 | 360 | 350 | 78 | 587 | 310 | 220 | 78 | 569 | 360 | | | |
| 16 | 400 | | | | | 102 | 516 | 360 | 350 | 102 | 642 | 310 | 220 | 102 | 649 | 360 | | | |
| 18 | 450 | | | | | 114 | 540 | 360 | 350 | 114 | 666 | 310 | 220 | 114 | 673 | 360 | | | |
| 20 | 500 | | | | | 127 | 623 | 500 | 400 | 127 | 779 | 360 | 350 | 127 | 766 | 500 | | | |
| 22 | 550 | | | | | 154 | 646 | 500 | 400 | | | | | | | | | | |
| 24 | 600 | | | | | 154 | 671 | 500 | 400 | 154 | 827 | 360 | 350 | 154 | 814 | 500 | | | |
| Body | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | |
| Bracket/Stand | | | | | | | | | | | PP up to 6 ⁹ /CF8 for 8 ⁸ & above | | | | | | | | |
| Stem/Bottom Stem | 410SS | | | | | 410SS/420J2 | | | | | 410SS/420J2 | | | | | 410SS/420J2 | | | |
| Disc | CF8M | | | | | CF8M | | | | | CF8 | | | | | DI+ENP | | | |
| O ring | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | EPDM | | | | | NBR (E: EPDM) | | | |
| Rubber Seat | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | EPDM | | | | | NBR (E: EPDM) | | | |
| Features | | | | | | | | | | | Dew Condensation Prevention | | | | | | | | |
| Service Temperature Range | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | |
| Remarks | | | | | | | | | | | PP: Polypropylene | | | | | | | | |





| Type | DJ Series | | | | DJ Series | | | | DJ Series | | | | DJ Series | | | |
|---------------------------|---|-----|-----|-----|---|-----|-----|----|---|-----|-----|-----|---|-----|--|--|
| Butterfly Valve | | | | | | | | | | | | | | | | |
| | 16K | | | | 16K | | | | 20K | | | | 20K | | | |
| Fig | VG-16DJU(E) | | | | VG-16DJM(E) | | | | 20DJUE | | | | G-20DJUE | | | |
| End Connection | Wafer (JIS 16K) | | | | Wafer (JIS 16K) | | | | Wafer (JIS 20K) | | | | Wafer (JIS 20K) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | B | | |
| 2 | 50 | 43 | 270 | 110 | 43 | 270 | 110 | 43 | 191 | 180 | 43 | 194 | 80 | 122 | | |
| 2 1/2 | 65 | 46 | 278 | 110 | 46 | 278 | 110 | 46 | 199 | 180 | 46 | 202 | 80 | 122 | | |
| 3 | 80 | 46 | 285 | 110 | 46 | 285 | 110 | 46 | 217 | 180 | 46 | 236 | 110 | 135 | | |
| 4 | 100 | 52 | 295 | 110 | 52 | 295 | 110 | 52 | 227 | 180 | 52 | 246 | 110 | 135 | | |
| 5 | 125 | 56 | 325 | 170 | 56 | 325 | 170 | 56 | 265 | 230 | 56 | 274 | 110 | 150 | | |
| 6 | 150 | 56 | 337 | 170 | 56 | 337 | 170 | 56 | 277 | 230 | 56 | 286 | 110 | 150 | | |
| 8 | 200 | 60 | 404 | 200 | 60 | 404 | 200 | | | | 60 | 325 | 170 | 180 | | |
| 10 | 250 | 68 | 461 | 310 | 68 | 461 | 310 | | | | 68 | 381 | 250 | 250 | | |
| 12 | 300 | 78 | 486 | 310 | 78 | 486 | 310 | | | | 78 | 406 | 250 | 250 | | |
| 14 | 350 | 78 | 569 | 360 | 78 | 569 | 360 | | | | 78 | 445 | 310 | 220 | | |
| 16 | 400 | 102 | 649 | 360 | 102 | 649 | 360 | | | | 102 | 500 | 310 | 220 | | |
| 18 | 450 | 114 | 673 | 360 | 114 | 673 | 360 | | | | 114 | 540 | 360 | 350 | | |
| 20 | 500 | 127 | 766 | 500 | 127 | 766 | 500 | | | | 127 | 589 | 500 | 350 | | |
| 22 | 550 | | | | | | | | | | 154 | 646 | 500 | 400 | | |
| 24 | 600 | 154 | 814 | 500 | 154 | 814 | 500 | | | | 154 | 671 | 500 | 400 | | |
| Body | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | |
| Stem/Bottom Stem | 410SS/420J2 | | | | 410SS/420J2 | | | | 410SS/420J2 | | | | 410SS/420J2 | | | |
| Disc | CF8 | | | | CF8M | | | | CF8M | | | | CF8 | | | |
| O ring | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | EPDM | | | | EPDM | | | |
| Rubber Seat | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | EPDM | | | | EPDM | | | |
| Service Temperature Range | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | |




| Type | DJ Series | | | | DJ Series | | | | DJK Series | | | |
|---------------------------|---|----|-----|-----|---|-----|-----|-----|---|-----|-----|-----|
| Butterfly Valve | | | | | | | | | | | | |
| | 20K | | | | 20K | | | | 20K | | | |
| Fig | 20DJME | | | | G-20DJME | | | | G-20DJKUE | | | |
| End Connection | Wafer (JIS 20K) | | | | Wafer (JIS 20K) | | | | Wafer (JIS 20K) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | B |
| 2 | 50 | 43 | 191 | 180 | 43 | 194 | 80 | 122 | 43 | 220 | 110 | 135 |
| 2 1/2 | 65 | 46 | 199 | 180 | 46 | 202 | 80 | 122 | 46 | 228 | 110 | 135 |
| 3 | 80 | 46 | 217 | 180 | 46 | 236 | 110 | 135 | 46 | 248 | 110 | 135 |
| 4 | 100 | 52 | 227 | 180 | 52 | 246 | 110 | 135 | 52 | 258 | 110 | 135 |
| 5 | 125 | 56 | 265 | 230 | 56 | 274 | 110 | 150 | 56 | 286 | 110 | 150 |
| 6 | 150 | 56 | 277 | 230 | 56 | 286 | 110 | 150 | 56 | 298 | 110 | 150 |
| 8 | 200 | | | | 60 | 325 | 170 | 180 | 60 | 409 | 170 | 180 |
| 10 | 250 | | | | 68 | 381 | 250 | 250 | 68 | 477 | 250 | 250 |
| 12 | 300 | | | | 78 | 406 | 250 | 250 | 78 | 502 | 250 | 250 |
| 14 | 350 | | | | 78 | 445 | 310 | 220 | | | | |
| 16 | 400 | | | | 102 | 500 | 310 | 220 | | | | |
| 18 | 450 | | | | 114 | 540 | 360 | 350 | | | | |
| 20 | 500 | | | | 127 | 589 | 500 | 350 | | | | |
| 22 | 550 | | | | 154 | 646 | 500 | 400 | | | | |
| 24 | 600 | | | | 154 | 671 | 500 | 400 | | | | |
| Body | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | |
| Bracket/Stand | | | | | | | | | PP up to 6 ^B /CF8 for 8 ^B & above | | | |
| Stem/Bottom Stem | 410SS/420J2 | | | | 410SS/420J2 | | | | 410SS/420J2 | | | |
| Disc | CF8M | | | | CF8M | | | | CF8 | | | |
| O ring | EPDM | | | | EPDM | | | | EPDM | | | |
| Rubber Seat | EPDM | | | | EPDM | | | | EPDM | | | |
| Features | | | | | | | | | Dew Condensation Prevention | | | |
| Service Temperature Range | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | NBR: 0°C~+70°C, EPDM: -20°C ~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | |
| Remarks | | | | | | | | | PP: Polypropylene | | | |





| Type | SA Series | | | | | SA Series | | | | | EJ Series | | | EJ Series | | | |
|---------------------------|---|-----|------|-----|-----|---|-----|-----|-----|----|---|-----|-----|---|-----|-----|--|
| Butterfly Valve |  | | | | |  | | | | |  | | |  | | | |
| Fig | G-10SAUE | | | | | G-16SAUE | | | | | PN10EJMW(Q)F | | | G-PN10EJMW(Q)F | | | |
| End Connection | Wafer (JIS 10K) & * | | | | | Wafer (JIS 16K) & * | | | | | Wafer (EN1092 PN6/10/16 *) | | | Wafer (EN1092 PN6/10/16 *) | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | L | H | D | B | |
| 2 | 50 | | | | | | | | | 43 | 191 | 180 | | | | | |
| 2 1/2 | 65 | | | | | | | | | 46 | 199 | 180 | | | | | |
| 3 | 80 | | | | | | | | | 46 | 217 | 180 | | | | | |
| 4 | 100 | | | | | | | | | 52 | 227 | 180 | | | | | |
| 5 | 125 | | | | | | | | | 56 | 265 | 230 | | | | | |
| 6 | 150 | | | | | | | | | 56 | 277 | 230 | | | | | |
| 8 | 200 | | | | | | | | | 60 | 295 | 350 | | | | | |
| 10 | 250 | | | | | | | | | | | | 68 | 381 | 250 | 250 | |
| 12 | 300 | | | | | | | | | | | | 78 | 406 | 250 | 250 | |
| 26 | 650 | 165 | 670 | 500 | 410 | 165 | 670 | 500 | 410 | | | | | | | | |
| 28 | 700 | 165 | 695 | 500 | 410 | 165 | 695 | 500 | 410 | | | | | | | | |
| 30 | 750 | 190 | 757 | 500 | 410 | 190 | 757 | 500 | 410 | | | | | | | | |
| 32 | 800 | 190 | 782 | 500 | 410 | 190 | 782 | 500 | 410 | | | | | | | | |
| 36 | 900 | 203 | 832 | 500 | 410 | 203 | 832 | 500 | 410 | | | | | | | | |
| 40 | 1000 | 216 | 902 | 500 | 410 | 216 | 902 | 500 | 410 | | | | | | | | |
| 44 | 1100 | 216 | 940 | 500 | 410 | | | | | | | | | | | | |
| 48 | 1200 | 254 | 1007 | 500 | 410 | | | | | | | | | | | | |
| 54 | 1350 | 280 | 1133 | 500 | 410 | | | | | | | | | | | | |
| Body | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | DI (EN-GJS-450-10) | | | DI (EN-GJS-450-10) | | | |
| Stem/Bottom Stem | 420J2 | | | | | 420J2 | | | | | 410SS | | | 410SS | | | |
| Disc | CF8 | | | | | CF8 | | | | | CF8M | | | CF8M | | | |
| O ring | EPDM | | | | | EPDM | | | | | FKM | | | FKM | | | |
| Rubber Seat | NBR | | | | | NBR | | | | | W: W-NBR, Q: VMQ (Silicon rubber), F: FKM (Fluoro rubber) | | | W: W-NBR, Q: VMQ (Silicon rubber), F: FKM (Fluoro rubber) | | | |
| Standard/Approval | | | | | | | | | | | CE(SEP for 2 ^B & below) | | | CE | | | |
| Service Temperature Range | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | | NBR: 0°C~+70°C, EPDM: -20°C~+120°C(Not Frozen)/Continuous Service Temp. -20°C~+100°C | | | | | Continuous Service: W-NBR: 0°C~+80°C, VMQ: -10°C~+180°C, FKM: 0°C~+130°C(Not Frozen) | | | Continuous Service: W-NBR: 0°C~+80°C, VMQ: -10°C~+180°C, FKM: 0°C~+130°C(Not Frozen) | | | |
| Reference Page | | | | | | | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | |
| Remarks | * JIS B2239 10K FF & with U-section | | | | | * JIS B2239(1996) 16K FF & with U-section | | | | | *BS10/AS2129 Table E, ASME CL.125/150 | | | *BS10/AS2129 Table E, ASME CL.125/150 | | | |
| Type | DJ Series | | | | | DJ Series | | | | | DJ Series | | | DJ Series | | | |
| Butterfly Valve |  | | | | |  | | | | |  | | |  | | | |
| Fig | PN16DJ(E) | | | | | G-PN16DJ(E) | | | | | PN16DJU(E) | | | G-PN16DJU(E) | | | |
| End Connection | Wafer (EN1092 PN16 *) | | | | | Wafer (EN1092 PN16 *) | | | | | Wafer (EN1092 PN16 *) | | | Wafer (EN1092 PN16 *) | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | L | H | D | B | |
| 2 | 50 | 43 | 191 | 180 | | 43 | 194 | 80 | 122 | 43 | 191 | 180 | 43 | 194 | 80 | 122 | |
| 2 1/2 | 65 | 46 | 199 | 180 | | 46 | 202 | 80 | 122 | 46 | 199 | 180 | 46 | 202 | 80 | 122 | |
| 3 | 80 | 46 | 217 | 180 | | 46 | 236 | 110 | 135 | 46 | 217 | 180 | 46 | 236 | 110 | 135 | |
| 4 | 100 | 52 | 227 | 180 | | 52 | 246 | 110 | 135 | 52 | 227 | 180 | 52 | 246 | 110 | 135 | |
| 5 | 125 | 56 | 265 | 230 | | 56 | 274 | 110 | 150 | 56 | 265 | 230 | 56 | 274 | 110 | 150 | |
| 6 | 150 | 56 | 277 | 230 | | 56 | 286 | 110 | 150 | 56 | 277 | 230 | 56 | 286 | 110 | 150 | |
| 8 | 200 | 60 | 295 | 350 | | 60 | 325 | 170 | 180 | 60 | 295 | 350 | 60 | 325 | 170 | 180 | |
| 10 | 250 | | | | | 68 | 381 | 250 | 250 | | | | 68 | 381 | 250 | 250 | |
| 12 | 300 | | | | | 78 | 406 | 250 | 250 | | | | 78 | 406 | 250 | 250 | |
| 14 | 350 | | | | | 78 | 461 | 360 | 350 | | | | 78 | 461 | 360 | 350 | |
| 16 | 400 | | | | | 102 | 516 | 360 | 350 | | | | 102 | 516 | 360 | 350 | |
| 18 | 450 | | | | | 114 | 540 | 360 | 350 | | | | 114 | 540 | 360 | 350 | |
| 20 | 500 | | | | | 127 | 623 | 500 | 400 | | | | 127 | 623 | 500 | 400 | |
| 24 | 600 | | | | | 154 | 671 | 500 | 400 | | | | 154 | 671 | 500 | 400 | |
| Body | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | FCD450-10(ASTM A536) | | | |
| Stem/Bottom Stem | 410SS | | | | | 410SS/420J2 | | | | | 410SS | | | 410SS/420J2 | | | |
| Disc | DI+ENP | | | | | DI+ENP | | | | | CF8 | | | CF8 | | | |
| O ring | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Rubber Seat | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Standard/Approval | CE, WRAS | | | | | CE, WRAS | | | | | CE, WRAS, EAC | | | CE, WRAS, EAC | | | |
| Service Condition | Max. Service Pressure 1.6MPa. (Max. Operating Temp. for WRAS Certified Valves: up to 100°C) | | | | | Max. Service Pressure 1.6MPa. (Max. Operating Temp. for WRAS Certified Valves: up to 100°C) | | | | | Max. Service Pressure 1.6MPa. (Max. Operating Temp. for WRAS Certified Valves: up to 100°C) | | | Max. Service Pressure 1.6MPa. (Max. Operating Temp. for WRAS Certified Valves: up to 100°C) | | | |
| Reference Page | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | |
| Remarks | CE(SEP for 2 ^B & below) | | | | | CE(SEP for 2 ^B & below) | | | | | CE(SEP for 2 ^B & below), WRAS Certified Valves: up to 12 ^B | | | CE(SEP for 2 ^B & below), WRAS Certified Valves: up to 12 ^B | | | |





| Type | DJ Series | | | | | DJ Series | | | | | DJL Series | | | | | DJL Series | | | | |
|-------------------|---|----|-----|-----|--|---|-----|-----|-----|----|---|-----|--|----|-----|---|-----|--|--|--|
| Butterfly Valve | | | | | | | | | | | | | | | | | | | | |
| Fig | PN16DJM(E) | | | | | G-PN16DJM(E) | | | | | PN16DJSM(E) | | | | | G-PN16DJSM(E) | | | | |
| End Connection | Wafer (EN1092 PN16) | | | | | Wafer (EN1092 PN16) | | | | | Semi Lugged (EN1092 PN16) | | | | | Semi Lugged (EN1092 PN16) | | | | |
| inch | mm | L | H | D | | L | H | D | B | L | H | D | | L | H | D | B | | | |
| 2 | 50 | 43 | 191 | 180 | | 43 | 194 | 80 | 122 | 43 | 191 | 180 | | 43 | 194 | 80 | 122 | | | |
| 2 1/2 | 65 | 46 | 199 | 180 | | 46 | 202 | 80 | 122 | 46 | 199 | 180 | | 46 | 202 | 80 | 122 | | | |
| 3 | 80 | 46 | 217 | 180 | | 46 | 236 | 110 | 135 | 46 | 217 | 180 | | 46 | 236 | 110 | 135 | | | |
| 4 | 100 | 52 | 227 | 180 | | 52 | 246 | 110 | 135 | 52 | 227 | 180 | | 52 | 246 | 110 | 135 | | | |
| 5 | 125 | 56 | 265 | 230 | | 56 | 274 | 110 | 150 | 56 | 265 | 230 | | 56 | 274 | 110 | 150 | | | |
| 6 | 150 | 56 | 277 | 230 | | 56 | 286 | 110 | 150 | 56 | 277 | 230 | | 56 | 286 | 110 | 150 | | | |
| 8 | 200 | 60 | 295 | 350 | | 60 | 325 | 170 | 180 | 60 | 295 | 350 | | 60 | 325 | 170 | 180 | | | |
| 10 | 250 | | | | | 68 | 381 | 250 | 250 | | | | | | | | | | | |
| 12 | 300 | | | | | 78 | 406 | 250 | 250 | | | | | | | | | | | |
| 14 | 350 | | | | | 78 | 461 | 360 | 350 | | | | | | | | | | | |
| 16 | 400 | | | | | 102 | 516 | 360 | 350 | | | | | | | | | | | |
| 18 | 450 | | | | | 114 | 540 | 360 | 350 | | | | | | | | | | | |
| 20 | 500 | | | | | 127 | 623 | 500 | 400 | | | | | | | | | | | |
| 24 | 600 | | | | | 154 | 671 | 500 | 400 | | | | | | | | | | | |
| Body | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | |
| Stem/Bottom Stem | 410SS | | | | | 410SS/420J2 | | | | | 410SS | | | | | 410SS | | | | |
| Disc | CF8M | | | | | CF8M | | | | | CF8M | | | | | CF8M | | | | |
| O ring | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | |
| Rubber Seat | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | |
| Standard/Approval | CE, WRAS, EAC | | | | | CE, WRAS, EAC | | | | | CE, WRAS, EAC | | | | | CE, WRAS, EAC | | | | |
| Service Condition | Max. Service Pressure 1.6MPa. (Max. Operating Temp. for WRAS Certified Valves: up to 100°C) | | | | | Max. Service Pressure 1.6MPa. (Max. Operating Temp. for WRAS Certified Valves: up to 100°C) | | | | | Max. Service Pressure 1.6MPa. (Max. Operating Temp. for WRAS Certified Valves: up to 100°C) | | | | | Max. Service Pressure 1.6MPa. (Max. Operating Temp. for WRAS Certified Valves: up to 100°C) | | | | |
| Reference Page | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | |
| Remarks | CE(SEP for 2 ^B & below), WRAS Certified Valves: up to 12 ^B | | | | | CE(SEP for 2 ^B & below), WRAS Certified Valves: up to 12 ^B | | | | | CE(SEP for 2 ^B & below), WRAS Certified Valves: up to 12 ^B | | | | | CE(SEP for 2 ^B & below), WRAS Certified Valves: up to 12 ^B | | | | |





| Type | DJL Series | | | | | DJL Series | | | | | DJ Series | | | | | DJ Series | | | | |
|-------------------|---|----|-----|-----|--|---|-----|-----|-----|----|--|-----|--|----|-----|--|-----|--|--|--|
| Butterfly Valve | | | | | | | | | | | | | | | | | | | | |
| Fig | PN16DJLM(E) | | | | | G-PN16DJLM(E) | | | | | PN25DJE | | | | | G-PN25DJE | | | | |
| End Connection | Lugged (EN1092 PN16) | | | | | Lugged (EN1092 PN16) | | | | | Wafer (EN1092 PN25) | | | | | Wafer (EN1092 PN25) | | | | |
| inch | mm | L | H | D | | L | H | D | B | L | H | D | | L | H | D | B | | | |
| 2 | 50 | 43 | 191 | 180 | | 43 | 194 | 80 | 122 | 43 | 191 | 180 | | 43 | 194 | 80 | 122 | | | |
| 2 1/2 | 65 | 46 | 199 | 180 | | 46 | 202 | 80 | 122 | 46 | 199 | 180 | | 46 | 202 | 80 | 122 | | | |
| 3 | 80 | 46 | 217 | 180 | | 46 | 236 | 110 | 135 | 46 | 217 | 180 | | 46 | 236 | 110 | 135 | | | |
| 4 | 100 | 52 | 227 | 180 | | 52 | 246 | 110 | 135 | 52 | 227 | 180 | | 52 | 246 | 110 | 135 | | | |
| 5 | 125 | 56 | 265 | 230 | | 56 | 274 | 110 | 150 | 56 | 265 | 230 | | 56 | 274 | 110 | 150 | | | |
| 6 | 150 | 56 | 277 | 230 | | 56 | 286 | 110 | 150 | 56 | 277 | 230 | | 56 | 286 | 110 | 150 | | | |
| 8 | 200 | 60 | 295 | 350 | | 60 | 325 | 170 | 180 | | | | | 60 | 325 | 250 | 250 | | | |
| 10 | 250 | | | | | 68 | 381 | 250 | 250 | | | | | 68 | 381 | 250 | 250 | | | |
| 12 | 300 | | | | | 78 | 406 | 250 | 250 | | | | | 78 | 406 | 250 | 250 | | | |
| 14 | 350 | | | | | 78 | 461 | 360 | 350 | | | | | | | | | | | |
| 16 | 400 | | | | | 102 | 516 | 360 | 350 | | | | | | | | | | | |
| 18 | 450 | | | | | 114 | 540 | 360 | 350 | | | | | | | | | | | |
| 20 | 500 | | | | | 127 | 623 | 500 | 400 | | | | | | | | | | | |
| 24 | 600 | | | | | 154 | 671 | 500 | 400 | | | | | | | | | | | |
| Body | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | |
| Stem/Bottom Stem | 410SS | | | | | 410SS/420J2 | | | | | 403SS/410SS/420J2 | | | | | 403SS/410SS/420J2 | | | | |
| Disc | CF8M | | | | | CF8M | | | | | DI+ENP | | | | | DI+ENP | | | | |
| O ring | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | EPDM | | | | | EPDM | | | | |
| Rubber Seat | NBR (E: EPDM) | | | | | NBR (E: EPDM) | | | | | EPDM | | | | | EPDM | | | | |
| Standard/Approval | CE, WRAS, EAC | | | | | CE, WRAS, EAC | | | | | | | | | | | | | | |
| Service Condition | Max. Service Pressure 1.6MPa. (Max. Operating Temp. for WRAS Certified Valves: up to 100°C) | | | | | Max. Service Pressure 1.6MPa. (Max. Operating Temp. for WRAS Certified Valves: up to 100°C) | | | | | Max. Service Pressure 2.5MPa | | | | | Max. Service Pressure 2.5MPa | | | | |
| Reference Page | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV31 | | | | |
| Remarks | CE(SEP for 2 ^B & below), WRAS Certified Valves: up to 12 ^B | | | | | CE(SEP for 2 ^B & below), WRAS Certified Valves: up to 12 ^B | | | | | | | | | | | | | | |





| Type | DJ Series | | | | | DJ Series | | | | DJL Series | | | DJL Series | | | |
|-------------------|---|----|-----|-----|--|---|-----|-----|-----|--|-----|-----|---|-----|-----|-----|
| Butterfly Valve |  | | | | |  | | | |  | | |  | | | |
| Fig | PN25DJUE | | | | | G-PN25DJUE | | | | PN25DJLE | | | G-PN25DJLE | | | |
| End Connection | Wafer (EN1092 PN25) | | | | | Wafer (EN1092 PN25) | | | | Lugged (EN1092 PN25) | | | Lugged (EN1092 PN25) | | | |
| inch | mm | L | H | D | | L | H | D | B | L | H | D | L | H | D | B |
| 2 | 50 | 43 | 191 | 180 | | 43 | 194 | 80 | 122 | 43 | 191 | 180 | 43 | 194 | 80 | 122 |
| 2 1/2 | 65 | 46 | 199 | 180 | | 46 | 202 | 80 | 122 | 46 | 199 | 180 | 46 | 202 | 80 | 122 |
| 3 | 80 | 46 | 217 | 180 | | 46 | 236 | 110 | 135 | 46 | 217 | 180 | 46 | 236 | 110 | 135 |
| 4 | 100 | 52 | 227 | 180 | | 52 | 246 | 110 | 135 | 52 | 227 | 180 | 52 | 246 | 110 | 135 |
| 5 | 125 | 56 | 265 | 230 | | 56 | 274 | 110 | 150 | 56 | 265 | 230 | 56 | 274 | 110 | 150 |
| 6 | 150 | 56 | 277 | 230 | | 56 | 286 | 110 | 150 | 56 | 277 | 230 | 56 | 286 | 110 | 150 |
| 8 | 200 | | | | | 60 | 325 | 250 | 250 | | | | 60 | 325 | 250 | 250 |
| 10 | 250 | | | | | 68 | 381 | 250 | 250 | | | | 68 | 381 | 250 | 250 |
| 12 | 300 | | | | | 78 | 406 | 250 | 250 | | | | 78 | 406 | 250 | 250 |
| Body | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | FCD450-10(ASTM A536) | | | |
| Stem/Bottom Stem | 403SS/410SS/420J2 | | | | | 403SS/410SS/420J2 | | | | 403SS/410SS/420J2 | | | 403SS/410SS/420J2 | | | |
| Disc | CF8 | | | | | CF8 | | | | DI+ENP | | | DI+ENP | | | |
| O ring | EPDM | | | | | EPDM | | | | EPDM | | | EPDM | | | |
| Rubber Seat | EPDM | | | | | EPDM | | | | EPDM | | | EPDM | | | |
| Service Condition | Max. Service Pressure 2.5MPa | | | | | Max. Service Pressure 2.5MPa | | | | Max. Service Pressure 2.5MPa | | | Max. Service Pressure 2.5MPa | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | |





| Type | DJL Series | | | | | DJL Series | | | | DJ Series (BV13F(FSK)) | | | |
|-------------------|---|----|-----|-----|--|---|-----|-----|-----|--|-----|-----|-------|
| Butterfly Valve |  | | | | |  | | | |  | | | |
| Fig | PN25DJLUE | | | | | G-PN25DJLUE | | | | G-PN16SFKBV13FUE | | | |
| End Connection | Lugged (EN1092 PN25) | | | | | Lugged (EN1092 PN25) | | | | Double flanged (EN1092-2 PN16) | | | |
| inch | mm | L | H | D | | L | H | D | B | L | H | D | B |
| 2 | 50 | 43 | 191 | 180 | | 43 | 194 | 80 | 122 | | | | |
| 2 1/2 | 65 | 46 | 199 | 180 | | 46 | 202 | 80 | 122 | | | | |
| 3 | 80 | 46 | 217 | 180 | | 46 | 236 | 110 | 135 | | | | |
| 4 | 100 | 52 | 227 | 180 | | 52 | 246 | 110 | 135 | | | | |
| 5 | 125 | 56 | 265 | 230 | | 56 | 274 | 110 | 150 | | | | |
| 6 | 150 | 56 | 277 | 230 | | 56 | 286 | 110 | 150 | | | | |
| 8 | 200 | | | | | 60 | 325 | 250 | 250 | | | | |
| 10 | 250 | | | | | 68 | 381 | 250 | 250 | | | | |
| 12 | 300 | | | | | 78 | 406 | 250 | 250 | | | | |
| 26 | 650 | | | | | | | | | 292 | TBA | 400 | 402 |
| 28 | 700 | | | | | | | | | 292 | TBA | 400 | 402 |
| 30 | 750 | | | | | | | | | 318 | TBA | 400 | 402 |
| 32 | 800 | | | | | | | | | 318 | TBA | 400 | 402 |
| 36 | 900 | | | | | | | | | 330 | TBA | 400 | 448.5 |
| 40 | 1000 | | | | | | | | | 410 | TBA | 400 | 448.5 |
| 48 | 1200 | | | | | | | | | 470 | TBA | 450 | 496 |
| Body | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | |
| Stem/Bottom Stem | 403SS/410SS/420J2 | | | | | 403SS/410SS/420J2 | | | | 420SS | | | |
| Disc | CF8 | | | | | CF8 | | | | 304SS | | | |
| O ring | EPDM | | | | | EPDM | | | | NBR | | | |
| Rubber Seat | EPDM | | | | | EPDM | | | | EPDM | | | |
| Service Condition | Max. Service Pressure 2.5MPa | | | | | Max. Service Pressure 2.5MPa | | | | Max. Service Pressure 1.6MPa, -15°C~120°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | | | |





| Type | DJ Series | | | | DJ Series | | | | DJL Series | | | DJL Series | | | |
|-------------------|--|------|-----|-----|--|-----|-----|-------|--|-----|-----|--|-----|-----|-------|
| Butterfly Valve |  | | | |  | | | |  | | |  | | | |
| | NSF | | | | NSF | | | | NSF | | | NSF | | | |
| Fig | 150DJH(E) | | | | G-150DJH(E) | | | | 150DJLH(E) | | | G-150DJLH(E) | | | |
| End Connection | Wafer (ASME CL. 150) | | | | Wafer (ASME CL. 150) | | | | Lugged (ASME CL. 150) | | | Lugged (ASME CL. 150) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | B |
| 2 | 50 | 42.9 | 191 | 180 | 42.9 | 194 | 80 | 121.5 | 42.9 | 191 | 180 | 42.9 | 194 | 80 | 121.5 |
| 2 1/2 | 65 | 46 | 199 | 180 | 46 | 202 | 80 | 121.5 | 46 | 199 | 180 | 46 | 202 | 80 | 121.5 |
| 3 | 80 | 46 | 217 | 180 | 46 | 236 | 110 | 135 | 46 | 217 | 180 | 46 | 236 | 110 | 135 |
| 4 | 100 | 52.3 | 227 | 180 | 52.3 | 246 | 110 | 135 | 52.3 | 227 | 180 | 52.3 | 246 | 110 | 135 |
| 5 | 125 | 55.6 | 265 | 230 | 55.6 | 274 | 110 | 150 | 55.6 | 265 | 230 | 55.6 | 274 | 110 | 150 |
| 6 | 150 | 55.6 | 277 | 230 | 55.6 | 286 | 110 | 150 | 55.6 | 277 | 230 | 55.6 | 286 | 110 | 150 |
| 8 | 200 | 60.5 | 295 | 350 | 60.5 | 325 | 170 | 180 | 60.5 | 295 | 350 | 60.5 | 325 | 170 | 180 |
| 10 | 250 | | | | 68.3 | 381 | 170 | 180 | | | | 68.3 | 381 | 170 | 180 |
| 12 | 300 | | | | 77.7 | 406 | 170 | 180 | | | | 77.7 | 406 | 170 | 180 |
| 14 | 350 | | | | 77.7 | 445 | 310 | 220 | | | | 77.7 | 445 | 310 | 220 |
| 16 | 400 | | | | 101.6 | 500 | 310 | 220 | | | | 101.6 | 500 | 310 | 220 |
| 18 | 450 | | | | 114.3 | 524 | 310 | 220 | | | | 114.3 | 524 | 310 | 220 |
| 20 | 500 | | | | 127 | 589 | 500 | 360 | | | | 127 | 589 | 500 | 360 |
| 24 | 600 | | | | 153.9 | 637 | 500 | 360 | | | | 153.9 | 637 | 500 | 360 |
| Body | ASTM A536 | | | | ASTM A536 | | | | ASTM A536 | | | ASTM A536 | | | |
| Stem/Bottom Stem | 316SS | | | | 316SS | | | | 316SS | | | 316SS | | | |
| Disc | CF8M | | | | CF8M | | | | CF8M | | | CF8M | | | |
| O ring | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Rubber Seat | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Standard/Approval | NSF372 | | | | NSF372 | | | | NSF372 | | | NSF372 | | | |
| Service Condition | NBR: 0°C~+70°C 1.03MPa, EPDM: -20°C~+120°C 1.03MPa/Continuous Service Temp. 0°C~+100°C | | | | NBR: 0°C~+70°C 1.03MPa, EPDM: -20°C~+120°C 1.03MPa/Continuous Service Temp. 0°C~+100°C | | | | NBR: 0°C~+70°C 1.03MPa, EPDM: -20°C~+120°C 1.03MPa/Continuous Service Temp. 0°C~+100°C | | | NBR: 0°C~+70°C 1.03MPa, EPDM: -20°C~+120°C 1.03MPa/Continuous Service Temp. 0°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | |

| Type | DJ Series | | | | DJ Series | | | | DJ Series | | | DJL Series | | | |
|-------------------|--|------|-----|-----|--|-----|-----|-----|--|-----|-----|--|------|-----|-----|
| Butterfly Valve |  | | | |  | | | |  | | |  | | | |
| | NSF | | | | NSF | | | | NSF | | | NSF | | | |
| Fig | 250DJM(E) | | | | G-250DJM(E) | | | | G-150DJM(E) | | | 250DJLM(E) | | | |
| End Connection | Wafer (ASME CL. 250) | | | | Wafer (ASME CL. 250) | | | | Wafer (ASME CL. 150) | | | Lugged (ASME CL. 250) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | B | L | H | D |
| 2 | 50 | 42.9 | 191 | 180 | 42.9 | 194 | 80 | 122 | 42.9 | 194 | 80 | 122 | 42.9 | 191 | 180 |
| 2 1/2 | 65 | 46 | 199 | 180 | 46 | 202 | 80 | 122 | 46 | 202 | 80 | 122 | 46 | 199 | 180 |
| 3 | 80 | 46 | 217 | 180 | 46 | 236 | 110 | 135 | 46 | 236 | 110 | 135 | 46 | 217 | 180 |
| 4 | 100 | 52.3 | 227 | 180 | 52.3 | 246 | 110 | 135 | 52.3 | 246 | 110 | 135 | 52.3 | 227 | 180 |
| 5 | 125 | 55.6 | 265 | 230 | 55.6 | 274 | 110 | 150 | 55.6 | 274 | 110 | 150 | 55.6 | 265 | 230 |
| 6 | 150 | 55.6 | 277 | 230 | 55.6 | 286 | 110 | 150 | 55.6 | 286 | 110 | 150 | 55.6 | 277 | 230 |
| 8 | 200 | 60.5 | 295 | 350 | 60.5 | 325 | 170 | 180 | 60.5 | 325 | 170 | 180 | 60.5 | 295 | 350 |
| 10 | 250 | | | | 68.3 | 381 | 250 | 250 | 68.3 | 381 | 170 | 180 | | | |
| 12 | 300 | | | | 77.7 | 406 | 250 | 250 | 77.7 | 406 | 170 | 180 | | | |
| 14 | 350 | | | | | | | | 77.7 | 447 | 310 | 220 | | | |
| 16 | 400 | | | | | | | | 101.6 | 502 | 310 | 220 | | | |
| 18 | 450 | | | | | | | | 114.3 | 526 | 310 | 220 | | | |
| 20 | 500 | | | | | | | | 127 | 587 | 500 | 360 | | | |
| 24 | 600 | | | | | | | | 153.9 | 635 | 500 | 360 | | | |
| Body | ASTM A536 | | | | ASTM A536 | | | | ASTM A536 | | | ASTM A536 | | | |
| Stem/Bottom Stem | 329SS | | | | 329SS | | | | 329SS | | | 329SS | | | |
| Disc | CF8M | | | | CF8M | | | | CF8M | | | CF8M | | | |
| O ring | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Rubber Seat | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Standard/Approval | NSF372 | | | | NSF372 | | | | NSF372 | | | NSF372 | | | |
| Service Condition | NBR: 0°C~+70°C 1.72 MPa, EPDM: -20°C~+120°C 1.72 MPa/Continuous Service Temp. 0°C~+100°C | | | | NBR: 0°C~+70°C 1.72 MPa, EPDM: -20°C~+120°C 1.72 MPa/Continuous Service Temp. 0°C~+100°C | | | | NBR: 0°C~+70°C 1.03MPa, EPDM: -20°C~+120°C 1.03MPa/Continuous Service Temp. 0°C~+100°C | | | NBR: 0°C~+70°C 1.72 MPa, EPDM: -20°C~+120°C 1.72 MPa/Continuous Service Temp. 0°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | |

| Type | DJL Series | | | | | | DJL Series | | | | DJ Series | | | DJ Series | | | |
|-------------------|--|------|-----|-----|-----|-------|--|-----|-----|------|--|-----|------|--|-----|-------|--|
| Butterfly Valve |  | | | | | |  | | | |  | | |  | | | |
| Fig | G-250DJLM(E) | | | | | | G-150DJLM(E) | | | | 200DJJA(E) | | | G-200DJJA(E) | | | |
| End Connection | Lugged (ASME CL. 250) | | | | | | Lugged (ASME CL. 150) | | | | Wafer (ASME CL. 200) | | | Wafer (ASME CL. 200) | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | L | H | D | B | |
| 2 | 50 | 42.9 | 194 | 80 | 122 | 42.9 | 194 | 80 | 122 | 42.9 | 191 | 180 | 42.9 | 194 | 80 | 121.5 | |
| 2 1/2 | 65 | 46 | 202 | 80 | 122 | 46 | 202 | 80 | 122 | 46 | 199 | 180 | 46 | 202 | 80 | 121.5 | |
| 3 | 80 | 46 | 236 | 110 | 135 | 46 | 236 | 110 | 135 | 46 | 217 | 180 | 46 | 236 | 110 | 135 | |
| 4 | 100 | 52.3 | 246 | 110 | 135 | 52.3 | 246 | 110 | 135 | 52.3 | 227 | 180 | 52.3 | 246 | 110 | 135 | |
| 5 | 125 | 55.6 | 274 | 110 | 150 | 55.6 | 274 | 110 | 150 | 55.6 | 265 | 230 | 55.6 | 274 | 110 | 150 | |
| 6 | 150 | 55.6 | 286 | 110 | 150 | 55.6 | 286 | 110 | 150 | 55.6 | 277 | 230 | 55.6 | 286 | 110 | 150 | |
| 8 | 200 | 60.5 | 325 | 170 | 180 | 60.5 | 325 | 170 | 180 | 60.5 | 295 | 350 | 60.5 | 325 | 170 | 180 | |
| 10 | 250 | 68.3 | 381 | 250 | 250 | 68.3 | 381 | 170 | 180 | | | | 68.3 | 381 | 170 | 180 | |
| 12 | 300 | 77.7 | 406 | 250 | 250 | 77.7 | 406 | 170 | 180 | | | | 77.7 | 406 | 170 | 180 | |
| 14 | 350 | | | | | 77.7 | 447 | 310 | 220 | | | | | | | | |
| 16 | 400 | | | | | 101.6 | 502 | 310 | 220 | | | | | | | | |
| 18 | 450 | | | | | 114.3 | 526 | 310 | 220 | | | | | | | | |
| 20 | 500 | | | | | 127 | 587 | 500 | 360 | | | | | | | | |
| 24 | 600 | | | | | 153.9 | 635 | 500 | 360 | | | | | | | | |
| Body | ASTM A536 | | | | | | ASTM A536 | | | | ASTM A536 | | | ASTM A536 | | | |
| Stem/Bottom Stem | 329SS | | | | | | 329SS | | | | 410SS | | | 410SS | | | |
| Disc | CF8M | | | | | | CF8M | | | | Al-BC | | | Al-BC | | | |
| O ring | NBR (E: EPDM) | | | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Rubber Seat | NBR (E: EPDM) | | | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | NBR (E: EPDM) | | | |
| Standard/Approval | NSF372 | | | | | | NSF372 | | | | NSF372 | | | NSF372 | | | |
| Service Condition | NBR: 0°C~+70°C 1.72 MPa, EPDM: -20°C~+120°C 1.72 MPa/Continuous Service Temp. 0°C~+100°C | | | | | | NBR: 0°C~+70°C 1.03MPa, EPDM: -20°C~+120°C 1.03MPa/Continuous Service Temp. 0°C~+100°C | | | | NBR: 0°C~+70°C 1.38 MPa, EPDM: -20°C~+120°C 1.38 MPa/Continuous Service Temp. 0°C~+100°C | | | NBR: 0°C~+70°C 1.38 MPa, EPDM: -20°C~+120°C 1.38 MPa/Continuous Service Temp. 0°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | |





| Type | DJ Series | | | | DJL Series | | | | DJL Series | | | | DJL Series | | | | |
|-------------------|--|-------|-----|-----|--|------|-----|-----|--|------|-----|-----|--|-------|-----|-----|-----|
| Butterfly Valve |  | | | |  | | | |  | | | |  | | | | |
| Fig | G-150DJJA(E) | | | | 200DJJA(E) | | | | G-200DJJA(E) | | | | G-150DJJA(E) | | | | |
| End Connection | Wafer (ASME CL. 150) | | | | Lugged (ASME CL. 200) | | | | Lugged (ASME CL. 200) | | | | Lugged (ASME CL. 150) | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 2 | 50 | | | | | 42.9 | 191 | 180 | 121.5 | 42.9 | 194 | 80 | 121.5 | | | | |
| 2 1/2 | 65 | | | | | 46 | 199 | 180 | 121.5 | 46 | 202 | 80 | 121.5 | | | | |
| 3 | 80 | | | | | 46 | 217 | 180 | 135 | 46 | 236 | 110 | 135 | | | | |
| 4 | 100 | | | | | 52.3 | 227 | 180 | 135 | 52.3 | 246 | 110 | 135 | | | | |
| 5 | 125 | | | | | 55.6 | 265 | 230 | 150 | 55.6 | 274 | 110 | 150 | | | | |
| 6 | 150 | | | | | 55.6 | 277 | 230 | 150 | 55.6 | 286 | 110 | 150 | | | | |
| 8 | 200 | | | | | 60.5 | 295 | 350 | 180 | 60.5 | 325 | 170 | 180 | | | | |
| 10 | 250 | | | | | | | | 180 | 68.3 | 381 | 170 | 180 | | | | |
| 12 | 300 | | | | | | | | 180 | 77.7 | 406 | 170 | 180 | | | | |
| 14 | 350 | 77.7 | 447 | 310 | 220 | | | | | | | | | 77.7 | 447 | 310 | 220 |
| 16 | 400 | 101.6 | 502 | 310 | 220 | | | | | | | | | 101.6 | 502 | 310 | 220 |
| 18 | 450 | 114.3 | 526 | 310 | 220 | | | | | | | | | 114.3 | 526 | 310 | 220 |
| 20 | 500 | 127 | 587 | 500 | 360 | | | | | | | | | 127 | 587 | 500 | 360 |
| 24 | 600 | 153.9 | 635 | 500 | 360 | | | | | | | | | 153.9 | 635 | 500 | 360 |
| Body | ASTM A536 | | | | ASTM A536 | | | | ASTM A536 | | | | ASTM A536 | | | | |
| Stem/Bottom Stem | 410SS/420SS | | | | 410SS | | | | 410SS | | | | 410SS/420SS | | | | |
| Disc | Al-BC | | | | Al-BC | | | | Al-BC | | | | Al-BC | | | | |
| O ring | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | |
| Rubber Seat | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | |
| Standard/Approval | NSF372 | | | | NSF372 | | | | NSF372 | | | | NSF372 | | | | |
| Service Condition | NBR: 0°C~+70°C 1.03MPa, EPDM: -20°C~+120°C 1.03MPa/Continuous Service Temp. 0°C~+100°C | | | | NBR: 0°C~+70°C 1.38 MPa, EPDM: -20°C~+120°C 1.38 MPa/Continuous Service Temp. 0°C~+100°C | | | | NBR: 0°C~+70°C 1.38 MPa, EPDM: -20°C~+120°C 1.38 MPa/Continuous Service Temp. 0°C~+100°C | | | | NBR: 0°C~+70°C 1.03MPa, EPDM: -20°C~+120°C 1.03MPa/Continuous Service Temp. 0°C~+100°C | | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | |





| Type | DJ Series | | | | DJ Series | | | | DJL Series | | | | DJL Series | | | |
|-------------------|---|------|-----|-----|---|-----|-----|-------|---|-----|-----|------|---|-----|-------|--|
| Butterfly Valve |  | | | |  | | | |  | | | |  | | | |
| Fig | 250DJA(E) | | | | G-250DJA(E) | | | | 250DJLA(E) | | | | G-250DJLA(E) | | | |
| End Connection | Wafer (ASME CL. 250) | | | | Wafer (ASME CL. 250) | | | | Lugged (ASME CL. 250) | | | | Lugged (ASME CL. 250) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | B | |
| 2 | 50 | 42.9 | 191 | 180 | 42.9 | 194 | 80 | 121.5 | 42.9 | 191 | 180 | 42.9 | 194 | 80 | 121.5 | |
| 2 1/2 | 65 | 46 | 199 | 180 | 46 | 202 | 80 | 121.5 | 46 | 199 | 180 | 46 | 202 | 80 | 121.5 | |
| 3 | 80 | 46 | 217 | 180 | 46 | 236 | 110 | 135 | 46 | 217 | 180 | 46 | 236 | 110 | 135 | |
| 4 | 100 | 52.3 | 227 | 180 | 52.3 | 246 | 110 | 135 | 52.3 | 227 | 180 | 52.3 | 246 | 110 | 135 | |
| 5 | 125 | 55.6 | 265 | 230 | 55.6 | 274 | 110 | 150 | 55.6 | 265 | 230 | 55.6 | 274 | 110 | 150 | |
| 6 | 150 | 55.6 | 277 | 230 | 55.6 | 286 | 110 | 150 | 55.6 | 277 | 230 | 55.6 | 286 | 110 | 150 | |
| 8 | 200 | 60.5 | 295 | 350 | 60.5 | 325 | 170 | 180 | 60.5 | 295 | 350 | 60.5 | 325 | 170 | 180 | |
| 10 | 250 | | | | 68.3 | 381 | 250 | 250 | | | | 68.3 | 381 | 250 | 250 | |
| 12 | 300 | | | | 77.7 | 406 | 250 | 250 | | | | 77.7 | 406 | 250 | 250 | |
| Body | ASTM A536 | | | | ASTM A536 | | | | ASTM A536 | | | | ASTM A536 | | | |
| Stem/Bottom Stem | 410SS | | | | 410SS | | | | 410SS | | | | 410SS | | | |
| Disc | Al-BC | | | | Al-BC | | | | Al-BC | | | | Al-BC | | | |
| O ring | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | |
| Rubber Seat | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | |
| Stem Bearing | Metal Backed PTFE & G/F PTFE | | | | Metal Backed PTFE & G/F PTFE | | | | Metal Backed PTFE & G/F PTFE | | | | Metal Backed PTFE & G/F PTFE | | | |
| Standard/Approval | NSF372 | | | | NSF372 | | | | NSF372 | | | | NSF372 | | | |
| Service Condition | NBR: 0°C~+70°C 1.72 MPa for CL 250, EPDM: -20°C~+120°C 1.72 MPa for CL 250 /Continuous Service Temp. 0°C~+100°C | | | | NBR: 0°C~+70°C 1.72 MPa for CL 250, EPDM: -20°C~+120°C 1.72 MPa for CL 250 /Continuous Service Temp. 0°C~+100°C | | | | NBR: 0°C~+70°C 1.72 MPa for CL 250, EPDM: -20°C~+120°C 1.72 MPa for CL 250 /Continuous Service Temp. 0°C~+100°C | | | | NBR: 0°C~+70°C 1.72 MPa for CL 250, EPDM: -20°C~+120°C 1.72 MPa for CL 250 /Continuous Service Temp. 0°C~+100°C | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | |





| Type | DJF Series | | | | DJF Series | | | | FJ Series | | | | FJ Series | | | |
|-------------------|--|-----|-----|-----|--|-----|-----|-----|--|----|-----|-----|---|-----|-----|-----|
| Butterfly Valve |  | | | |  | | | |  | | | |  | | | |
| Fig | G-10DJFU(E) | | | | G-16DJFU(E) | | | | 10FJUF | | | | G-10FJUF | | | |
| End Connection | JIS B2239 10K FF | | | | JIS B2239 16K FF | | | | Wafer (JIS 10K) | | | | Wafer (JIS 10K) | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | L | H | D | B |
| 2 | 50 | | | | | | | | | 43 | 176 | 180 | 43 | 179 | 80 | 122 |
| 2 1/2 | 65 | | | | | | | | | 46 | 184 | 180 | 46 | 187 | 80 | 122 |
| 3 | 80 | | | | | | | | | 46 | 194 | 180 | 46 | 213 | 110 | 135 |
| 4 | 100 | 100 | 214 | 110 | 150 | 100 | 214 | 110 | 150 | 52 | 204 | 180 | 52 | 223 | 110 | 135 |
| 5 | 125 | 100 | 239 | 110 | 150 | 100 | 244 | 170 | 180 | 56 | 249 | 230 | 56 | 258 | 110 | 150 |
| 6 | 150 | 100 | 252 | 110 | 150 | 100 | 257 | 170 | 180 | 56 | 261 | 230 | 56 | 270 | 110 | 150 |
| 8 | 200 | 100 | 288 | 170 | 180 | 152 | 389 | 170 | 180 | | | | 60 | 311 | 170 | 180 |
| 10 | 250 | 110 | 369 | 170 | 180 | 110 | 389 | 310 | 280 | | | | 68 | 381 | 250 | 250 |
| 12 | 300 | 110 | 394 | 170 | 180 | 178 | 414 | 310 | 280 | | | | 78 | 406 | 250 | 250 |
| 14 | 350 | 120 | 445 | 310 | 220 | 190 | 461 | 360 | 310 | | | | 78 | 437 | 250 | 250 |
| 16 | 400 | 130 | 500 | 310 | 220 | 216 | 516 | 360 | 310 | | | | 102 | 500 | 310 | 220 |
| 18 | 450 | 150 | 524 | 310 | 220 | 150 | 539 | 360 | 310 | | | | 114 | 524 | 310 | 220 |
| 20 | 500 | 160 | 589 | 360 | 350 | 160 | 623 | 500 | 410 | | | | 127 | 589 | 360 | 350 |
| 22 | 550 | 170 | 613 | 360 | 350 | 170 | 647 | 500 | 410 | | | | | | | |
| 24 | 600 | 170 | 637 | 360 | 350 | 170 | 671 | 500 | 410 | | | | 154 | 637 | 360 | 350 |
| Body | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | |
| Stem/Bottom Stem | 410SS/420J2 | | | | 410SS/420J2 | | | | 410SS/403SS | | | | 410SS/403SS | | | |
| Disc | CF8 | | | | CF8 | | | | CF8 | | | | CF8 | | | |
| O ring | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | FKM | | | | FKM | | | |
| Rubber Seat | NBR (E: EPDM) | | | | NBR (E: EPDM) | | | | FKM | | | | FKM | | | |
| Service Condition | NBR: 0°C~+70°C 1.0MPa for 10K/1.6MPa for 16K, EPDM: -20°C~+120°C 1.0MPa for 10K/1.6MPa for 16K | | | | NBR: 0°C~+70°C 1.0MPa for 10K/1.6MPa for 16K, EPDM: -20°C~+120°C 1.0MPa for 10K/1.6MPa for 16K | | | | 5°C~+90°C 1.0MPa up to 12"/0.5MPa for 14" & above | | | | 5°C~+90°C 1.0MPa up to 12"/0.5MPa for 14" & above | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV31 | | | | | | | | | | | |





| Type | NFJ Series | | | | NFJ Series | | | | NFJ Series | | | NFJ Series | | | |
|-------------------|--|----|-----|-----|--|-----|-----|-----|--|-----|-----|--|-----|-----|-----|
| Butterfly Valve | | | | | | | | | | | | | | | |
| Fig | 10NFJUE(W) | | | | G-10NFJUE(W) | | | | 10NFJNE(W) | | | G-10NFJNE(W) | | | |
| End Connection | Wafer (JIS 10K) | | | | Wafer (JIS 10K) | | | | Wafer (JIS 10K) | | | Wafer (JIS 10K) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | B |
| 2 | 50 | 43 | 176 | 180 | 43 | 179 | 80 | 122 | 43 | 176 | 180 | 43 | 179 | 80 | 122 |
| 2 1/2 | 65 | 46 | 184 | 180 | 46 | 187 | 80 | 122 | 46 | 184 | 180 | 46 | 187 | 80 | 122 |
| 3 | 80 | 46 | 194 | 180 | 46 | 213 | 110 | 135 | 46 | 194 | 180 | 46 | 213 | 110 | 135 |
| 4 | 100 | 52 | 204 | 180 | 52 | 223 | 110 | 135 | 52 | 204 | 180 | 52 | 223 | 110 | 135 |
| 5 | 125 | 56 | 249 | 230 | 56 | 258 | 110 | 150 | 56 | 249 | 230 | 56 | 258 | 110 | 150 |
| 6 | 150 | 56 | 261 | 230 | 56 | 270 | 110 | 150 | 56 | 261 | 230 | 56 | 270 | 110 | 150 |
| 8 | 200 | | | | 60 | 311 | 170 | 180 | | | | 60 | 311 | 170 | 180 |
| 10 | 250 | | | | 68 | 381 | 250 | 250 | | | | 68 | 381 | 250 | 250 |
| 12 | 300 | | | | 78 | 406 | 250 | 250 | | | | 78 | 406 | 250 | 250 |
| Body | FCD450-10 + Nylon Lining | | | | FCD450-10 + Nylon Lining | | | | FCD450-10 + Nylon Lining | | | FCD450-10 + Nylon Lining | | | |
| Stem/Bottom Stem | 410SS | | | | 410SS | | | | 410SS | | | 410SS | | | |
| Disc | CF8 | | | | CF8 | | | | DI + Nylon Lining | | | DI + Nylon Lining | | | |
| O ring | EPDM (W: NBR) | | | | EPDM (W: NBR) | | | | EPDM (W: NBR) | | | EPDM (W: NBR) | | | |
| Rubber Seat | EPDM (W: W-NBR) | | | | EPDM (W: W-NBR) | | | | EPDM (W: W-NBR) | | | EPDM (W: W-NBR) | | | |
| Service Condition | CF8 Disc: 0°C~+60°C 1.0 MPa, FCD450-10+Nylon Lining: 0°C~+40°C 1.0 MPa | | | | CF8 Disc: 0°C~+60°C 1.0 MPa, FCD450-10+Nylon Lining: 0°C~+40°C 1.0 MPa | | | | CF8 Disc: 0°C~+60°C 1.0 MPa, FCD450-10+Nylon Lining: 0°C~+40°C 1.0 MPa | | | CF8 Disc: 0°C~+60°C 1.0 MPa, FCD450-10+Nylon Lining: 0°C~+40°C 1.0 MPa | | | |





| Type | NFJ Series | | | | NFJ Series | | | | LJ Series | | | LJ Series | | | |
|-------------------|--|----|-----|-----|--|-----|-----|---|-------------------------|-----|-----|-------------------------|-----|-----|-----|
| Butterfly Valve | | | | | | | | | | | | | | | |
| Fig | VG-10NFJUE(W) | | | | VG-10NFJNE(W) | | | | 10LJF | | | G-10LJF | | | |
| End Connection | Wafer (JIS 10K) | | | | Wafer (JIS 10K) | | | | Wafer (JIS 10K) | | | Wafer (JIS 10K) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | B |
| 2 | 50 | 43 | 255 | 110 | 43 | 255 | 110 | | 43 | 155 | 230 | 43 | 175 | 110 | 150 |
| 2 1/2 | 65 | 46 | 263 | 110 | 46 | 263 | 110 | | 46 | 171 | 280 | 46 | 188 | 110 | 150 |
| 3 | 80 | 46 | 262 | 110 | 46 | 262 | 110 | | 46 | 178 | 280 | 46 | 195 | 110 | 150 |
| 4 | 100 | 52 | 272 | 110 | 52 | 272 | 110 | | 52 | 182 | 280 | 52 | 200 | 110 | 150 |
| 5 | 125 | 56 | 309 | 170 | 56 | 309 | 170 | | 56 | 217 | 350 | 56 | 238 | 170 | 180 |
| 6 | 150 | 56 | 321 | 170 | 56 | 321 | 170 | | 56 | 230 | 350 | 56 | 253 | 170 | 180 |
| 8 | 200 | 60 | 390 | 200 | 60 | 390 | 200 | | | | | 60 | 287 | 200 | 205 |
| 10 | 250 | 68 | 461 | 310 | 68 | 461 | 310 | | | | | 68 | 357 | 310 | 280 |
| 12 | 300 | 78 | 480 | 310 | 78 | 480 | 310 | | | | | 78 | 382 | 310 | 280 |
| 14 | 350 | | | | | | | | | | | 78 | 444 | 360 | 350 |
| 16 | 400 | | | | | | | | | | | 102 | 519 | 500 | 360 |
| 18 | 450 | | | | | | | | | | | 114 | 542 | 500 | 360 |
| 20 | 500 | | | | | | | | | | | 127 | 589 | 500 | 400 |
| 24 | 600 | | | | | | | | | | | 154 | 639 | 500 | 400 |
| Body | FCD450-10 + Nylon Lining | | | | FCD450-10 + Nylon Lining | | | | FCD450-10(ASTM A536) | | | FCD450-10(ASTM A536) | | | |
| Stem/Bottom Stem | 410SS | | | | 410SS | | | | 420J2 | | | 420J2 | | | |
| Disc | CF8 | | | | DI + Nylon Lining | | | | CF8 + PFA | | | CF8 + PFA | | | |
| O ring | EPDM (W: NBR) | | | | EPDM (W: NBR) | | | | FKM | | | FKM | | | |
| Rubber Seat | EPDM (W: W-NBR) | | | | EPDM (W: W-NBR) | | | | PFA | | | PFA | | | |
| Service Condition | CF8 Disc: 0°C~+60°C 1.0 MPa, FCD450-10+Nylon Lining: 0°C~+40°C 1.0 MPa | | | | CF8 Disc: 0°C~+60°C 1.0 MPa, FCD450-10+Nylon Lining: 0°C~+40°C 1.0 MPa | | | | -10°C~+150°C 1.0 MPa | | | -10°C~+150°C 1.0 MPa | | | |
| Reference Page | | | | | | | | | P-T Rating : Page BFV34 | | | P-T Rating : Page BFV34 | | | |





| Type | HDRJ Series (Throttling) | | | | | HDRJ Series (Throttling) | | | | | UB Series | | | UB Series | | |
|-----------------------|---|----|-----|-----|-----|---|-----|-----|-----|----|--|-----|-----|---|-----|-----|
| Butterfly Valve |  | | | | |  | | | | |  | | |  | | |
| Fig | G-10HRDJUE | | | | | G-20HRDJUE | | | | | 10UB | | | GL-10UB | | |
| End Connection | Wafer (JIS 10K) | | | | | Wafer (JIS 20K) | | | | | Wafer (JIS 10K) | | | Wafer (JIS 10K) | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | L | H | D | B |
| 11/2 | 40 | | | | | | | | | 33 | 183 | 230 | 33 | 202 | 110 | 150 |
| 2 | 50 | 43 | 210 | 110 | 135 | 43 | 210 | 110 | 135 | 43 | 176 | 230 | 43 | 192 | 140 | 150 |
| 2 1/2 | 65 | 46 | 218 | 110 | 135 | 46 | 218 | 110 | 135 | 46 | 185 | 230 | 46 | 202 | 140 | 150 |
| 3 | 80 | 46 | 236 | 110 | 135 | 46 | 236 | 110 | 135 | 46 | 207 | 280 | 46 | 226 | 170 | 195 |
| 4 | 100 | 52 | 246 | 110 | 135 | 52 | 246 | 110 | 135 | 52 | 221 | 280 | 52 | 240 | 170 | 195 |
| 5 | 125 | 56 | 274 | 110 | 150 | 56 | 274 | 110 | 150 | 56 | 240 | 350 | 56 | 261 | 200 | 204 |
| 6 | 150 | 56 | 286 | 110 | 150 | 56 | 286 | 110 | 150 | 56 | 263 | 350 | 56 | 283 | 200 | 204 |
| 8 | 200 | 60 | 325 | 170 | 180 | 60 | 325 | 170 | 180 | | | | 71 | 348 | 310 | 280 |
| 10 | 250 | 68 | 393 | 310 | 280 | 68 | 393 | 310 | 280 | | | | 76 | 416 | 360 | 310 |
| 12 | 300 | 78 | 418 | 310 | 280 | 78 | 418 | 310 | 280 | | | | 83 | 443 | 360 | 310 |
| 14 | 350 | | | | | | | | | | | | 92 | 474 | 500 | 358 |
| 16 | 400 | | | | | | | | | | | | 102 | 573 | 500 | 360 |
| 18 | 450 | | | | | | | | | | | | 114 | 607 | 500 | 360 |
| 20 | 500 | | | | | | | | | | | | 127 | 623 | 500 | 360 |
| 24 | 600 | | | | | | | | | | | | 154 | 757 | 500 | 377 |
| Body | FCD450-10(ASTM A536) | | | | | FCD450-10(ASTM A536) | | | | | CF8 | | | CF8 | | |
| Stem/Bottom Stem | 630SS | | | | | 630SS | | | | | 304SS | | | 304SS | | |
| Disc | CF8 | | | | | CF8 | | | | | CF8+Cr Plating | | | CF8+Cr Plating | | |
| Packing/O ring | EPDM | | | | | EPDM | | | | | PTFE | | | PTFE | | |
| Rubber Seat/Seat Ring | EPDM | | | | | EPDM | | | | | PTFE | | | PTFE | | |
| Service Condition | Refer to Page BFV40 | | | | | Refer to Page BFV40 | | | | | -29°C~+160°C 1.0 MPa | | | -29°C~+160°C 1.0 MPa | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV39 & 40 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV39 & 40 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV36 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV36 | | |
| Remarks | Gear Operation with Locking Device | | | | | Gear Operation with Locking Device | | | | | Double Eccentric, Unidirectional | | | Double Eccentric, Unidirectional | | |



| Type | UB Series | | | | | UB Series | | | | | UB Series | | | UB Series | | |
|-------------------|---|----|-----|-----|---|---|-----|-----|-----|----|--|-----|-----|---|-----|-----|
| Butterfly Valve |  | | | | |  | | | | |  | | |  | | |
| Fig | 10UBM | | | | | GL-10UBM | | | | | 16UB | | | GL-16UB | | |
| End Connection | Wafer (JIS 10K) | | | | | Wafer (JIS 10K) | | | | | Wafer (JIS 16K) | | | Wafer (JIS 16K) | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | L | H | D | B |
| 11/2 | 40 | 33 | 183 | 230 | | 33 | 202 | 110 | 150 | 33 | 183 | 230 | 33 | 202 | 110 | 150 |
| 2 | 50 | 43 | 176 | 230 | | 43 | 192 | 140 | 150 | 43 | 176 | 230 | 43 | 192 | 140 | 150 |
| 2 1/2 | 65 | 46 | 185 | 230 | | 46 | 202 | 140 | 150 | 46 | 186 | 230 | 46 | 202 | 140 | 150 |
| 3 | 80 | 46 | 207 | 280 | | 46 | 226 | 170 | 195 | 46 | 207 | 280 | 46 | 226 | 170 | 195 |
| 4 | 100 | 52 | 221 | 280 | | 52 | 240 | 170 | 195 | 52 | 221 | 280 | 52 | 240 | 170 | 195 |
| 5 | 125 | 56 | 240 | 350 | | 56 | 261 | 200 | 204 | 56 | 241 | 350 | 56 | 261 | 200 | 204 |
| 6 | 150 | 56 | 263 | 350 | | 56 | 283 | 200 | 204 | 56 | 263 | 350 | 56 | 283 | 200 | 204 |
| 8 | 200 | | | | | 71 | 348 | 310 | 280 | | | | 71 | 348 | 310 | 280 |
| 10 | 250 | | | | | 76 | 416 | 360 | 310 | | | | 76 | 416 | 360 | 310 |
| 12 | 300 | | | | | 83 | 443 | 360 | 310 | | | | 83 | 443 | 360 | 310 |
| 14 | 350 | | | | | 92 | 474 | 500 | 358 | | | | 92 | 474 | 500 | 358 |
| 16 | 400 | | | | | 102 | 573 | 500 | 360 | | | | 102 | 572 | 500 | 360 |
| 18 | 450 | | | | | 114 | 607 | 500 | 360 | | | | 114 | 607 | 500 | 360 |
| 20 | 500 | | | | | 127 | 623 | 500 | 360 | | | | 127 | 623 | 500 | 360 |
| 24 | 600 | | | | | 154 | 757 | 500 | 377 | | | | 154 | 757 | 500 | 377 |
| Body | CF8M | | | | | CF8M | | | | | CF8 | | | CF8 | | |
| Stem/Bottom Stem | 316SS | | | | | 316SS | | | | | 304SS | | | 304SS | | |
| Disc | CF8M+Cr Plating | | | | | CF8M+Cr Plating | | | | | CF8+Cr Plating | | | CF8+Cr Plating | | |
| Packing | PTFE | | | | | PTFE | | | | | PTFE | | | PTFE | | |
| Seat Ring | PTFE | | | | | PTFE | | | | | PTFE | | | PTFE | | |
| Service Condition | -29°C~+160°C 1.0 MPa | | | | | -29°C~+160°C 1.0 MPa | | | | | -29°C~+160°C 2.0 MPa up to 12 ⁹ /1.4MPa for 14 ⁹ & above | | | -29°C~+160°C 2.0 MPa up to 12 ⁹ /1.4MPa for 14 ⁹ & above | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV36 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV36 | | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV36 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV36 | | |
| Remarks | Double Eccentric, Unidirectional | | | | | Double Eccentric, Unidirectional | | | | | Double Eccentric, Unidirectional | | | Double Eccentric, Unidirectional | | |

| Type | UB Series | | | | | UB Series | | | | | UB Series | | | | | UB Series | | | | |
|-------------------|---|----|-----|-----|--|---|-----|-----|-----|--|--|-----|-----|--|-----|---|-----|-----|--|--|
| Butterfly Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| Fig | 16UBM | | | | | GL-16UBM | | | | | 150UB | | | | | GL-150UB | | | | |
| End Connection | Wafer (JIS 16K) | | | | | Wafer (JIS 16K) | | | | | Wafer (ASME CL. 150) | | | | | Wafer (ASME CL. 150) | | | | |
| inch | mm | L | H | D | | L | H | D | B | | L | H | D | | L | H | D | B | | |
| 11/2 | 40 | 33 | 183 | 230 | | 33 | 202 | 110 | 150 | | 33 | 183 | 230 | | 33 | 202 | 110 | 150 | | |
| 2 | 50 | 43 | 176 | 230 | | 43 | 192 | 140 | 150 | | 43 | 176 | 230 | | 43 | 192 | 140 | 150 | | |
| 2 1/2 | 65 | 46 | 186 | 230 | | 46 | 202 | 140 | 150 | | 46 | 186 | 230 | | 46 | 202 | 140 | 150 | | |
| 3 | 80 | 46 | 207 | 280 | | 46 | 226 | 170 | 195 | | 46 | 207 | 280 | | 46 | 226 | 170 | 195 | | |
| 4 | 100 | 52 | 221 | 280 | | 52 | 240 | 170 | 195 | | 52 | 221 | 280 | | 52 | 240 | 170 | 195 | | |
| 5 | 125 | 56 | 241 | 350 | | 56 | 261 | 200 | 204 | | 56 | 241 | 350 | | 56 | 261 | 200 | 204 | | |
| 6 | 150 | 56 | 263 | 350 | | 56 | 283 | 200 | 204 | | 56 | 263 | 350 | | 56 | 283 | 200 | 204 | | |
| 8 | 200 | | | | | 71 | 348 | 310 | 280 | | | | | | 71 | 348 | 310 | 280 | | |
| 10 | 250 | | | | | 76 | 416 | 360 | 310 | | | | | | 76 | 416 | 360 | 310 | | |
| 12 | 300 | | | | | 83 | 443 | 360 | 310 | | | | | | 83 | 443 | 360 | 310 | | |
| 14 | 350 | | | | | 92 | 474 | 500 | 358 | | | | | | 92 | 476 | 500 | 358 | | |
| 16 | 400 | | | | | 102 | 572 | 500 | 360 | | | | | | 102 | 572 | 500 | 360 | | |
| 18 | 450 | | | | | 114 | 607 | 500 | 360 | | | | | | 114 | 607 | 500 | 360 | | |
| 20 | 500 | | | | | 127 | 623 | 500 | 360 | | | | | | 127 | 623 | 500 | 360 | | |
| 24 | 600 | | | | | 154 | 757 | 500 | 377 | | | | | | 154 | 757 | 500 | 377 | | |
| Body | CF8M | | | | | CF8M | | | | | CF8 | | | | | CF8 | | | | |
| Stem/Bottom Stem | 329J1 | | | | | 329J1 | | | | | 304SS | | | | | 304SS | | | | |
| Disc | CF8M+Cr Plating | | | | | CF8M+Cr Plating | | | | | CF8+Cr Plating | | | | | CF8+Cr Plating | | | | |
| Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Seat Ring | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Service Condition | -29°C~+160°C 2.0 MPa up to 12 ⁹ /1.4MPa for 14 ⁹ & above | | | | | -29°C~+160°C 2.0 MPa up to 12 ⁹ /1.4MPa for 14 ⁹ & above | | | | | -29°C~+160°C 1.9 MPa up to 12 ⁹ /1.4MPa for 14 ⁹ & above | | | | | -29°C~+160°C 1.9 MPa up to 12 ⁹ /1.4MPa for 14 ⁹ & above | | | | |
| Reference Page | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV36 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV36 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV36 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV36 | | | | |
| Remarks | Double Eccentric, Unidirectional | | | | | Double Eccentric, Unidirectional | | | | | Double Eccentric, Unidirectional | | | | | Double Eccentric, Unidirectional | | | | |

| Type | UB Series | | | | | UB Series | | | | | HB Series | | | | | HB Series | | | | |
|-------------------|---|----|-----|-----|--|---|-----|-----|-----|--|--|-----|-----|--|----|---|-----|-----|--|--|
| Butterfly Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| Fig | 150UBM | | | | | GL-150UBM | | | | | 10UHB | | | | | G-10UHB | | | | |
| End Connection | Wafer (ASME CL. 150) | | | | | Wafer (ASME CL. 150) | | | | | Wafer (JIS 10K) | | | | | Wafer (JIS 10K) | | | | |
| inch | mm | L | H | D | | L | H | D | B | | L | H | D | | L | H | D | B | | |
| 11/2 | 40 | 33 | 183 | 230 | | 33 | 202 | 110 | 150 | | 33 | 183 | 230 | | 33 | 202 | 110 | 150 | | |
| 2 | 50 | 43 | 176 | 230 | | 43 | 192 | 140 | 150 | | 43 | 190 | 230 | | 43 | 209 | 110 | 150 | | |
| 2 1/2 | 65 | 46 | 186 | 230 | | 46 | 202 | 140 | 150 | | 46 | 203 | 230 | | 46 | 222 | 110 | 150 | | |
| 3 | 80 | 46 | 207 | 280 | | 46 | 226 | 170 | 195 | | 46 | 223 | 280 | | 46 | 240 | 110 | 150 | | |
| 4 | 100 | 52 | 221 | 280 | | 52 | 240 | 170 | 195 | | 52 | 237 | 280 | | 52 | 254 | 110 | 150 | | |
| 5 | 125 | 56 | 241 | 350 | | 56 | 261 | 200 | 204 | | 56 | 258 | 350 | | 56 | 280 | 170 | 180 | | |
| 6 | 150 | 56 | 263 | 350 | | 56 | 283 | 200 | 204 | | 56 | 275 | 350 | | 56 | 297 | 170 | 180 | | |
| 8 | 200 | | | | | 71 | 348 | 310 | 280 | | | | | | 60 | 324 | 200 | 205 | | |
| 10 | 250 | | | | | 76 | 416 | 360 | 310 | | | | | | 68 | 401 | 310 | 220 | | |
| 12 | 300 | | | | | 83 | 443 | 360 | 310 | | | | | | 78 | 429 | 310 | 220 | | |
| 14 | 350 | | | | | 92 | 476 | 500 | 358 | | | | | | | | | | | |
| 16 | 400 | | | | | 102 | 572 | 500 | 360 | | | | | | | | | | | |
| 18 | 450 | | | | | 114 | 607 | 500 | 360 | | | | | | | | | | | |
| 20 | 500 | | | | | 127 | 623 | 500 | 360 | | | | | | | | | | | |
| 24 | 600 | | | | | 154 | 757 | 500 | 377 | | | | | | | | | | | |
| Body | CF8M | | | | | CF8M | | | | | CF8 | | | | | CF8 | | | | |
| Stem/Bottom Stem | 329J1 | | | | | 329J1 | | | | | 304SS | | | | | 304SS | | | | |
| Disc | CF8M+Cr Plating | | | | | CF8M+Cr Plating | | | | | CF8+Cr Plating | | | | | CF8+Cr Plating | | | | |
| Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Seat Ring | PTFE | | | | | PTFE | | | | | C/F PTFE | | | | | C/F PTFE | | | | |
| Service Condition | -29°C~+160°C 1.9 MPa up to 12 ⁹ /1.4MPa for 14 ⁹ & above | | | | | -29°C~+160°C 1.9 MPa up to 12 ⁹ /1.4MPa for 14 ⁹ & above | | | | | -29°C~+200°C 1.4 MPa | | | | | -29°C~+200°C 1.4 MPa | | | | |
| Reference Page | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV36 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV36 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV38 | | | | | P-T Rating/Flow Characteristics/Pressure Loss : Page BFV38 | | | | |
| Remarks | Double Eccentric, Unidirectional | | | | | Double Eccentric, Unidirectional | | | | | Double Eccentric, Bidirectional | | | | | Double Eccentric, Bidirectional | | | | |

| Type | HB Series | | | | HB Series | | | | HB Series | | | HB Series | | | |
|-------------------|---|----|-----|-----|---|-----|-----|-----|--|-----|-----|---|-----|-----|-----|
| Butterfly Valve |  | | | |  | | | |  | | |  | | | |
| | Fig 20UHB | | | | Fig G-20UHB | | | | Fig 150UHB | | | Fig G-150UHB | | | |
| End Connection | Wafer (JIS 16K/20K) | | | | Wafer (JIS 16K/20K) | | | | Wafer (ASME CL. 150) | | | Wafer (ASME CL. 150) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | B |
| 11/2 | 40 | 33 | 183 | 230 | 33 | 202 | 110 | 150 | 33 | 183 | 230 | 33 | 202 | 110 | 150 |
| 2 | 50 | 43 | 190 | 230 | 43 | 209 | 110 | 150 | 43 | 190 | 230 | 43 | 209 | 110 | 150 |
| 2 1/2 | 65 | 46 | 203 | 230 | 46 | 222 | 110 | 150 | 46 | 203 | 230 | 46 | 222 | 110 | 150 |
| 3 | 80 | 46 | 223 | 280 | 46 | 240 | 110 | 150 | 46 | 223 | 280 | 46 | 240 | 110 | 150 |
| 4 | 100 | 52 | 237 | 280 | 52 | 254 | 110 | 150 | 52 | 237 | 280 | 52 | 254 | 110 | 150 |
| 5 | 125 | 56 | 258 | 350 | 56 | 280 | 170 | 180 | 56 | 258 | 350 | 56 | 280 | 170 | 180 |
| 6 | 150 | 56 | 275 | 350 | 56 | 297 | 170 | 180 | 56 | 275 | 350 | 56 | 297 | 170 | 180 |
| 8 | 200 | | | | 60 | 324 | 200 | 205 | | | | 60 | 324 | 200 | 205 |
| 10 | 250 | | | | 68 | 401 | 310 | 220 | | | | 68 | 401 | 310 | 220 |
| 12 | 300 | | | | 78 | 429 | 310 | 220 | | | | 78 | 429 | 310 | 220 |
| Body | CF8 | | | | CF8 | | | | CF8 | | | CF8 | | | |
| Stem/Bottom Stem | 304SS | | | | 304SS | | | | 304SS | | | 304SS | | | |
| Disc | CF8+Cr Plating | | | | CF8+Cr Plating | | | | CF8+Cr Plating | | | CF8+Cr Plating | | | |
| Packing | PTFE | | | | PTFE | | | | PTFE | | | PTFE | | | |
| Seat Ring | C/F PTFE | | | | C/F PTFE | | | | C/F PTFE | | | C/F PTFE | | | |
| Service Condition | -29°C~+200°C 2.0 MPa | | | | -29°C~+200°C 2.0 MPa | | | | -29°C~+200°C 1.9 MPa | | | -29°C~+200°C 1.9 MPa | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV38 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV38 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV38 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV38 | | | |
| Remarks | Double Eccentric, Bidirectional | | | | Double Eccentric, Bidirectional | | | | Double Eccentric, Bidirectional | | | Double Eccentric, Bidirectional | | | |

| Type | HB Series | | | | HB Series | | | | HB Series | | | HB Series | | | |
|-------------------|---|----|-----|-----|---|-----|-----|-----|--|-----|-----|---|-----|-----|-----|
| Butterfly Valve |  | | | |  | | | |  | | |  | | | |
| | Fig 10SHB | | | | Fig G-10SHB | | | | Fig 16SHB | | | Fig G-16SHB | | | |
| End Connection | Wafer (JIS 10K) | | | | Wafer (JIS 10K) | | | | Wafer (JIS 16K/20K) | | | Wafer (JIS 16K/20K) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | B |
| 2 | 50 | 43 | 190 | 230 | 43 | 209 | 110 | 150 | 43 | 190 | 230 | 43 | 209 | 110 | 150 |
| 2 1/2 | 65 | 46 | 203 | 230 | 46 | 222 | 110 | 150 | 46 | 203 | 230 | 46 | 222 | 110 | 150 |
| 3 | 80 | 46 | 223 | 280 | 46 | 240 | 110 | 150 | 46 | 223 | 280 | 46 | 240 | 110 | 150 |
| 4 | 100 | 52 | 237 | 280 | 52 | 254 | 110 | 150 | 52 | 237 | 280 | 52 | 254 | 110 | 150 |
| 5 | 125 | 56 | 258 | 350 | 56 | 280 | 170 | 180 | 56 | 258 | 350 | 56 | 280 | 170 | 180 |
| 6 | 150 | 56 | 275 | 350 | 56 | 297 | 170 | 180 | 56 | 275 | 350 | 56 | 297 | 170 | 180 |
| 8 | 200 | | | | 60 | 324 | 200 | 205 | | | | 60 | 324 | 200 | 205 |
| 10 | 250 | | | | 68 | 401 | 310 | 220 | | | | 68 | 401 | 310 | 220 |
| 12 | 300 | | | | 78 | 429 | 310 | 220 | | | | 78 | 429 | 310 | 220 |
| Body | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | FCD450-10(ASTM A536) | | | |
| Stem/Bottom Stem | 420J2 | | | | 420J2 | | | | 420J2 | | | 420J2 | | | |
| Disc | CF8+Cr Plating | | | | CF8+Cr Plating | | | | CF8+Cr Plating | | | CF8+Cr Plating | | | |
| Packing | PTFE | | | | PTFE | | | | PTFE | | | PTFE | | | |
| Seat Ring | C/F PTFE | | | | C/F PTFE | | | | C/F PTFE | | | C/F PTFE | | | |
| Service Condition | -10°C~+200°C 1.4 MPa | | | | -10°C~+200°C 1.4 MPa | | | | -10°C~+200°C 2.0 MPa | | | -10°C~+200°C 2.0 MPa | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV38 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV38 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV38 | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV38 | | | |
| Remarks | Double Eccentric, Bidirectional | | | | Double Eccentric, Bidirectional | | | | Double Eccentric, Bidirectional | | | Double Eccentric, Bidirectional | | | |

| Type | HB Series | | | | HB Series | | | | CP Series (Double/Triple Eccentric) | | | |
|-------------------|---|----|-----|-----|---|-----|-----|-----|--|--|--|--|
| Butterfly Valve |  | | | |  | | | | (Double/Triple Eccentric) Product Coding G- 10 U CPD L H M ① ② ③ ④ ⑤ ⑥ ⑦ | | | |
| Fig | 150SHB | | | | G-150SHB | | | | | | | |
| End Connection | Wafer (ASME CL. 150) | | | | Wafer (ASME CL. 150) | | | | | | | |
| inch | mm | L | H | D | L | H | D | B | | | | |
| 2 | 50 | 43 | 190 | 230 | 43 | 209 | 110 | 150 | | | | |
| 2 1/2 | 65 | 46 | 203 | 230 | 46 | 222 | 110 | 150 | | | | |
| 3 | 80 | 46 | 223 | 280 | 46 | 240 | 110 | 150 | | | | |
| 4 | 100 | 52 | 237 | 280 | 52 | 254 | 110 | 150 | | | | |
| 5 | 125 | 56 | 258 | 350 | 56 | 280 | 170 | 180 | | | | |
| 6 | 150 | 56 | 275 | 350 | 56 | 297 | 170 | 180 | | | | |
| 8 | 200 | | | | 60 | 324 | 200 | 205 | | | | |
| 10 | 250 | | | | 68 | 401 | 310 | 220 | | | | |
| 12 | 300 | | | | 78 | 429 | 310 | 220 | | | | |
| Body | FCD450-10(ASTM A536) | | | | FCD450-10(ASTM A536) | | | | | | | |
| Stem/Bottom Stem | 420J2 | | | | 420J2 | | | | | | | |
| Disc | CF8+Cr Plating | | | | CF8+Cr Plating | | | | | | | |
| Packing | PTFE | | | | PTFE | | | | | | | |
| Seat Ring | C/F PTFE | | | | C/F PTFE | | | | | | | |
| Service Condition | -10°C~+200°C 1.9 MPa | | | | -10°C~+200°C 1.9 MPa | | | | | | | |
| Reference Page | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV38 | | | | P-T Rating/Flow Characteristics/ Pressure Loss : Page BFV38 | | | | | | | |
| Remarks | Double Eccentric, Bidirectional | | | | Double Eccentric, Bidirectional | | | | | | | |

① Valve Operation
None: Lever
G: Gear
E: Electric Actuator
YS: Pneumatic Actuator (Spring Return)
Y: Pneumatic Actuator

② Class
150, 300, 10-30K, PN10-40 for CPD Series
150-2500, 10-40K, PN10-40 for CPT Series





③ Symbol of Shell Material
SC: Carbon Steel
U: Stainless Steel

④ Series
CPD Series: Double Eccentric
CPC Series: Double Eccentric (JIS 30K Rubber Seat)
CPT Series: Tripple Eccentric

⑤ End Connection
None: Wafer
L: Lugged
F: Flanged





⑥ Seat Material
For CPD/CPC Series of ④
None (or ST) PTFE
H (ot FM) Metal
FS (or TF) PTFE + Metal
RN (or RS) NBR
RE (or RS) EPDM
RF (or RS) FKM
For CPT Series of ④
None (or TE) Laminated (Metal + Graphite or PTFE)





⑦ Shell Material
For U: None:CF8, M:CF8M
For SC: None:WCB, CL:LCC, BL:LCB



| Type | HBS Series (Dead End) | | | | HBS Series (Dead End) | | | | GE Series (Dead End) | | | | GE Series (Dead End) | | | |
|-------------------|---|----|-----|-----|---|-----|-----|-----|--|-----|-----|-------|---|-----|-----|--|
| Butterfly Valve |  | | | |  | | | |  | | | |  | | | |
| Fig | 300SCHBSL | | | | G-300SCHBSL | | | | 300SGECE | | | | G-300SGECE | | | |
| End Connection | Lugged (ASME CL. 300) | | | | Lugged (ASME CL. 300) | | | | Grooved (AWWA C606-15) | | | | Grooved (AWWA C606-15) | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | B | |
| 2 | 50 | | | | | | | | 81 | 188 | 180 | 81 | 192 | 80 | 122 | |
| 2 1/2 | 65 | 46 | 221 | 230 | | | | | 96.8 | 197 | 180 | 96.8 | 200 | 80 | 122 | |
| 3 | 80 | 48 | 235 | 280 | | | | | 96.8 | 214 | 180 | 96.8 | 233 | 110 | 135 | |
| 4 | 100 | 54 | 255 | 280 | | | | | 115.8 | 225 | 180 | 115.8 | 244 | 110 | 135 | |
| 5 | 125 | 59 | 273 | 350 | | | | | 147.6 | 263 | 230 | 147.6 | 272 | 110 | 150 | |
| 6 | 150 | | | | 59 | 315 | 170 | 180 | 147.6 | 276 | 230 | 147.6 | 284 | 110 | 150 | |
| 8 | 200 | | | | 73 | 379 | 310 | 220 | | | | 133.4 | 324 | 170 | 180 | |
| 10 | 250 | | | | 83 | 422 | 310 | 220 | | | | 158.8 | 377 | 250 | 251 | |
| 12 | 300 | | | | 92 | 477 | 360 | 350 | | | | 165.1 | 405 | 250 | 251 | |
| Body | WCB | | | | WCB | | | | FCD450-10 + Nylon Lining | | | | FCD450-10 + Nylon Lining | | | |
| Stem/Bottom Stem | 420J2 | | | | 420J2 | | | | 410SS/420J2 | | | | 410SS/420J2 | | | |
| Disc | CF8M+HCr | | | | CF8M+HCr | | | | CF8+Cr Plating | | | | CF8+Cr Plating | | | |
| Packing/O ring | PTFE | | | | PTFE | | | | FCD450-10 + EPDM* | | | | FCD450-10 + EPDM* | | | |
| Seat Ring | G/F PTFE | | | | G/F PTFE | | | | EPDM | | | | EPDM | | | |
| Standard/Approval | | | | | | | | | NSF61 | | | | NSF61 | | | |
| Service Condition | -29°C~+100°C for Air Conditioning 5.1 MPa | | | | -29°C~+100°C for Air Conditioning 5.1 MPa | | | | -20°C~+110°C 2.1 MPa/Continuous Service Temp. 0°C~+100°C | | | | -20°C~+110°C 2.1 MPa/Continuous Service Temp. 0°C~+100°C | | | |
| Reference Page | P-T Rating : API 609 | | | | P-T Rating : API 609 | | | | | | | | | | | |
| Remarks | Double Eccentric, Bidirectional, Dead End Service | | | | Double Eccentric, Bidirectional, Dead End Service | | | | Dead End Service | | | | Dead End Service | | | |

* Chlorine Resistance

* Chlorine Resistance

| Type | DRAIN Series | | | | | DRAIN Series | | | | | DRAIN Series | | | | DRAIN Series | | | |
|--------------------|--|-----|-----|-----|-----|--|-----|-----|-----|-----|--|-----|-----|-----|---|-----|-----|--|
| Butterfly Valve |  | | | | |  | | | | |  | | | |  | | | |
| Fig | G-7.5SVB | | | | | G-10SVB | | | | | G-7.5SGBFS | | | | G-10SGBFS | | | |
| End Connection | Flanged (JIS G5527 7.5K) | | | | | Flanged (JIS G5527 10K*) | | | | | Flanged (JWWA B138 7.5K) | | | | Flanged (JWWA B138 10K) | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | |
| 3 | 75/80 | 240 | 233 | 110 | 127 | 240 | 233 | 110 | 127 | | | | | | | | | |
| 4 | 100 | 250 | 255 | 170 | 183 | 250 | 255 | 170 | 183 | | | | | | | | | |
| 5 | 125 | 260 | 339 | 310 | 284 | 260 | 339 | 310 | 284 | | | | | | | | | |
| 6 | 150 | 280 | 351 | 310 | 284 | 280 | 351 | 310 | 284 | | | | | | | | | |
| 8 | 200 | 300 | 381 | 310 | 285 | 300 | 381 | 310 | 285 | 300 | 395 | 430 | 273 | 300 | 395 | 430 | 273 | |
| 10 | 250 | 380 | 421 | 360 | 315 | 380 | 421 | 360 | 315 | 380 | 415 | 430 | 273 | 380 | 415 | 430 | 273 | |
| 12 | 300 | 400 | 441 | 360 | 316 | 400 | 441 | 360 | 316 | 400 | 445 | 430 | 273 | 400 | 445 | 430 | 273 | |
| 14 | 350 | | | | | | | | | 430 | 470 | 430 | 273 | 430 | 470 | 430 | 273 | |
| 16 | 400 | | | | | | | | | 470 | 520 | 430 | 378 | 470 | 520 | 430 | 378 | |
| 18 | 450 | | | | | | | | | 500 | 555 | 430 | 378 | 500 | 585 | 430 | 378 | |
| 20 | 500 | | | | | | | | | 530 | 590 | 430 | 378 | 530 | 620 | 430 | 378 | |
| 24 | 600 | | | | | | | | | 560 | 695 | 630 | 418 | 560 | 695 | 630 | 418 | |
| 28 | 700 | | | | | | | | | 610 | 755 | 630 | 418 | 610 | 770 | 630 | 502 | |
| 32 | 800 | | | | | | | | | 690 | 855 | 630 | 502 | 690 | 870 | 730 | 597 | |
| 36 | 900 | | | | | | | | | 740 | 940 | 730 | 597 | 740 | 940 | 730 | 597 | |
| 40 | 1000 | | | | | | | | | 770 | 1000 | 730 | 597 | 770 | 1000 | 730 | 597 | |
| 44 | 1100 | | | | | | | | | 800 | 1065 | 730 | 597 | 800 | 1105 | 730 | 749 | |
| 48 | 1200 | | | | | | | | | 820 | 1170 | 730 | 749 | 820 | 1170 | 730 | 749 | |
| 54 | 1350 | | | | | | | | | 850 | 1265 | 730 | 749 | 850 | 1280 | 630 | 661 | |
| 60 | 1500 | | | | | | | | | 900 | 1375 | 630 | 661 | 900 | 1375 | 630 | 661 | |
| Body | FCD450-10 | | | | | FCD450-10 | | | | | FCD450-10 | | | | FCD450-10 | | | |
| Stem/Bottom Stem | 304SS | | | | | 304SS | | | | | 403SS | | | | 304SS | | | |
| Disc | CF8 | | | | | CF8 | | | | | DI+Cr Free Anti-rust Paint | | | | CF8 | | | |
| O-ring | CR (JIS K6353) | | | | | CR (JIS K6353) | | | | | CR (JIS K6353) | | | | CR (JIS K6353) | | | |
| Seat Ring | 304SS+CR Rubber (JIS K6353) | | | | | 304SS+CR Rubber (JIS K6353) | | | | | 304SS+CR Rubber (JIS K6353) | | | | 304SS+CR Rubber (JIS K6353) | | | |
| Rotation Direction | Counterclockwise to Open** | | | | | Counterclockwise to Open** | | | | | Counterclockwise to Open** | | | | Counterclockwise to Open** | | | |
| Service Condition | Static Water Ambient Temp. 0.74MPa | | | | | Static Water Ambient Temp. 0.98MPa | | | | | Static Water Ambient Temp. 0.75MPa | | | | Static Water Ambient Temp. 1.0MPa | | | |
| Remarks | Internal: Epoxy Resin Paint** External: Anti-rust Paint** Face to Face: JIS B2064 End Flange of 125A: JIS B2062 | | | | | Internal: Epoxy Resin Paint** External: Anti-rust Paint** Face to Face: JIS B2064 End Flange of 125A: JIS B2062 | | | | | Internal: Epoxy Resin Paint** External: Epoxy Resin Primer** | | | | Internal: Epoxy Resin Paint** External: Epoxy Resin Primer** | | | |
| | **Other Options: Available | | | | | *Flange Outside Dia.: KITZ STD | | | | | **Other Options: Available | | | | **Other Options: Available | | | |

| Type | Damper | | | | | Damper | | | | | Damper | | | | Damper | | | |
|-------------------|---|-----|-----|-----|-----|---|-----|-----|-----|-----|--|-----|-----|-----|---|-----|-----|--|
| Butterfly Valve |  | | | | |  | | | | |  | | | |  | | | |
| Fig | 10D | | | | | GL-10D | | | | | 10A | | | | GL-10A | | | |
| End Connection | Wafer (JIS 10K) | | | | | Wafer (JIS 10K) | | | | | Wafer (JIS 10K) | | | | Wafer (JIS 10K) | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | |
| 2 | 50 | 40 | 183 | 200 | 150 | 40 | 198 | 110 | 150 | 40 | 183 | 200 | 150 | 40 | 198 | 110 | 150 | |
| 2 1/2 | 65 | 45 | 191 | 200 | 150 | 45 | 206 | 110 | 150 | 45 | 191 | 200 | 150 | 45 | 206 | 110 | 150 | |
| 3 | 80 | 50 | 198 | 200 | 150 | 50 | 213 | 110 | 150 | 50 | 198 | 200 | 150 | 50 | 213 | 110 | 150 | |
| 4 | 100 | 60 | 208 | 200 | 150 | 60 | 223 | 110 | 150 | 60 | 208 | 200 | 150 | 60 | 223 | 110 | 150 | |
| 5 | 125 | 65 | 237 | 280 | 190 | 65 | 249 | 170 | 190 | 65 | 237 | 280 | 190 | 65 | 249 | 170 | 190 | |
| 6 | 150 | 70 | 247 | 280 | 190 | 70 | 259 | 170 | 190 | 70 | 247 | 280 | 190 | 70 | 259 | 170 | 190 | |
| 8 | 200 | 80 | 272 | 280 | 190 | 80 | 284 | 170 | 190 | 80 | 272 | 280 | 190 | 80 | 284 | 170 | 190 | |
| 10 | 250 | 90 | 340 | 350 | 195 | 90 | 355 | 170 | 195 | 90 | 340 | 350 | 195 | 90 | 355 | 170 | 195 | |
| 12 | 300 | 100 | 365 | 350 | 195 | 100 | 380 | 170 | 195 | 100 | 365 | 350 | 195 | 100 | 380 | 170 | 195 | |
| Body | FC250+HCr | | | | | FC250+HCr | | | | | FC250+HCr | | | | FC250+HCr | | | |
| Stem/Bottom Stem | 403SS | | | | | 403SS | | | | | 403SS | | | | 403SS | | | |
| Disc | 430SS | | | | | 430SS | | | | | 430SS | | | | 430SS | | | |
| Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | Flexible Graphite | | | |
| Service Condition | 0°C~+230°C 0.5 MPa | | | | | 0°C~+230°C 0.5 MPa | | | | | 0°C~+230°C 0.5 MPa | | | | 0°C~+230°C 0.5 MPa | | | |
| Reference Page | Flow Coefficient (Cv)/Flow Characteristics : Page BFV41 | | | | | Flow Coefficient (Cv)/Flow Characteristics : Page BFV41 | | | | | Flow Coefficient (Cv)/Flow Characteristics : Page BFV41 | | | | Flow Coefficient (Cv)/Flow Characteristics : Page BFV41 | | | |
| Remarks | Max. Allowable Leakage: 3% of Normal Cv Value | | | | | Max. Allowable Leakage: 3% of Normal Cv Value | | | | | Max. Allowable Leakage: 2% of Normal Cv Value | | | | Max. Allowable Leakage: 2% of Normal Cv Value | | | |
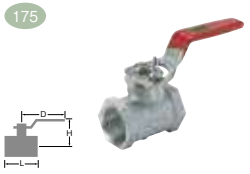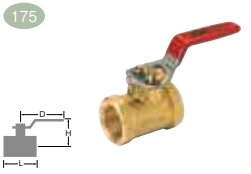
| Type | Special BUTTERFLY Series | | | Special BUTTERFLY Series | | | |
|-------------------|--|----|----|--|----|----|-----|
| Butterfly Valve |  | | |  | | | |
| | UV | | | FV | | | |
| End Connection | BS21 (JIS B0203) | | | BS21 (JIS B0203) | | | |
| inch | mm | L | H | D | L | H | D |
| 1/2 | 15 | 43 | 45 | 85 | 47 | 45 | 85 |
| 3/4 | 20 | 47 | 47 | 85 | 51 | 47 | 85 |
| 1 | 25 | 56 | 50 | 85 | 58 | 50 | 85 |
| 1 1/4 | 32 | 63 | 60 | 110 | 67 | 60 | 110 |
| 1 1/2 | 40 | 69 | 64 | 110 | 73 | 64 | 110 |
| 2 | 50 | 77 | 70 | 110 | 82 | 70 | 110 |
| Body | CF8 | | | B283 C37700 | | | |
| Stem/Bottom Stem | 304SS | | | 304SS | | | |
| Disc | 304SS + W-NBR | | | 304SS + W-NBR | | | |
| Packing/O ring | NBR | | | NBR | | | |
| Handle | 430SS | | | 430SS | | | |
| Service Condition | W.O.G. Non-shock 1.21MPa(175psi) (DO NOT USE against Flammable Gas or Toxic Gas.) | | | W.O.G. Non-shock 1.21MPa(175psi) (DO NOT USE against Flammable Gas or Toxic Gas.) | | | |
| Reference Page | Flow Rate/Pressure Loss/Cv : Page BFV42 | | | Flow Rate/Pressure Loss/Cv : Page BFV42 | | | |
| Remarks | Balancing Stop Handle Lever | | | Balancing Stop Handle Lever | | | |

KITZ XJ Series Aluminum Butterfly Valves:
Featuring unique style for neck designs (U.S.P. No. 6676109) to accommodate various piping designs, piping positions and installation environments.

Specification

| Class | JIS 10K | Class 150 | PN16 |
|--|--|---|------------------|
| Maximum Service Pressure | 1 MPa | 1 MPa | 1.6 MPa (16 bar) |
| Service Temperature Range*1 | -20°C to +120°C | | |
| Continuous Service Temperature Range*2 | -20°C to +100°C | | |
| Face to Face Dimension | API609, BS EN558 Basic Series20 ISO 5752-20, JIS B 2002 46 Series | | |
| Coupling Flanges | JIS B 2220/ 2239 10K | ASME Class 150 JIS B 2220/ 2239 10K | EN1092 PN16*3 |

*1 Condition: Unfrozen Fluid.


*2 Refer to P-T Rating.

*3 With Centering Sleeves.

Refer to Product Range Chart in Page BFV29 and Precautions in Page BFV43 for details.

Cv Value

| Size | | CV | Size | | CV |
|------|-------|-----|------|-----|------|
| DN | NPS | | DN | NPS | |
| 40 | 1 1/2 | 77 | 125 | 5 | 1100 |
| 50 | 2 | 99 | 150 | 6 | 1820 |
| 65 | 2 1/2 | 205 | 200 | 8 | 2780 |
| 80 | 3 | 372 | 250 | 10 | 4350 |
| 100 | 4 | 723 | 300 | 12 | 6860 |

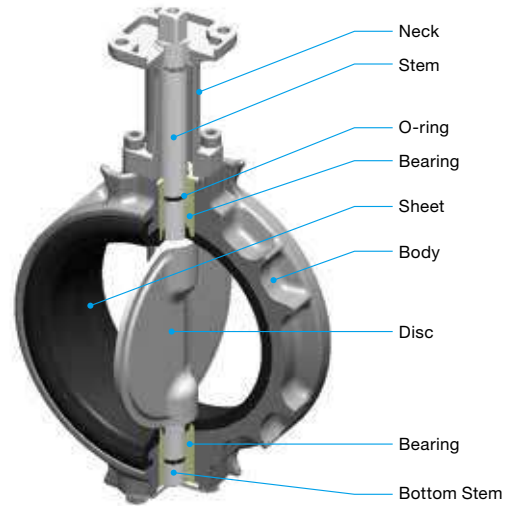

Standard Material

| Parts | Materials |
|-------------|---|
| Body | Aluminum Die-Cast/ASTM B85-84-383.0 equivalent |
| Neck | 304 SS |
| Stem | SUS410/ASTM A276 Type 410 equivalent |
| Disc | A351 Gr. CF8M |
| O-ring | EPDM |
| Rubber seat | EPDM |
| Bottom stem | SUS410/ASTM A276 Type 410 equivalent |
| Bearing | Metal Backed PTFE (Size 10 ^B and 12 ^B) Polyphenylenesulfide (10XJMEA : Size 1 1/2 ^B to 8 ^B) Bronze : CAC401 (PN16XJME : Size 2 ^B to 8 ^B) |

* Please refer to the drawing of deliverables for detail.

Features

Choice of Two Neck Designs

Long neck type and short neck type are available for variety of applications.

Easy Valve-to-Flange Centering

Light weight in aluminum die-cast body (which is only one third of the weight of KITZ' conventional cast iron butterfly valves) eases valve-to-flange centering in installing valves to pipeline.

Wide Range of Service Applications

Austenitic stainless steel disc and EPDM* rubber seat is able to handle various types of line fluid without risk of corrosion.

* EPDM: Ethylene Propylene Diene Terpolymer

Stabilized Operating Torque

Pair of stem bearings assembled around top and bottom stems prevents stem galling and stabilizes valve operating torque for smooth and trouble-free disc rotation.

On-the-Spot Actuator Assembly

Actuator mounting pad of all neck types are designed to conform ISO 5211 requirements for direct on-site mounting of actuators.

Dew Condensation Prevention (Long Neck Type)

Long stainless steel neck blocks fluid heat transfer to the operating device of valves, therefore, insulation is not required on the operating devices. Dew condensation is also minimized for gear-operated valves used in cold water services.

Rust Prevention


Main parts, such as stem, disc, neck and neck connector end plate and small parts, such as stopper plates, washers and bolts are all made of stainless steel for high-grade rust prevention.

S-shaped Spherical Disc for High Sealing Performance (Patented)


KITZ' original cross-section S-shaped disc with spherical surface makes evenly tight contact with rubber liners for excellent sealing performance with reduced operating torque. Complete 360° shut-off mechanism helps to extend service life of rubber liners. (Size ≥ 2inches)

Carefully designed KITZ' EPDM seats have unique features which ensures functional stability, sealing performance and long life;


- Self-reinforced ribbing
 - Wide disc seating contact
 - Dual stem seal bearings
- ① Wide disc seating contact for high sealing performance.
 - ② Reinforced ribbing minimizes valve operating problems such as distortion, skidding, and exfoliation of rubber liners caused by line pressure load and friction with metal discs.
 - ③ Stem seal bearings are assembled on the top and bottom stems for stable sealing.
 - ④ Gasketless flange sealing contact for easy valve mounting.




P-T Rating

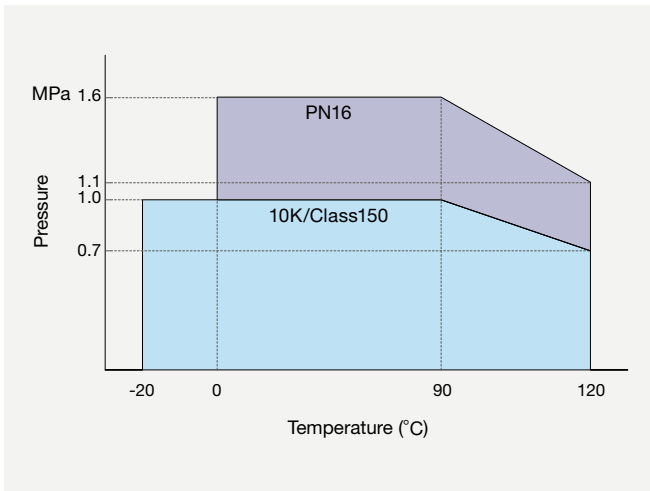

Flow Characteristics

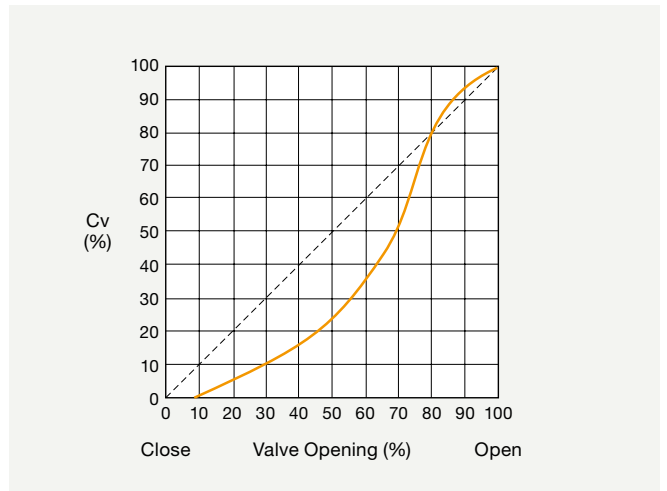

Pressure Loss

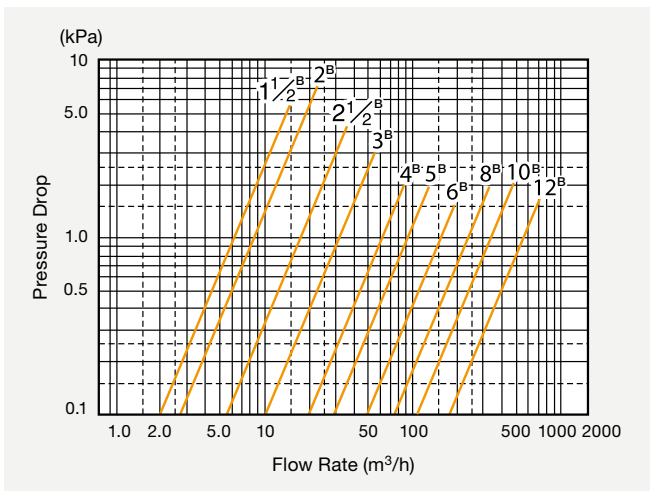

Long Neck Type

Dew Condensation Prevented



Features


- Long stainless steel neck reduces conductivity of fluid heat and prevents dew condensation.
- Available in variety of valve body and neck design for insulation.
- Choice of actuators for automated valve operation.

Applications

- Building utilities.
- Piping networks for cold water, hot water, and other water supply.

Valve Insulation

Recommended area for insulation is shown below in blue.

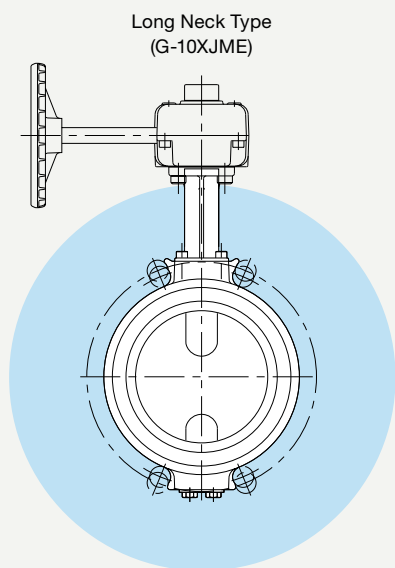

Note: Not available in short neck type.

Short Neck Type

Compact Design



Features

- Suitable for installation in limited space.
- Choice of actuators in automated valve operation.


Applications

- Building utilities.
- Plant facilities.
- Water treatment facilities.
- Industrial machinery operation.

Dew Condensation Test

Samples of KITZ XJ Series butterfly valves equipped with long neck (KITZ Product Code: G-10XJMEA) were tested at KITZ laboratory under conditions in below 'Test Conditions'. Temperature in lower surface of gear box, ambient temperature and ambient humidity was measured as variable function. Dew condensation boundary is estimated to illustration in below chart.

G-10XJMEA Estimated Dew Condensation Boundary

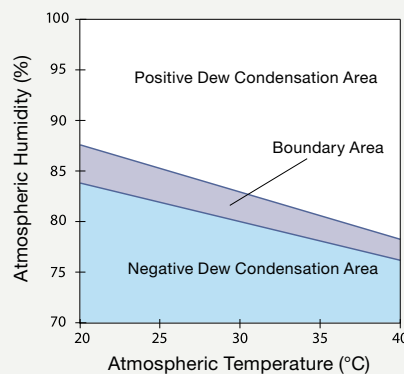

Test Conditions

- Line Fluid : +5°C Cold Water
- Atmospheric Temperature Range : +20°C to +40°C
- Valve Insulation: 50mm glass wool (JIS A 9501) surrounding tested valve with gear box exposed to open air.

Note: Estimation shown above is a result of tests in summary carried out within test basin at constant temperature and humidity, and does not necessarily represent absolute values. Kindly note dew condensation prevention properties of tested valves may be affected by the changes in testing conditions, such as variation in degree of air transfer, line fluid temperature, atmospheric humidity or condition of insulation. Acceptance allowance of ±5% beyond boundary is recommended.

Through pursuit of functions required for butterfly valves, a variety of product range is available to comply with user's requirements.

Specification

| Maximum Service Pressure | | | |
|--------------------------|----------|-----|---------|
| ASME 150 | 1.03 MPa | 10K | 1.0 MPa |
| ASME 200 | 1.38 MPa | 16K | 1.6 MPa |
| ASME 250 | 1.72 MPa | 20K | 2.0 MPa |
| PN16 | 1.6 MPa | | |
| PM25 | 2.5 MPa | | |

| Service Temperature Range | |
|--------------------------------------|------------------|
| NBR (Buna-N) Seat | 0°C to + 70°C |
| EPDM Seat | -20°C to + 120°C |
| Continuous Service Temperature Range | 0°C to + 100°C |

| Applicable Standards | |
|-------------------------|---|
| Valve Design | API 609, MSS-SP 67, EN 593, JIS B 2032 |
| Face to Face Dimensions | API 609 Category A, MSS-SP 67 W-1: Size 2 ^B to 14 ^B W-2: Size 16 ^B to 24 ^B |
| | EN 558 Basic Series 20, ISO 5752 20Series, JIS B 2002 46 Series |

Features

Non-Peeling Seat-to-Body Construction

Molded-in (bonded) seat structure is employed for size 2^B to 12^B (DN50 to DN300). Larger size valves are provided with replaceable seat. This non-peeling, seat-to-body construction assures maintenance free application for high velocity fluid service*¹, vacuum service*² and handling surging fluid velocity. It also guarantees peel-free valve installation in pipeline.

*¹ Maximum 4 meters/second for valves up to size 12^B (DN300) and 3 meters/second for sizes 14^B (DN350) and above.

*² Vacuum service is optional for sizes 14^B and above. (Up to 30 Torr.)

Spherical Design for Discs and Seats

Rubber seats are spherically designed to contact with top and bottom stems. Widely designed rubber seats are protected from peeling or deformation for prolonged service life of the valve. Thinly streamlined metal disc is the result of elaborate laboratory studies ultimately minimize pressure loss.

Choice of Materials and Operating Devices

Choice among 4 disc and 2 seat materials, manual, pneumatic or electric valve operating devices makes service application highly versatile.

Integral ISO 5211 Actuator Mounting Flange

Any pneumatic or electric valve actuators provided with ISO 5211 valve mounting flanges can easily be mounted for actuation.

Low Operating Torque

Designed to low operating torque for extension of valve's service life and economic consideration in selection of valve's operating device.

Lightly-Designed for Operation Efficiency

For operation efficiency in piping, XJ Series is designed much lighter in weight than our conventional series.

Emission-Free Stem Sealing Mechanism


Prevention of external fluid leakage is maximized with a rubber O-ring around top stem, tight contact between spherically designed rubber seat and spherically designed disc at top & bottom ends.

Dew Condensation Prevention


Dew condensation prevention type is available optionally with heat insulating plate (Sizes 2^B to 6^B/DN50 to DN150) or stainless steel stand (Sizes 8^B to 24^B/DN200 to DN600).

| Coupling Flanges | |
|------------------|---|
| Wafer Type | ASME Class 150/200/250 |
| | EN 1092 PN10: DN 50 to DN 350, PN16: All sizes PN25: DN 50 to DN 300 |
| | BS 10 Table D/Table E JIS 10K/16K/20K |
| Lugged Type | ASME Class 150/200/250 |
| | EN 1092 PN10: DN 50 to DN 150, PN16: All sizes PN25: DN 50 to DN 300 |

Molded-in (Bonded) Seat Structure (Size 2^B to 12^B)*¹

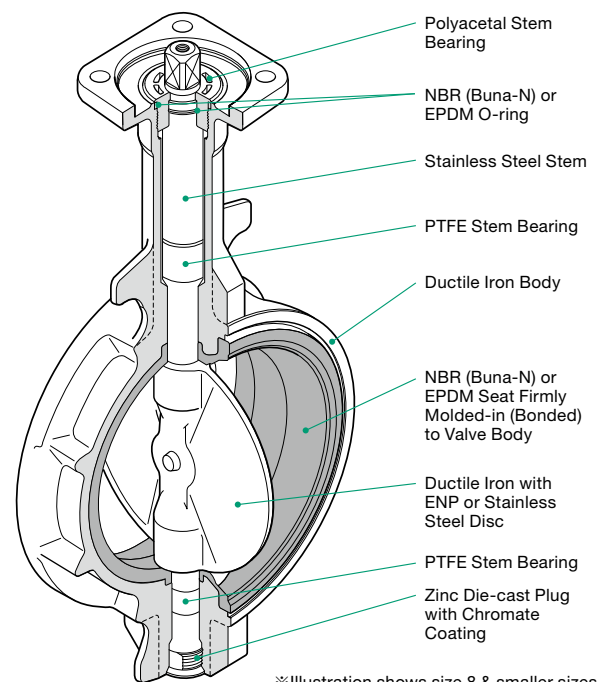


Replaceable Seat Structure (Size 14^B to 24^B)*²

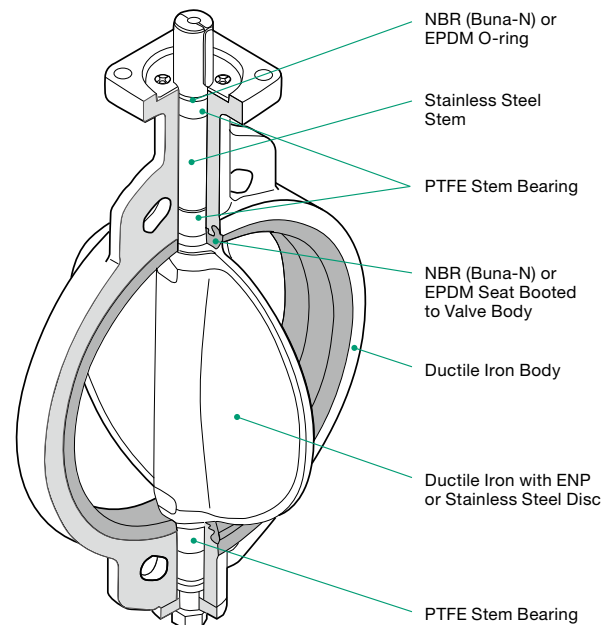


Flow Coefficient (Cv)

| Size | | Cv Value |
|------|-----|----------|
| DN | NPS | |
| 40 | 1½ | 77 |
| 50 | 2 | 124 |
| 65 | 2½ | 270 |
| 80 | 3 | 397 |
| 100 | 4 | 671 |
| 125 | 5 | 1013 |
| 150 | 6 | 1532 |
| 200 | 8 | 2792 |
| 250 | 10 | 4025 |
| 300 | 12 | 6010 |
| 350 | 14 | 7525 |
| 400 | 16 | 10080 |
| 450 | 18 | 13120 |
| 500 | 20 | 15990 |
| 600 | 24 | 23690 |


Pressure Loss (for handling static clean water with valve fully open)

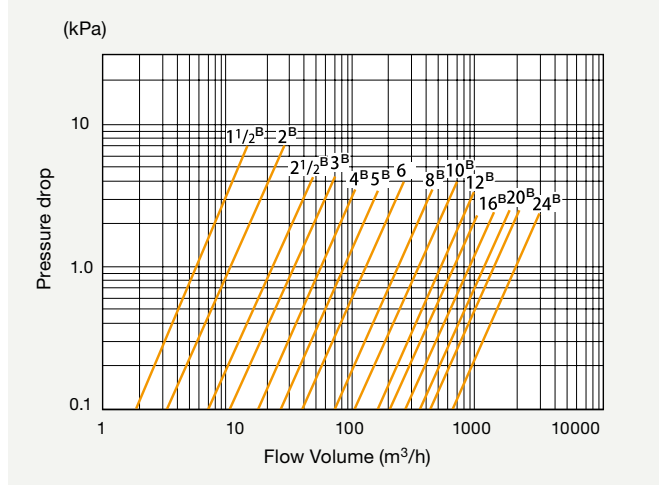

P-T Rating

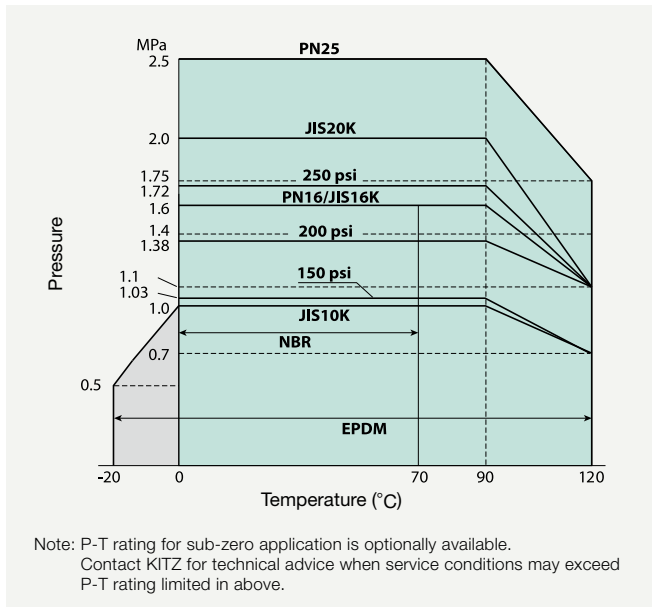

Flow Characteristics

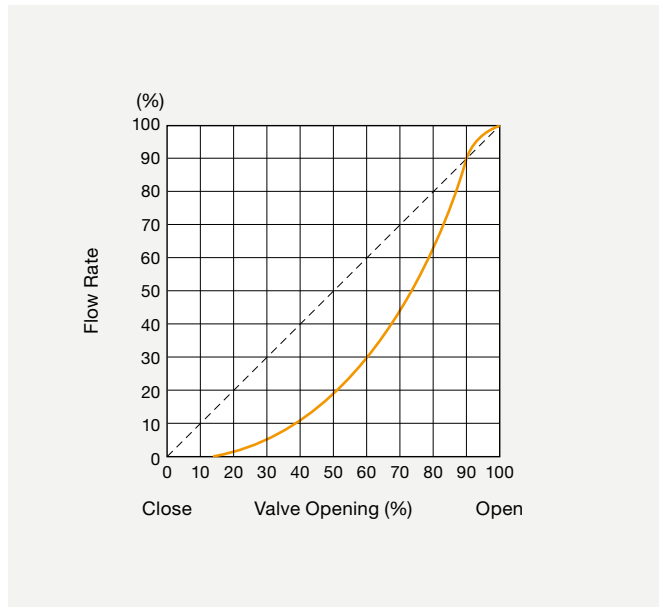

Standard Materials

| Parts | Material | |
|---|---|---|
| Body | Ductile Iron | |
| | Cast Iron (JIS 10K design Size 14 ^B to 24 ^B) | |
| Stem Bottom Stem | 410 SS/420 SS | |
| Disc | Ductile Iron (Ni-plated)/304SS/316SS /Aluminum Bronze (See Explanation of Product Code) | |
| Seat O-ring | NBR (Buna-N)/EPDM (See Explanation of Product Code) | |
| Bearing | Polyacetal/Glass Filled PTFE/Metal Backed PTFE | |
| Plug (Size 2 ^B to 8 ^B) | Zinc Die-cast (Chromate Coating) | |
| Operator | Lever | Aluminum Die-cast |
| | Gear | Aluminum Die-cast (Size 2 ^B to 12 ^B) Cast-Iron (Size 14 ^B to 24 ^B) |
| | Vertical Gear | Cast-Iron |


Line-up of Three Special Seat Materials available for variety of fluids.

Specification

| Maximum Service Pressure | |
|--------------------------|--|
| PN10 | 10ber (1.0MPa) |
| Body Material | |
| Ductile Iron | EN-GJS-450-10, Equivalent to ASTM A536 Gr. 65-45-12, BS 2789 Gr. 40/10*1 |
| *1 Obsolete Standard. | |
| Applicable Standards | |
| Valve Design | EN 593:2004 |
| Coupling Flanges | |
| Wafer Type | EN1092 PN6, PN10, PN16 BS10 Table E ASME Class125, Class150 |

Cv Value

| Size | | Open Degree | | | | | | | | |
|------|-------|-------------|-----|-----|------|------|------|------|------|--|
| DN | NPS | 20° | 30° | 40° | 50° | 60° | 70° | 80° | 90° | |
| 50 | 2 | 8 | 17 | 29 | 42 | 56 | 75 | 86 | 88 | |
| 65 | 2 1/2 | 16 | 36 | 60 | 88 | 122 | 172 | 219 | 246 | |
| 80 | 3 | 21 | 45 | 75 | 113 | 165 | 248 | 345 | 415 | |
| 100 | 4 | 3 | 65 | 109 | 172 | 274 | 446 | 689 | 886 | |
| 125 | 5 | 47 | 95 | 160 | 255 | 406 | 655 | 997 | 1250 | |
| 150 | 6 | 68 | 138 | 234 | 375 | 598 | 958 | 1430 | 1760 | |
| 200 | 8 | 116 | 241 | 419 | 681 | 1080 | 1700 | 2470 | 2900 | |
| 250 | 10 | 160 | 325 | 575 | 950 | 1510 | 2420 | 3460 | 4020 | |
| 300 | 12 | 258 | 493 | 859 | 1410 | 2260 | 3610 | 5160 | 6010 | |

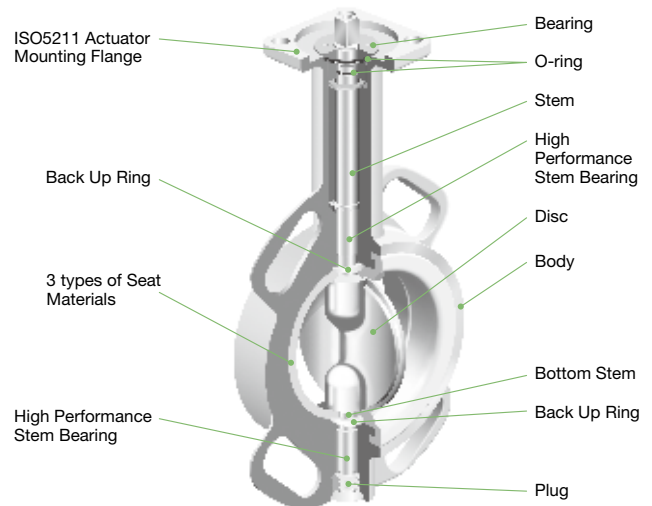

Standard Materials

| Parts | Materials |
|--------------|---|
| Body | Ductile Iron [EN-GJS-450-10] |
| Stem | Stainless Steel [AISI 410] |
| Disc | Stainless Steel [A351 Gr.CF8M] |
| Seat | W-NBR (White NBR) VMQ (Silicone Rubber) FKM (Fluoro Rubber) |
| O-ring | FKM |
| Bearing | Multi-layered Bearing* |
| Stem Bearing | Multi-layered Bearing* |
| Plug | Zinc Die-cast |
| Bottom Stem | Stainless Steel [AISI 410] |

* Tetrafluoroethylene resin filled over layer, sintered bronze interlayer with steel backing.

Features

Three Types of Seat Material

Three (3) types of seat materials are as follows; VMQ (Silicone Rubber) can be used for wide range of temperature applications; W-NBR (White NBR) is suitable for use in food processing industry; and FKM (Fluoro Rubber) has properties such as strength and durability for use in variety of fluid application. W-NBR and VMQ meets the requirements of FDA*.

* All of the above listed materials are approved by FDA, and the seats are manufactured within maximum allowable limitations and restrictions.

Suitable for Various Flanges

Flanges in EN1092 PN16, PN10, PN16, BS10 Table E, ASME Class 125 and Class 150 are suitable in all sizes.

Integral ISO 5211 Actuator Mounting Flange

All actuators, pneumatic or electric, provided with ISO 5211 valve mounting flange can easily be mounted for valve actuation.

High Performance Stem Bearing having additional strength to withstand high temperature and high pressure

Stem Bearing in EJ Series is multi layered back material to provide high performance bearing surface capable of withstanding high pressure and temperature.

Backup Ring to maintain Stem Sealing

Backup ring around the stem maintains performance of stem sealing by the movement of stem/disc in sealing/seat of the valve.


Stainless Steel Bearing Features

Embedded within stainless steel upper body bearing is multi-layered to provide smooth stem operation. Also, housed within stem is snap ring to provide protection and prevent blow out of the stem caused by internal pressure.


Polished Disc

Polished disc is standard for VMQ and is optional for W-NBR seats for use in food and pharmaceutical industries.


P-T Rating

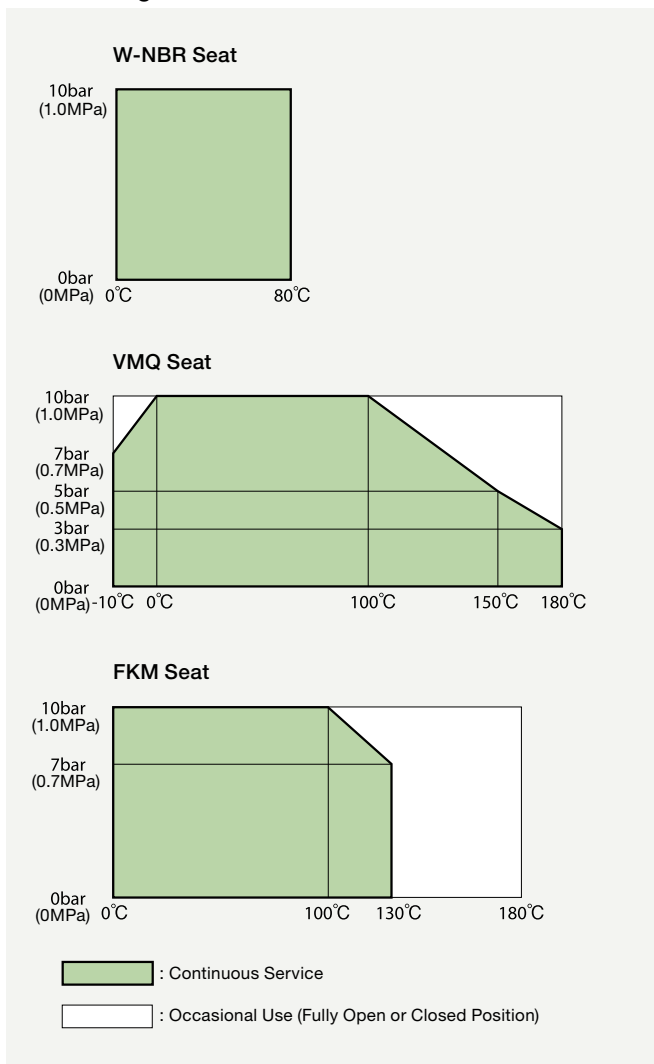

Flow Characteristics

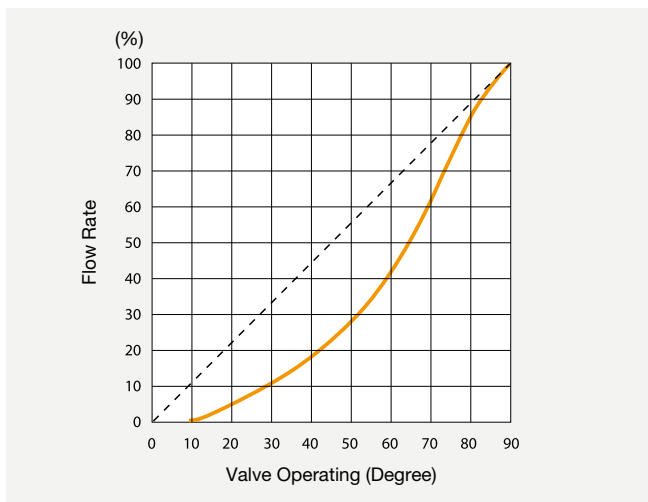

Pressure Loss

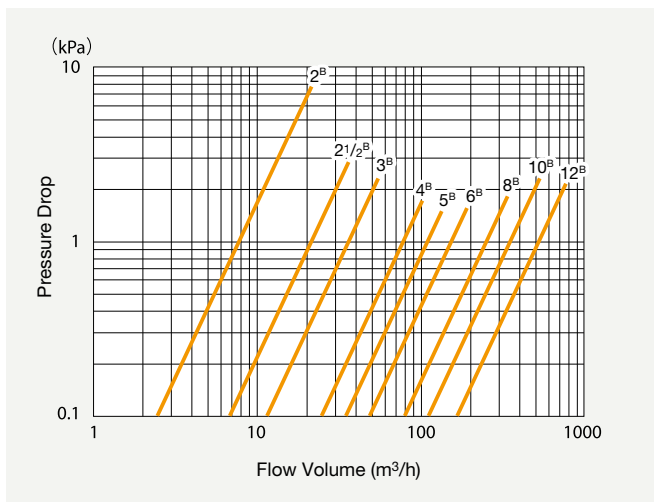


Butterfly Valves BFV

PFA Lined Butterfly Valves applicable to high corrosive fluids.

Specification

| | |
|----------------------------------|--|
| Size | 50 to 300mm (2 ^B to 12 ^B) |
| Product Code | 10LJF |
| Maximum Service Pressure | 1.0MPa |
| Service Temperature Range | -10 to +150°C Note: Refer to Pressure-Temperature Ratings. |
| Coupling Flanges | JIS2220 / 2239 10K Note: JIS5K and ASME Class 150 are optional. |
| Automatic Operation | Please contact us |

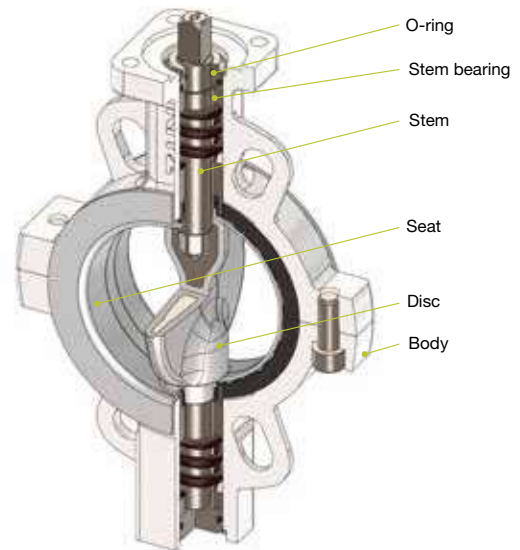


Standard Materials

| Parts | Materials |
|----------------|------------|
| Body | FCD450-10 |
| Disc | SCS13A+PFA |
| Seat Liner | PFA |
| Back Up Rubber | FKM |

Features

- Various fluids are applicable for PFA-lined internal wetted parts.
- High-grade PFA prevents troubles from corrosive fluid permeation.
- Sealing mechanism with coil spring realizes high sealing performance.
- Original stem sealing design prevents external fluid leakage.
- Easy maintenance with easily disassembled stem and disc.
- Top flange in accordance with ISO 5211.
- Blowout-proof stem.

P-T Rating

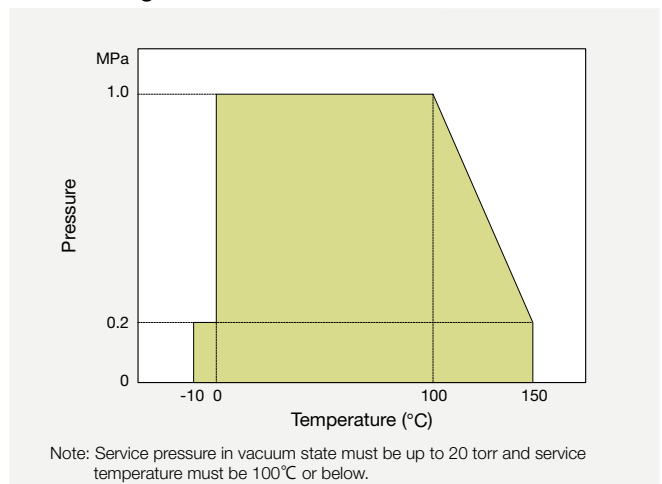

LJ Series is designated as Strategic Materials in the Foreign Trade Law. In order to export, export license issued by the exporting country is required. Kindly contact KITZ representative for details.

CAUTION

- Note 1: Be careful not to damage PFA seat when handling this product.
- Note 2: Do not store this product in place exposed to direct sunlight.
- Note 3: Installation of gaskets between valve and flanges is not required with accurate centering of each pair of upstream/downstream pipes. Flange and pipe bores must be cleaned thoroughly to remove wetted spatters and foreign objects that may have been left inside.
- Note 4: When necessary, install solid PFA gaskets having minimum of 3mm in thickness. (Rubber materials are not allowed.)


With Double Eccentric Kinematics and all Stainless Steel Body and Trim guarantees high performance corrosion resistant services for application of KITZ UB Series Butterfly Valves to Chemical Industries.

Specification

| Maximum Service Pressure | | | |
|---|------------------|--|---------|
| 10UB | 1.4 MPa | 16UB (size 14 ^B to 24 ^B) | 1.4 MPa |
| 16UB (size 1 1/2 ^B to 12 ^B) | 2.0 MPa | 150UB | 1.9 MPa |
| Service Temperature Range | | | |
| PTFE Seat | -29°C to + 160°C | | |
| Carbon Filled PTFE Seat | -29°C to + 200°C | | |
| Wall Thickness | | | |
| ASME B 16.34 Class 150 | | | |
| Face to Face Dimensions | | | |
| 6 ^B and smaller | ISO 5752 Short | | |
| 8 ^B and larger | ISO 5752 Medium | | |
| Coupling Flanges | | | |
| 10UB | JIS 10K | | |
| 16UB | JIS 16K | | |
| 150UB | ASME Class 150 | | |

Standard Materials

| Parts | ASTM Materials | JIS Materials |
|---------------|---------------------------|----------------------|
| Body | A351 Gr.CF8* ¹ | SCS13A* ¹ |
| Stem | 304SS | |
| Disc | A351 Gr.CF8* ¹ | SCS13A* ¹ |
| Gland | A351 Gr.CF8* ¹ | SCS13A* ¹ |
| Seat Ring | PTFE* ² | |
| Seat Retainer | 304SS | |
| Gland Packing | PTFE | |
| Gasket | PTFE | |

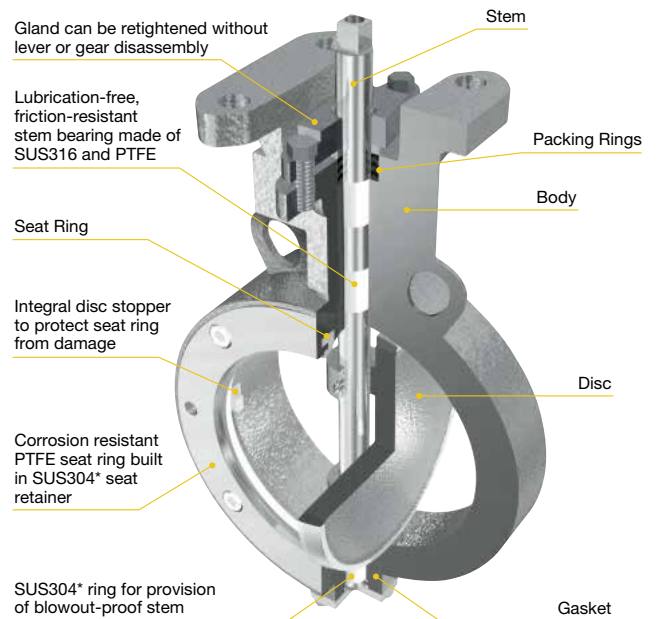

*SCS14A or SUS316 is available as an option

| Parts | ASTM Materials | JIS Materials |
|-----------------|-------------------|---------------|
| Set Bolt | Stainless Steel | |
| Taper Pin | 316SS | |
| Stem Bearing | METAL BACKED PTFE | |
| Gland Bolts | Stainless Steel | |
| Thrust Washer | PTFE | |
| End Plate | A351 Gr.CF8 | SCS13A |
| End Plate Bolts | 304SS | |

*1 CF8M(316)/ SCS14A(SUS316) is available as an option.

*2 Carbon Filled PTFE seat rings are optionally available.

Features

Double Eccentric Kinematics

Valve stem is designed in eccentric to both center of seat ring (by X) and to center of the valve body (by Y), which makes clearance 'C' between seat ring and disc seat surface to its fully open position (Fig. 1). Disc seating surface is spherically machined and contacts with PTFE seat tightly through 360° for leakage-free service. These functions minimize friction wear of seat ring and reduce valve operating torque considerably.

Durable Seat Rings

Seat rings are made of PTFE with stainless steel supporter. Furthermore, double eccentric kinematics relieve seat ring from damage or wear which is rather usual problem in conventional butterfly valves. This allows service life twice as long as rubber seated butterfly valves.

Retightening of Gland Packing

Room between gland and lever or gear allows retightening of gland bolt without trouble to disassemble lever or gear during plant operation is another feature of KITZ UB Series Butterfly Valves (Fig. 2).

Fig.1


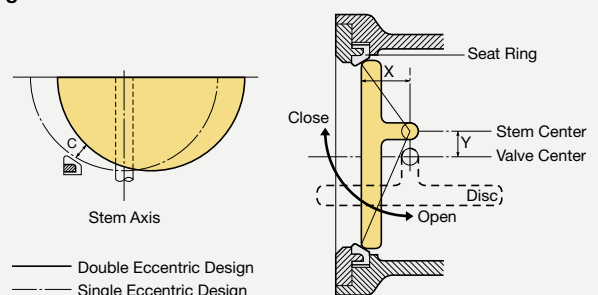



Fig.2

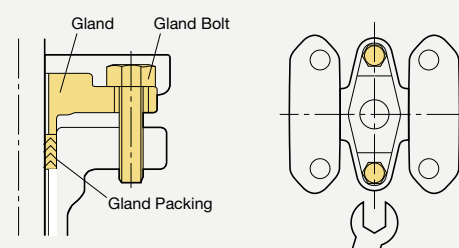


Flow Coefficient (Cv)

| Size | | Cv Value |
|------|-------|----------|
| DN | NPS | |
| 40 | 1 1/2 | 30 |
| 50 | 2 | 83 |
| 65 | 2 1/2 | 175 |
| 80 | 3 | 255 |
| 100 | 4 | 460 |
| 125 | 5 | 722 |
| 150 | 6 | 1180 |
| 200 | 8 | 2240 |
| 250 | 10 | 3660 |
| 300 | 12 | 5640 |
| 350 | 14 | 7060 |
| 400 | 16 | 9390 |
| 450 | 18 | 12300 |
| 500 | 20 | 15300 |
| 600 | 24 | 22900 |


P-T Rating

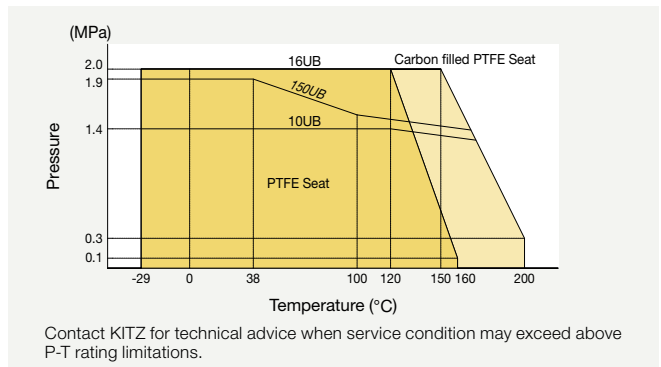

Pressure Loss (for Handling Static Clean Water)

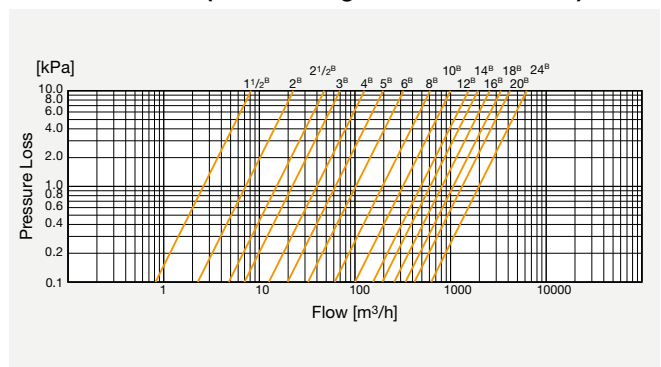

Flow Characteristics

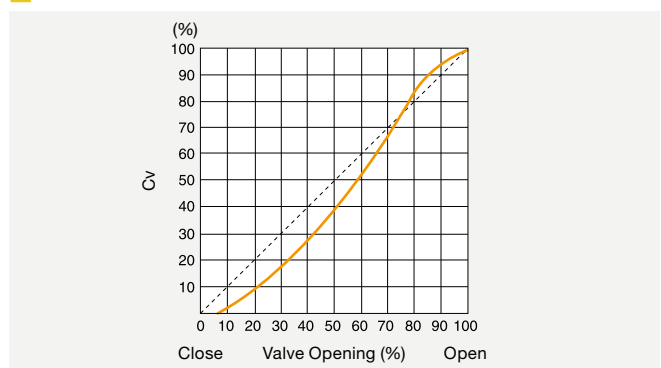

CAUTION

When installing valves between pipes, be sure to use gaskets* specified below:

*Non-asbestos joint sheet or PTFE sheet

unit: mm

| Size | | I/D | | O/D | Thickness |
|------|-------|------|------|------|-----------|
| DN | NPS | Min. | Max. | Min. | Min. |
| 40 | 1 1/2 | 48 | 57 | 73 | 3 |
| 50 | 2 | 60 | 61 | 90 | 3 |
| 65 | 2 1/2 | 73 | 77 | 115 | 3 |
| 80 | 3 | 88 | 90 | 126 | 3 |
| 100 | 4 | 108 | 116 | 146 | 3 |
| 125 | 5 | 136 | 143 | 181 | 3 |
| 150 | 6 | 162 | 170 | 211 | 3 |
| 200 | 8 | 213 | 220 | 257 | 3 |
| 250 | 10 | 266 | 275 | 322 | 3 |
| 300 | 12 | 312 | 326 | 367 | 3 |
| 350 | 14 | 342 | 359 | 410 | 3 |
| 400 | 16 | 389 | 410 | 470 | 3 |
| 450 | 18 | 444 | 460 | 530 | 3 |
| 500 | 20 | 493 | 513 | 580 | 3 |
| 600 | 24 | 594 | 615 | 688 | 3 |

CAUTION

- Following gaskets should be used for installation of UB Series Butterfly Valves to pipelines.
 - [Type of Gasket]
 - Non-Asbestos Joint Gasket Sheet
 - Reinforced PTFE Gasket (Joint Gasket, Spiral Wound Gasket or Metal Gasket cannot be used.)
 - [Shape of Gasket]
 - Full Face Gasket
 - Ring Gasket (for Full Face Flanges and Flat Face Flanges)
 - [Dimensions of Gasket]
 - Dimensions of gasket should comply with JIS B2404 and ASME B16.21 (minimum gasket thickness is 3mm).
- UB Series Butterfly Valves cannot be used with lapped loose flanges (lap joints + stub ends, stainless steel pipe joints with flanged pipe ends).
- UB Series Butterfly Valves may not be used with some large flat face flanges.
 - JIS 5K RF Flanges: Not Applicable
 - JIS 10K RF Flanges: Applicable, but be sure to align center of flanges and the valve
 - JIS 16K RF Flanges: Applicable
 - Class 150 RF Flanges: Applicable, but be sure to align center of flanges and the valve.
- UB Series Butterfly Valves cannot be used with rubber lining pipes.
- UB is unidirectional valves. Valve must be installed according to an arrow provided on the side of operator mounting flange.
 - This arrow must point from higher pressure side to lower pressure side when valve is in closed position.
- When retightening the packing, do not cover the gland with insulation material.
- Retighten gland bolts before operating the valves.; Check handle torque while retightening the bolts in order to avoid over tightening and difficult to operate. Gland bolts should tightened alternately with even force. Make sure to retighten gland bolts, if leakage is observed from the gland section due to stress relaxation.

Original Seat Configuration and Materials for Stable Sealing Performance

Double Eccentric Structure and RPTFE Seat

Specification

| Valve Nominal Size | |
|--------------------|------------------------------------|
| SHB | 50 ^A ~ 300 ^A |
| UHB | 40 ^A ~ 300 ^A |

| Applicable Flange | |
|-------------------|-------------------|
| 5UHB | JIS 5K |
| 10SHB · 10UHB | JIS 10K |
| 16SHB · 20UHB | JIS 16K (JIS 20K) |
| 150SHB · 150UHB | ASME Class150 |

| Maximum Allowable Pressure | |
|----------------------------|---------|
| 5UHB | 0.7MPa |
| 10SHB · 10UHB | 1.4MPa |
| 16SHB · 20UHB | 2.0MPa |
| 150SHB · 150UHB | 1.72MPa |


| Service Temperature Range | |
|---------------------------|--------------|
| SHB | -10 ~ +200°C |
| UHB | -29 ~ +200°C |

| Face to Face Dimensions | |
|-------------------------|--|
| JJIS B 2002 46 series | |

| Flow Direction | |
|--|--|
| Bidirectional flow | |
| * Recommended flow direction: Flow pressure from retainer side | |

| Applicable Gaskets (commercially available gaskets) | |
|---|--|
| Joint seats (Minimum thickness 1.5 mm) | |
| Spiral wound gaskets / Envelope gaskets | |

| Automatic Valves | |
|---------------------------------------|--|
| Contact KITZ Corporation for details. | |

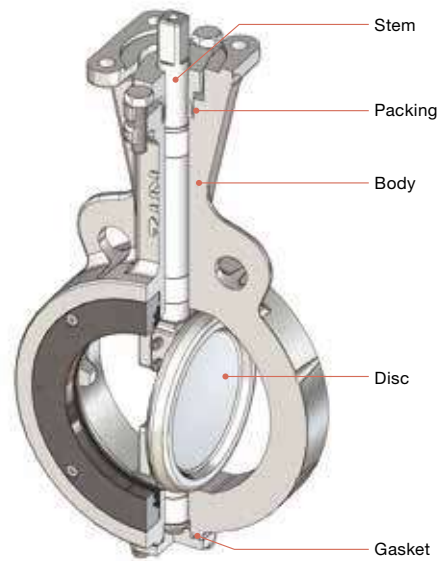

* Illustration above shows the structure of Size 4^B

Standard Materials

| Parts | Material | |
|---------------|----------------------------------|--------------------|
| | SHB | UHB |
| Body | FCD450-10 | SUS13A/A351 Gr.CF8 |
| Stem | SUS420J2 | SUS304N2 |
| Disc | SCS13A+Cr Plated | |
| Gland | SCS13A | |
| Seat Ring | RPTFE (Carbon Fiber-filled PTFE) | |
| Seat Retainer | S45C | SUS304 |
| Stem Bearing | PTFE (Metal Backed) | |
| Gland Packing | PTFE | |
| Gasket | PTFE | |

Features

RPTFE Seat Rings for Various Types of Fluids

Chemical resistant RPTFE is adopted as seat material which allows to be used with fluids that cannot be handled with rubber seats. (Refer to table 'Corrosion Resistant Level of Materials in Disc and Seat against Fluid' in Page BFV5.)

Double Eccentric Structure for Stable Sealing Performance

Double eccentric structure minimizes contact between disc and seat during operation and provide stable sealing performance with less wear of the seats over long period of time. (Fig. 1)

Easy Retightening of Packing

Retightening of packing is possible without removing operating device. (Fig. 2)

Fig.1
Structural Drawing of Double Eccentric Butterfly Valve





Fig.2
Retightening of Gland Bolts



Original Seat Configuration for High Durability (Patented)

Bidirectional Flow

Applicable to both direct and reverse flow control, however, flow pressure from retainer side is recommended.

Applicable to Commercially Available Pipe Gaskets

Joint seats (minimum thickness 1.5mm), spiral wound gaskets and PTFE envelope gaskets conforming applicable standards can be used.

Top Flange Dimension According to ISO 5211

Cv

| Nominal Size | Rated CV Value | |
|--------------|----------------|------|
| | A | B |
| 50 | 2 | 64 |
| 65 | 2 1/2 | 112 |
| 80 | 3 | 199 |
| 100 | 4 | 371 |
| 125 | 5 | 569 |
| 150 | 6 | 838 |
| 200 | 8 | 1669 |
| 250 | 10 | 3088 |
| 300 | 12 | 4502 |

CAUTION


- HB Series Butterfly Valves must be installed in accordance with arrow direction indicated on the body.
- When HB Series Butterfly Valves are used for bidirectional service, align flow direction with an arrow indicating flow direction from higher pressure side to lower pressure side.
- HB Series Butterfly Valves can be used with joint seals (minimum thickness 1.5mm), spiral wound gaskets and PTFE envelope gaskets conforming applicable standards.
- HB Series Butterfly Valves cannot be used with stub ends (lap joints, stainless steel pipe joints with flanged pipe end).
- HB Series Butterfly Valves adopt gland structure. Retighten gland bolts before operating the valve. Check handle torque while retightening bolts in order to avoid over-tightening and difficult to operate. Tightening gland bolts alternately with even force. Retighten gland bolts if leakage from the gland section due to stress relaxation is observed.
- Do not cover the gland with insulation material. Keep gland uncovered to retighten.

High Pressure (Upstream)
Side when Valve at Fully
Closed Position


Low Pressure (Downstream)
Side when Valve at Fully
Closed Position




P-T Rating (SHB Series)

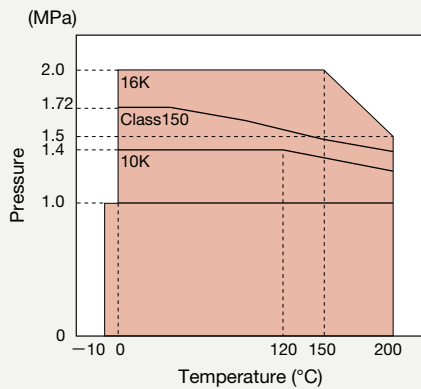


P-T Rating (UHB Series)

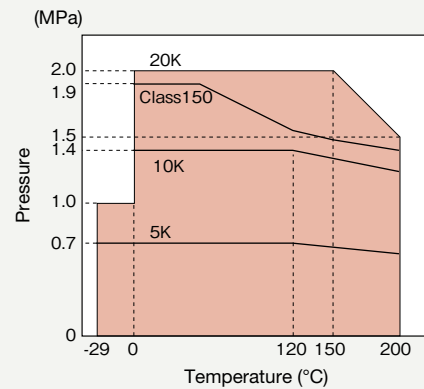

Flow Characteristics

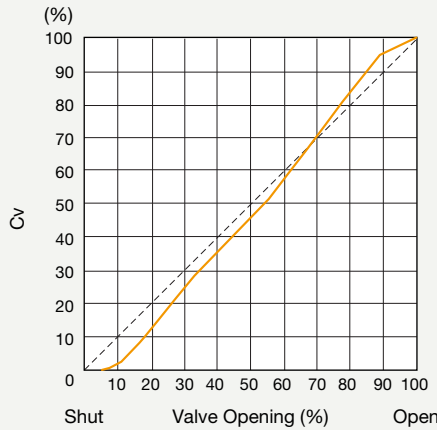

Pressure Loss

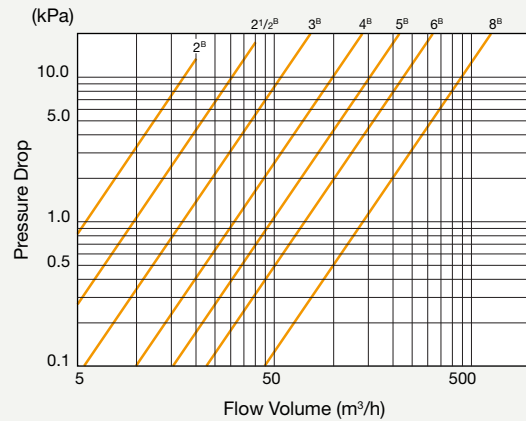

THROTTL is designed to handle extremely low fluid volume, while it completely shuts off the line flow.

Specification


| | |
|---|---|
| Maximum Service Pressure | 1.0 MPa |
| Service Temperature Range EPDM | -20°C to +120°C |
| Continuous Service Temperature Range | 0 ~ +100°C Note: Refer to Pressure-Temperature Ratings in next page. |
| Rangeability | 160: 1 |
| Flow Characteristics | Equal Percentage Flow Characteristics |
| Sealing Features | Tight Shutoff |
| Face to Face Dimensions | JIS B 2032 Series Number 46 |
| Coupling Flange | JIS 5K/10K/16K/20K |

Features

Excellent Flow Volume Control Performance with 160:1 Rangeability



- Tight shut/high rangeability is realized with combining disc section for full-shutoff and disc section for low-operating control of the disc. Also, cavitation is suppressed by installing pressure chamber to improve anti-noise multi orifice.
- Installing multi hall at disc section for low operating control and fin section realizes flow volume characteristics to close ideal equal percent characteristics for flow volume control.

Pressure Reducing Slit and Multi-orifice Reduces Flow Velocity, and Minimize Cavitation and Noise

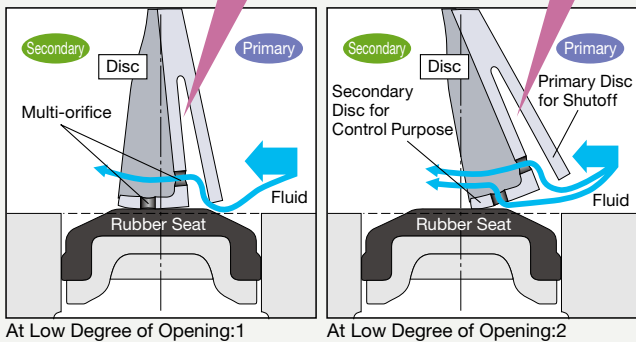


Prevention of Erosion by Jet Flow

- Vulcanized bonded seat is suitable for controlling high flow velocity fluid to reduce erosion due to jet flow.

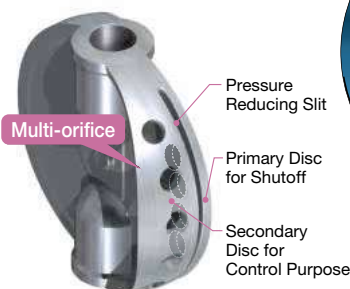

Fluid flows only through orifices at low degree of opening.

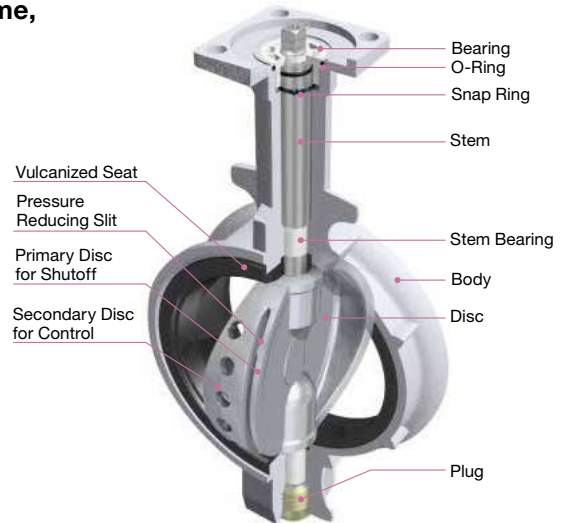


Standard Materials

| Parts | Materials |
|-------------|--|
| Body | FCD450-10 |
| Stem | SUS630 |
| Disc | A351 Gr. CF8 / SCS13A |
| Seat | EPDM |
| O-ring | EPDM |
| Bearing | POM (2 ^B to 8 ^B) |
| Plug | Chromated ZDC |
| Bottom Stem | SUS403 (2 ^B to 4 ^B) SUS420J2 (10 ^B to 12 ^B) |

* Please refer to the drawing of deliverables for details.


Flow Characteristic Curve

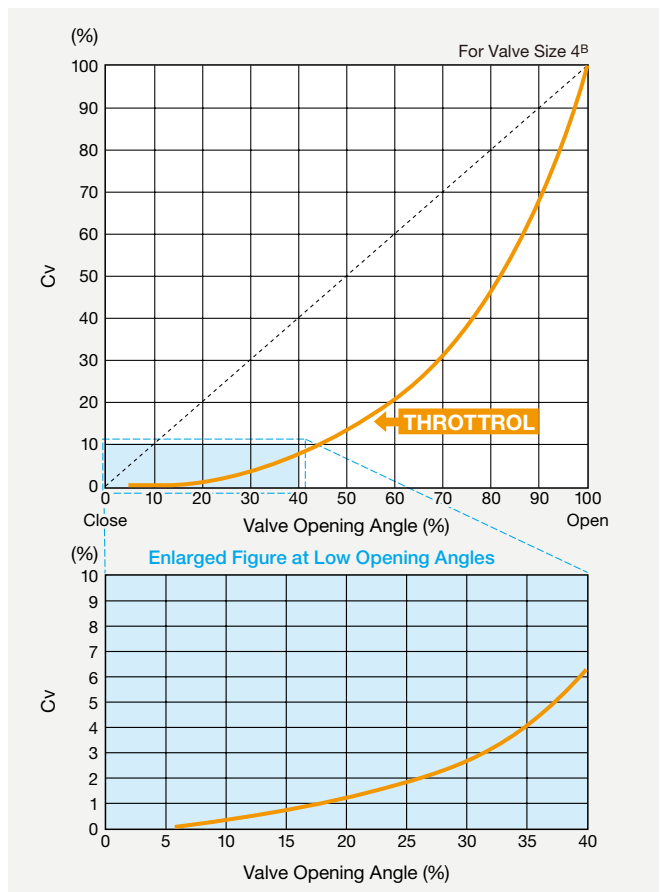

Cv

| Nominal Size | | Valve Opening Angle (%) | | | | | | | | | | |
|--------------|-------|-------------------------|------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
| A | B | 5 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 |
| 50 | 2 | 0.2 | 0.7 | 1.8 | 4.0 | 7.5 | 14.3 | 23.9 | 35.9 | 49.3 | 62.6 | 74.2 |
| 65 | 2 1/2 | 0.3 | 1.0 | 2.0 | 4.6 | 10.0 | 24.6 | 44.0 | 68.9 | 99.2 | 132.8 | 167.0 |
| 80 | 3 | 0.3 | 1.6 | 4.5 | 10.0 | 25.3 | 47.0 | 71.9 | 106.4 | 149.5 | 201.9 | 258.5 |
| 100 | 4 | 0.4 | 1.9 | 6.0 | 13.3 | 29.4 | 55.3 | 94.2 | 149.6 | 225.4 | 325.6 | 454.2 |
| 125 | 5 | 0.5 | 4.3 | 9.8 | 29.0 | 75.0 | 128.2 | 208.2 | 308.9 | 429.2 | 566.4 | 713.9 |
| 150 | 6 | 2.5 | 12.0 | 29.0 | 77.0 | 141.2 | 209.8 | 289.5 | 290.2 | 528.3 | 726.8 | 1015.7 |
| 200 | 8 | 5.3 | 18.8 | 45.9 | 138.2 | 244.5 | 382.5 | 553.7 | 827.7 | 1175.3 | 1618.6 | 1986.6 |
| 250 | 10 | 7.8 | 32.1 | 131.4 | 306.5 | 496.2 | 744.3 | 1080.0 | 1488.7 | 1955.7 | 2452.0 | 2919.0 |
| 300 | 12 | 12.4 | 51.1 | 208.4 | 487.4 | 789.1 | 1183.7 | 1717.5 | 2367.4 | 3110.1 | 3899.3 | 4642.0 |

P-T Rating of Seats

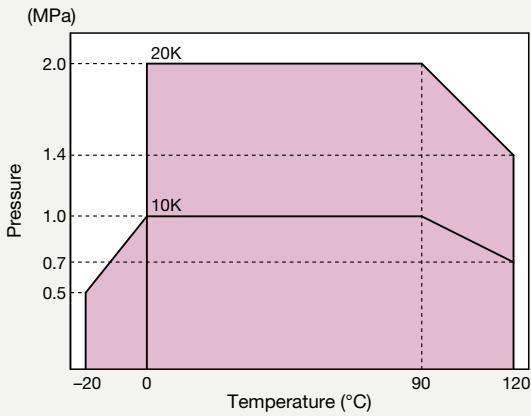

- Note 1 : Contact KITZ for technical advice when service conditions may exceed above PT-Rating range. Take appropriate measures to prevent valves from freezing.
- Note 2 : Valve can continuously be used at temperature range of 0°C to 100°C.
- Note 3 : EPDM Seats are not suitable for oil service.
- Note 4 : Contact KITZ when valves are used in hot water supply system.

CAUTION

- THROTTROL is a unidirectional valve. THROTTROL must be installed with the direction of flow in accordance with to an arrow marked on the body during installation.
- THROTTROL cannot be used with rubber lining pipes. THROTTROL is constructed to seal flanges by pressing rubber seat with compressive force exerted by the flange, where compressive force becomes too large or too small if rubber lining is applied to flange joint surface, thereby causing an increase in operating torque of the valve, deterioration of sealing member or external leakage.

Suitable for High Temperature Service

Specification

| | |
|----------------------------------|--|
| Maximum Service Pressure | 0.5 MPa |
| Service Temperature Range | 0°C to +230°C |
| Maximum Allowable Leakage | 3% of Normal Cv Values (D Type) 2% of Normal Cv Values (A Type) |
| Coupling Flange | JIS 5K/10K |



Features

Type D

For High Temperature

Type D Damper enables flow volume control of high temperature fluid up to 230°C by metal disc and metals seat (hard chrome coating).

Type A

For High Temperature Fluid

Angle bar of Type A Damper is shaped in oval to have the disc contact with inner surface of the body with certain angle when the valve is closed. Therefore, valve can be used for the same application of Type D Damper with even less leakage volume than Type D.

Flow Coefficient (Cv)


| Size | | Cv |
|------|----|------|
| A | B | |
| 50 | 2 | 104 |
| 65 | 2½ | 174 |
| 80 | 3 | 348 |
| 100 | 4 | 557 |
| 125 | 5 | 905 |
| 150 | 6 | 1183 |
| 200 | 8 | 2575 |
| 250 | 10 | 4037 |
| 300 | 12 | 6264 |

Standard Materials

| Parts | Materials |
|---------------|-------------------|
| Body | FC250+HCr |
| Stem | 403SS |
| Disc | SUS430 |
| Gland | C3604 |
| Gland Packing | Flexible Graphite |
| Disc Nut | 304SS |
| Disc Bolt | 304SS |
| Index Plate | Carbon Steel |
| Set Bolt | Carbon Steel |
| Bottom Stem | 403SS |

* Please refer to the drawing of deliverables for details.
Gasket is required to pipe this product.

Flow Characteristics

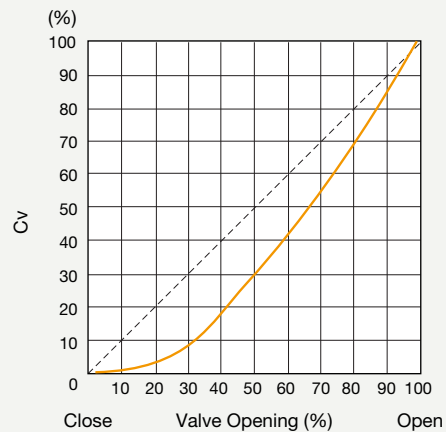

KITZ BUTTER Series

KITZ Threaded Compact Butterfly Valves

Compact Butterfly Valves for Threaded Piping Connection

Specification

| | |
|---------------------------|-----------------------------------|
| Size | 1/2 ^B ~ 2 ^B |
| Product Code | FV · UV |
| Connection Type | Threaded Type (JIS B 0203) |
| Maximum Pressure | 1.21 MPa |
| Service Temperature Range | 0°C to +70°C |
| Face to Face Dimensions | KITZ Standard |

Features

- Clean Design with Pocketless to prevent standing fluid**
 Full-port structure prevents fluid in pocket in ball valves and rubber seat is adopted to clear Food Sanitation Act.
- Threaded Type is the first in Butterfly Valve**
 Screw-in type for simple pipe connection enables adoption to various small sizes of piping used in vast range of application.
- Compact/Light Weight Design**
 Compact design with weight approximately 1/4, dimension between faces to approx. 2/3 and height of valve to approx. 3/4 compared to same size ball valves. (Compared to KITZ products)
- W-NBR Seat with High Sealing Characteristics**
 By adopting W-NBR with high elasticity for seat to improve sealing characteristics is ideal for fluid line such as air/gas where high sealing is required.
- Self Cleaning Feature for Sealing Section**
 Equipped with self cleaning feature to remove dirt at sealing section during open/close with elastic effect.
- Flow Volume Control Capability**
 Butter Series is equipped with balancing stop mechanism fixed at intermediate opening degree and is capable of stable flow volume control with help of opening scale.
- Accurate Lost-Wax Casting**
 Stainless steel body products employ accurate lost-wax casting to configure clean and dust-free piping line with smooth surface.



Standard Materials

| Parts | Materials | |
|--------|--------------|--------|
| | FV | UV |
| Body | C3771BE | SCS13A |
| Stem | SUS304 | |
| Disc | SUS304+W-NBR | |
| Gland | C3771BD | SUS304 |
| O-ring | NBR | |

* Please refer to the drawing of deliverables for details

W-NBR No.NF81W Test Results

| Test Item | Test Result | Criteria | |
|----------------------|------------------------------------|--|---|
| Material Test | Lead | Applicable (7.00ppm) | 100ppm or less |
| | Cadmium | Applicable (not detected [0.2ppm or less]) | 100ppm or less |
| Dissolution Test | Potassium Permanganate Consumption | Applicable (2.4ppm) | 10 ppm or less |
| | Heavy Metal | Applicable | Must be thinner than color presented by standard fluid for comparison |
| Vaporization Residue | Water | Applicable (0 ppm) | 30 ppm or less |
| | 4% Acetic Acid | Applicable (1.5 ppm) | 30 ppm or less |
| | n-heptane | Applicable (16.5 ppm) | 30 ppm or less |
| | 20% Ethanol | Applicable (1.5 ppm) | 30 ppm or less |


Cv

| Size | | Cv |
|------|-------|-----|
| A | B | |
| 15 | 1/2 | 8.7 |
| 20 | 3/4 | 21 |
| 25 | 1 | 39 |
| 32 | 1 1/4 | 66 |
| 40 | 1 1/2 | 94 |
| 50 | 2 | 176 |


CAUTION

This product is not applicable for combustible gas or toxic gas.

Flow Rate

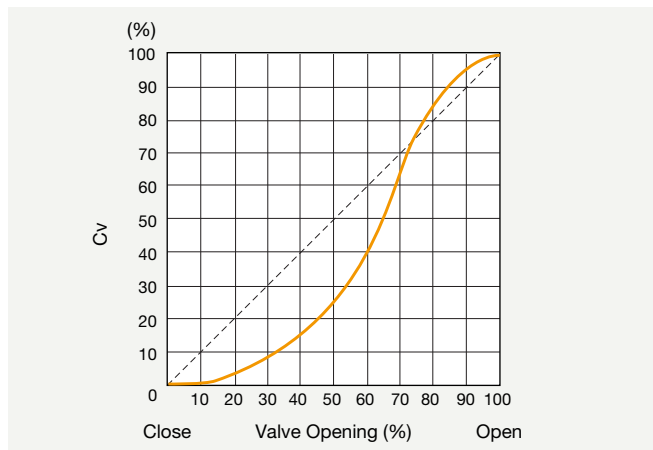

Pressure Loss

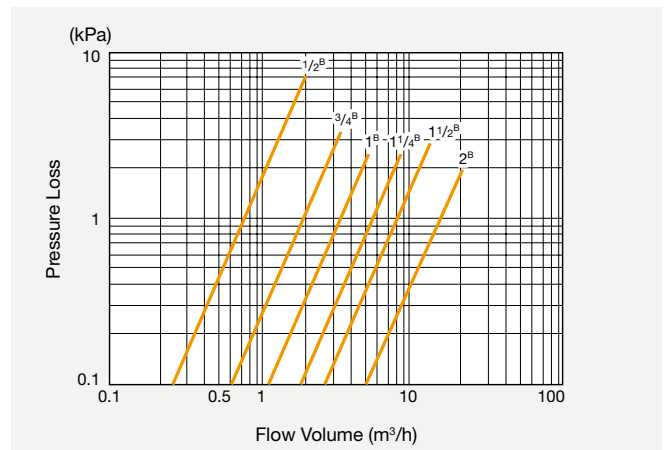

Precautions for Trouble-free Operation of KITZ Butterfly Valves

Valve Selection

- Make sure to select a valve with design specification which are appropriate in fluid type, pressure and temperature conditions expected.
- Lubricants are applied to discs and rubber seats to protect its surfaces.
Oil-free treated types are also available. Contact KITZ or its local distributors for details.
- Consult KITZ or its local distributors for services with fine particles.


Storage and Handling

- Valves must be stored in clean, dry, corrosion-free environment with no direct exposure to the sunlight. Valves should be left open 10° to prevent permanent distortion of resilient seats. Refrain from overloading valves and actuators by storing in piles or placing other objects.

Mounting to Pipelines


- Valves must be mounted to flanges only after flanges have been welded to pipes and cooled down to ambient temperature. Otherwise, welding heat may affect quality of resilient seats.
- Edges of welded flanges must be machined to achieve smooth surface finish not to damage resilient seats during valve installation. Flange faces must be free of damage or deformation and must be cleaned to remove rust and any foreign objects to prevent leakage through the valve and flange connections. Gaskets are not required to install KITZ XJ Series Butterfly Valves.
- Flanges and pipe bores must be cleaned thoroughly to remove welding spatters, scales and foreign objects which may have been left inside.
- Accurate centering of each pair of upstream and downstream pipe is essential for trouble-free operation of the valve mounted in between. Incorrect centering shown in Fig. 1 must be avoided.

Fig.1

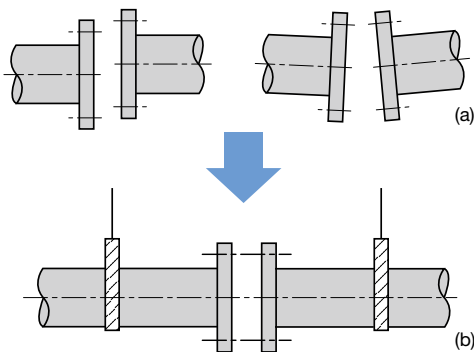

- When mounting a butterfly valve, set jack bolts under the pipe to provide support at consistent height and adjust flange-to-flange distance to allow 6 to 10 mm of space on each side of the body. Remember to have a valve 10° open from fully closed position (Fig. 2).
- Set two (2) bolts into lower mounting guides of a valve and mount carefully in order to avoid flange faces to damage resilient seats.
- Next, set another two bolts into upper mounting guides of the valve, ensuring correct centering between pipes and the valve.
- Try opening the valve to check if there is no obstructing contact between the valve disc and flanges.
- Remove jack bolts, set all bolts around the body tighten the bolts alternately and diagonally until the flanges come into contact with the valve body (Fig. 3). Refer to table shown below for recommended torque values.


Fig.2



Recommended Torque Values


| DN | N · m (kgf · m) |
|-----|-----------------|
| 40 | 49 (5) |
| 50 | |
| 65 | |
| 80 | |
| 100 | |
| 125 | 88 (9) |
| 150 | |
| 200 | |
| 250 | |
| 300 | 118 (12) |

Fig.3

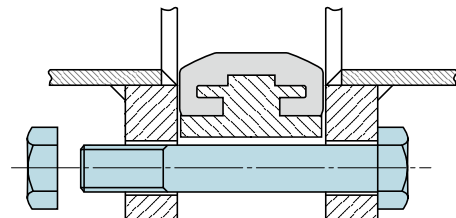


- For mounting actuated valves, provide valve supports to prevent bending valve necks and reduce valve and pipe vibration.
- Do not step on the valve neck or valve lever/handwheel.
- Do not mount butterfly valves directly to check valves or pumps; this may create damages caused by disc contacts.
- Do not mount valves to the downstream side of elbows, reducers or regulating valves where fluid velocity changes. It is recommended for valves to be installed with distance of approximately 10 times the nominal size.

- Consider the effects to discs in fluid velocity or pressure changes to the piping when mounting valves. Please refer to illustrations in Fig. 4.
- Contact KITZ or one of its local distributors for details.

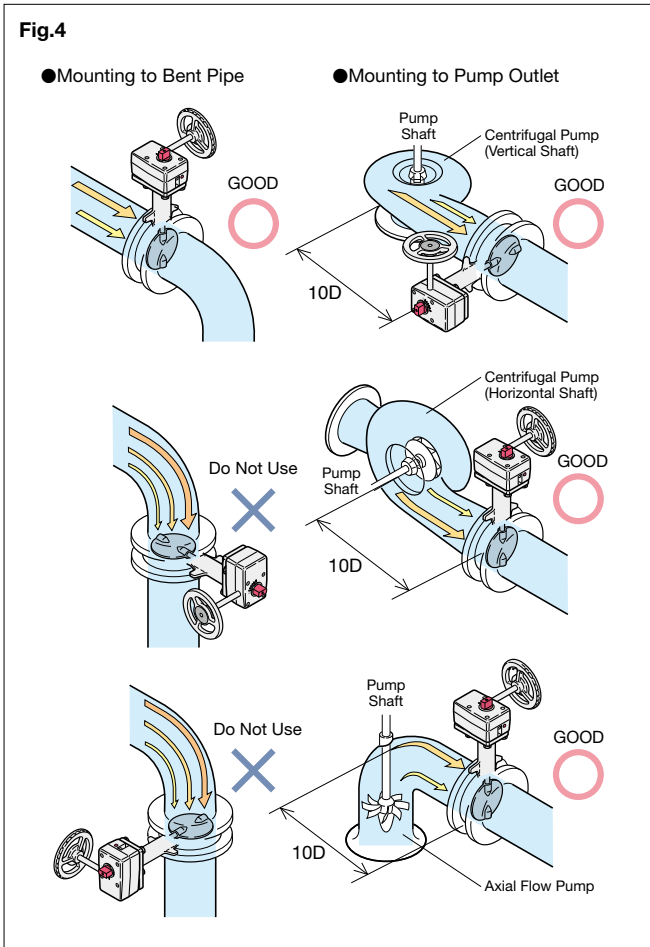

Note:
For accurate centering, use of centering sleeve is required for valves equipped with sleeves as shown in Fig. 5. Kindly refer Page 3 for applicable sizes.

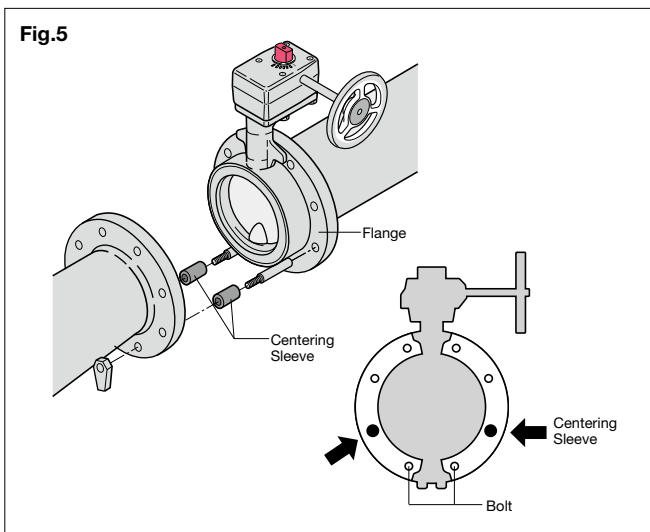

Valve Operation

- Valves equipped with manual operators, such as levers, handles and gears, must be **MANUALLY OPERATED ONLY**. Application of excessive external force to operate valves may result malfunctioning of the valve and its operators.
- Make sure to full open the valve before conducting loop test of piping system at a line pressure higher than the nominal pressure of tested valves. Never use closed valves in place of blind flanges.
- When valve needs to be removed from pipe for maintenance or any other reasons, make sure to thoroughly relieve line pressure beforehand. Loosening piping bolts under line pressure is dangerous. Any residual fluid left inside pipeline must be drained completely.
- Users should contact KITZ representative or its local distributors for technical advice when valves need to continuously pressured while left open at 30° or less.
- Do not use position indicators to operate valves or overload position indicators. These action may damage the indicators.
- Make sure to use blind flanges when butterfly valves are mounted at the end of pipeline.
- Standard actuators are referenced in this catalogue for actuated valve operation. Contact KITZ representative or its local distributors for information on mounting optional actuators.
- Contact KITZ for service or pump outlets.
- Avoid touching gear operators and actuator stopper bolts accidentally.
- Following Periodic Inspection is recommended
 - Check valve opening
 - Check for loosened bolts and leakage at each connection
 - Check for vibration and noise
- Refer to operation manual for other precautions. Also refer to actuator catalog and operation manual for actuated valves.

WARNING

To prevent stem blow-out, do not disassemble neck while a valve is pressurized. Do not dismantle valve operating device, since it may cause valve disc to rotate which may result in valve malfunction.


Disclaimer

- KITZ will not take any responsibilities for damages caused by result of natural disasters, accidents or fire which KITZ is not liable for, conduct of a third party, intentional act, misuse or used under abnormal conditions by a customer.
- KITZ will not take any responsibilities for damages arise from negligence or prohibitions, cautions, installation and usage beyond specification range mentioned in the catalogs and operation manuals.
- KITZ will not take any responsibility for damages caused by product modification not entrusted by KITZ or usage under load applied from other devices.

KITZ

GENERAL CATALOG

Steel Ball Valves

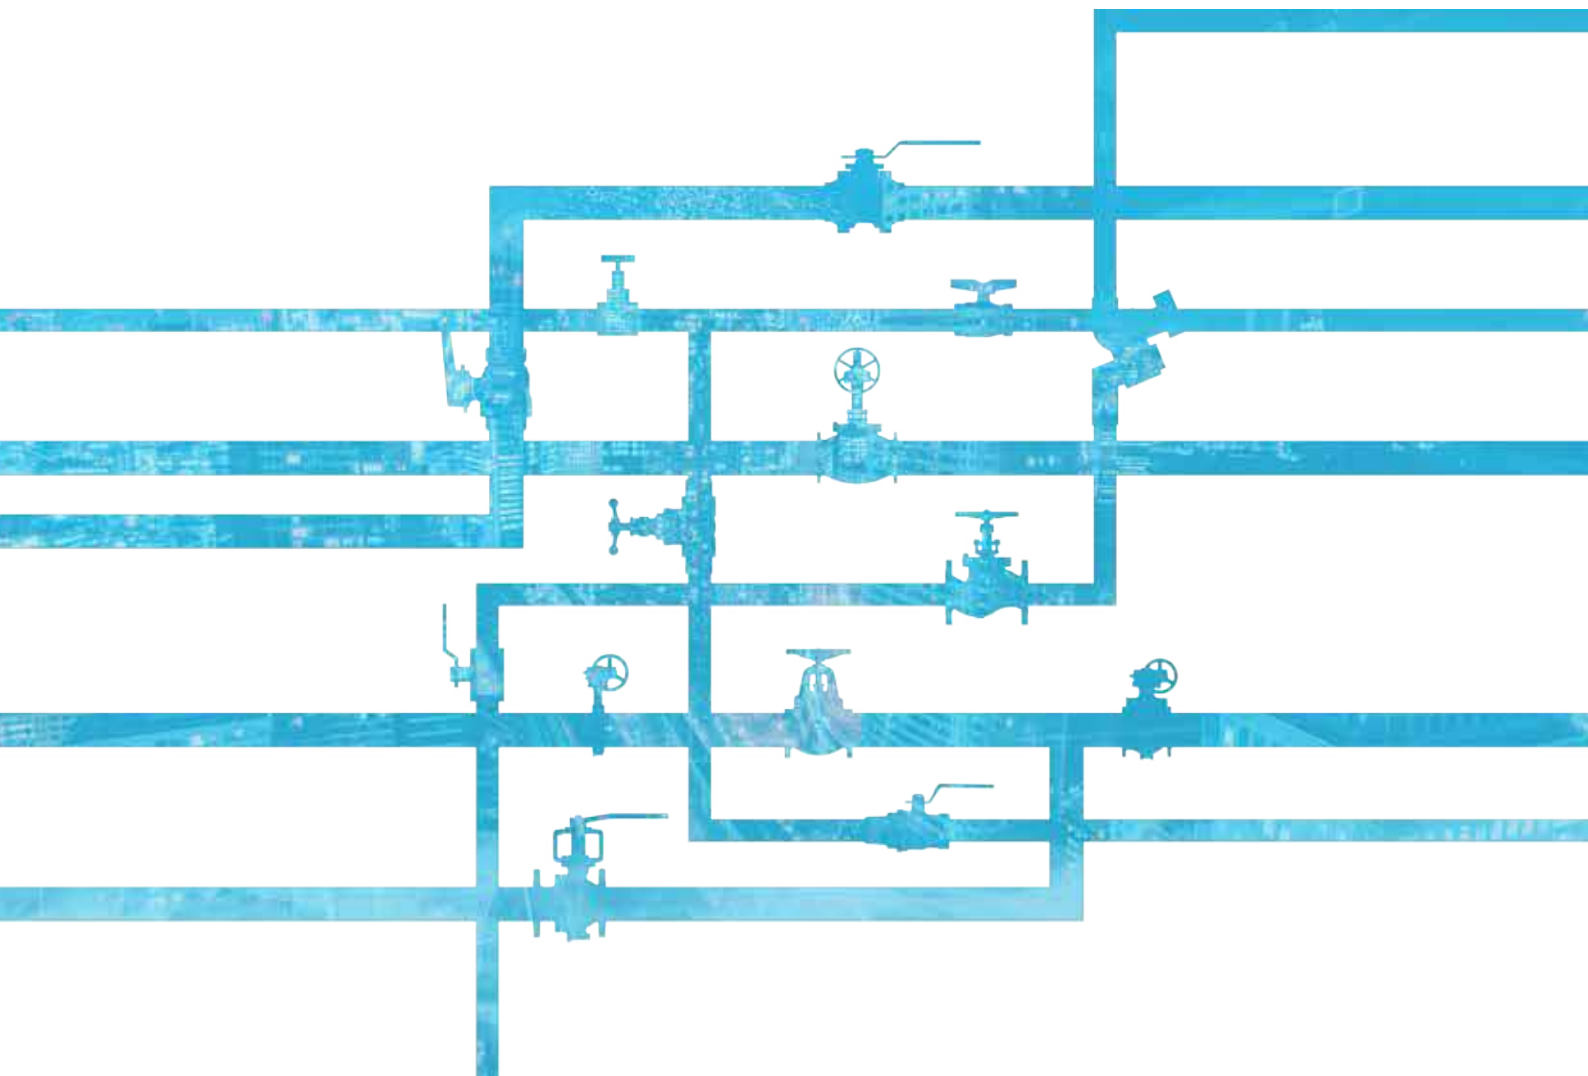

INDEX

| Series | Body Material | Class | End Connection | Bore | Face to Face Dimension | Actuator Mounting Pad | Body Design | Size Range | Fig | Page | | |
|-----------------|---------------|-------|----------------------------------|-----------------|----------------------------------|-----------------------|-----------------------|---------------------------------------|-----------------------------------|--------------|-------------------------------|--------------|
| TB | SS | 10K | RF | FB | KITZ Standard | KITZ Standard | Split | 1/2 ^B - 10 ^B | 10UTB/G-10UTB | BAL6 149 | | |
| | | | | | ASME B16.10 | | | | 10UTBM/G-10UTBM | | | |
| TB (Pocketless) | SS | 150 | RF | FB | KITZ Standard | KITZ Standard | Split (Pocketless) | 1/2 ^B - 8 ^B | 10UTBD/G-10UTBD | BAL7 150 | | |
| ASME B16.10 | | | | | | | | | 10UTBDM/G-10UTBDM | | | |
| TR | SS | 10K | RF | RB | KITZ Standard | KITZ Standard | Split | 2 ^B - 12 ^B | 150UTB/G-150UTB | BAL8 151 | | |
| | | | | | | | | | ASME B16.10 | | 150UTBM/G-150UTBM | |
| | CS | 150 | | | 5 ^B - 12 ^B | | | 150UTBP | BAL9 152 | | | |
| | | | | | | | | ASME B16.10 | | 150UTBPM | | |
| | SS | 20K | | | 300 | | | 2 ^B - 10 ^B | 10UTR/G-10UTR | BAL10 153 | | |
| | | | | | | | | | ASME B16.10 | | 10UTRM/G-10UTRM | |
| CS | 20K | 300 | 6 ^B - 10 ^B | 150UTR/G-150UTR | BAL11 154 | | | | | | | |
| | | | | ASME B16.10 | | 150UTRM/G-150UTRM | | | | | | |
| TB | SS | 600 | RF | FB | KITZ Standard | KITZ Standard | Split/Tank Ball | 1 ^B - 10 ^B | 20UTR | BAL12 155 | | |
| | | | | | | | | | ASME B16.10 | | 20UTRM | |
| | CS | 1500 | | | | | | 1 ^B - 6 ^B | 300UTR | | BAL13 156 | |
| | | | | | | | | | ASME B16.10 | | | 300UTRM |
| SS | 10K | 150 | RF | RB | KITZ Standard | KITZ Standard | Split/3-way · 2-seats | 1 ^B - 4 ^B | 600UTBM | BAL14 157 | | |
| | | | | | | | | | ASME B16.10 | | 600UTBSM | |
| TR | SS | 10K | RF | RB | KITZ Standard | KITZ Standard | Split/3-way · 4-seats | 1 ^B - 8 ^B | 600SCTB | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 600SCTBS | |
| TB | SS | 150 | RF | FB | KITZ Standard | KITZ Standard | Split/3-way · 2-seats | 1 ^B - 8 ^B | 150UTBM | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150UTBSM | |
| TR | SS | 150 | RF | RB | KITZ Standard | KITZ Standard | Split/3-way · 4-seats | 5 ^B - 8 ^B | 150SCTB | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150SCTBS | |
| TB | SS | 10K | RF | FB | KITZ Standard | KITZ Standard | Jacketed | 1/2 ^B - 4 ^B | 150SCTBS | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150SCTBS | |
| TR | SS | 150 | RF | RB | KITZ Standard | KITZ Standard | Jacketed | 1/2 ^B - 2 1/2 ^B | 10UTBT/G-10UTBT | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 10UTBTM/G-10UTBTM | |
| TB | SS | 10K | RF | FB | KITZ Standard | KITZ Standard | Jacketed | 3 ^B - 6 ^B | 150UTBT | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150UTBTM | |
| | | | | | | | | 150 | 1/2 ^B - 6 ^B | | 10UTB2L | BAL15 158 |
| | | | | | | | | | | | ASME B16.10 | |
| TR | SS | 150 | RF | RB | KITZ Standard | KITZ Standard | Jacketed | 6 ^B | 150UTB2L | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150UTB2LM | |
| TB | SS | 10K | RF | FB | KITZ Standard | KITZ Standard | Jacketed | 1/2 ^B - 4 ^B | 10UTR2L | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 10UTR2LM | |
| TR | SS | 150 | RF | RB | KITZ Standard | KITZ Standard | Jacketed | 3 ^B - 6 ^B | 150UTR2L | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150UTR2LM | |
| TB | SS | 10K | RF | FB | KITZ Standard | KITZ Standard | Jacketed | 1/2 ^B - 6 ^B | 10UTB4L(T)A/G-10UTB4L(T)A | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 10UTB4L(T)AM/G-10UTB4L(T)AM | |
| | | | | | | | | 150 | 1/2 ^B - 2 ^B | | 150UTB4L(T)A/G-150UTB4L(T)A | BAL15 158 |
| | | | | | | | | | | | ASME B16.10 | |
| TR | SS | 150 | RF | RB | KITZ Standard | KITZ Standard | Jacketed | 6 ^B - 8 ^B | 10UTR4L(T)A/G-10UTR4L(T)A | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 10UTR4L(T)AM/G-10UTR4L(T)AM | |
| TB | SS | 10K | RF | FB | KITZ Standard | KITZ Standard | Jacketed | 1/2 ^B - 8 ^B | 150UTR4L(T)A/G-150UTR4L(T)A | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150UTR4L(T)AM/G-150UTR4L(T)AM | |
| TR | SS | 150 | RF | RB | KITZ Standard | KITZ Standard | Jacketed | 3 ^B - 6 ^B | 10UTBJ | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 10UTBJM | |
| TB | SS | 10K | RF | FB | KITZ Standard | KITZ Standard | Jacketed | 1/2 ^B - 2 1/2 ^B | 150UTBJ | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150UTBJM | |
| | | | | | | | | 150 | 1/2 ^B - 6 ^B | | 10UTRJ | BAL15 158 |
| | | | | | | | | | | | ASME B16.10 | |
| TR | SS | 150 | RF | RB | KITZ Standard | KITZ Standard | Jacketed | 3 ^B - 6 ^B | 150UTRJ | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150UTRJM | |
| TB | SS | 10K | RF | FB | KITZ Standard | KITZ Standard | Jacketed | 1/2 ^B - 6 ^B | 20UTBJ | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 20UTBJM | |
| | | | | | | | | 150 | 1/2 ^B - 2 ^B | | 300UTBJ | BAL15 158 |
| | | | | | | | | | | | ASME B16.10 | |
| TR | SS | 150 | RF | RB | KITZ Standard | KITZ Standard | Jacketed | 1/2 ^B - 2 ^B | 150UTDZJ | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150UTDZJM | |
| TB | SS | 10K | RF | FB | KITZ Standard | KITZ Standard | Split/PFA Lined | 1/2 ^B - 4 ^B | 10UTBLN | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150UTAZM | |
| TAZ | CS | 300 | RF | RB | ASME B16.10 | ISO 5211 | Uni | 1/2 ^B - 10 ^B | 150SCTAZ | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 300SCTAZ | |
| TAZX (-46°C) | CS | 150 | RF | RB | ASME B16.10 | ISO 5211 | Uni | 1/2 ^B - 10 ^B | 300SCTAZ | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150SCTAZXCL/G-150SCTAZXCL | |
| TAZXL (-104°C) | SS | 150 | RF | RB | ASME B16.10 | ISO 5211 | Uni/Ext. Bonnet | 1/2 ^B - 10 ^B | 300SCTAZXCL | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 300SCTAZXCL/G-300SCTAZXCL | |
| TAZL (-196°C) | SS | 150 | RF | RB | ASME B16.10 | ISO 5211 | Uni/Ext. Bonnet | 1/2 ^B - 10 ^B | 150UTAZXLM/G-150UTAZXLM | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 300UTAZXLM/G-300UTAZXLM | |
| TDZ | SS | 10K | RF | FB | ASME B16.10 | ISO 5211 | Split | 1/2 ^B - 10 ^B | 150UTAZLM/G-150UTAZLM | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 300UTAZLM/G-300UTAZLM | |
| TDRZ | SS | 10K | RF | RB | ASME B16.10 | ISO 5211 | Split | 6 ^B - 8 ^B | 10UTDZ/G-10UTDZ | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 10UTDZM/G-10UTDZM | |
| TDRZ | SS | 10K | RF | RB | ASME B16.10 | ISO 5211 | Split | 6 ^B - 8 ^B | 150UTDZ/G-150UTDZ | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 150UTDZM/G-150UTDZM | |
| TDRZ | SS | 10K | RF | RB | ASME B16.10 | ISO 5211 | Split | 6 ^B - 8 ^B | 10UTDRZ | BAL15 158 | | |
| | | | | | | | | | ASME B16.10 | | 10UTDRZM | |

| Series | Body Material | Class | End Connection | Bore | Face to Face Dimension | Actuator Mounting Pad | Body Design | Size Range | Fig | Page | |
|--------------|---------------|-------|------------------------------------|---------------------|------------------------|-----------------------|-----------------------------------|------------------------------------|---------------------------|--------------|--------------|
| TDRZ | SS | 150 | RF | RB | ASME B16.10 | ISO 5211 | Split | 6 ^B - 8 ^B | 150UTDRZ | BAL16 169 | |
| | | 10K | | FB | | | | 6 ^B - 8 ^B | 150UTDRZM | | |
| TDZ | CS | 150 | | RB | | | | 1/2 ^B - 10 ^B | 10SCTDZ/G-10SCTDZ | | |
| TDRZ | SS | 20K | | FB | | | | 6 ^B - 8 ^B | 150SCTDRZ | | |
| | | | | | | | | 20UTDZ | | | |
| | | | | | | | | 20UTDZM | | | |
| | | | | | | | | 300UTDZ | | | |
| | | | | | | | | 300UTDZM | | | |
| | | | | | | | | 300UTDRZ | | | |
| | | 300 | | RB | | | | 6 ^B - 10 ^B | 20UTDRZ | | BAL17 160 |
| | | 20K | | FB | | | | 20UTDRZM | | | |
| | | 300 | | | | | | 300UTDRZ | | | |
| | | | | | | | 300UTDRZM | | | | |
| | | | | | | | 1/2 ^B - 8 ^B | 20SCTDZ | | | |
| | | | | | | | 300SCTDZ | | | | |
| | | | | | | | RB | 6 ^B - 10 ^B | 300SCTDRZ | BAL18 161 | |
| TDZX (-46°C) | CS | 150 | | ASME B16.10 | | | KITZ Standard | 1/2 ^B - 10 ^B | 150SCTDZBXL/G-150SCTDZBXL | | |
| | | 300 | | | | | | 150SCTDZXCL/G-150SCTDZXCL | | | |
| | | 150 | | | | | | 1/2 ^B - 8 ^B | 300SCTDZBXL/G-300SCTDZBXL | | |
| | | 300 | | | | | | 1/2 ^B - 10 ^B | 300SCTDZXCL/G-300SCTDZXCL | | |
| | | | | | | | | 1/2 ^B - 8 ^B | 10UTDZXL/G-10UTDZXL | | |
| | | | | | | | | 10UTDZXLM/G-10UTDZXLM | | | |
| | | | | | | | | 20UTDZXL/G-20UTDZXL | | | |
| | | | | | | | | 20UTDZXLM/G-20UTDZXLM | | | |
| | | | 1/2 ^B - 8 ^B | | 150UTDZXL/G-150UTDZXL | | | | | | |
| | | | 150UTDZXLM/G-150UTDZXLM | | | | | | | | |
| | | | 1/2 ^B - 8 ^B | | 300UTDZXL/G-300UTDZXL | BAL19 162 | | | | | |
| | | | 300UTDZXLM/G-300UTDZXLM | | | | | | | | |
| | | | 10UTDZL/G-10UTDZL | | | | | | | | |
| | | | 10UTDZLM/G-10UTDZLM | | | | | | | | |
| | | | 20UTDZL/G-20UTDZL | | | | | | | | |
| | | | 20UTDZLM/G-20UTDZLM | | | | | | | | |
| | | | 1/2 ^B - 10 ^B | 150UTDZL/G-150UTDZL | BAL20 163 | | | | | | |
| | | | 150UTDZLM/G-150UTDZLM | | | | | | | | |
| | | | 300UTDZL/G-300UTDZL | | | | | | | | |
| | | | 300UTDZLM/G-300UTDZLM | | | | | | | | |
| | | | 10UTBDXK/G-10UTBDXK | | | | | | | | |
| | | | 10UTBDXKM/G-10UTBDXKM | | | | | | | | |
| | | | 150UTBDXK/G-150UTBDXK | BAL21 164 | | | | | | | |
| | | | 150UTBDXKM/G-150UTBDXKM | | | | | | | | |
| | | | 10UTDZ1H/G-10UTDZ1H | | | | | | | | |
| | | | 150UTDZ1HM/G-150UTDZ1HM | | | | | | | | |
| | | | 10SCTDZ1H/G-10SCTDZ1H | | | | | | | | |
| | | | 150SCTDZ1H/G-150SCTDZ1H | | | | | | | | |
| | | | 20UTDZ1H/G-20UTDZ1H | | | | | | | | |
| | | | 300UTDZ1HM/G-300UTDZ1HM | | | | | | | | |
| | | | 20SCTDZ1H/G-20SCTDZ1H | | | | | | | | |
| | | | 300SCTDZ1H/G300SCTDZ1H | | | | | | | | |
| | | | 10UTDZ3H/G-10UTDZ3H | | BAL22 165 | | | | | | |
| | | | 150UTDZ3HM/G-150UTDZ3HM | | | | | | | | |
| | | | 10SCTDZ3H/G-10SCTDZ3H | | | | | | | | |
| | | | 150SCTDZ3H/G-150SCTDZ3H | | | | | | | | |
| | | | 20UTDZ3H/G-20UTDZ3H | | | | | | | | |
| | | | 300UTDZ3HM/G-300UTDZ3HM | | | | | | | | |
| | | | 20SCTDZ3H/G-20SCTDZ3H | BAL23 166 | | | | | | | |
| | | | 300SCTDZ3H/G300SCTDZ3H | | | | | | | | |
| | | | 10UTDZ5H/G-10UTDZ5H | | | | | | | | |
| | | | 150UTDZ5HM/G-150UTDZ5HM | | | | | | | | |
| | | | 10SCTDZ5H/G-10SCTDZ5H | | | | | | | | |
| | | | 150SCTDZ5H/G-150SCTDZ5H | | | | | | | | |
| | | | 20UTDZ5H/G-20UTDZ5H | | | | | | | | |
| | | | 300UTDZ5HM/G-300UTDZ5HM | | | | | | | | |
| | | | 20SCTDZ5H/G-20SCTDZ5H | | | | | | | | |
| | | | 300SCTDZ5H/G300SCTDZ5H | | | | | | | | |
| | | | 10UTDZ6H/G-10UTDZ6H | | BAL24 167 | | | | | | |
| | | | 150UTDZ6HM/G-150UTDZ6HM | | | | | | | | |
| | | | 10SCTDZ6H/G-10SCTDZ6H | | | | | | | | |
| | | | 150SCTDZ6H/G-150SCTDZ6H | | | | | | | | |
| | | | 20UTDZ6H/G-20UTDZ6H | | | | | | | | |
| | | | 300UTDZ6HM/G-300UTDZ6HM | | | | | | | | |
| | | | 20SCTDZ6H/G-20SCTDZ6H | BAL25 168 | | | | | | | |
| | | | 300SCTDZ6H/G300SCTDZ6H | | | | | | | | |
| | | | 1 ^B - 8 ^B | | L-10UVC | | | | | | |
| | | | L-150UVC | | | | | | | | |
| | | | G-10UVC | | | | | | | | |
| | | | G-150UVC | | | | | | | | |
| | | | 1 ^B - 8 ^B | | L-20UVC | | | | | | |
| | | | L-300UVC | | | | | | | | |
| | | | G-20UVC | | | | | | | | |
| | | | G-300UVC | | | | | | | | |
| | | | 6 ^B - 10 ^B | | G-300UVC | | | | | | |


| Series | Body Material | Class | End Connection | Bore | Face to Face Dimension | Actuator Mounting Pad | Body Design | Size Range | Fig | Page | |
|----------------|---------------|-------------|-------------------------------------|--|------------------------|-----------------------|-------------------|----------------------------------|--|--------------|--------------|
| Λ Port (Knife) | SS | 10K | RF | FB | ASME B16.10 | ISO 5211 | Split/For Control | 1 ^B - 8 ^B | L-10UVCT L-150UVCTM | BAL26 169 | |
| | | 150 | | | | | | 6 ^B - 12 ^B | G-10UVCT G-150UVCTM | | |
| | | 20K | | | | | | 1 ^B - 8 ^B | L-20UVCT L-300UVCTM | | |
| | | 300 | | | | | | 6 ^B - 10 ^B | G-20UVCT G-300UVCTM | | |
| | | 3TC (T60S) | | | | | | 2 ^B - 24 ^B | 10UF3TCSM/G-10UF3TCSM 150UF3TCSM/G-150UF3TCSM | | BAL27 170 |
| | | 3TCR (T60S) | | | | | | 3 ^B - 24 ^B | 10UF3TCRSM/G-10UF3TCRSM 150UF3TCRSM/G-150UF3TCRSM | | |
| 3TC (T60S) | CS | 10K | 2 ^B - 24 ^B | 10SF3TCS/G-10SF3TCS 150SF3TCS/G-150SF3TCS | | | | | | | |
| | | 150 | 3 ^B - 24 ^B | 10SF3TCRS/G-10SF3TCRS 150SF3TCRS/G-150SF3TCRS | | | | | | | |
| 3TCR (T60S) | CS | 10K | 2 ^B - 24 ^B | 10SF3TCSBL/G-10SF3TCSBL 150SF3TCSBL/G-150SF3TCSBL | BAL28 171 | | | | | | |
| | | 150 | 3 ^B - 24 ^B | 10SF3TCRSL/G-10SF3TCRSL 150SF3TCRSL/G-150SF3TCRSL | | | | | | | |
| 3TC (T60S) | SS | 20K | 2 ^B - 24 ^B | 20UF3TCSM/G-20UF3TCSM 300UF3TCSM/G-300UF3TCSM | | BAL29 172 | | | | | |
| | | 300 | 3 ^B - 24 ^B | 20UF3TCRSM/G-20UF3TCRSM 300UF3TCRSM/G-300UF3TCRSM | | | | | | | |
| 3TCR (T60S) | SS | 20K | 2 ^B - 24 ^B | 20SF3TCS/G-20SF3TCS 300SF3TCS/G-300SF3TCS | | | BAL30 173 | | | | |
| | | 300 | 3 ^B - 24 ^B | 20SF3TCRS/G-20SF3TCRS 300SF3TCRS/G-300SF3TCRS | | | | | | | |
| 3TC (T60S) | CS | 20K | 2 ^B - 24 ^B | 20SF3TCSBL/G-20SF3TCSBL 300SF3TCSBL/G-300SF3TCSBL | BAL31 174 | | | | | | |
| | | 300 | 3 ^B - 24 ^B | 20SF3TCRSL/G-20SF3TCRSL 300SF3TCRSL/G-300SF3TCRSL | | | | | | | |
| 3TCR (T60S) | CS | 20K | 2 ^B - 24 ^B | 600UF3TCSM/G-600UF3TCSM 900SF3TCS/G-900SF3TCS | | BAL32 175 | | | | | |
| | | 300 | 3 ^B - 24 ^B | 600UF3TCRSM/G-600UF3TCRSM 900SF3TCRS/G-900SF3TCRS | | | | | | | |
| 3TC (T60S) | SS | 600 | 2 ^B - 24 ^B | 1500UF3TCSM/G-1500UF3TCSM 1500SF3TCS/G-1500SF3TCS | | | BAL33 176 | | | | |
| | | | 3 ^B - 24 ^B | 1500SF3TCSBL/G-1500SF3TCSBL 1500SF3TCRS/G-1500SF3TCRS | | | | | | | |
| 3TCR (T60S) | SS | 600 | 2 ^B - 24 ^B | 1500UF3TCRSM/G-1500UF3TCRSM 1500SF3TCRSM/G-1500SF3TCRSM | BAL34 177 | | | | | | |
| | | | 3 ^B - 24 ^B | 1500SF3TCRSL/G-1500SF3TCRSL 1500SF3TCRSL/G-1500SF3TCRSL | | | | | | | |
| 3TC (T60M) | CS | 150 | 2 ^B - 24 ^B | 300UF3TC6HM/G-300UF3TC6HM 300SF3TC6HM/G-300SF3TC6HM | | BAL35 178 | | | | | |
| | | | 3 ^B - 24 ^B | 300UF3TCR6HM/G-300UF3TCR6HM 300SF3TCR6HM/G-300SF3TCR6HM | | | | | | | |
| 3TCR (T60M) | CS | 150 | 2 ^B - 24 ^B | G-600UF3TC6HM G-600UF3TCR6HM | | | | | | | |
| | | | 3 ^B - 24 ^B | G-600SF3TC6HM G-600SF3TCR6HM | | | | | | | |
| 3TC (T60M) | SS | 300 | 2 ^B - 24 ^B | (G-)150UPG14K (G-)300UPG14K | | | | | | | |
| | | | 3 ^B - 24 ^B | (G-)600UPG14K | | | | | | | |
| 3TCR (T60M) | SS | 300 | 1 ^B - 8 ^B | (G-)W150UPG67K (G-)W300UPG67K | | | | | | | |
| | | | 1 ^B - 2 ^B | (G-)W600UPG67K (G-)W900UPG67K | | | | | | | |
| 3TC (T60M) | CS | 600 | 1 ^B - 2 ^B | (G-)W150UPG66K (G-)W300UPG66K | | | | | | | |
| | | | 1/2 ^B - 3/4 ^B | (G-)W600UPG66K (G-)W900UPG66K | | | | | | | |
| 3TCR (T60M) | CS | 600 | 1/2 ^B - 2 ^B | (G-)W150UPG64K (G-)W300UPG64K | | | | | | | |
| | | | 10 ^B - 16 ^B | (G-)W600UPG64K (G-)W900UPG64K | | | | | | | |
| 3TC (T60M) | SS | 1500 | 1/2 ^B - 2 ^B | (G-)W150UPG64K (G-)W300UPG64K | | | | | | | |
| | | | 21/2 ^B - 16 ^B | (G-)W600UPG64K (G-)W900UPG64K | | | | | | | |

* (Abbreviation) RF: Raised Face Ends, BW: Butt welding Ends
FB: Full Bore, RB: Reduced Bore

PRODUCT CODING

Steel Floating Ball Valves

(Note: Some products do not follow this coding system)



1 Operation

| | |
|------|-------|
| None | Lever |
| G | Gear |

2 Pressure Class

| | |
|------|------------|
| 10 | 10K |
| 20 | 20K |
| 150 | Class 150 |
| 300 | Class 300 |
| 600 | Class 600 |
| 1500 | Class 1500 |

3 Symbols for Shell Material

| | |
|----|------------------------------|
| U | Stainless / High Alloy Steel |
| SC | Carbon / Low Alloy Steel |

4 Design & Type

| | |
|-----------------|------------------------------------|
| TB·TR | TB (FB) / TR (RB) Series |
| TBD | TB (F-to-F:API 6D/ASME B16.10) |
| TBP | TB (Pocketless) |
| TBT | TB (Tank Ball) |
| TB2L/T·TR2L/T | TB/TR (3-way, 2-seat, L or T-Port) |
| TB4L/LA·TR4L/LA | TB/TR (3-way, 4-seat, L or T-Port) |
| TBJ·TRJ | TB/TR (Jacketed) |
| TBLN | TB (PFA Lined) |
| TAZ | TA (RB) Series |
| TAZX | TA (-46°C Series) for SC in ③ |
| TAZXL | TA (-104°C Service) for U in ② |
| TAZL | TA (-196°C Service) for U in ③ |
| TDZ·TDRZ | TDZ (FB) / TDRZ (RB) Series |
| TDZX | TDZ (-46°C Service) for SC in ③ |
| TDZXL | TDZ (-104°C Service) for U in ③ |
| TDZL | TDZ (-196°C Service) for U in ③ |

5 Seat Material

| | |
|------|---|
| None | HYPATITE® PTFE (RTFE or Nylon w/ MoS2*) |
| 1H*1 | Filltite (300°C) |
| 3H*1 | Hard Graphite (500°C (WCB 425°C)) |
| 5H*1 | Metal (300°C) |
| 6H*1 | Metal (500°C (WCB 425°C)) |

*1 TDZ Series only *2 for Class 600/1500

6 Shell / Trim Material

For U in ③

| | |
|------|-----------------------|
| None | CF8 (304) |
| M | CF8M (316) |
| O | CF3M (316L) |
| V | CF3 (304L) |
| CB | CF8C (321) |
| CG | CG8M (317) |
| CK | CK20 (310) |
| SD | Super Duplex |
| CN | CN7M (Alloy 20) |
| HB | N-12MV (Hastelloy B) |
| HC | CW-12MW (Hastelloy C) |

For SC of ③


| | |
|------|-----------------------|
| None | WCB (A105)/CF8 (304) |
| M | WCB (A105)/CF8M (316) |
| BLM | LCC (LF2)/CF8M (316) |
| CLM | LCB (LF2)/CF8M (316) |

7 Packing / Gasket Material

| | |
|------|--|
| None | PTFE (Except 1H/3H/5H/6H) |
| S | Flexible Graphite (For Class 600/1500) |
| -FS | Flexible Graphite (For TA/TDZ Series) |

Λ (Lambda) - Port Control Valves

(Note: Some products do not follow this coding system)



1 Operation

| | |
|---|------------------|
| L | Lever for Λ Port |
| G | Gear |

2 Pressure Class

| | |
|-----|-----------|
| 10 | 10K |
| 20 | 20K |
| 150 | Class 150 |
| 300 | Class 300 |

4 Seat Type

| | |
|------|----------------------------------|
| None | Flekseat for General Service |
| T | Knifeseat for Heavy Duty Service |


5 Shell / Trim Material

For U of ③

| | |
|------|------------|
| None | CF8 (304) |
| M | CF8M (316) |

Steel Trunnion Mounted Ball Valves

(Note: Some products do not follow this coding system)



1 Operation

None Lever
G Gear

2 Pressure Class

10 10K
20 20K
150 Class 150
300 Class 300
600 Class 600
1500 Class 1500

3 Symbols for Shell Material

UF Stainless / High Alloy Steel
SF Carbon / Low Alloy Steel

4 Design & Type

3TC 3 pc FB Trunnion Mounted
3TCR 3 pc RB Trunnion Mounted

5 Seat Type

S Soft Seated (Fire Safe)
6H* Metal Seated (Fire Safe)

* In case of use at higher than 400°C, please contact KITZ.

6 Shell Material

For UF in ③

None F304 (or CF8)
M F316 (or CF8M)

For SF in ③

None A105 or (A105)
BL LF2 (or LCB or LCC)

Design Specification

Ball Valves

| Series | | TB/TR/TBD | TAZ/TDZ/TDRZ | 3TC/3TCR | △ Port |
|--|-------------------------|---------------------------|-----------------------|--|---------------------------|
| P-T Rating | Shell | ASME B16.34 | | | |
| | Resilient Seating Parts | KITZ Standard | | | |
| Bore Size | | KITZ Standard | API 608/ISO 17292 | API 6D/ISO 14313 | KITZ Standard |
| Shell Wall Thickness & General Valve Design | | ASME B16.34 | ASME B16.34/ISO 17292 | ASME B16.34 | |
| Face to Face Dimension | | ASME B16.10* ¹ | ASME B16.10 | ASME B16.10/API 6D | ASME B16.10 |
| End Flange Dimension & Flange Gasket Facing | | ASME B16.5* ² | | ASME B16.5/MSS SP-44 (20 ^B)/ASME B16.47 Series A (26 ^B & above) | ASME B16.5 * ² |
| Butt Welding End Dimension | | ASME B16.25 | | | - |
| Pressure Test | | API 598 | API 598/ISO 5208 | API 598/ISO 5208/API 6D | KITZ Standard |
| Fire Test | | - | API 607/ISO 10497 | API 607/ISO 10497/API 6FA | - |
| Fugitive Emission Test (Up to Class 600) | | - | API 641/ISO 15848-1 | | - |
| Cryogenic / Low Temperature Test* ³ | | - | ISO 28921-1 | | - |

*1 For 10UTBD, 150UTBP, 150/300UTR/SCTR, 150/600UTB only. Others are KITZ Standard.





*2 (1) 10K Type is JIS B2220





(2) Dimensions in Pipe Connection except 3TC/3TCR Series shall indicate dimensions in millimeters converted from dimensions in inches according to ASME B16.5.





*3 For X, XL, L (Low Temperature & Cryogenic Service Valves)





| Type | TB Series | | | | | TB Series | | | | | TB Series | | | | | TB Series | | | | | |
|-----------------------|---|------------------|-----|------|-----|---|------------------|------|-----|-----|---|------------------|-----|-----|-----|---|------------------|--|--|--|--|
| Ball Valve | | | | | | | | | | | | | | | | | | | | | |
| | 10OUTB/G-10OUTB | | | | | 10OUTBM/G-10OUTBM | | | | | 10OUTBD/G-10OUTBD | | | | | 10OUTBDM/G-10OUTBDM | | | | | |
| End Connection | | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | | |
| 1/2 | 15 | 110 | 102 | 130 | | 110 | 102 | 130 | | 108 | 102 | 130 | | 108 | 102 | 130 | | | | | |
| 3/4 | 20 | 120 | 105 | 130 | | 120 | 105 | 130 | | 117 | 105 | 130 | | 117 | 105 | 130 | | | | | |
| 1 | 25 | 130 | 124 | 160 | | 130 | 124 | 160 | | 127 | 124 | 160 | | 127 | 124 | 160 | | | | | |
| 1 1/4 | 32 | 140 | 128 | 160 | | 140 | 128 | 160 | | 140 | 128 | 160 | | 140 | 128 | 160 | | | | | |
| 1 1/2 | 40 | 165 | 113 | 230 | | 165 | 113 | 230 | | 165 | 113 | 230 | | 165 | 113 | 230 | | | | | |
| 2 | 50 | 180 | 120 | 230 | | 180 | 120 | 230 | | 178 | 120 | 230 | | 178 | 120 | 230 | | | | | |
| 2 1/2 | 65 | 190 | 154 | 400 | | 190 | 154 | 400 | | 190 | 154 | 400 | | 190 | 154 | 400 | | | | | |
| 3 | 80 | 200 | 163 | 400 | | 200 | 163 | 400 | | 203 | 163 | 400 | | 203 | 163 | 400 | | | | | |
| 4 | 100 | 230 | 197 | 460 | | 230 | 197 | 460 | | 229 | 197 | 460 | | 229 | 197 | 460 | | | | | |
| 5 | 125 | 300 | 217 | 460 | | 300 | 217 | 460 | | 356 | 217 | 460 | | 356 | 217 | 460 | | | | | |
| 6 | 150 | 340 | 291 | 1000 | | 340 | 291 | 1000 | | 394 | 291 | 1000 | | 394 | 291 | 1000 | | | | | |
| 8 | 200 | 450 | 350 | 1500 | | 450 | 350 | 1500 | | 457 | 350 | 1500 | | 457 | 350 | 1500 | | | | | |
| 10 | 250 | 533 | 477 | 500 | 363 | 533 | 477 | 500 | 363 | 533 | 477 | 500 | 363 | 533 | 477 | 500 | 363 | | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | | CF8M | | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 316SS | | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | | |
| Gasket | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | |
| Reference Page | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 10 ^B Gear for 21/2 ^B & over: Available | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 10 ^B Gear for 21/2 ^B & over: Available | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 10 ^B Gear for 21/2 ^B & over: Available | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 10 ^B Gear for 21/2 ^B & over: Available | | | | | |





| Type | TB Series | | | | | TB Series | | | | | TB Series (Pocketless) | | | | | TB Series (Pocketless) | | | | | |
|-----------------------|---|-------------------------|-----|------|-----|---|-------------------------|------|-----|-----|---|-------------------------|---|-----|-----|---|-------------------------|--|--|--|--|
| Ball Valve | | | | | | | | | | | | | | | | | | | | | |
| | 150OUTB/G-150UTB | | | | | 150OUTBM/G-150UTBM | | | | | 150OUTBP | | | | | 150OUTBPM | | | | | |
| End Connection | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | | |
| 1/2 | 15 | 108 | 102 | 130 | | 108 | 102 | 130 | | 108 | 102 | 130 | | 108 | 102 | 130 | | | | | |
| 3/4 | 20 | 117 | 105 | 130 | | 117 | 105 | 130 | | 117 | 105 | 130 | | 117 | 105 | 130 | | | | | |
| 1 | 25 | 127 | 124 | 160 | | 127 | 124 | 160 | | 127 | 124 | 160 | | 127 | 124 | 160 | | | | | |
| 1 1/4 | 32 | 140 | 128 | 160 | | 140 | 128 | 160 | | | | | | | | | | | | | |
| 1 1/2 | 40 | 165 | 113 | 230 | | 165 | 113 | 230 | | 165 | 113 | 230 | | 165 | 113 | 230 | | | | | |
| 2 | 50 | 178 | 120 | 230 | | 178 | 120 | 230 | | 178 | 121 | 230 | | 178 | 121 | 230 | | | | | |
| 2 1/2 | 65 | 190 | 154 | 400 | | 190 | 154 | 400 | | 190 | 154 | 400 | | 190 | 154 | 400 | | | | | |
| 3 | 80 | 203 | 163 | 400 | | 203 | 163 | 400 | | 203 | 163 | 400 | | 203 | 163 | 400 | | | | | |
| 4 | 100 | 229 | 197 | 460 | | 229 | 197 | 460 | | 229 | 197 | 460 | | 229 | 197 | 460 | | | | | |
| 5 | 125 | 356 | 217 | 460 | | 356 | 217 | 460 | | 356 | 217 | 460 | | 356 | 217 | 460 | | | | | |
| 6 | 150 | 394 | 292 | 1000 | | 394 | 292 | 1000 | | 394 | 292 | 1000 | | 394 | 292 | 1000 | | | | | |
| 8 | 200 | 457 | 350 | 1500 | | 457 | 350 | 1500 | | 457 | 350 | 1500 | | 457 | 350 | 1500 | | | | | |
| 10 | 250 | 533 | 477 | 500 | 363 | 533 | 477 | 500 | 363 | | | | | | | | | | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | | CF8M | | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 316SS | | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | | |
| Gasket | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS | | | | | DI/CS | | | | | |
| Standard/Approval | TR-CU/EAC | | | | | TR-CU/EAC | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | |
| Reference Page | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 10 ^B Gear for 21/2 ^B & over: Available | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 10 ^B Gear for 21/2 ^B & over: Available | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | |





| Type | TR Series | | | | | TR Series | | | | | TR Series | | | | | TR Series | | | | |
|-----------------------|--|-----|-----|------|-----|--|-----|------|-----|-----|--|------|-----|-----|-----|--|-----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| Fig | 10UTR/G-10UTR | | | | | 10UTRM/G-10UTRM | | | | | 150UTR/G-150UTR | | | | | 150UTRM/G-150UTRM | | | | |
| End Connection | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 2 | 50 | 178 | 113 | 230 | | 178 | 113 | 230 | | 178 | 113 | 230 | | 178 | 113 | 230 | | | | |
| 2 1/2 | 65 | 190 | 120 | 230 | | 190 | 120 | 230 | | 190 | 120 | 230 | | 190 | 120 | 230 | | | | |
| 3 | 80 | 203 | 154 | 400 | | 203 | 154 | 400 | | 203 | 154 | 400 | | 203 | 154 | 400 | | | | |
| 4 | 100 | 229 | 163 | 400 | | 229 | 163 | 400 | | 229 | 163 | 400 | | 229 | 163 | 400 | | | | |
| 5 | 125 | 250 | 197 | 460 | | 250 | 197 | 460 | | 254 | 200 | 460 | | 254 | 200 | 460 | | | | |
| 6 | 150 | 270 | 217 | 460 | | 270 | 217 | 460 | | 267 | 217 | 460 | | 267 | 217 | 460 | | | | |
| 8 | 200 | 290 | 292 | 1000 | | 290 | 291 | 1000 | | 292 | 292 | 1000 | | 292 | 292 | 1000 | | | | |
| 10 | 250 | 330 | 350 | 1500 | | 330 | 350 | 1500 | | 330 | 350 | 1500 | | 330 | 350 | 1500 | | | | |
| 12 | 300 | 356 | 477 | 500 | 363 | 356 | 477 | 500 | 363 | 356 | 477 | 500 | 363 | 356 | 477 | 500 | 363 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | | CF8M | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 316SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Gasket | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | |
| Bore | Reduced Bore | | | | | Reduced Bore | | | | | Reduced Bore | | | | | Reduced Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Reference Page | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 12 ^B Gear for 3 ^B & over: Available | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 12 ^B Gear for 3 ^B & over: Available | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 12 ^B Gear for 3 ^B & over: Available | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 12 ^B Gear for 3 ^B & over: Available | | | | |



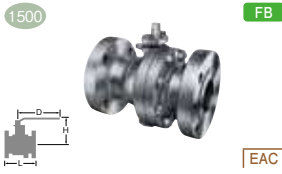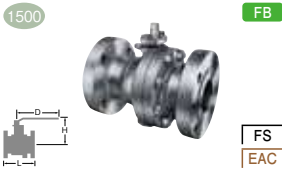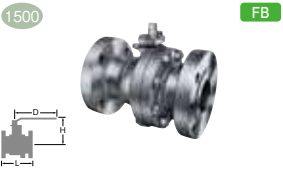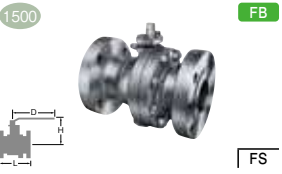

| Type | TR Series | | | | | TR Series | | | | | TR Series | | | | | TR Series | | | | |
|-----------------------|--|-----|-----|------|-----|--|-----|------|-----|-----|--|------|---|-----|-----|---|---|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| Fig | 10SCTR/G-10SCTR | | | | | 150SCTR/G-150SCTR | | | | | 20UTR | | | | | 20UTRM | | | | |
| End Connection | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | JIS B2220 20K RF | | | | | JIS B2220 20K RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 2 | 50 | | | | | | | | | 216 | 113 | 230 | | 216 | 113 | 230 | | | | |
| 3 | 80 | | | | | | | | | 283 | 154 | 400 | | 283 | 154 | 400 | | | | |
| 4 | 100 | | | | | | | | | 305 | 163 | 400 | | 305 | 163 | 400 | | | | |
| 5 | 125 | 254 | 197 | 460 | | 254 | 197 | 460 | | | | | | | | | | | | |
| 6 | 150 | 267 | 217 | 460 | | 267 | 217 | 460 | | 403 | 263 | 750 | | 403 | 263 | 750 | | | | |
| 8 | 200 | 292 | 292 | 1000 | | 292 | 292 | 1000 | | 419 | 292 | 1000 | | 419 | 292 | 1000 | | | | |
| 10 | 250 | 330 | 350 | 1500 | | 330 | 350 | 1500 | | 457 | 350 | 1500 | | 457 | 350 | 1500 | | | | |
| 12 | 300 | 356 | 477 | 500 | 363 | 356 | 477 | 500 | 363 | | | | | | | | | | | |
| Body/Cap | WCB | | | | | WCB | | | | | CF8 | | | | | CF8M | | | | |
| Stem | 304SS | | | | | 304SS | | | | | 304SS | | | | | 316SS | | | | |
| Ball | 304SS/CF8 | | | | | 304SS/CF8 | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Gasket | Non Asbestos Sheet | | | | | Non Asbestos Sheet | | | | | PTFE | | | | | PTFE | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | |
| Bore | Reduced Bore | | | | | Reduced Bore | | | | | Reduced Bore | | | | | Reduced Bore | | | | |
| Cap B/N | B7/2H | | | | | B7/2H | | | | | B8/8 | | | | | B8/8 | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS | | | | | DI/CS | | | | |
| Reference Page | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 12 ^B Gear for 5 ^B & over: Available | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 12 ^B Gear for 5 ^B & over: Available | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |





| Type | TR Series | | | | | TR Series | | | | | TR Series | | | | | TR Series | | | | |
|-----------------------|---|-----|-----|------|--|---|-----|------|--|-----|--|------|--|-----|-----|--|--|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 300 | | | | | 300 | | | | | 20K | | | | | 300 | | | | |
| Fig | 300UTR | | | | | 300UTRM | | | | | 20SCTR | | | | | 300SCTR | | | | |
| End Connection | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 300 RF | | | | | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | L | H | D | | | | |
| 2 | 50 | 216 | 113 | 230 | | 216 | 113 | 230 | | | | | | | | | | | | |
| 3 | 80 | 283 | 154 | 400 | | 283 | 154 | 400 | | | | | | | | | | | | |
| 4 | 100 | 305 | 163 | 400 | | 305 | 163 | 400 | | | | | | | | | | | | |
| 6 | 150 | 403 | 263 | 750 | | 403 | 263 | 750 | | 403 | 260 | 750 | | 403 | 263 | 750 | | | | |
| 8 | 200 | 419 | 292 | 1000 | | 419 | 292 | 1000 | | 419 | 295 | 1000 | | 419 | 292 | 1000 | | | | |
| 10 | 250 | 457 | 350 | 1500 | | 457 | 350 | 1500 | | 457 | 355 | 1500 | | 457 | 350 | 1500 | | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | WCB | | | | | WCB | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 304SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 304SS/CF8 | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Gasket | PTFE | | | | | PTFE | | | | | Non Asbestos Sheet | | | | | Non Asbestos Sheet | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | |
| Bore | Reduced Bore | | | | | Reduced Bore | | | | | Reduced Bore | | | | | Reduced Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B7/2H | | | | | B7/2H | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Handle | DI/CS | | | | | DI/CS | | | | | DI/CS | | | | | DI/CS | | | | |
| Reference Page | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 12 ^B Gear for 5 ^B & over: Available | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design Gear for 12 ^B Gear for 5 ^B & over: Available | | | | |





| Type | TB Series | | | | | TB Series | | | | | TB Series | | | | | TB Series | | | | |
|-----------------------|---|-----|-----|-----|--|---|-----|-----|--|-----|--|-----|--|-----|-----|---|--|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 600 | | | | | 600 | | | | | 600 | | | | | 600 | | | | |
| Fig | 600UTBM | | | | | 600UTBSM | | | | | 600SCTB | | | | | 600SCTBS | | | | |
| End Connection | ASME B16.5 Class 600 RF | | | | | ASME B16.5 Class 600 RF | | | | | ASME B16.5 Class 600 RF | | | | | ASME B16.5 Class 600 RF | | | | |
| inch | mm | L | H | D | | L | H | D | | L | H | D | | L | H | D | | | | |
| 1/2 | 15 | 165 | 105 | 130 | | 165 | 105 | 130 | | 165 | 105 | 130 | | 165 | 105 | 130 | | | | |
| 3/4 | 20 | 190 | 108 | 130 | | 190 | 108 | 130 | | 190 | 108 | 130 | | 190 | 108 | 130 | | | | |
| 1 | 25 | 216 | 130 | 160 | | 216 | 130 | 160 | | 216 | 130 | 160 | | 216 | 130 | 160 | | | | |
| 1 1/2 | 40 | 241 | 118 | 230 | | 241 | 118 | 230 | | 241 | 118 | 230 | | 241 | 118 | 230 | | | | |
| Body/Cap | CF8M | | | | | CF8M | | | | | A105 | | | | | A105 | | | | |
| Stem | 316SS | | | | | 316SS | | | | | 304SS | | | | | 304SS | | | | |
| Ball | 316SS/CF8M | | | | | 316SS/CF8M | | | | | 304SS | | | | | 304SS | | | | |
| Gland Packing | PTFE | | | | | Flexible Graphite | | | | | PTFE | | | | | Flexible Graphite | | | | |
| Gasket | | | | | | Flexible Graphite Spiral Wound | | | | | | | | | | Flexible Graphite Spiral Wound | | | | |
| Ball Seat | G/F PTFE with MoS2 | | | | | G/F PTFE with MoS2 | | | | | G/F PTFE with MoS2 | | | | | G/F PTFE with MoS2 | | | | |
| Boffre | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B7/2H | | | | | B7/2H | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Handle | DI | | | | | DI | | | | | DI | | | | | DI | | | | |
| O ring/Seat Spring | FKM/Inconel X-750 | | | | | FKM/Inconel X-750 | | | | | NBR/304SS | | | | | NBR/304SS | | | | |
| Standard/Approval | PED/CE, TR-CU/EAC | | | | | FS: API607, PED/CE, TR-CU/EAC | | | | | PED/CE, TR-CU/EAC | | | | | FS: API607, PED/CE, TR-CU/EAC | | | | |
| Reference Page | P-T Rating : Page BAL59 | | | | | P-T Rating : Page BAL59 | | | | | P-T Rating : Page BAL59 | | | | | P-T Rating : Page BAL59 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |





| Type | TB Series | | | | TB Series | | | | TB Series | | | | TB Series | | | |
|-----------------------|---|-----|-----|-----|---|-----|-----|-----|--|-----|-----|-----|---|-----|-----|-----|
| Ball Valve |  | | | |  | | | |  | | | |  | | | |
| Fig | 1500UTBM | | | | 1500UTBSM | | | | 1500SCTB | | | | 1500SCTBS | | | |
| End Connection | ASME B16.5 Class 1500 RF | | | | ASME B16.5 Class 1500 RF | | | | ASME B16.5 Class 1500 RF | | | | ASME B16.5 Class 1500 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 216 | 134 | 160 | 216 | 134 | 160 | 216 | 134 | 160 | 216 | 134 | 160 | 216 | 134 | 160 |
| 3/4 | 20 | 229 | 117 | 230 | 229 | 117 | 230 | 229 | 117 | 230 | 229 | 117 | 230 | 229 | 117 | 230 |
| 1 | 25 | 254 | 123 | 230 | 254 | 123 | 230 | 254 | 123 | 230 | 254 | 123 | 230 | 254 | 123 | 230 |
| 1 1/2 | 40 | 305 | 149 | 400 | 305 | 149 | 400 | 305 | 149 | 400 | 305 | 149 | 400 | 305 | 149 | 400 |
| Body/Cap | CF8M | | | | CF8M | | | | WCB | | | | WCB | | | |
| Stem | 316SS | | | | 316SS | | | | 304SS | | | | 304SS | | | |
| Ball | 316SS/CF8M | | | | 316SS/CF8M | | | | 304SS | | | | 304SS | | | |
| Gland Packing | PTFE | | | | Flexible Graphite | | | | PTFE | | | | Flexible Graphite | | | |
| Gasket | | | | | Flexible Graphite Spiral Wound | | | | | | | | Flexible Graphite Spiral Wound | | | |
| Ball Seat | Nylon with MoS2 | | | | Nylon with MoS2 | | | | Nylon with MoS2 | | | | Nylon with MoS2 | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | |
| Cap B/N | B8/8 | | | | B8/8 | | | | B7/2H | | | | B7/2H | | | |
| O ring/Seat Spring | FKM/Inconel X-750 | | | | FKM/Inconel X-750 | | | | NBR/304SS | | | | NBR/304SS | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | KITZ Standard | | | | KITZ Standard | | | | KITZ Standard | | | | KITZ Standard | | | |
| Handle | DI | | | | DI | | | | DI | | | | DI | | | |
| Standard/Approval | TR-CU/EAC | | | | FS: API607, TR-CU/EAC | | | | | | | | FS: API607 | | | |
| Reference Page | P-T Rating : Page BAL59 | | | | P-T Rating : Page BAL59 | | | | P-T Rating : Page BAL59 | | | | P-T Rating : Page BAL59 | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | |





| Type | TB Series(Tank Ball) | | | | | TB Series(Tank Ball) | | | | | TB Series(Tank Ball) | | | | TB Series(Tank Ball) | | | |
|-----------------------|---|-------|-----|------|-----|---|-----|------|-----|-----|--|------|-----|-----|---|---|---|---|
| Ball Valve |  | | | | |  | | | | |  | | | |  | | | |
| Fig | 10UTBT/G-10UTBT | | | | | 10UTBTM/G-10UTBTM | | | | | 150UTBT | | | | 150UTBTM | | | |
| End Connection | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 150 RF | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | L | H | D | L | H | D |
| 1 | 25 | 105 | 150 | 160 | | 105 | 150 | 160 | | 102 | 150 | 160 | 102 | 150 | 160 | | | |
| 1 1/2 | 40 | 125 | 133 | 230 | | 125 | 133 | 230 | | 125 | 133 | 230 | 125 | 133 | 230 | | | |
| 2 | 50 | 143 | 142 | 230 | | 143 | 142 | 230 | | 142 | 142 | 230 | 142 | 142 | 230 | | | |
| 2 1/2 | 65 | 160 | 176 | 400 | | 160 | 176 | 400 | | 160 | 176 | 400 | 160 | 176 | 400 | | | |
| 3 | 80 | 167 | 185 | 400 | | 167 | 185 | 400 | | 171 | 185 | 400 | 171 | 185 | 400 | | | |
| 4 | 100 | 176.5 | 221 | 460 | | 176.5 | 221 | 460 | | 176 | 221 | 460 | 176 | 221 | 460 | | | |
| 5 | 125 | 227 | 241 | 460 | | 227 | 241 | 460 | | 255 | 241 | 460 | 255 | 241 | 460 | | | |
| 6 | 150 | 265 | 311 | 1000 | | 265 | 311 | 1000 | | 292 | 312 | 1000 | 292 | 312 | 1000 | | | |
| 8 | 200 | 358 | 434 | 360 | 210 | 358 | 434 | 360 | 210 | | | | | | | | | |
| 10 | 250 | 454 | 497 | 500 | 363 | 454 | 497 | 500 | 363 | | | | | | | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | CF8M | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | 316SS | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | 316SS/CF8M | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | PTFE | | | |
| Gasket | PTFE (Ceramic PTFE for Tank Pad) | | | | | PTFE (Ceramic PTFE for Tank Pad) | | | | | PTFE (Ceramic PTFE for Tank Pad) | | | | PTFE (Ceramic PTFE for Tank Pad) | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | Full Bore | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | B8/8 | | | |
| Tank pad | 316SS | | | | | 316SS | | | | | 316SS | | | | 316SS | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | KITZ Standard | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | KITZ Standard | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS | | | | DI/CS | | | |
| Reference Page | P-T Rating : Page BAL58 Max Allowable Temp is 200°C (382°F) | | | | | P-T Rating : Page BAL58 Max Allowable Temp is 200°C (382°F) | | | | | P-T Rating : Page BAL58 Max Allowable Temp is 200°C (382°F) | | | | P-T Rating : Page BAL58 Max Allowable Temp is 200°C (382°F) | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem | | | | | Anti-Static Design Anti-Blowout Stem | | | | | Anti-Static Design Anti-Blowout Stem | | | | Anti-Static Design Anti-Blowout Stem | | | |





| Type | TB Series(3-way,2-seat,L-Port) | | | | | TB Series(3-way,2-seat,L-Port) | | | | | TB Series(3-way,2-seat,L-Port) | | | | | TB Series(3-way,2-seat,L-Port) | | | | |
|-----------------------|---|-----|-----|-----|------|---|-----|-----|------|-----|--|-----|------|-----|-----|---|------|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 10K | | | | | 10K | | | | | 150 | | | | | 150 | | | | |
| Fig | 10UTB2L | | | | | 10UTB2LM | | | | | 150UTB2L | | | | | 150UTB2LM | | | | |
| End Connection | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | L1 | L | H | D | L1 | L | H | D | L1 | L | H | D | L1 | | | |
| 1 | 25 | 165 | 124 | 160 | 82.5 | 165 | 124 | 160 | 82.5 | 165 | 124 | 160 | 82.5 | 165 | 124 | 160 | 82.5 | | | |
| 1 1/2 | 40 | 210 | 113 | 230 | 105 | 210 | 113 | 230 | 105 | 210 | 113 | 230 | 105 | 210 | 113 | 230 | 105 | | | |
| 2 | 50 | 220 | 122 | 230 | 110 | 220 | 122 | 230 | 110 | 220 | 122 | 230 | 110 | 220 | 122 | 230 | 110 | | | |
| 2 1/2 | 65 | 250 | 156 | 400 | 125 | 250 | 156 | 400 | 125 | 250 | 156 | 400 | 125 | 250 | 156 | 400 | 125 | | | |
| 3 | 80 | 260 | 163 | 400 | 130 | 260 | 163 | 400 | 130 | 262 | 163 | 400 | 131 | 262 | 163 | 400 | 131 | | | |
| 4 | 100 | 330 | 201 | 460 | 165 | 330 | 201 | 460 | 165 | 342 | 201 | 460 | 171 | 342 | 201 | 460 | 171 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | | CF8M | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 316SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Gasket | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Handle | DI | | | | | DI | | | | | DI | | | | | DI | | | | |
| Reference Page | P-T Rating : Page BAL58 Port Orientation : Page BAL63 | | | | | P-T Rating : Page BAL58 Port Orientation : Page BAL63 | | | | | P-T Rating : Page BAL58 Port Orientation : Page BAL63 | | | | | P-T Rating : Page BAL58 Port Orientation : Page BAL63 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem | | | | | Anti-Static Design Anti-Blowout Stem | | | | | Anti-Static Design Anti-Blowout Stem | | | | | Anti-Static Design Anti-Blowout Stem | | | | |
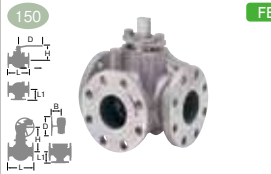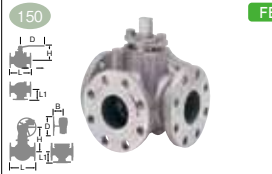
| Type | TR Series(3-way,2-seat,L-Port) | | | | | TR Series(3-way,2-seat,L-Port) | | | | | TR Series(3-way,2-seat,L-Port) | | | | | TR Series(3-way,2-seat,L-Port) | | | | |
|-----------------------|---|-----|-----|-----|-------|---|-----|-----|-------|-----|--|-----|-------|-----|-----|---|-------|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 10K | | | | | 10K | | | | | 150 | | | | | 150 | | | | |
| Fig | 10UTR2L | | | | | 10UTR2LM | | | | | 150UTR2L | | | | | 150UTR2LM | | | | |
| End Connection | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | L1 | L | H | D | L1 | L | H | D | L1 | L | H | D | L1 | | | |
| 6 | 150 | 430 | 220 | 460 | 218.5 | 430 | 220 | 460 | 218.5 | 437 | 220 | 460 | 218.5 | 437 | 220 | 460 | 218.5 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | | CF8M | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 316SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Gasket | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | |
| Bore | Reduced Bore | | | | | Reduced Bore | | | | | Reduced Bore | | | | | Reduced Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Handle | DI | | | | | DI | | | | | DI | | | | | DI | | | | |
| Reference Page | P-T Rating : Page BAL58 Port Orientation : Page BAL63 | | | | | P-T Rating : Page BAL58 Port Orientation : Page BAL63 | | | | | P-T Rating : Page BAL58 Port Orientation : Page BAL63 | | | | | P-T Rating : Page BAL58 Port Orientation : Page BAL63 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem | | | | | Anti-Static Design Anti-Blowout Stem | | | | | Anti-Static Design Anti-Blowout Stem | | | | | Anti-Static Design Anti-Blowout Stem | | | | |

| Type | TB Series(3-way,4-seat,L or T-Port) | | | | | | TB Series(3-way,4-seat,L or T-Port) | | | | | | TB Series(3-way,4-seat,L or T-Port) | | | | | | TB Series(3-way,4-seat,L or T-Port) | | | | | | | |
|-----------------------|--|-----|-----|------|-----|-----|--|-----|------|-----|-----|-----|---|------|-------|-----|-----|-----|---|-------|-----|-----|-----|------|-------|-----|
| Ball Valve |  | | | | | |  | | | | | |  | | | | | |  | | | | | | | |
| | 10UTB4L(T)A/G-10UTB4L(T)A | | | | | | 10UTB4L(T)AM/G-10UTB4L(T)AM | | | | | | 150UTB4L(T)A/G-150UTB4L(T)A | | | | | | 150UTB4L(T)AM/G-150UTB4L(T)AM | | | | | | | |
| End Connection | | | | | | | | | | | | | | | | | | | | | | | | | | |
| inch | mm | L | H | D | L1 | B | L | H | D | L1 | B | L | H | D | L1 | B | L | H | D | L1 | B | L | H | D | L1 | B |
| 1/2 | 15 | 120 | 127 | 160 | 65 | | 120 | 127 | 160 | 65 | | 120 | 127 | 160 | 65 | | 120 | 127 | 160 | 65 | | 120 | 127 | 160 | 65 | |
| 3/4 | 20 | 140 | 130 | 160 | 70 | | 140 | 130 | 160 | 70 | | 135 | 130 | 160 | 67.5 | | 135 | 130 | 160 | 67.5 | | 135 | 130 | 160 | 67.5 | |
| 1 | 25 | 160 | 134 | 160 | 80 | | 160 | 134 | 160 | 80 | | 154 | 134 | 160 | 77 | | 154 | 134 | 160 | 77 | | 154 | 134 | 160 | 77 | |
| 1 1/2 | 40 | 180 | 144 | 400 | 90 | | 180 | 144 | 400 | 90 | | 177 | 144 | 400 | 88.5 | | 177 | 144 | 400 | 88.5 | | 177 | 144 | 400 | 88.5 | |
| 2 | 50 | 200 | 153 | 400 | 100 | | 200 | 153 | 400 | 100 | | 200 | 153 | 400 | 100 | | 200 | 153 | 400 | 100 | | 200 | 153 | 400 | 100 | |
| 2 1/2 | 65 | 240 | 183 | 460 | 120 | | 240 | 183 | 460 | 120 | | 240 | 183 | 460 | 120 | | 240 | 183 | 460 | 120 | | 240 | 183 | 460 | 120 | |
| 3 | 80 | 260 | 195 | 460 | 130 | | 260 | 195 | 460 | 130 | | 262 | 195 | 460 | 131 | | 262 | 195 | 460 | 131 | | 262 | 195 | 460 | 131 | |
| 4 | 100 | 330 | 267 | 1000 | 165 | | 330 | 267 | 1000 | 165 | | 342 | 267 | 1000 | 171 | | 342 | 267 | 1000 | 171 | | 342 | 267 | 1000 | 171 | |
| 5 | 125 | 400 | 289 | 1000 | 200 | | 400 | 289 | 1000 | 200 | | | | | | | | | | | | | | | | |
| 6 | 150 | 450 | 335 | 1500 | 225 | | 450 | 335 | 1500 | 225 | | 456 | 399 | 360 | 228.5 | 210 | 456 | 399 | 360 | 228.5 | 210 | 456 | 399 | 360 | 228.5 | 210 |
| 8 | 200 | 550 | 467 | 500 | 275 | 363 | 550 | 467 | 500 | 275 | 363 | 563 | 467 | 500 | 281.5 | 363 | 563 | 467 | 500 | 281.5 | 363 | 563 | 467 | 500 | 281.5 | 363 |
| Body/Cap | CF8 | | | | | | CF8M | | | | | | CF8 | | | | | | CF8M | | | | | | | |
| Stem | 304SS | | | | | | 316SS | | | | | | 304SS | | | | | | 316SS | | | | | | | |
| Ball | 304SS/CF8 | | | | | | 316SS/CF8M | | | | | | 304SS/CF8 | | | | | | 316SS/CF8M | | | | | | | |
| Gland Packing | PTFE | | | | | | PTFE | | | | | | PTFE | | | | | | PTFE | | | | | | | |
| Gasket | PTFE | | | | | | PTFE | | | | | | PTFE | | | | | | PTFE | | | | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | | HYPATITE® PTFE | | | | | | HYPATITE® PTFE | | | | | | HYPATITE® PTFE | | | | | | | |
| Bore | Full Bore | | | | | | Full Bore | | | | | | Full Bore | | | | | | Full Bore | | | | | | | |
| Cap B/N | B8/8 | | | | | | B8/8 | | | | | | B8/8 | | | | | | B8/8 | | | | | | | |
| F-to-F Dimension | KITZ Standard | | | | | | KITZ Standard | | | | | | KITZ Standard | | | | | | KITZ Standard | | | | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | | KITZ Standard | | | | | | KITZ Standard | | | | | | KITZ Standard | | | | | | | |
| Handle | DI/CS/Gear Unit | | | | | | DI/CS/Gear Unit | | | | | | DI/CS/Gear Unit | | | | | | DI/CS/Gear Unit | | | | | | | |
| Reference Page | P-T Rating : Page BAL59 Port Orientation : Page BAL63 | | | | | | P-T Rating : Page BAL59 Port Orientation : Page BAL63 | | | | | | P-T Rating : Page BAL59 Port Orientation : Page BAL63 | | | | | | P-T Rating : Page BAL59 Port Orientation : Page BAL63 | | | | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Gear for 8 ^ø , Gear for 6 ^ø : Available | | | | | | Anti-Static Design Anti-Blowout Stem Gear for 8 ^ø , Gear for 6 ^ø : Available | | | | | | Anti-Static Design Anti-Blowout Stem Gear for 6 ^ø & 8 ^ø | | | | | | Anti-Static Design Anti-Blowout Stem Gear for 6 ^ø & 8 ^ø | | | | | | | |

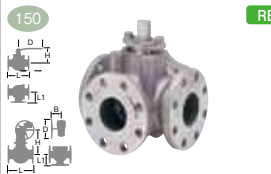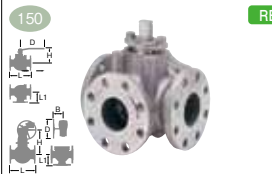

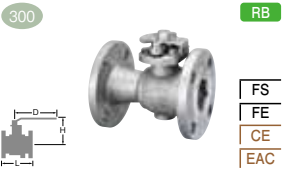

| Type | TR Series(3-way,4-seat,L or T-Port) | | | | | | TR Series(3-way,4-seat,L or T-Port) | | | | | | TR Series(3-way,4-seat,L or T-Port) | | | | | | TR Series(3-way,4-seat,L or T-Port) | | | | | | | |
|-----------------------|--|-----|-----|------|-----|-----|--|-----|------|-----|-----|-----|--|------|-------|-----|-----|-----|--|-------|-----|-----|-----|------|-------|-----|
| Ball Valve |  | | | | | |  | | | | | |  | | | | | |  | | | | | | | |
| | 10UTR4L(T)A/G-10UTR4L(T)A | | | | | | 10UTR4L(T)AM/G-10UTR4L(T)AM | | | | | | 150UTR4L(T)A/G-150UTR4L(T)A | | | | | | 150UTR4L(T)AM/G-150UTR4L(T)AM | | | | | | | |
| End Connection | | | | | | | | | | | | | | | | | | | | | | | | | | |
| inch | mm | L | H | D | L1 | B | L | H | D | L1 | B | L | H | D | L1 | B | L | H | D | L1 | B | L | H | D | L1 | B |
| 5 | 125 | 340 | 267 | 1000 | 170 | | 340 | 267 | 1000 | 170 | | | | | | | | | | | | | | | | |
| 6 | 150 | 400 | 289 | 1000 | 200 | | 400 | 289 | 1000 | 200 | | 407 | 289 | 1000 | 203.5 | | 407 | 289 | 1000 | 203.5 | | 407 | 289 | 1000 | 203.5 | |
| 8 | 200 | 450 | 399 | 360 | 225 | 210 | 450 | 399 | 360 | 225 | 210 | 463 | 399 | 360 | 231.5 | 210 | 463 | 399 | 360 | 231.5 | 210 | 463 | 399 | 360 | 231.5 | 210 |
| Body/Cap | CF8 | | | | | | CF8M | | | | | | CF8 | | | | | | CF8M | | | | | | | |
| Stem | 304SS | | | | | | 316SS | | | | | | 304SS | | | | | | 316SS | | | | | | | |
| Ball | 304SS/CF8 | | | | | | 316SS/CF8M | | | | | | 304SS/CF8 | | | | | | 316SS/CF8M | | | | | | | |
| Gland Packing | PTFE | | | | | | PTFE | | | | | | PTFE | | | | | | PTFE | | | | | | | |
| Gasket | PTFE | | | | | | PTFE | | | | | | PTFE | | | | | | PTFE | | | | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | | HYPATITE® PTFE | | | | | | HYPATITE® PTFE | | | | | | HYPATITE® PTFE | | | | | | | |
| Bore | Reduced Bore | | | | | | Reduced Bore | | | | | | Reduced Bore | | | | | | Reduced Bore | | | | | | | |
| Cap B/N | B8/8 | | | | | | B8/8 | | | | | | B8/8 | | | | | | B8/8 | | | | | | | |
| F-to-F Dimension | KITZ Standard | | | | | | KITZ Standard | | | | | | KITZ Standard | | | | | | KITZ Standard | | | | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | | KITZ Standard | | | | | | KITZ Standard | | | | | | KITZ Standard | | | | | | | |
| Handle | CS/Gear | | | | | | CS/Gear | | | | | | CS/Gear | | | | | | CS/Gear | | | | | | | |
| Reference Page | P-T Rating : Page BAL59 Port Orientation : Page BAL63 | | | | | | P-T Rating : Page BAL59 Port Orientation : Page BAL63 | | | | | | P-T Rating : Page BAL59 Port Orientation : Page BAL63 | | | | | | P-T Rating : Page BAL59 Port Orientation : Page BAL63 | | | | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Gear for 8 ^ø , Gear for 6 ^ø : Available | | | | | | Anti-Static Design Anti-Blowout Stem Gear for 8 ^ø , Gear for 6 ^ø : Available | | | | | | Anti-Static Design Anti-Blowout Stem Gear for 8 ^ø , Gear for 6 ^ø : Available | | | | | | Anti-Static Design Anti-Blowout Stem Gear for 8 ^ø , Gear for 6 ^ø : Available | | | | | | | |





| Type | TB Series(Jacketed) | | | | | TB Series(Jacketed) | | | | | TB Series(Jacketed) | | | | | TB Series(Jacketed) | | | | |
|-----------------------|---|-----|-----|-----|-------|---|-----|-----|-------|-----|--|-----|-------|-----|-----|---|-------|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 10UTBJ | | | | | 10UTBJM | | | | | 150UTBJ | | | | | 150UTBJM | | | | |
| End Connection | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | F* | L | H | D | F* | L | H | D | F* | L | H | D | F* | | | |
| 1/2 | 15 | 110 | 128 | 130 | 11/2 | 110 | 128 | 130 | 11/2 | 110 | 128 | 130 | 11/2 | 110 | 128 | 130 | 11/2 | | | |
| 3/4 | 20 | 120 | 132 | 130 | 11/2 | 120 | 132 | 130 | 11/2 | 120 | 132 | 130 | 11/2 | 120 | 132 | 130 | 11/2 | | | |
| 1 | 25 | 130 | 150 | 160 | 2 | 130 | 150 | 160 | 2 | 130 | 150 | 160 | 2 | 130 | 150 | 160 | 2 | | | |
| 1 1/2 | 40 | 165 | 149 | 230 | 2 1/2 | 165 | 149 | 230 | 2 1/2 | 165 | 149 | 230 | 2 1/2 | 165 | 149 | 230 | 2 1/2 | | | |
| 2 | 50 | 180 | 156 | 230 | 3 | 180 | 156 | 230 | 3 | 180 | 156 | 230 | 3 | 180 | 156 | 230 | 3 | | | |
| 2 1/2 | 65 | 190 | 186 | 400 | 4 | 190 | 186 | 400 | 4 | 190 | 186 | 400 | 4 | 190 | 186 | 400 | 4 | | | |
| 4 | 100 | 254 | 237 | 460 | 6 | 254 | 237 | 460 | 6 | | | | | | | | | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | | CF8M | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 316SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Gasket | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | SS | | | | | SS | | | | | SS | | | | | SS | | | | |
| O-ring | FKM | | | | | FKM | | | | | FKM | | | | | FKM | | | | |
| Jacket | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Handle | DI | | | | | DI | | | | | DI | | | | | DI | | | | |
| Reference Page | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | |
| Remarks | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F*: Flange Size (inch) | | | | | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F*: Flange Size (inch) | | | | | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F*: Flange Size (inch) | | | | | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F*: Flange Size (inch) | | | | |





| Type | TR Series(Jacketed) | | | | | TR Series(Jacketed) | | | | | TR Series(Jacketed) | | | | | TR Series(Jacketed) | | | | |
|-----------------------|---|-----|-----|-----|----|---|-----|-----|----|-----|--|-----|----|-----|-----|---|----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 10UTRJ | | | | | 10UTRJM | | | | | 150UTRJ | | | | | 150UTRJM | | | | |
| End Connection | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | F* | L | H | D | F* | L | H | D | F* | L | H | D | F* | | | |
| 3 | 80 | 200 | 186 | 400 | 4 | 200 | 186 | 400 | 4 | 200 | 186 | 400 | 4 | 200 | 186 | 400 | 4 | | | |
| 4 | 100 | 230 | 211 | 400 | 6 | 230 | 211 | 400 | 6 | 230 | 211 | 400 | 6 | 230 | 211 | 400 | 6 | | | |
| 6 | 150 | 270 | 257 | 460 | 8 | 270 | 257 | 460 | 8 | 270 | 257 | 460 | 8 | 270 | 257 | 460 | 8 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | | CF8M | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 316SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Gasket | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | SS | | | | | SS | | | | | SS | | | | | SS | | | | |
| O-ring | FKM | | | | | FKM | | | | | FKM | | | | | FKM | | | | |
| Jacket | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Handle | DI | | | | | DI | | | | | DI | | | | | DI | | | | |
| Reference Page | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | |
| Remarks | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F*: Flange Size (inch) | | | | | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F*: Flange Size (inch) | | | | | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F*: Flange Size (inch) | | | | | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F*: Flange Size (inch) | | | | |





| Type | TB Series(Jacketed) | | | | | TB Series(Jacketed) | | | | | TB Series(Jacketed) | | | | | TB Series(Jacketed) | | | | |
|-----------------------|---|-----|-----|------|-------|---|-----|------|-------|-----|---|------|-------|-----|-----|---|-------|--|--|--|
| Ball Valve | | | | | | | | | | | | | | | | | | | | |
| Fig | 20UTBJ | | | | | 20UTBJM | | | | | 300UTBJ | | | | | 300UTBJM | | | | |
| End Connection | JIS B2220 20K RF | | | | | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 300 RF | | | | |
| inch | mm | L | H | D | F* | L | H | D | F* | L | H | D | F* | L | H | D | F* | | | |
| 1/2 | 15 | 140 | 128 | 130 | 11/2 | 140 | 128 | 130 | 11/2 | 140 | 128 | 130 | 11/2 | 140 | 128 | 130 | 11/2 | | | |
| 3/4 | 20 | 152 | 132 | 130 | 11/2 | 152 | 132 | 130 | 11/2 | 152 | 132 | 130 | 11/2 | 152 | 132 | 130 | 11/2 | | | |
| 1 | 25 | 165 | 150 | 160 | 2 | 165 | 150 | 160 | 2 | 165 | 150 | 160 | 2 | 165 | 150 | 160 | 2 | | | |
| 1 1/2 | 40 | 190 | 149 | 230 | 2 1/2 | 190 | 149 | 230 | 2 1/2 | 190 | 150 | 230 | 2 1/2 | 190 | 150 | 230 | 2 1/2 | | | |
| 2 | 50 | 216 | 156 | 230 | 3 | 216 | 156 | 230 | 3 | 216 | 157 | 230 | 3 | 216 | 157 | 230 | 3 | | | |
| 2 1/2 | 65 | 241 | 186 | 400 | 4 | 241 | 186 | 400 | 4 | 241 | 186 | 400 | 4 | 241 | 186 | 400 | 4 | | | |
| 3 | 80 | 283 | 211 | 400 | 5 | 283 | 211 | 400 | 5 | 283 | 211 | 400 | 5 | 283 | 211 | 400 | 5 | | | |
| 4 | 100 | 305 | 280 | 750 | 6 | 305 | 280 | 750 | 6 | 305 | 280 | 750 | 6 | 305 | 280 | 750 | 6 | | | |
| 6 | 150 | 403 | 257 | 1000 | 10 | 403 | 257 | 1000 | 10 | 403 | 257 | 1000 | 10 | 403 | 257 | 1000 | 10 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | | CF8M | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 316SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Gasket | PTFE | | | | | PTFE | | | | | PTFE | | | | | PTFE | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | SS | | | | | SS | | | | | SS | | | | | SS | | | | |
| O ring | FKM | | | | | FKM | | | | | FKM | | | | | FKM | | | | |
| Jacket&Plug | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Handle | DI/CS | | | | | DI/CS | | | | | DI/CS | | | | | DI/CS | | | | |
| Reference Page | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | | P-T Rating : Page BAL58 | | | | |
| Remarks | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F-to-F: KITZ Standard F*: Flange Size (inch) | | | | | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F-to-F: KITZ Standard F*: Flange Size (inch) | | | | | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F-to-F: KITZ Standard F*: Flange Size (inch) | | | | | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F-to-F: KITZ Standard F*: Flange Size (inch) | | | | |
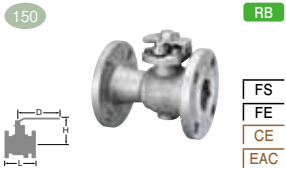
| Type | TDZ Series(Jacketed) | | | | | TDZ Series(Jacketed) | | | | | TB Series(PFA lining) | | | TB Series(PFA lining) | | |
|-----------------------|--|-----|-----|-----|-------|--|-----|-----|-------|-----|--|-----|-----|--|-----|--|
| Ball Valve | | | | | | | | | | | | | | | | |
| Fig | 150UTDZJ | | | | | 150UTDZJM | | | | | 10UTBLN | | | 150UTBLN | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | | JIS B2220 10K RF | | | ASME B16.5 Class 150 RF | | |
| inch | mm | L | H | D | F* | L | H | D | F* | L | H | D | L | H | D | |
| 1/2 | 15 | 110 | 129 | 130 | 11/2 | 110 | 129 | 130 | 11/2 | 140 | 104 | 130 | 140 | 104 | 130 | |
| 3/4 | 20 | 120 | 132 | 130 | 11/2 | 120 | 132 | 130 | 11/2 | 152 | 106 | 130 | 152 | 106 | 130 | |
| 1 | 25 | 130 | 143 | 160 | 2 | 130 | 143 | 160 | 2 | 165 | 129 | 160 | 165 | 129 | 160 | |
| 1 1/2 | 40 | 165 | 157 | 230 | 2 1/2 | 165 | 157 | 230 | 2 1/2 | 191 | 118 | 230 | 191 | 118 | 230 | |
| 2 | 50 | 180 | 166 | 230 | 3 | 180 | 166 | 230 | 3 | 216 | 124 | 230 | 216 | 124 | 230 | |
| 2 1/2 | 65 | | | | | | | | | 240 | 156 | 400 | 240 | 156 | 400 | |
| 3 | 80 | | | | | | | | | 250 | 165 | 400 | 250 | 165 | 400 | |
| 4 | 100 | | | | | | | | | 280 | 203 | 460 | 280 | 203 | 460 | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 + PFA | | | CF8 + PFA | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS + PFA | | | 304SS + PFA | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 + PFA | | | 304SS/CF8 + PFA | | |
| Gland Packing | PTFE | | | | | PTFE | | | | | PTFE | | | PTFE | | |
| Gasket | PTFE | | | | | PTFE | | | | | PTFE | | | PTFE | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | Full Bore | | |
| Cap B/N | SS | | | | | SS | | | | | B8/8 | | | | | |
| O ring | FKM | | | | | FKM | | | | | | | | | | |
| Jacket&Plug | Carbon Steel | | | | | Carbon Steel | | | | | | | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | KITZ Standard | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | KITZ Standard | | | KITZ Standard | | |
| Handle | DI | | | | | DI | | | | | DI | | | DI | | |
| Reference Page | P-T Rating : Page BAL55 | | | | | P-T Rating : Page BAL55 | | | | | P-T Rating : Page BAL59 | | | P-T Rating : Page BAL59 | | |
| Remarks | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F*: Flange Size (inch) | | | | | Rating for Jacket: 260°C/1.37MPa Anti-Static Design F*: Flange Size (inch) | | | | | Ambient Temp.: -30~+150°C Anti-Blowout Stem | | | Ambient Temp.: -30~+150°C Anti-Blowout Stem | | |
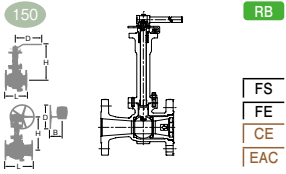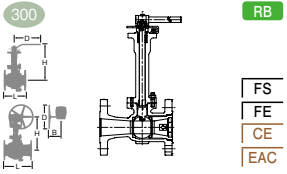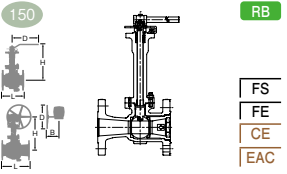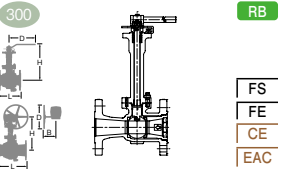
| Type | TAZ Series | | | | TAZ Series | | | | TAZ Series | | | | TAZ Series | | | |
|-----------------------|---|-----|-----|------|---|-----|------|-----|---|------|-----|-----|---|-----|-----|------|
| Ball Valve |  | | | |  | | | |  | | | |  | | | |
| | 150UTAZM | | | | 150SCTAZ | | | | 300UTAZM | | | | 300SCTAZ | | | |
| Fig | 150UTAZM | | | | 150SCTAZ | | | | 300UTAZM | | | | 300SCTAZ | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 300 RF | | | | ASME B16.5 Class 300 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 108 | 92 | 130 | 108 | 92 | 130 | 140 | 92 | 130 | 140 | 92 | 130 | 140 | 92 | 130 |
| 3/4 | 20 | 117 | 95 | 130 | 117 | 95 | 130 | 152 | 95 | 130 | 152 | 95 | 130 | 152 | 95 | 130 |
| 1 | 25 | 127 | 110 | 130 | 127 | 110 | 130 | 165 | 110 | 130 | 165 | 110 | 130 | 165 | 110 | 130 |
| 1 1/2 | 40 | 165 | 127 | 160 | 165 | 127 | 160 | 190 | 127 | 160 | 190 | 127 | 160 | 190 | 127 | 160 |
| 2 | 50 | 178 | 134 | 230 | 178 | 134 | 230 | 216 | 134 | 230 | 216 | 134 | 230 | 216 | 134 | 230 |
| 3 | 80 | 203 | 173 | 400 | 203 | 173 | 400 | 283 | 173 | 400 | 283 | 173 | 400 | 283 | 173 | 400 |
| 4 | 100 | 229 | 189 | 400 | 229 | 189 | 400 | 305 | 189 | 400 | 305 | 189 | 400 | 305 | 189 | 400 |
| 6 | 150 | 267 | 224 | 460 | 267 | 224 | 460 | 403 | 251 | 750 | 403 | 251 | 750 | 403 | 251 | 750 |
| 8 | 200 | 292 | 315 | 1000 | 292 | 315 | 1000 | 419 | 315 | 1000 | 419 | 315 | 1000 | 419 | 315 | 1000 |
| 10 | 250 | 330 | 392 | 1500 | 330 | 392 | 1500 | 457 | 392 | 1500 | 457 | 392 | 1500 | 457 | 392 | 1500 |
| Body/Cap | CF8M | | | | WCB | | | | CF8M | | | | WCB | | | |
| Stem | 316SS | | | | 316SS | | | | 316SS | | | | 316SS | | | |
| Ball | 316SS/CF8M | | | | 316SS/CF8M | | | | 316SS/CF8M | | | | 316SS/CF8M | | | |
| Gland Packing | PTFE (FS:Flexible Graphite) | | | | PTFE (FS:Flexible Graphite) | | | | PTFE (FS:Flexible Graphite) | | | | PTFE (FS:Flexible Graphite) | | | |
| Gasket | PTFE (FS:PTFE+Flexible Graphite) | | | | PTFE (FS:PTFE+Flexible Graphite) | | | | PTFE (FS:PTFE+Flexible Graphite) | | | | PTFE (FS:PTFE+Flexible Graphite) | | | |
| Ball Seat | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | |
| Bore | Reduced Bore | | | | Reduced Bore | | | | Reduced Bore | | | | Reduced Bore | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | |
| Handle | DI/CS | | | | DI/CS | | | | DI/CS | | | | DI/CS | | | |
| Standard/Approval | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, FE: API641, SIL3, Shell: TAMAP Star Level 2, PED/CE, TR-CU/EAC | | | | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, FE: API641, SIL3, Shell: TAMAP Star Level 2, PED/CE, TR-CU/EAC | | | | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, FE: API641, SIL3, Shell: TAMAP Star Level 2, PED/CE, TR-CU/EAC | | | | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, FE: API641, SIL3, Shell: TAMAP Star Level 2, PED/CE, TR-CU/EAC | | | |
| Reference Page | P-T Rating : Page BAL55 | | | | P-T Rating : Page BAL55 | | | | P-T Rating : Page BAL55 | | | | P-T Rating : Page BAL55 | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | |
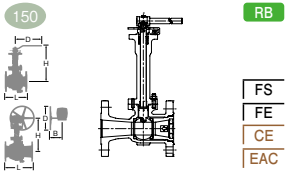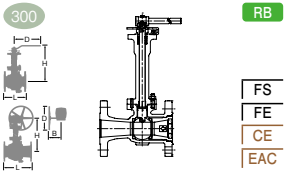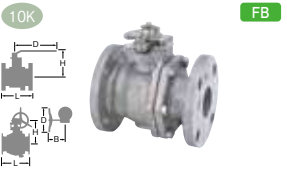
| Type | TAZ Series(-46°C) | | | | TAZ Series(-46°C) | | | | TAZ Series(-104°C) | | | | TAZ Series(-104°C) | | | | |
|-----------------------|---|-----|-----|-----|---|-----|-----|-----|--|-----|-----|-----|---|-----|-----|-----|-----|
| Ball Valve |  | | | |  | | | |  | | | |  | | | | |
| | 150SCTAZXCL/G-150SCTAZXCL | | | | 300SCTAZXCL/G-300SCTAZXCL | | | | 150UTAZXLM/G-150UTAZXLM | | | | 300UTAZXLM/G-300UTAZXLM | | | | |
| Fig | 150SCTAZXCL/G-150SCTAZXCL | | | | 300SCTAZXCL/G-300SCTAZXCL | | | | 150UTAZXLM/G-150UTAZXLM | | | | 300UTAZXLM/G-300UTAZXLM | | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 300 RF | | | | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 300 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 1/2 | 15 | 108 | 213 | 130 | | 140 | 213 | 130 | | 108 | 213 | 130 | | 140 | 213 | 130 | |
| 3/4 | 20 | 117 | 215 | 130 | | 152 | 215 | 130 | | 117 | 215 | 130 | | 152 | 215 | 130 | |
| 1 | 25 | 127 | 230 | 130 | | 165 | 230 | 130 | | 127 | 239 | 130 | | 165 | 230 | 130 | |
| 1 1/2 | 40 | 165 | 270 | 160 | | 190 | 270 | 160 | | 165 | 280 | 160 | | 190 | 280 | 160 | |
| 2 | 50 | 178 | 300 | 230 | | 216 | 298 | 230 | | 178 | 300 | 230 | | 216 | 300 | 230 | |
| 3 | 80 | 203 | 367 | 400 | | 283 | 396 | 700 | | 203 | 366 | 400 | | 283 | 396 | 700 | |
| 4 | 100 | 229 | 383 | 400 | | 305 | 413 | 700 | | 229 | 413 | 700 | | 305 | 413 | 750 | |
| 6 | 150 | 267 | 474 | 300 | 283 | 403 | 474 | 300 | 283 | 267 | 500 | 300 | 283 | 403 | 500 | 300 | 283 |
| 8 | 200 | 292 | 594 | 400 | 286 | 419 | 600 | 500 | 347 | 292 | 594 | 500 | 306 | 419 | 594 | 600 | 347 |
| 10 | 250 | 330 | 668 | 500 | 347 | 457 | 668 | 500 | 349 | 330 | 712 | 400 | 329 | 457 | 712 | 600 | 349 |
| Body/Cap | LCC/LF2 | | | | LCC/LF2 | | | | CF8M | | | | CF8M | | | | |
| Stem | 316SS | | | | 316SS | | | | 316SS | | | | 316SS | | | | |
| Ball | 316SS/CF8M | | | | 316SS/CF8M | | | | 316/XM-19HS | | | | 316/XM-19HS | | | | |
| Gland Packing | PTFE (FS:Flexible Graphite) | | | | PTFE (FS:Flexible Graphite) | | | | PTFE (FS:Flexible Graphite) | | | | PTFE (FS:Flexible Graphite) | | | | |
| Gasket | PTFE (FS:PTFE+Flexible Graphite) | | | | PTFE (FS:PTFE+Flexible Graphite) | | | | PTFE (FS:PTFE+Flexible Graphite) | | | | PTFE (FS:PTFE+Flexible Graphite) | | | | |
| Ball Seat | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | | |
| Bore | Reduced Bore | | | | Reduced Bore | | | | Reduced Bore | | | | Reduced Bore | | | | |
| Bonnet B/N | L7M/7M | | | | L7M/7M | | | | B8M/8M | | | | B8M/8M | | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, PED/CE, TR- CU/EAC | | | | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, PED/CE, TR- CU/EAC | | | | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, PED/CE, TR- CU/EAC | | | | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, PED/CE, TR- CU/EAC | | | | |
| Reference Page | P-T Rating : Page BAL61 | | | | P-T Rating : Page BAL61 | | | | P-T Rating : Page BAL61 | | | | P-T Rating : Page BAL61 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |
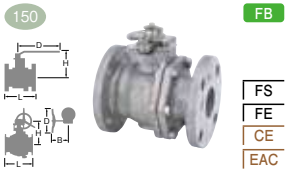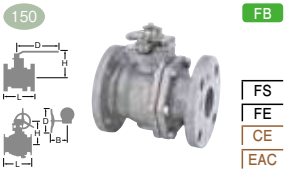
| Type | TAZ Series(-196°C) | | | | | TAZ Series(-196°C) | | | | | TDZ Series | | | | TDZ Series | | | |
|-----------------------|---|-----|-------|-----|-----|---|-------|-----|-----|-----|--|------|-----|-----|---|------|-----|--|
| Ball Valve |  | | | | |  | | | | |  | | | |  | | | |
| Fig | 150UTAZLM/G-150UTAZLM | | | | | 300UTAZLM/G-300UTAZLM | | | | | 10UTDZ/G-10UTDZ | | | | 10UTDZM/G-10UTDZM | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 300 RF | | | | | JIS B2220 10K RF | | | | JIS B2220 10K RF | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | |
| 1/2 | 15 | 108 | 307 | 130 | | 140 | 307 | 130 | | 108 | 108 | 130 | | 108 | 108 | 130 | | |
| 3/4 | 20 | 117 | 309 | 130 | | 152 | 309 | 130 | | 117 | 111 | 130 | | 117 | 111 | 130 | | |
| 1 | 25 | 127 | 331.7 | 130 | | 165 | 331.7 | 130 | | 127 | 124 | 160 | | 127 | 124 | 160 | | |
| 1 1/4 | 32 | | | | | | | | | 140 | 128 | 160 | | 140 | 128 | 160 | | |
| 1 1/2 | 40 | 165 | 405 | 160 | | 190 | 405 | 160 | | 165 | 134 | 230 | | 165 | 134 | 230 | | |
| 2 | 50 | 178 | 421 | 230 | | 216 | 421 | 400 | | 178 | 143 | 230 | | 178 | 143 | 230 | | |
| 2 1/2 | 65 | | | | | | | | | 190 | 179 | 400 | | 190 | 179 | 400 | | |
| 3 | 80 | 203 | 549.6 | 700 | | 283 | 549.6 | 700 | | 203 | 188 | 400 | | 203 | 188 | 400 | | |
| 4 | 100 | 229 | 565.6 | 700 | | 305 | 566 | 300 | 283 | 229 | 224 | 460 | | 229 | 224 | 460 | | |
| 5 | 125 | | | | | | | | | 356 | 240 | 460 | | 356 | 240 | 460 | | |
| 6 | 150 | 267 | 675 | 300 | 283 | 403 | 675 | 400 | 283 | 394 | 314 | 1000 | | 394 | 314 | 1000 | | |
| 8 | 200 | 292 | 779 | 500 | 306 | 419 | 779 | 500 | 347 | 457 | 406 | 1500 | | 457 | 406 | 1500 | | |
| 10 | 250 | 330 | 912 | 400 | 329 | 457 | 912 | 600 | 349 | 533 | 448 | 500 | 363 | 533 | 448 | 500 | 363 | |
| Body/Cap | CF8M | | | | | CF8M | | | | | CF8 | | | | CF8M | | | |
| Stem | 660SS | | | | | 660SS | | | | | 304SS | | | | 316SS | | | |
| Seat Spring | 304CSP for 3" & above | | | | | 304CSP for 3" & above | | | | | | | | | | | | |
| Ball | 316/CF8M | | | | | 316/CF8M | | | | | 304SS/CF8 | | | | 316SS/CF8M | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | PTFE (FS:Flexible Graphite) | | | | PTFE (FS:Flexible Graphite) | | | |
| Gasket | PTFE+Flexible Graphite | | | | | PTFE+Flexible Graphite | | | | | PTFE (FS:Flexible Graphite) | | | | PTFE (FS:Flexible Graphite) | | | |
| Ball Seat | A:HYPATITE® PTFE, B: PCTFE up to 2" or HYPATITE® | | | | | A:HYPATITE® PTFE, B: PCTFE up to 2" or HYPATITE® | | | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | |
| Bore | Reduced Bore | | | | | Reduced Bore | | | | | Full Bore | | | | Full Bore | | | |
| Cap B/N | B8M/8M | | | | | B8M/8M | | | | | B8/8 | | | | B8/8 | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | ISO 5211 | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | |
| Standard/Approval | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, PED/CE, TR-CU/EAC | | | | | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, PED/CE, TR-CU/EAC | | | | | | | | | | | | |
| Reference Page | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL55 | | | | P-T Rating : Page BAL55 | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design Uni Directional | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design Uni Directional | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | |





| Type | TDZ Series | | | | | TDZ Series | | | | | TDRZ Series | | | | TDRZ Series | | | |
|-----------------------|---|-----|-----|------|-----|---|-----|------|-----|-----|--|------|---|-----|---|------|---|--|
| Ball Valve |  | | | | |  | | | | |  | | | |  | | | |
| Fig | 150UTDZ/G-150UTDZ | | | | | 150UTDZM/G-150UTDZM | | | | | 10UTDRZ | | | | 10UTDRZM | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | | JIS B2220 10K RF | | | | JIS B2220 10K RF | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | |
| 1/2 | 15 | 108 | 108 | 130 | | 108 | 108 | 130 | | | | | | | | | | |
| 3/4 | 20 | 117 | 111 | 130 | | 117 | 111 | 130 | | | | | | | | | | |
| 1 | 25 | 127 | 124 | 160 | | 127 | 124 | 160 | | | | | | | | | | |
| 1 1/4 | 32 | 140 | 128 | 160 | | 140 | 128 | 160 | | | | | | | | | | |
| 1 1/2 | 40 | 165 | 134 | 230 | | 165 | 134 | 230 | | | | | | | | | | |
| 2 | 50 | 178 | 143 | 230 | | 178 | 143 | 230 | | | | | | | | | | |
| 2 1/2 | 65 | 190 | 179 | 400 | | 190 | 179 | 400 | | | | | | | | | | |
| 3 | 80 | 203 | 188 | 400 | | 203 | 188 | 400 | | | | | | | | | | |
| 4 | 100 | 229 | 224 | 460 | | 229 | 224 | 460 | | | | | | | | | | |
| 5 | 125 | 356 | 240 | 460 | | 356 | 240 | 460 | | | | | | | | | | |
| 6 | 150 | 394 | 314 | 1000 | | 394 | 314 | 1000 | | 267 | 240 | 460 | | 267 | 240 | 460 | | |
| 8 | 200 | 457 | 406 | 1500 | | 457 | 406 | 1500 | | 292 | 315 | 1000 | | 292 | 315 | 1000 | | |
| 10 | 250 | 533 | 448 | 500 | 363 | 533 | 448 | 500 | 363 | | | | | | | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | CF8M | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | 316SS | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | 316SS/CF8M | | | |
| Gland Packing | PTFE (FS:Flexible Graphite) | | | | | PTFE (FS:Flexible Graphite) | | | | | PTFE | | | | PTFE | | | |
| Gasket | PTFE (FS:Flexible Graphite) | | | | | PTFE (FS:Flexible Graphite) | | | | | PTFE | | | | PTFE | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Reduced Bore | | | | Reduced Bore | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | B8/8 | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | ISO 5211 | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS | | | | DI/CS | | | |
| Standard/Approval | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, FE: API641, SIL3, Shell: TAMAP Star level 2, PED/CE, TR-CU/EAC | | | | | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, FE: API641, SIL3, Shell: TAMAP Star level 2, PED/CE, TR-CU/EAC | | | | | | | | | | | | |
| Reference Page | P-T Rating : Page BAL55 | | | | | P-T Rating : Page BAL55 | | | | | P-T Rating : Page BAL55 | | | | P-T Rating : Page BAL55 | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | |





| Type | TDRZ Series | | | | TDRZ Series | | | | TDZ Series | | | | TDZ Series | | | |
|-----------------------|---|-----|-----|------|---|-----|------|-----|---|------|-----|-----|---|------|-----|--|
| Ball Valve | | | | | | | | | | | | | | | | |
| Fig | 150UTDRZ | | | | 150UTDRZM | | | | 10SCTDZ/G-10SCTDZ | | | | 150SCTDZ/G-150SCTDZ | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 150 RF | | | | JIS B2220 10K RF | | | | ASME B16.5 Class 150 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | B | L | H | D | B | |
| 1/2 | 15 | | | | | | | 108 | 108 | 130 | | 108 | 108 | 130 | | |
| 3/4 | 20 | | | | | | | 117 | 111 | 130 | | 117 | 111 | 130 | | |
| 1 | 25 | | | | | | | 127 | 124 | 160 | | 127 | 124 | 160 | | |
| 1 1/2 | 40 | | | | | | | 165 | 134 | 230 | | 165 | 134 | 230 | | |
| 2 | 50 | | | | | | | 178 | 143 | 230 | | 178 | 143 | 230 | | |
| 2 1/2 | 65 | | | | | | | 190 | 179 | 400 | | 190 | 179 | 400 | | |
| 3 | 80 | | | | | | | 203 | 188 | 400 | | 203 | 188 | 400 | | |
| 4 | 100 | | | | | | | 229 | 224 | 460 | | 229 | 224 | 460 | | |
| 5 | 125 | | | | | | | 356 | 240 | 460 | | 356 | 240 | 460 | | |
| 6 | 150 | 267 | 240 | 460 | 267 | 240 | 460 | 394 | 313 | 1000 | | 394 | 313 | 1000 | | |
| 8 | 200 | 292 | 315 | 1000 | 292 | 315 | 1000 | 457 | 406 | 1500 | | 457 | 412 | 1500 | | |
| 10 | 250 | | | | | | | 533 | 448 | 500 | 363 | 533 | 448 | 500 | 363 | |
| Body/Cap | CF8 | | | | CF8M | | | | WCB | | | | WCB | | | |
| Stem | 304SS | | | | 316SS | | | | 304SS | | | | 304SS | | | |
| Ball | 304SS/CF8 | | | | 316SS/CF8M | | | | 304SS/CF8 | | | | 304SS/CF8 | | | |
| Gland Packing | PTFE (FS:Flexible Graphite) | | | | PTFE (FS:Flexible Graphite) | | | | PTFE | | | | PTFE | | | |
| Gasket | PTFE (FS:Flexible Graphite) | | | | PTFE (FS:Flexible Graphite) | | | | PTFE | | | | PTFE | | | |
| Ball Seat | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | |
| Bore | Reduced Bore | | | | Reduced Bore | | | | Full Bore | | | | Full Bore | | | |
| Cap B/N | B8/8 | | | | B8/8 | | | | B7/2H | | | | B7/2H | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | |
| Handle | DI/CS | | | | DI/CS | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | |
| Standard/Approval | ISO 17292, API 608 FS: API607orAPI6FA | | | | ISO 17292, API 608 FS: API607orAPI6FA | | | | | | | | | | | |
| Reference Page | P-T Rating : Page BAL55 | | | | P-T Rating : Page BAL55 | | | | P-T Rating : Page BAL55 | | | | P-T Rating : Page BAL55 | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | |





| Type | TDRZ Series | | | | TDZ Series | | | | TDZ Series | | | | TDZ Series | | | |
|-----------------------|---|-----|-----|------|---|-----|------|-----|---|------|-----|-----|---|-----|--|--|
| Ball Valve | | | | | | | | | | | | | | | | |
| Fig | 150SCTDRZ | | | | 20UTDZ | | | | 20UTDZM | | | | 300UTDZ | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | JIS B2220 20K RF | | | | JIS B2220 20K RF | | | | ASME B16.5 Class 300 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D | L | | |
| 1/2 | 15 | | | | 140 | 108 | 130 | 140 | 108 | 130 | 140 | 108 | 130 | 140 | | |
| 3/4 | 20 | | | | 152 | 111 | 130 | 152 | 111 | 130 | 152 | 111 | 130 | 152 | | |
| 1 | 25 | | | | 165 | 124 | 160 | 165 | 124 | 160 | 165 | 124 | 160 | 165 | | |
| 1 1/4 | 32 | | | | 178 | 128 | 160 | 178 | 128 | 160 | 178 | 128 | 160 | 178 | | |
| 1 1/2 | 40 | | | | 190 | 134 | 230 | 190 | 134 | 230 | 190 | 134 | 230 | 190 | | |
| 2 | 50 | | | | 216 | 143 | 230 | 216 | 143 | 230 | 216 | 143 | 230 | 216 | | |
| 2 1/2 | 65 | | | | 241 | 179 | 400 | 241 | 179 | 400 | 241 | 179 | 400 | 241 | | |
| 3 | 80 | | | | 283 | 188 | 400 | 283 | 188 | 400 | 283 | 188 | 400 | 283 | | |
| 4 | 100 | | | | 305 | 251 | 750 | 305 | 251 | 750 | 305 | 251 | 750 | 305 | | |
| 5 | 125 | | | | 381 | 267 | 750 | 381 | 267 | 750 | 381 | 267 | 750 | 381 | | |
| 6 | 150 | 267 | 240 | 460 | 403 | 314 | 1000 | 403 | 314 | 1000 | 403 | 314 | 1000 | 403 | | |
| 8 | 200 | 292 | 315 | 1000 | 502 | 406 | 1500 | 502 | 406 | 1500 | 502 | 406 | 1500 | 502 | | |
| Body/Cap | WCB | | | | CF8 | | | | CF8M | | | | CF8 | | | |
| Stem | 304SS | | | | 304SS | | | | 316SS | | | | 304SS | | | |
| Ball | 304SS/CF8 | | | | 304SS/CF8 | | | | 316SS/CF8M | | | | 304SS/CF8 | | | |
| Gland Packing | PTFE (FS:Flexible Graphite) | | | | PTFE | | | | PTFE | | | | PTFE (FS:Flexible Graphite) | | | |
| Gasket | PTFE (FS:Flexible Graphite) | | | | PTFE | | | | PTFE | | | | PTFE (FS:Flexible Graphite) | | | |
| Ball Seat | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | |
| Bore | Reduced Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | |
| Cap B/N | B7/2H | | | | B8/8 | | | | B8/8 | | | | B8/8 | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | |
| Handle | DI/CS | | | | DI/CS | | | | DI/CS | | | | DI/CS | | | |
| Standard/Approval | ISO 17292, API 608 FS: API607orAPI6FA | | | | | | | | | | | | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, FE: API641, SIL3, Shell: TAMAP Star level 2, PED/CE, TR-CU/EAC | | | |
| Reference Page | P-T Rating : Page BAL54 | | | | P-T Rating : Page BAL54 | | | | P-T Rating : Page BAL54 | | | | P-T Rating : Page BAL54 | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | |





| Type | TDZ Series | | | | TDRZ Series | | | TDRZ Series | | | TDRZ Series | | |
|-----------------------|---|----------|-----|------|---|---------|------|---|----------|------|---|----------|------|
| Ball Valve | | | | | | | | | | | | | |
| | Fig | 300UTDZM | | | | 20UTDRZ | | | 20UTDRZM | | | 300UTDRZ | |
| End Connection | ASME B16.5 Class 300 RF | | | | JIS B2220 20K RF | | | JIS B2220 20K RF | | | ASME B16.5 Class 300 RF | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 140 | 108 | 130 | | | | | | | | | |
| 3/4 | 20 | 152 | 111 | 130 | | | | | | | | | |
| 1 | 25 | 165 | 124 | 160 | | | | | | | | | |
| 1 1/4 | 32 | 178 | 128 | 160 | | | | | | | | | |
| 1 1/2 | 40 | 190 | 134 | 230 | | | | | | | | | |
| 2 | 50 | 216 | 143 | 230 | | | | | | | | | |
| 2 1/2 | 65 | 241 | 179 | 400 | | | | | | | | | |
| 3 | 80 | 283 | 188 | 400 | | | | | | | | | |
| 4 | 100 | 305 | 251 | 750 | | | | | | | | | |
| 5 | 125 | 381 | 267 | 750 | | | | | | | | | |
| 6 | 150 | 403 | 314 | 1000 | 403 | 240 | 460 | 403 | 240 | 460 | 403 | 240 | 460 |
| 8 | 200 | 502 | 406 | 1500 | 419 | 315 | 1000 | 419 | 315 | 1000 | 419 | 315 | 1000 |
| 10 | 250 | | | | 457 | 406 | 1500 | 457 | 406 | 1500 | 457 | 406 | 1500 |
| Body/Cap | CF8M | | | | CF8 | | | CF8M | | | CF8 | | |
| Stem | 316SS | | | | 304SS | | | 316SS | | | 304SS | | |
| Ball | 316SS/CF8M | | | | 304SS/CF8 | | | 316SS/CF8M | | | 304SS/CF8 | | |
| Gland Packing | PTFE (FS:Flexible Graphite) | | | | PTFE | | | PTFE | | | PTFE (FS:Flexible Graphite) | | |
| Gasket | PTFE (FS:Flexible Graphite) | | | | PTFE | | | PTFE | | | PTFE (FS:Flexible Graphite) | | |
| Ball Seat | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | |
| Bore | Full Bore | | | | Reduced Bore | | | Reduced Bore | | | Reduced Bore | | |
| Cap B/N | B8/8 | | | | B8/8 | | | B8/8 | | | B8/8 | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | ASME B16.10 | | | ASME B16.10 | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | ISO 5211 | | | ISO 5211 | | |
| Handle | DI/CS | | | | DI/CS | | | DI/CS | | | DI/CS | | |
| Standard/Approval | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, FE: API641, SIL3, Shell: TAMAP Star level 2, PED/CE, TR-CU/EAC | | | | | | | | | | ISO 17292, API 608 FS: API607orAPI6FA | | |
| Reference Page | P-T Rating : Page BAL55 | | | | P-T Rating : Page BAL55 | | | P-T Rating : Page BAL55 | | | P-T Rating : Page BAL55 | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | |





| Type | TDRZ Series | | | | TDZ Series | | | TDZ Series | | | TDRZ Series | | |
|-----------------------|---|-----------|-----|------|---|---------|------|---|----------|------|---|-----------|------|
| Ball Valve | | | | | | | | | | | | | |
| | Fig | 300UTDRZM | | | | 20SCTDZ | | | 300SCTDZ | | | 300SCTDRZ | |
| End Connection | ASME B16.5 Class 300 RF | | | | JIS B2220 20K RF | | | ASME B16.5 Class 300 RF | | | ASME B16.5 Class 300 RF | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | | | | 140 | 108 | 130 | 140 | 108 | 130 | | | |
| 3/4 | 20 | | | | 152 | 111 | 130 | 152 | 111 | 130 | | | |
| 1 | 25 | | | | 165 | 124 | 160 | 165 | 124 | 160 | | | |
| 1 1/2 | 40 | | | | 190 | 134 | 230 | 190 | 134 | 230 | | | |
| 2 | 50 | | | | 216 | 143 | 230 | 216 | 143 | 230 | | | |
| 2 1/2 | 65 | | | | 241 | 179 | 400 | 241 | 179 | 400 | | | |
| 3 | 80 | | | | 283 | 188 | 400 | 283 | 188 | 400 | | | |
| 4 | 100 | | | | 305 | 251 | 750 | 305 | 251 | 750 | | | |
| 5 | 125 | | | | 381 | 267 | 750 | 381 | 267 | 750 | | | |
| 6 | 150 | 403 | 240 | 460 | 403 | 315 | 1000 | 403 | 313 | 1000 | 403 | 267 | 750 |
| 8 | 200 | 419 | 315 | 1000 | 502 | 406 | 1500 | 502 | 406 | 1500 | 419 | 315 | 1000 |
| 10 | 250 | 457 | 406 | 1500 | | | | | | | 457 | 406 | 1500 |
| Body/Cap | CF8M | | | | WCB | | | WCB | | | WCB | | |
| Stem | 316SS | | | | 304SS | | | 304SS | | | 304SS | | |
| Ball | 316SS/CF8M | | | | 304SS/CF8 | | | 304SS/CF8 | | | 304SS/CF8 | | |
| Gland Packing | PTFE (FS:Flexible Graphite) | | | | PTFE | | | PTFE (FS:Flexible Graphite) | | | PTFE (FS:Flexible Graphite) | | |
| Gasket | PTFE (FS:Flexible Graphite) | | | | PTFE | | | PTFE (FS:Flexible Graphite) | | | PTFE (FS:Flexible Graphite) | | |
| Ball Seat | HYPATITE® PTFE | | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | | HYPATITE® PTFE | | |
| Bore | Reduced Bore | | | | Full Bore | | | Full Bore | | | Reduced Bore | | |
| Cap B/N | B8/8 | | | | B7/2H | | | B7/2H | | | B7/2H | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | ASME B16.10 | | | ASME B16.10 | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | ISO 5211 | | | ISO 5211 | | |
| Handle | DI/CS | | | | DI/CS | | | DI/CS | | | DI/CS | | |
| Standard/Approval | ISO 17292, API 608 FS: API607orAPI6FA | | | | | | | ISO 17292, API 608, ISO 15848-1 FS: API607orAPI6FA, FE: API641, SIL3, Shell: TAMAP Star Level 2, PED/CE, TR-CU/EAC | | | ISO 17292, API 608 FS: API607orAPI6FA | | |
| Reference Page | P-T Rating : Page BAL55 | | | | P-T Rating : Page BAL55 | | | P-T Rating : Page BAL55 | | | P-T Rating : Page BAL55 | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | |





| Type | TDZ Series(-46°C) | | | | | TDZ Series(-46°C) | | | | | TDZ Series(-46°C) | | | | | TDZ Series(-46°C) | | | | | |
|-----------------------|---|-----|-----|-----|-----|---|-----|-----|-----|-----|--|-----|-----|-----|-----|---|-----|-----|-----|-----|-----|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | | |
| Fig | 150SCTDZXBL/G-150SCTDZXBL | | | | | 150SCTDZXCL/G-150SCTDZXCL | | | | | 300SCTDZXBL/G-300SCTDZXBL | | | | | 300SCTDZXCL/G-300SCTDZXCL | | | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 300 RF | | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 1/2 | 15 | 108 | 228 | 130 | | 108 | 228 | 130 | | 140 | 228 | 130 | | 140 | 228 | 130 | | 140 | 228 | 130 | |
| 3/4 | 20 | 117 | 231 | 130 | | 117 | 231 | 130 | | 152 | 231 | 130 | | 152 | 231 | 130 | | 152 | 231 | 130 | |
| 1 | 25 | 127 | 268 | 160 | | 127 | 268 | 160 | | 165 | 268 | 160 | | 165 | 268 | 160 | | 165 | 268 | 160 | |
| 1 1/2 | 40 | 165 | 300 | 230 | | 165 | 300 | 230 | | 190 | 300 | 230 | | 190 | 300 | 230 | | 190 | 300 | 230 | |
| 2 | 50 | 178 | 309 | 230 | | 178 | 309 | 230 | | 216 | 313 | 400 | | 216 | 313 | 400 | | 216 | 313 | 400 | |
| 3 | 80 | 203 | 383 | 400 | | 203 | 383 | 400 | | 283 | 413 | 700 | | 283 | 413 | 700 | | 283 | 413 | 700 | |
| 4 | 100 | 229 | 474 | 300 | 283 | 229 | 474 | 300 | 283 | 305 | 474 | 300 | 283 | 305 | 474 | 300 | 283 | 305 | 474 | 300 | 283 |
| 6 | 150 | 394 | 594 | 400 | 337 | 394 | 594 | 400 | 337 | 403 | 600 | 500 | 347 | 403 | 600 | 500 | 347 | 403 | 600 | 500 | 347 |
| 8 | 200 | 457 | 682 | 500 | 347 | 457 | 682 | 500 | 347 | 502 | 726 | 500 | 349 | 502 | 726 | 500 | 349 | 502 | 726 | 500 | 349 |
| 10 | 250 | 533 | 764 | 600 | 349 | 533 | 764 | 600 | 349 | | | | | | | | | | | | |
| Body/Cap | LCB/LF2 | | | | | LCC/LF2 | | | | | LCB/LF2 | | | | | LCC/LF2 | | | | | |
| Stem | 316/XM-19HS | | | | | 316/XM-19HS | | | | | 316/XM-19HS | | | | | 316/XM-19HS | | | | | |
| Ball | 316SS/CF8M | | | | | 316SS/CF8M | | | | | 316SS/CF8M | | | | | 316SS/CF8M | | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | |
| Gasket | Flexible Graphite SPW, Flexible Graphite | | | | | Flexible Graphite SPW, Flexible Graphite | | | | | Flexible Graphite SPW, Flexible Graphite | | | | | Flexible Graphite SPW, Flexible Graphite | | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | |
| Bonnet/Cap B/N | L7M/7M | | | | | L7M/7M | | | | | L7M/7M | | | | | L7M/7M | | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | |
| Standard/Approval | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | | |
| Reference Page | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | |

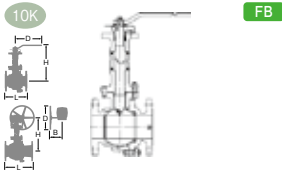
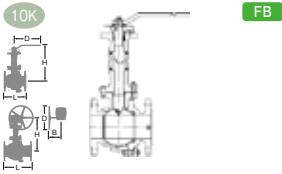
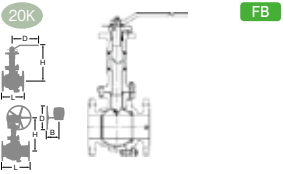
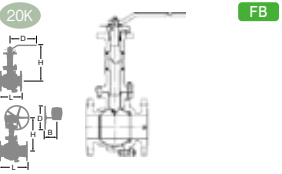
| Type | TDZ Series(-104°C) | | | | | TDZ Series(-104°C) | | | | | TDZ Series(-104°C) | | | | | TDZ Series(-104°C) | | | | | |
|-----------------------|---|-----|-----|-----|-----|---|-----|-----|-----|-----|--|-----|-----|-----|-----|---|-----|-----|-----|-----|-----|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | | |
| Fig | 10UTDZXL/G-10UTDZXL | | | | | 10UTDZXLM/G-10UTDZXLM | | | | | 20UTDZXL/G-20UTDZXL | | | | | 20UTDZXLM/G-20UTDZXLM | | | | | |
| End Connection | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | JIS B2220 20K RF | | | | | JIS B2220 20K RF | | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 1/2 | 15 | 108 | 229 | 130 | | 108 | 229 | 130 | | 140 | 229 | 130 | | 140 | 229 | 130 | | 140 | 229 | 130 | |
| 3/4 | 20 | 117 | 232 | 130 | | 117 | 232 | 130 | | 152 | 232 | 130 | | 152 | 232 | 130 | | 152 | 232 | 130 | |
| 1 | 25 | 127 | 268 | 160 | | 127 | 268 | 160 | | 165 | 268 | 160 | | 165 | 268 | 160 | | 165 | 268 | 160 | |
| 1 1/4 | 32 | 140 | 272 | 160 | | 140 | 272 | 160 | | 178 | 272 | 160 | | 178 | 272 | 160 | | 178 | 272 | 160 | |
| 1 1/2 | 40 | 165 | 300 | 230 | | 165 | 300 | 230 | | 190 | 300 | 230 | | 190 | 300 | 230 | | 190 | 300 | 230 | |
| 2 | 50 | 178 | 309 | 230 | | 178 | 309 | 230 | | 216 | 309 | 230 | | 216 | 309 | 230 | | 216 | 309 | 230 | |
| 2 1/2 | 65 | 190 | 373 | 400 | | 190 | 373 | 400 | | 241 | 373 | 400 | | 241 | 373 | 400 | | 241 | 373 | 400 | |
| 3 | 80 | 203 | 383 | 400 | | 203 | 383 | 400 | | 283 | 383 | 400 | | 283 | 383 | 400 | | 283 | 383 | 400 | |
| 4 | 100 | 229 | 458 | 750 | | 229 | 458 | 750 | | 305 | 466 | 310 | 165 | 305 | 466 | 310 | 165 | 305 | 466 | 310 | 165 |
| 5 | 125 | 356 | 482 | 310 | 165 | 356 | 482 | 310 | 165 | 381 | 510 | 360 | 210 | 381 | 510 | 360 | 210 | 381 | 510 | 360 | 210 |
| 6 | 150 | 394 | 572 | 360 | 210 | 394 | 572 | 360 | 210 | 403 | 569 | 500 | 363 | 403 | 569 | 500 | 363 | 403 | 569 | 500 | 363 |
| 8 | 200 | 457 | 677 | 500 | 363 | 457 | 677 | 500 | 363 | 502 | 685 | 500 | 377 | 502 | 685 | 500 | 377 | 502 | 685 | 500 | 377 |
| 10 | 250 | 533 | 724 | 500 | 377 | 533 | 724 | 500 | 377 | | | | | | | | | | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | | CF8M | | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 316SS | | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | | |
| Gland Packing | PTFE | | | | | PTFE (FS:Flexible Graphite) | | | | | PTFE | | | | | PTFE (FS:Flexible Graphite) | | | | | |
| Gasket | Ceramic PTFE, Flexible Graphite SPW | | | | | PTFE (FS:Flexible Graphite) | | | | | Ceramic PTFE, Flexible Graphite SPW | | | | | PTFE (FS:Flexible Graphite) | | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | |
| Bonnet/Cap B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | |
| Standard/Approval | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | | |
| Reference Page | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | |

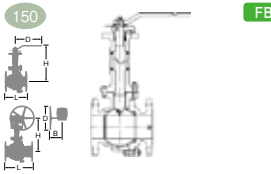
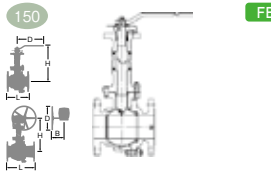
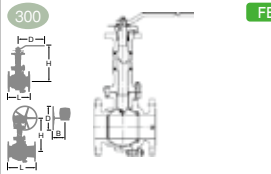
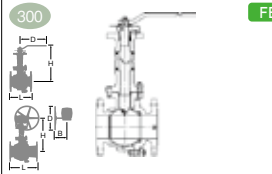
| Type | TDZ Series(-104°C) | | | | | TDZ Series(-104°C) | | | | | TDZ Series(-104°C) | | | | | TDZ Series(-104°C) | | | | |
|-----------------------|---|-----|-----|-----|-----|---|-----|-----|-----|-----|--|-----|-----|-----|-----|---|-----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| Fig | 150UTDZXL/G-150UTDZXL | | | | | 150UTDZML/G-150UTDZML | | | | | 300UTDZXL/G-300UTDZXL | | | | | 300UTDZML/G-300UTDZML | | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 300 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 1/2 | 15 | 108 | 229 | 130 | | 108 | 229 | 130 | | 140 | 229 | 130 | | 140 | 229 | 130 | | | | |
| 3/4 | 20 | 117 | 232 | 130 | | 117 | 232 | 130 | | 152 | 232 | 130 | | 152 | 232 | 130 | | | | |
| 1 | 25 | 127 | 268 | 160 | | 127 | 268 | 160 | | 165 | 268 | 160 | | 165 | 268 | 160 | | | | |
| 1 1/4 | 32 | 140 | 272 | 160 | | 140 | 272 | 160 | | | | | | | | | | | | |
| 1 1/2 | 40 | 165 | 301 | 230 | | 165 | 301 | 230 | | 190 | 300 | 230 | | 190 | 300 | 230 | | | | |
| 2 | 50 | 178 | 309 | 230 | | 178 | 309 | 230 | | 216 | 309 | 230 | | 216 | 309 | 230 | | | | |
| 2 1/2 | 65 | 190 | 373 | 400 | | 190 | 373 | 400 | | 241 | 373 | 400 | | 241 | 373 | 400 | | | | |
| 3 | 80 | 203 | 383 | 400 | | 203 | 383 | 400 | | 283 | 383 | 400 | | 283 | 383 | 400 | | | | |
| 4 | 100 | 229 | 458 | 750 | | 229 | 458 | 750 | | 305 | 466 | 310 | 165 | 305 | 466 | 310 | 165 | | | |
| 5 | 125 | 356 | 482 | 310 | 165 | 356 | 482 | 310 | 165 | | | | | | | | | | | |
| 6 | 150 | 394 | 572 | 360 | 210 | 394 | 572 | 360 | 210 | 403 | 569 | 500 | 363 | 403 | 569 | 500 | 363 | | | |
| 8 | 200 | 457 | 685 | 500 | 363 | 457 | 685 | 500 | 363 | 502 | 685 | 500 | 377 | 502 | 685 | 500 | 377 | | | |
| 10 | 250 | 533 | 724 | 500 | 377 | 533 | 724 | 500 | 377 | | | | | | | | | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | | CF8M | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 316SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | |
| Gland Packing | PTFE | | | | | PTFE (FS:Flexible Graphite) | | | | | PTFE | | | | | PTFE (FS:Flexible Graphite) | | | | |
| Gasket | Ceramic PTFE, Flexible Graphite SPW | | | | | PTFE (FS:Flexible Graphite) | | | | | Ceramic PTFE, Flexible Graphite SPW | | | | | PTFE (FS:Flexible Graphite) | | | | |
| Ball Seat | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | | HYPATITE® PTFE | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Bonnet/Cap B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | |
| Reference Page | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |





| Type | TDZ Series(-196°C) | | | | | TDZ Series(-196°C) | | | | | TDZ Series(-196°C) | | | | | TDZ Series(-196°C) | | | | |
|-----------------------|---|-----|---------|-----|-----|---|---------|-----|-----|-----|--|-----|-----|-----|-----|---|-----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| Fig | 10UTDZL/G-10UTDZL | | | | | 10UTDZML/G-10UTDZML | | | | | 20UTDZL/G-20UTDZL | | | | | 20UTDZML/G-20UTDZML | | | | |
| End Connection | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | JIS B2220 20K RF | | | | | JIS B2220 20K RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 1/2 | 15 | 108 | 330 | 130 | | 108 | 330 | 130 | | 140 | 330 | 130 | | 140 | 330 | 130 | | | | |
| 3/4 | 20 | 117 | 333 | 130 | | 117 | 333 | 130 | | 152 | 333 | 130 | | 152 | 333 | 130 | | | | |
| 1 | 25 | 127 | 354 | 160 | | 127 | 354 | 160 | | 165 | 354 | 160 | | 165 | 354 | 160 | | | | |
| 1 1/4 | 32 | 140 | 358 | 160 | | 140 | 358 | 160 | | 178 | 358 | 160 | | 178 | 358 | 160 | | | | |
| 1 1/2 | 40 | 165 | 421 | 230 | | 165 | 421 | 230 | | 190 | 421 | 230 | | 190 | 421 | 230 | | | | |
| 2 | 50 | 178 | 430 | 230 | | 178 | 430 | 230 | | 216 | 435 | 300 | | 216 | 435 | 300 | | | | |
| 2 1/2 | 65 | 190 | 526 | 400 | | 190 | 526 | 400 | | 241 | 557 | 600 | | 241 | 557 | 600 | | | | |
| 3 | 80 | 203 | 536 | 400 | | 203 | 536 | 400 | | 283 | 557 | 310 | 165 | 283 | 557 | 310 | 165 | | | |
| 4 | 100 | 229 | 619 | 310 | 165 | 229 | 619 | 310 | 165 | 305 | 619 | 310 | 165 | 305 | 619 | 310 | 165 | | | |
| 5 | 125 | 356 | 635 | 310 | 165 | 356 | 635 | 310 | 165 | 381 | 663 | 360 | 210 | 381 | 663 | 360 | 210 | | | |
| 6 | 150 | 394 | 758 | 360 | 210 | 394 | 758 | 360 | 210 | 403 | 755 | 500 | 363 | 403 | 755 | 500 | 363 | | | |
| 8 | 200 | 457 | 841/849 | 500 | 377 | 457 | 841/849 | 500 | 377 | 502 | 849 | 500 | 377 | 502 | 849 | 500 | 377 | | | |
| 10 | 250 | 533 | 937 | 500 | 377 | 533 | 937 | 500 | 377 | | | | | | | | | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | CF8 | | | | | CF8M | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 316SS | | | | |
| Seat Spring | SUS304CSP for 2 ^B & above | | | | | SUS304CSP for 2 ^B & above | | | | | SUS304CSP for 2 ^B & above | | | | | SUS304CSP for 2 ^B & above | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 316SS/CF8M | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Gasket | Flexible Graphite SPW, Flexible Graphite | | | | | Flexible Graphite SPW, Flexible Graphite | | | | | Flexible Graphite SPW, Flexible Graphite | | | | | Flexible Graphite SPW, Flexible Graphite | | | | |
| Ball Seat | A:HYPATITE® PTFE, B: PCTFE up to 1 1/2 ^B or HYPATITE® | | | | | A:HYPATITE® PTFE, B: PCTFE up to 1 1/2 ^B or HYPATITE® | | | | | A:HYPATITE® PTFE, B: PCTFE up to 1 1/2 ^B or HYPATITE® | | | | | A:HYPATITE® PTFE, B: PCTFE up to 1 1/2 ^B or HYPATITE® | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Bonnet/Cap B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | | ISO 17292, API 608 | | | | |
| Reference Page | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | | P-T Rating : Page BAL61 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design, Uni Direcional | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design, Uni Direcional | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design, Uni Direcional | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design, Uni Direcional | | | | |





| Type | TDZ Series(-196°C) | | | | TDZ Series(-196°C) | | | | TDZ Series(-196°C) | | | | TDZ Series(-196°C) | | | | |
|-----------------------|--|-----|---------|-----|--|-----|---------|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| Ball Valve |  | | | |  | | | |  | | | |  | | | | |
| Fig | 150UTDZL/G-150UTDZL | | | | 150UTDZLM/G-150UTDZLM | | | | 300UTDZL/G-300UTDZL | | | | 300UTDZLM/G-300UTDZLM | | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 300 RF | | | | ASME B16.5 Class 300 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 1/2 | 15 | 108 | 330 | 130 | | 108 | 330 | 130 | | 140 | 330 | 130 | | 140 | 330 | 130 | |
| 3/4 | 20 | 117 | 333 | 130 | | 117 | 333 | 130 | | 152 | 333 | 130 | | 152 | 333 | 130 | |
| 1 | 25 | 127 | 354 | 160 | | 127 | 354 | 160 | | 165 | 354 | 160 | | 165 | 354 | 160 | |
| 1 1/4 | 32 | 140 | 358 | 160 | | 140 | 358 | 160 | | | | | | | | | |
| 1 1/2 | 40 | 165 | 421 | 230 | | 165 | 421 | 230 | | 190 | 421 | 230 | | 190 | 421 | 230 | |
| 2 | 50 | 178 | 430 | 230 | | 178 | 430 | 230 | | 216 | 435 | 300 | | 216 | 435 | 300 | |
| 2 1/2 | 65 | 190 | 526 | 400 | | 190 | 526 | 400 | | 241 | 557 | 600 | | 241 | 557 | 600 | |
| 3 | 80 | 203 | 536 | 400 | | 203 | 536 | 400 | | 283 | 557 | 310 | 165 | 283 | 557 | 310 | 165 |
| 4 | 100 | 229 | 619 | 310 | 165 | 229 | 619 | 310 | 165 | 305 | 619 | 310 | 165 | 305 | 619 | 310 | 165 |
| 5 | 125 | 356 | 635 | 310 | 165 | 356 | 635 | 310 | 165 | | | | | | | | |
| 6 | 150 | 394 | 758 | 360 | 210 | 394 | 758 | 360 | 210 | 403 | 755 | 500 | 363 | 403 | 755 | 500 | 363 |
| 8 | 200 | 457 | 841/849 | 500 | 377 | 457 | 841/849 | 500 | 377 | 502 | 849 | 500 | 377 | 502 | 849 | 500 | 377 |
| 10 | 250 | 533 | 937 | 500 | 377 | 533 | 937 | 500 | 377 | | | | | | | | |
| Body/Cap | CF8 | | | | CF8M | | | | CF8 | | | | CF8M | | | | |
| Stem | 304SS | | | | 316SS | | | | 304SS | | | | 316SS | | | | |
| Seat Spring | SUS304CSP for 2 nd & above | | | | SUS304CSP for 2 nd & above | | | | SUS304CSP for 2 nd & above | | | | SUS304CSP for 2 nd & above | | | | |
| Ball | 304SS/CF8 | | | | 316SS/CF8M | | | | 304SS/CF8 | | | | 316SS/CF8M | | | | |
| Gland Packing | Flexible Graphite | | | | Flexible Graphite | | | | Flexible Graphite | | | | Flexible Graphite | | | | |
| Gasket | Flexible Graphite SPW, Flexible Graphite | | | | Flexible Graphite SPW, Flexible Graphite | | | | Flexible Graphite SPW, Flexible Graphite | | | | Flexible Graphite SPW, Flexible Graphite | | | | |
| Ball Seat | A:HYPATITE [®] PTFE, B: PCTFE up to 11/2 nd or HYPATITE [®] | | | | A:HYPATITE [®] PTFE, B: PCTFE up to 11/2 nd or HYPATITE [®] | | | | A:HYPATITE [®] PTFE, B: PCTFE up to 11/2 nd or HYPATITE [®] | | | | A:HYPATITE [®] PTFE, B: PCTFE up to 11/2 nd or HYPATITE [®] | | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | | |
| Bonnet/Cap B/N | B8/8 | | | | B8/8 | | | | B8/8 | | | | B8/8 | | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | ISO 17292, API 608 | | | | ISO 17292, API 608 | | | | ISO 17292, API 608 | | | | ISO 17292, API 608 | | | | |
| Reference Page | P-T Rating : Page BAL61 | | | | P-T Rating : Page BAL61 | | | | P-T Rating : Page BAL61 | | | | P-T Rating : Page BAL61 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design, Uni Direcional | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design, Uni Direcional | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design, Uni Direcional | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design, Uni Direcional | | | | |





| Type | TBDXK Series(-50°C) | | | | TBDXK Series(-50°C) | | | | TBDXK Series(-50°C) | | | | TBDXK Series(-50°C) | | | | |
|-----------------------|---|-----|-------|-----|---|-----|-------|-----|--|-----|-------|-----|---|-----|-------|-----|-----|
| Ball Valve |  | | | |  | | | |  | | | |  | | | | |
| Fig | 10UTBDXK/G-10UTBDXK | | | | 10UTBDXKM/G-10UTBDXKM | | | | 150UTBDXK/G-150UTBDXK | | | | 150UTBDXKM/G-150UTBDXKM | | | | |
| End Connection | JIS B2220 10K RF | | | | JIS B2220 10K RF | | | | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 1/2 | 15 | 108 | 254 | 130 | | 108 | 254 | 130 | | 108 | 254 | 130 | | 108 | 254 | 130 | |
| 3/4 | 20 | 117 | 257 | 130 | | 117 | 257 | 130 | | 117 | 257 | 130 | | 117 | 257 | 130 | |
| 1 | 25 | 127 | 276 | 130 | | 127 | 276 | 130 | | 127 | 276 | 130 | | 127 | 276 | 130 | |
| 1 1/2 | 40 | 165 | 265 | 160 | | 165 | 265 | 160 | | 165 | 265 | 160 | | 165 | 265 | 160 | |
| 2 | 50 | 178 | 272 | 230 | | 178 | 272 | 230 | | 178 | 272 | 230 | | 178 | 272 | 230 | |
| 2 1/2 | 65 | 190 | 305.5 | 230 | | 190 | 305.5 | 230 | | 190 | 305.5 | 230 | | 190 | 305.5 | 230 | |
| 3 | 80 | 203 | 315 | 400 | | 203 | 315 | 400 | | 203 | 315 | 400 | | 203 | 315 | 400 | |
| 4 | 100 | 229 | 349 | 400 | | 229 | 349 | 400 | | 229 | 349 | 400 | | 229 | 349 | 400 | |
| 5 | 125 | 356 | 464 | 460 | 165 | 356 | 464 | 460 | 165 | 356 | 464 | 460 | 165 | 356 | 464 | 460 | 165 |
| 6 | 150 | 394 | 489 | 310 | 165 | 394 | 489 | 310 | 165 | 394 | 489 | 310 | 165 | 394 | 489 | 310 | 165 |
| Body/Cap | CF8 | | | | CF8M | | | | CF8 | | | | CF8M | | | | |
| Stem | 304SS | | | | 316SS | | | | 304SS | | | | 316SS | | | | |
| Ball | 304SS | | | | 316SS | | | | 304SS | | | | 316SS | | | | |
| Gland Packing | PTFE | | | | PTFE | | | | PTFE | | | | PTFE | | | | |
| Gasket | PTFE | | | | PTFE | | | | PTFE | | | | PTFE | | | | |
| Ball Seat | HYPATITE [®] PTFE | | | | HYPATITE [®] PTFE | | | | HYPATITE [®] PTFE | | | | HYPATITE [®] PTFE | | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | | |
| Bonnet/Cap B/N | B8/8 | | | | B8/8 | | | | B8/8 | | | | B8/8 | | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | KITZ Standard | | | | KITZ Standard | | | | KITZ Standard | | | | KITZ Standard | | | | |
| Handle | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | | | | | | | | | TR-CU/EAC | | | | TR-CU/EAC | | | | |
| Reference Page | P-T Rating : Page BAL58 | | | | P-T Rating : Page BAL58 | | | | P-T Rating : Page BAL58 | | | | P-T Rating : Page BAL58 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |

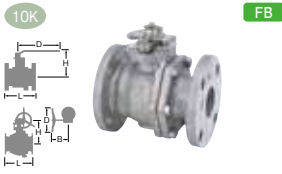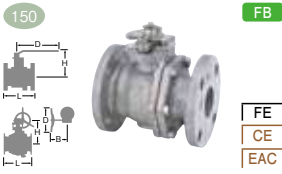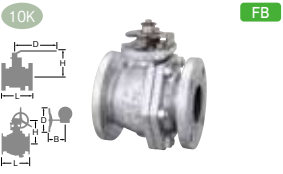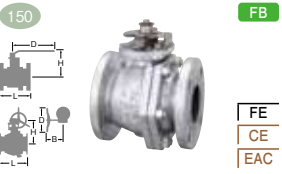

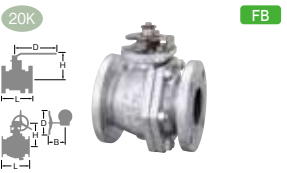
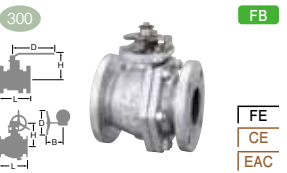
| Type | TDZ Series(Filtite(1H)) | | | | | TDZ Series(Filtite(1H)) | | | | | TDZ Series(Filtite(1H)) | | | | | TDZ Series(Filtite(1H)) | | | | |
|-----------------------|---|-----|-----|------|-----|---|-----|-----|-----|-----|--|-----|-----|-----|-----|---|-----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | FB | | | | | FB | | | | | FB | | | | | FB | | | | |
| Fig | 10UTDZ1H/G-10UTDZ1H | | | | | 150UTDZ1HM/G-150UTDZ1HM | | | | | 10SCTDZ1H/G-10SCTDZ1H | | | | | 150SCTDZ1H/G-150SCTDZ1H | | | | |
| End Connection | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 1/2 | 15 | 108 | 108 | 130 | | 108 | 108 | 130 | | 108 | 108 | 130 | | 108 | 108 | 130 | | | | |
| 3/4 | 20 | 117 | 111 | 130 | | 117 | 111 | 130 | | 117 | 111 | 130 | | 117 | 111 | 130 | | | | |
| 1 | 25 | 127 | 124 | 160 | | 127 | 124 | 160 | | 127 | 124 | 160 | | 127 | 124 | 160 | | | | |
| 1 1/4 | 32 | 140 | 128 | 160 | | 140 | 128 | 160 | | | | | | | | | | | | |
| 1 1/2 | 40 | 165 | 134 | 230 | | 165 | 134 | 230 | | 165 | 134 | 230 | | 165 | 134 | 230 | | | | |
| 2 | 50 | 178 | 143 | 300 | | 178 | 143 | 230 | | 178 | 143 | 230 | | 178 | 143 | 230 | | | | |
| 2 1/2 | 65 | 190 | 179 | 600 | | 190 | 179 | 400 | | 190 | 179 | 400 | | 190 | 179 | 400 | | | | |
| 3 | 80 | 203 | 189 | 600 | | 203 | 189 | 400 | | 203 | 188 | 400 | | 203 | 188 | 400 | | | | |
| 4 | 100 | 229 | 251 | 1000 | | 229 | 251 | 750 | | 229 | 251 | 750 | | 229 | 251 | 750 | | | | |
| 5 | 125 | 356 | 274 | 310 | 165 | 356 | 274 | 310 | 165 | 356 | 274 | 310 | 165 | 356 | 274 | 310 | 165 | | | |
| 6 | 150 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | | | |
| 8 | 200 | 457 | 409 | 500 | 377 | 457 | 409 | 500 | 363 | 457 | 409 | 500 | 377 | 457 | 417 | 500 | 363 | | | |
| 10 | 250 | 533 | 456 | 500 | 377 | 533 | 456 | 500 | 377 | 533 | 456 | 500 | 377 | 533 | 456 | 500 | 377 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | WCB | | | | | WCB | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 304SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 304SS/CF8 | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Ball Seat | FILLTITE PTFE | | | | | FILLTITE PTFE | | | | | FILLTITE PTFE | | | | | FILLTITE PTFE | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B7/2H | | | | | B7/2H | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | |
| Reference Page | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |

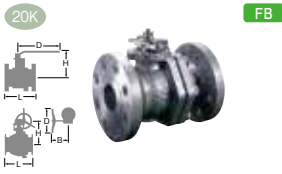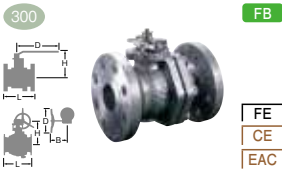
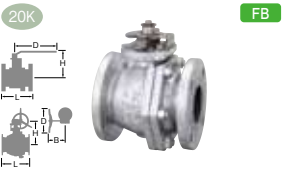
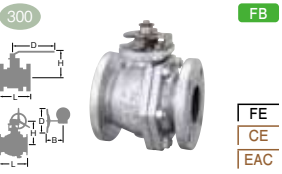

| Type | TDZ Series(Filtite(1H)) | | | | | TDZ Series(Filtite(1H)) | | | | | TDZ Series(Filtite(1H)) | | | | | TDZ Series(Filtite(1H)) | | | | |
|-----------------------|---|-----|-----|-----|-----|---|-----|-----|-----|-----|--|-----|-----|-----|-----|---|-----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | FB | | | | | FB | | | | | FB | | | | | FB | | | | |
| Fig | 20UTDZ1H/G-20UTDZ1H | | | | | 300UTDZ1HM/G-300UTDZ1HM | | | | | 20SCTDZ1H/G-20SCTDZ1H | | | | | 300SCTDZ1H/G-300SCTDZ1H | | | | |
| End Connection | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 1/2 | 15 | 140 | 108 | 130 | | 140 | 108 | 130 | | 140 | 108 | 130 | | 140 | 108 | 130 | | | | |
| 3/4 | 20 | 152 | 111 | 130 | | 152 | 111 | 130 | | 152 | 111 | 130 | | 152 | 111 | 130 | | | | |
| 1 | 25 | 165 | 124 | 160 | | 165 | 124 | 160 | | 165 | 124 | 160 | | 165 | 124 | 160 | | | | |
| 1 1/4 | 32 | 178 | 128 | 160 | | | | | | | | | | | | | | | | |
| 1 1/2 | 40 | 190 | 135 | 230 | | 190 | 134 | 230 | | 190 | 134 | 230 | | 190 | 134 | 230 | | | | |
| 2 | 50 | 216 | 143 | 230 | | 216 | 143 | 230 | | 216 | 143 | 230 | | 216 | 143 | 230 | | | | |
| 2 1/2 | 65 | 241 | 179 | 400 | | 241 | 179 | 400 | | 241 | 179 | 400 | | 241 | 179 | 400 | | | | |
| 3 | 80 | 283 | 188 | 400 | | 283 | 188 | 400 | | 283 | 188 | 400 | | 283 | 188 | 400 | | | | |
| 4 | 100 | 305 | 258 | 310 | 165 | 305 | 258 | 310 | 165 | 305 | 258 | 310 | 165 | 305 | 258 | 310 | 165 | | | |
| 5 | 125 | 381 | 301 | 360 | 210 | | | | | 381 | 302 | 360 | 210 | | | | | | | |
| 6 | 150 | 403 | 332 | 500 | 363 | 403 | 332 | 500 | 363 | 403 | 332 | 500 | 363 | 403 | 332 | 500 | 363 | | | |
| 8 | 200 | 502 | 416 | 500 | 377 | 502 | 417 | 500 | 377 | 502 | 417 | 500 | 377 | 502 | 417 | 500 | 377 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | WCB | | | | | WCB | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 304SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 304SS/CF8 | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Ball Seat | FILLTITE PTFE | | | | | FILLTITE PTFE | | | | | FILLTITE PTFE | | | | | FILLTITE PTFE | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B7/2H | | | | | B7/2H | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/Gear Unit | | | | | DI/Gear Unit | | | | | DI/Gear Unit | | | | | DI/Gear Unit | | | | |
| Standard/Approval | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | |
| Reference Page | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |





| Type | TDZ Series(Carbotite(3H)) | | | | | TDZ Series(Carbotite(3H)) | | | | | TDZ Series(Carbotite(3H)) | | | | | TDZ Series(Carbotite(3H)) | | | | |
|-----------------------|---|-----|-----|------|-----|---|-----|------|-----|-----|--|------|-----|-----|-----|---|-----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 10K | | | | | 150 | | | | | 10K | | | | | 150 | | | | |
| Fig | 10UTDZ3H/G-10UTDZ3H | | | | | 150UTDZ3HM/G-150UTDZ3HM | | | | | 10SCTDZ3H/G-10SCTDZ3H | | | | | 150SCTDZ3H/G-150SCTDZ3H | | | | |
| End Connection | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 1/2 | 15 | 108 | 108 | 130 | | 108 | 108 | 130 | | 108 | 108 | 130 | | 108 | 108 | 130 | | | | |
| 3/4 | 20 | 117 | 111 | 130 | | 117 | 111 | 130 | | 117 | 111 | 130 | | 117 | 111 | 130 | | | | |
| 1 | 25 | 127 | 124 | 160 | | 127 | 124 | 160 | | 127 | 124 | 160 | | 127 | 124 | 160 | | | | |
| 1 1/4 | 32 | 140 | 128 | 160 | | 140 | 128 | 160 | | | | | | | | | | | | |
| 1 1/2 | 40 | 165 | 134 | 230 | | 165 | 134 | 230 | | 165 | 134 | 230 | | 165 | 134 | 230 | | | | |
| 2 | 50 | 178 | 148 | 300 | | 178 | 148 | 300 | | 178 | 148 | 300 | | 178 | 148 | 300 | | | | |
| 2 1/2 | 65 | 190 | 209 | 600 | | 190 | 209 | 600 | | 190 | 209 | 600 | | 190 | 209 | 600 | | | | |
| 3 | 80 | 203 | 219 | 600 | | 203 | 219 | 600 | | 203 | 219 | 600 | | 203 | 219 | 600 | | | | |
| 4 | 100 | 229 | 251 | 1000 | | 229 | 251 | 1000 | | 229 | 251 | 1000 | | 229 | 251 | 1000 | | | | |
| 5 | 125 | 356 | 274 | 310 | 165 | 356 | 274 | 310 | 165 | 356 | 274 | 310 | 165 | 356 | 274 | 310 | 165 | | | |
| 6 | 150 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | | | |
| 8 | 200 | 457 | 417 | 500 | 377 | 457 | 417 | 500 | 377 | 457 | 417 | 500 | 377 | 457 | 417 | 500 | 377 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | WCB | | | | | WCB | | | | |
| Stem | 304SS | | | | | 316SS | | | | | 304SS | | | | | 304SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 304SS/CF8 | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Ball Seat | Carbon+329J1 | | | | | Carbon+329J1 | | | | | Carbon+329J1 | | | | | Carbon+329J1 | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B7/2H | | | | | B7/2H | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | |
| Reference Page | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |



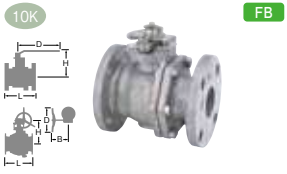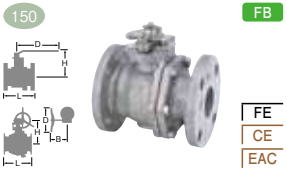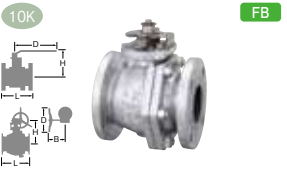
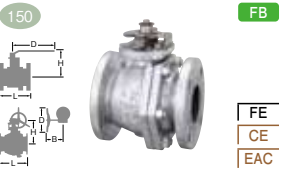
| Type | TDZ Series(Carbotite(3H)) | | | | | TDZ Series(Carbotite(3H)) | | | | | TDZ Series(Carbotite(3H)) | | | | | TDZ Series(Carbotite(3H)) | | | | |
|-----------------------|---|-----|-----|------|-----|---|-----|------|-----|-----|--|------|-----|-----|-----|---|-----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 20K | | | | | 300 | | | | | 20K | | | | | 300 | | | | |
| Fig | 20UTDZ3H/G-20UTDZ3H | | | | | 300UTDZ3HM/G-300UTDZ3HM | | | | | 20SCTDZ3H/G-20SCTDZ3H | | | | | 300SCTDZ3H/G-300SCTDZ3H | | | | |
| End Connection | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 1/2 | 15 | 140 | 108 | 130 | | 140 | 108 | 130 | | 140 | 108 | 130 | | 140 | 108 | 130 | | | | |
| 3/4 | 20 | 152 | 111 | 130 | | 152 | 111 | 130 | | 152 | 111 | 130 | | 152 | 111 | 130 | | | | |
| 1 | 25 | 165 | 124 | 160 | | 165 | 124 | 160 | | 165 | 124 | 160 | | 165 | 124 | 160 | | | | |
| 1 1/4 | 32 | 178 | 128 | 160 | | | | | | | | | | | | | | | | |
| 1 1/2 | 40 | 190 | 139 | 600 | | 190 | 139 | 600 | | 190 | 139 | 600 | | 190 | 139 | 600 | | | | |
| 2 | 50 | 216 | 148 | 600 | | 216 | 148 | 600 | | 216 | 148 | 600 | | 216 | 148 | 600 | | | | |
| 2 1/2 | 65 | 241 | 209 | 1000 | | 241 | 209 | 1000 | | 241 | 209 | 1000 | | 241 | 209 | 1000 | | | | |
| 3 | 80 | 283 | 219 | 1000 | | 283 | 219 | 1000 | | 283 | 219 | 1000 | | 283 | 219 | 1000 | | | | |
| 4 | 100 | 305 | 286 | 360 | 210 | 305 | 286 | 360 | 210 | 305 | 286 | 360 | 210 | 305 | 286 | 360 | 210 | | | |
| 5 | 125 | 381 | 302 | 360 | 210 | | | | | 381 | 302 | 360 | 210 | | | | | | | |
| 6 | 150 | 403 | 360 | 500 | 377 | 403 | 360 | 500 | 377 | 403 | 360 | 500 | 377 | 403 | 360 | 500 | 377 | | | |
| 8 | 200 | 502 | 488 | 500 | 377 | 502 | 489 | 500 | 377 | 502 | 489 | 500 | 377 | 502 | 489 | 500 | 377 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | WCB | | | | | WCB | | | | |
| Stem | 304SS | | | | | 316SS/630 for 4" & over | | | | | 304SS | | | | | 304SS | | | | |
| Ball | 304SS/CF8 | | | | | 316SS/CF8M | | | | | 304SS/CF8 | | | | | 304SS/CF8 | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Ball Seat | Carbon+329J1 | | | | | Carbon+329J1 | | | | | Carbon+329J1 | | | | | Carbon+329J1 | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B7/2H | | | | | B7/2H | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | |
| Reference Page | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | | P-T Rating : Page BAL56 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |

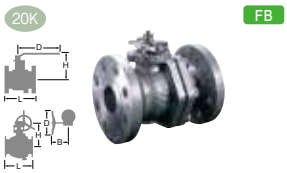

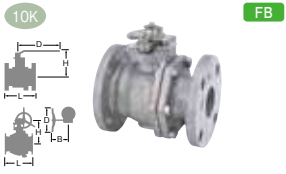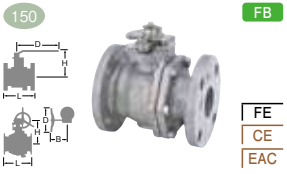
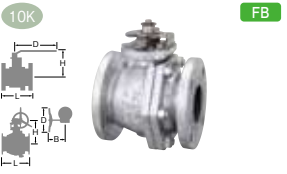
| Type | TDZ Series(Metal Seat(5H)) | | | | | TDZ Series(Metal Seat(5H)) | | | | | TDZ Series(Metal Seat(5H)) | | | | | TDZ Series(Metal Seat(5H)) | | | | |
|-----------------------|---|-----|-----|------|-----|---|-----|------|-----|-----|--|------|-----|-----|-----|---|-----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 10K | | | | | 150 | | | | | 10K | | | | | 150 | | | | |
| Fig | 10UTDZ5H/G-10UTDZ5H | | | | | 150UTDZ5HM/G-150UTDZ5HM | | | | | 10SCTDZ5H/G-10SCTDZ5H | | | | | 150SCTDZ5H/G-150SCTDZ5H | | | | |
| End Connection | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 1/2 | 15 | 108 | 108 | 130 | | 108 | 108 | 130 | | 108 | 108 | 130 | | 108 | 108 | 130 | | | | |
| 3/4 | 20 | 117 | 111 | 130 | | 117 | 111 | 130 | | 117 | 111 | 130 | | 117 | 111 | 130 | | | | |
| 1 | 25 | 127 | 124 | 160 | | 127 | 124 | 160 | | 127 | 124 | 160 | | 127 | 124 | 160 | | | | |
| 1 1/4 | 32 | 140 | 128 | 160 | | 140 | 128 | 160 | | | | | | | | | | | | |
| 1 1/2 | 40 | 165 | 134 | 230 | | 165 | 134 | 230 | | 165 | 134 | 230 | | 165 | 134 | 230 | | | | |
| 2 | 50 | 178 | 148 | 300 | | 178 | 148 | 300 | | 178 | 148 | 300 | | 178 | 148 | 300 | | | | |
| 2 1/2 | 65 | 190 | 209 | 600 | | 190 | 209 | 600 | | 190 | 209 | 600 | | 190 | 209 | 600 | | | | |
| 3 | 80 | 203 | 219 | 600 | | 203 | 219 | 600 | | 203 | 219 | 600 | | 203 | 219 | 600 | | | | |
| 4 | 100 | 229 | 251 | 1000 | | 229 | 251 | 1000 | | 229 | 251 | 1000 | | 229 | 251 | 1000 | | | | |
| 5 | 125 | 356 | 302 | 360 | 210 | 356 | 302 | 360 | 210 | 356 | 302 | 360 | 210 | 356 | 302 | 360 | 210 | | | |
| 6 | 150 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | | | |
| 8 | 200 | 457 | 417 | 500 | 377 | 457 | 417 | 500 | 377 | 457 | 417 | 500 | 377 | 457 | 417 | 500 | 377 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | WCB | | | | | WCB | | | | |
| Stem | Type 630 | | | | | Type 630 | | | | | Type 630 | | | | | Type 630 | | | | |
| Ball | 316SS with Cr. Plating | | | | | 316SS with Cr. Plating | | | | | 316SS with Cr. Plating | | | | | 316SS with Cr. Plating | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Ball Seat | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B7/2H | | | | | B7/2H | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | |
| Reference Page | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |
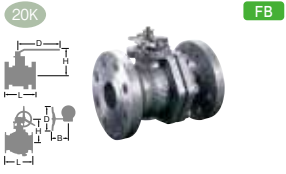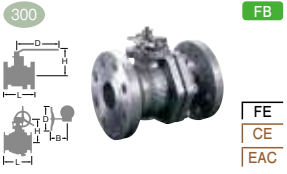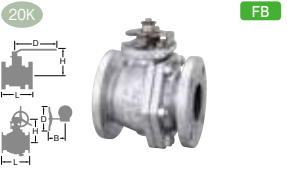
| Type | TDZ Series(Metal Seat(5H)) | | | | | TDZ Series(Metal Seat(5H)) | | | | | TDZ Series(Metal Seat(5H)) | | | | | TDZ Series(Metal Seat(5H)) | | | | |
|-----------------------|---|-----|-----|------|-----|---|-----|------|-----|-----|--|------|-----|-----|-----|---|-----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 20K | | | | | 300 | | | | | 20K | | | | | 300 | | | | |
| Fig | 20UTDZ5H/G-20UTDZ5H | | | | | 300UTDZ5HM/G-300UTDZ5HM | | | | | 20SCTDZ5H/G-20SCTDZ5H | | | | | 300SCTDZ5H/G-300SCTDZ5H | | | | |
| End Connection | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 1/2 | 15 | 140 | 108 | 130 | | 140 | 108 | 130 | | 140 | 108 | 130 | | 140 | 108 | 130 | | | | |
| 3/4 | 20 | 152 | 111 | 130 | | 152 | 111 | 130 | | 152 | 111 | 130 | | 152 | 111 | 130 | | | | |
| 1 | 25 | 165 | 124 | 160 | | 165 | 124 | 160 | | 165 | 124 | 160 | | 165 | 124 | 160 | | | | |
| 1 1/4 | 32 | 178 | 128 | 160 | | 178 | 128 | 160 | | | | | | | | | | | | |
| 1 1/2 | 40 | 190 | 139 | 600 | | 190 | 139 | 600 | | 190 | 139 | 600 | | 190 | 139 | 600 | | | | |
| 2 | 50 | 216 | 148 | 600 | | 216 | 148 | 600 | | 216 | 148 | 600 | | 216 | 148 | 600 | | | | |
| 2 1/2 | 65 | 241 | 209 | 1000 | | 241 | 209 | 1000 | | 241 | 209 | 1000 | | 241 | 209 | 1000 | | | | |
| 3 | 80 | 283 | 219 | 1000 | | 283 | 219 | 1000 | | 283 | 219 | 1000 | | 283 | 219 | 1000 | | | | |
| 4 | 100 | 305 | 286 | 360 | 210 | 305 | 286 | 360 | 210 | 305 | 286 | 360 | 210 | 305 | 286 | 360 | 210 | | | |
| 5 | 125 | 381 | 299 | 500 | 210 | 381 | 299 | 500 | 210 | 381 | 299 | 500 | 363 | | | | | | | |
| 6 | 150 | 403 | 360 | 500 | 377 | 403 | 360 | 500 | 377 | 403 | 360 | 500 | 377 | 403 | 360 | 500 | 377 | | | |
| 8 | 200 | 502 | 489 | 500 | 377 | 502 | 489 | 500 | 377 | 502 | 489 | 500 | 377 | 502 | 489 | 500 | 377 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | WCB | | | | | WCB | | | | |
| Stem | Type 630 | | | | | Type 630 | | | | | Type 630 | | | | | Type 630 | | | | |
| Ball | 316SS with Cr. Plating | | | | | 316SS with Cr. Plating | | | | | 316SS with Cr. Plating | | | | | 316SS with Cr. Plating | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Ball Seat | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B7/2H | | | | | B7/2H | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | |
| Reference Page | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |

| Type | TDZ Series(Metal Seat(6H)) | | | | | TDZ Series(Metal Seat(6H)) | | | | | TDZ Series(Metal Seat(6H)) | | | | | TDZ Series(Metal Seat(6H)) | | | | |
|-----------------------|---|-----|-----|------|-----|---|-----|------|-----|-----|--|-----|-----|-----|-----|---|-----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 10K | | | | | 150 | | | | | 10K | | | | | 150 | | | | |
| Fig | 10UTDZ6H/G-10UTDZ6H | | | | | 150UTDZ6HM/G-150UTDZ6HM | | | | | 10SCTDZ6H/G-10SCTDZ6H | | | | | 150SCTDZ6H/G-150SCTDZ6H | | | | |
| End Connection | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 1/2 | 15 | 108 | 108 | 130 | | 108 | 108 | 130 | | 108 | 108 | 130 | | 108 | 108 | 130 | | | | |
| 3/4 | 20 | 117 | 111 | 130 | | 117 | 111 | 130 | | 117 | 111 | 130 | | 117 | 111 | 130 | | | | |
| 1 | 25 | 127 | 124 | 160 | | 127 | 124 | 160 | | 127 | 124 | 160 | | 127 | 124 | 160 | | | | |
| 1 1/4 | 32 | 140 | 128 | 160 | | 140 | 128 | 160 | | | | | | | | | | | | |
| 1 1/2 | 40 | 165 | 134 | 230 | | 165 | 134 | 230 | | | | | | 165 | 134 | 230 | | | | |
| 2 | 50 | 178 | 148 | 300 | | 178 | 148 | 300 | | | | | | 178 | 148 | 300 | | | | |
| 2 1/2 | 65 | 190 | 209 | 600 | | 190 | 209 | 600 | | | | | | 190 | 209 | 600 | | | | |
| 3 | 80 | 203 | 219 | 600 | | 203 | 219 | 600 | | | | | | 203 | 219 | 600 | | | | |
| 4 | 100 | 229 | 251 | 1000 | | 229 | 251 | 1000 | | | | | | 229 | 251 | 1000 | | | | |
| 5 | 125 | 356 | 302 | 360 | 210 | 356 | 301 | 360 | 210 | 356 | 302 | 360 | 210 | 356 | 302 | 360 | 210 | | | |
| 6 | 150 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | 394 | 335 | 360 | 210 | | | |
| 8 | 200 | 457 | 417 | 500 | 377 | 457 | 417 | 500 | 377 | 457 | 417 | 500 | 377 | 457 | 417 | 500 | 377 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | WCB | | | | | WCB | | | | |
| Stem | Type 630 | | | | | Type 630 | | | | | Type 630 | | | | | Type 630 | | | | |
| Ball | 316SS with Ni-Cr Alloy HF | | | | | 316SS with Ni-Cr Alloy HF | | | | | 316SS with Ni-Cr Alloy HF | | | | | 316SS with Ni-Cr Alloy HF | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Ball Seat | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B7/2H | | | | | B7/2H | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | |
| Reference Page | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |
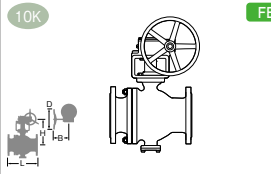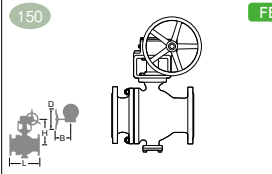
| Type | TDZ Series(Metal Seat(6H)) | | | | | TDZ Series(Metal Seat(6H)) | | | | | TDZ Series(Metal Seat(6H)) | | | | | TDZ Series(Metal Seat(6H)) | | | | |
|-----------------------|---|-----|-----|------|-----|---|-----|------|-----|-----|--|-----|-----|-----|-----|---|-----|--|--|--|
| Ball Valve |  | | | | |  | | | | |  | | | | |  | | | | |
| | 20K | | | | | 300 | | | | | 20K | | | | | 300 | | | | |
| Fig | 20UTDZ6H/G-20UTDZ6H | | | | | 300UTDZ6HM/G-300UTDZ6HM | | | | | 20SCTDZ6H/G-20SCTDZ6H | | | | | 300SCTDZ6H/G-300SCTDZ6H | | | | |
| End Connection | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 1/2 | 15 | 140 | 108 | 130 | | 140 | 108 | 130 | | 140 | 108 | 130 | | 140 | 108 | 130 | | | | |
| 3/4 | 20 | 152 | 111 | 130 | | 152 | 111 | 130 | | 152 | 111 | 130 | | 152 | 111 | 130 | | | | |
| 1 | 25 | 165 | 124 | 160 | | 165 | 124 | 160 | | 165 | 124 | 160 | | 165 | 124 | 160 | | | | |
| 1 1/4 | 32 | 178 | 128 | 160 | | | | | | | | | | | | | | | | |
| 1 1/2 | 40 | 190 | 139 | 600 | | 190 | 139 | 600 | | | | | | 190 | 139 | 600 | | | | |
| 2 | 50 | 216 | 148 | 600 | | 216 | 148 | 600 | | | | | | 216 | 148 | 600 | | | | |
| 2 1/2 | 65 | 241 | 209 | 1000 | | 241 | 209 | 1000 | | | | | | 241 | 209 | 1000 | | | | |
| 3 | 80 | 283 | 219 | 1000 | | 283 | 219 | 1000 | | | | | | 283 | 219 | 1000 | | | | |
| 4 | 100 | 305 | 286 | 360 | 210 | 305 | 286 | 360 | 210 | 305 | 286 | 360 | 210 | 305 | 286 | 360 | 210 | | | |
| 5 | 125 | 381 | 299 | 500 | 363 | | | | | 381 | 299 | 500 | 363 | | | | | | | |
| 6 | 150 | 403 | 360 | 500 | 377 | 403 | 360 | 500 | 377 | 403 | 360 | 500 | 377 | 403 | 360 | 500 | 377 | | | |
| 8 | 200 | 502 | 489 | 500 | 377 | 502 | 489 | 500 | 377 | 502 | 489 | 500 | 377 | 502 | 489 | 500 | 377 | | | |
| Body/Cap | CF8 | | | | | CF8M | | | | | WCB | | | | | WCB | | | | |
| Stem | Type 630 | | | | | Type 630 | | | | | Type 630 | | | | | Type 630 | | | | |
| Ball | 316SS with Ni-Cr Alloy HF | | | | | 316SS with Ni-Cr Alloy HF | | | | | 316SS with Ni-Cr Alloy HF | | | | | 316SS with Ni-Cr Alloy HF | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Ball Seat | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | | 316SS + Ni-Cr Alloy HF | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | B8/8 | | | | | B8/8 | | | | | B7/2H | | | | | B7/2H | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | | | | | | | ISO 17292, API 608 FE: API641, SIL3, PED/CE, TR-CU/ EAC | | | | |
| Reference Page | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | | P-T Rating : Page BAL57 | | | | |
| Remarks | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | | Anti-Static Design Anti-Blowout Stem Fire Safe Design | | | | |

| Type | Lambda Port (Flekseat) | | | | Lambda Port (Flekseat) | | | | Lambda Port (Flekseat) | | | | Lambda Port (Flekseat) | | | |
|-----------------------|---|-----|-------|------|---|-------|------|-----|--|-----|-----|-----|---|-----|-----|--|
| Ball Valve |  | | | |  | | | |  | | | |  | | | |
| | 10K | | | | 150 | | | | 10K | | | | 150 | | | |
| Fig | L-10UVC | | | | L-150UVC | | | | G-10UVC | | | | G-150UVC | | | |
| End Connection | JIS B2220 10K RF | | | | ASME B16.5 Class 150 RF | | | | JIS B2220 10K RF | | | | ASME B16.5 Class 150 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | B | L | H | D | B | |
| 1 | 25 | 127 | 181 | 160 | 127 | 181 | 160 | | | | | | | | | |
| 1 1/2 | 40 | 165 | 199 | 230 | 165 | 198 | 230 | | | | | | | | | |
| 2 | 50 | 178 | 205 | 230 | 178 | 204 | 230 | | | | | | | | | |
| 2 1/2 | 65 | 190 | 252 | 400 | 190 | 245 | 400 | | | | | | | | | |
| 3 | 80 | 203 | 259 | 400 | 203 | 252 | 400 | | | | | | | | | |
| 4 | 100 | 229 | 292 | 460 | 229 | 283 | 460 | | | | | | | | | |
| 5 | 125 | 356 | 314.5 | 460 | 356 | 305.5 | 460 | | | | | | | | | |
| 6 | 150 | 394 | 411 | 1000 | 394 | 392 | 1000 | 394 | 330 | 310 | 165 | 394 | 330 | 310 | 165 | |
| 8 | 200 | 457 | 483 | 1500 | 457 | 460 | 1500 | 457 | 410 | 360 | 210 | 457 | 410 | 360 | 210 | |
| 10 | 250 | | | | | | | 533 | 446 | 500 | 363 | 533 | 446 | 500 | 363 | |
| 12 | 300 | | | | | | | 610 | 524 | 500 | 377 | 610 | 524 | 500 | 377 | |
| 14 | 350 | | | | | | | 686 | 555 | 500 | 377 | 686 | 555 | 500 | 377 | |
| Body/Cap | CF8 | | | | CF8M | | | | CF8 | | | | CF8M | | | |
| Stem/Bottom Stem | 316SS | | | | 316SS | | | | 316SS | | | | 316SS | | | |
| Ball | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | |
| Gland Packing | PTFE | | | | PTFE | | | | PTFE | | | | PTFE | | | |
| Gasket | Ceramic PTFE | | | | Ceramic PTFE | | | | Ceramic PTFE | | | | Ceramic PTFE | | | |
| Ball Seat | 316SS | | | | 316SS | | | | 316SS | | | | 316SS | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | |
| Cap B/N | B8/8 | | | | B8/8 | | | | B8/8 | | | | B8/8 | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | |
| Handle | DI/CS | | | | DI/CS | | | | DI/CS | | | | DI/CS | | | |
| Reference Page | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | |
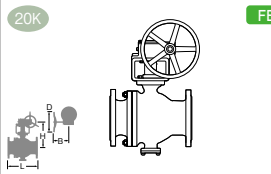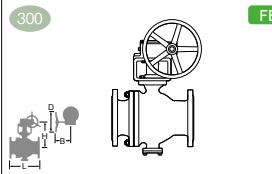
| Type | Lambda Port (Flekseat) | | | | Lambda Port (Flekseat) | | | | Lambda Port (Flekseat) | | | | Lambda Port (Flekseat) | | | |
|-----------------------|---|-----|-------|------|---|-------|------|-----|--|-----|-----|-----|---|-----|-----|--|
| Ball Valve |  | | | |  | | | |  | | | |  | | | |
| | 20K | | | | 300 | | | | 20K | | | | 300 | | | |
| Fig | L-20UVC | | | | L-300UVC | | | | G-20UVC | | | | G-300UVC | | | |
| End Connection | JIS B2220 20K RF | | | | ASME B16.5 Class 300 RF | | | | JIS B2220 20K RF | | | | ASME B16.5 Class 300 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | B | L | H | D | B | |
| 1 | 25 | 165 | 181 | 160 | 165 | 181 | 160 | | | | | | | | | |
| 1 1/2 | 40 | 190 | 198 | 230 | 190 | 198 | 230 | | | | | | | | | |
| 2 | 50 | 216 | 204 | 230 | 216 | 204 | 230 | | | | | | | | | |
| 2 1/2 | 65 | 241 | 245 | 400 | 241 | 245 | 400 | | | | | | | | | |
| 3 | 80 | 283 | 252 | 400 | 283 | 252 | 400 | | | | | | | | | |
| 4 | 100 | 305 | 283 | 460 | 305 | 283 | 460 | | | | | | | | | |
| 5 | 125 | 381 | 305.5 | 460 | 381 | 305.5 | 460 | | | | | | | | | |
| 6 | 150 | 403 | 392 | 1000 | 403 | 392 | 1000 | 403 | 330 | 310 | 165 | 403 | 330 | 310 | 165 | |
| 8 | 200 | 502 | 460 | 1500 | 502 | 460 | 1500 | 502 | 410 | 360 | 210 | 502 | 410 | 360 | 210 | |
| 10 | 250 | | | | | | | 568 | 446 | 500 | 363 | 568 | 446 | 500 | 363 | |
| Body/Cap | CF8 | | | | CF8M | | | | CF8 | | | | CF8M | | | |
| Stem/Bottom Stem | 316SS | | | | 316SS | | | | 316SS | | | | 316SS | | | |
| Ball | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | |
| Gland Packing | PTFE | | | | PTFE | | | | PTFE | | | | PTFE | | | |
| Gasket | Ceramic PTFE | | | | Ceramic PTFE | | | | Ceramic PTFE | | | | Ceramic PTFE | | | |
| Ball Seat | 316SS | | | | 316SS | | | | 316SS | | | | 316SS | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | |
| Cap B/N | B8/8 | | | | B8/8 | | | | B8/8 | | | | B8/8 | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | |
| Handle | DI/CS | | | | DI/CS | | | | DI/CS | | | | DI/CS | | | |
| Reference Page | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | |

| Type | Lambda Port (Knifeseat) | | | | Lambda Port (Knifeseat) | | | | Lambda Port (Knifeseat) | | | | Lambda Port (Knifeseat) | | | |
|-----------------------|---------------------------|-----|-------|------|---------------------------|-------|------|-----|---------------------------|-----|-----|-----|---------------------------|-----|-----|--|
| Ball Valve | | | | | | | | | | | | | | | | |
| | 10K | | | | 150 | | | | 10K | | | | 150 | | | |
| Fig | L-10UVCT | | | | L-150UVCTM | | | | G-10UVCT | | | | G-150UVCTM | | | |
| End Connection | JIS B2220 10K RF | | | | ASME B16.5 Class 150 RF | | | | JIS B2220 10K RF | | | | ASME B16.5 Class 150 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | B | L | H | D | B | |
| 1 | 25 | 127 | 181 | 160 | 127 | 181 | 160 | | | | | | | | | |
| 1 1/2 | 40 | 165 | 199 | 230 | 165 | 198 | 230 | | | | | | | | | |
| 2 | 50 | 178 | 205 | 230 | 178 | 204 | 230 | | | | | | | | | |
| 2 1/2 | 65 | 190 | 252 | 400 | 190 | 245 | 400 | | | | | | | | | |
| 3 | 80 | 203 | 259 | 400 | 203 | 252 | 400 | | | | | | | | | |
| 4 | 100 | 229 | 292 | 460 | 229 | 283 | 460 | | | | | | | | | |
| 5 | 125 | 356 | 314.5 | 460 | 356 | 305.5 | 460 | | | | | | | | | |
| 6 | 150 | 394 | 411 | 1000 | 394 | 392 | 1000 | 394 | 330 | 310 | 165 | 394 | 330 | 310 | 165 | |
| 8 | 200 | 457 | 483 | 1500 | 457 | 460 | 1500 | 457 | 410 | 360 | 210 | 457 | 410 | 360 | 210 | |
| 10 | 250 | | | | | | | 533 | 446 | 500 | 363 | 533 | 446 | 500 | 363 | |
| 12 | 300 | | | | | | | 610 | 524 | 500 | 377 | 610 | 524 | 500 | 377 | |
| Body/Cap | CF8 | | | | CF8M | | | | CF8 | | | | CF8M | | | |
| Stem/Bottom Stem | 316SS | | | | 316SS | | | | 316SS | | | | 316SS | | | |
| Ball | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | |
| Gland Packing | PTFE | | | | PTFE | | | | PTFE | | | | PTFE | | | |
| Gasket | Ceramic PTFE | | | | Ceramic PTFE | | | | Ceramic PTFE | | | | Ceramic PTFE | | | |
| Ball Seat | 316SS | | | | 316SS | | | | 316SS | | | | 316SS | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | |
| Cap B/N | B8/8 | | | | B8/8 | | | | B8/8 | | | | B8/8 | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | |
| Handle | DI/CS | | | | DI/CS | | | | | | | | | | | |
| Reference Page | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | |





| Type | Lambda Port (Knifeseat) | | | | Lambda Port (Knifeseat) | | | | Lambda Port (Knifeseat) | | | | Lambda Port (Knifeseat) | | | |
|-----------------------|---------------------------|-----|-------|------|---------------------------|-------|------|-----|---------------------------|-----|-----|-----|---------------------------|-----|-----|--|
| Ball Valve | | | | | | | | | | | | | | | | |
| | 10K | | | | 150 | | | | 10K | | | | 150 | | | |
| Fig | L-20UVCT | | | | L-300UVCTM | | | | G-20UVCT | | | | G-300UVCTM | | | |
| End Connection | JIS B2220 20K RF | | | | ASME B16.5 Class 300 RF | | | | JIS B2220 20K RF | | | | ASME B16.5 Class 300 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | B | L | H | D | B | |
| 1 | 25 | 165 | 181 | 160 | 165 | 181 | 160 | | | | | | | | | |
| 1 1/2 | 40 | 190 | 198 | 230 | 190 | 198 | 230 | | | | | | | | | |
| 2 | 50 | 216 | 204 | 230 | 216 | 204 | 230 | | | | | | | | | |
| 2 1/2 | 65 | 241 | 245 | 400 | 241 | 245 | 400 | | | | | | | | | |
| 3 | 80 | 283 | 252 | 400 | 283 | 252 | 400 | | | | | | | | | |
| 4 | 100 | 305 | 283 | 460 | 305 | 283 | 460 | | | | | | | | | |
| 5 | 125 | 381 | 305.5 | 460 | 381 | 305.5 | 460 | | | | | | | | | |
| 6 | 150 | 403 | 392 | 1000 | 403 | 392 | 1000 | 403 | 330 | 310 | 165 | 403 | 330 | 310 | 165 | |
| 8 | 200 | 502 | 460 | 1500 | 502 | 460 | 1500 | 502 | 410 | 360 | 210 | 502 | 410 | 360 | 210 | |
| 10 | 250 | | | | | | | 568 | 446 | 500 | 363 | 568 | 446 | 500 | 363 | |
| Body/Cap | CF8 | | | | CF8M | | | | CF8 | | | | CF8M | | | |
| Stem/Bottom Stem | 316SS | | | | 316SS | | | | 316SS | | | | 316SS | | | |
| Ball | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | | CF8M + Cr Plating: A Port | | | |
| Gland Packing | PTFE | | | | PTFE | | | | PTFE | | | | PTFE | | | |
| Gasket | Ceramic PTFE | | | | Ceramic PTFE | | | | Ceramic PTFE | | | | Ceramic PTFE | | | |
| Ball Seat | 316SS | | | | 316SS | | | | 316SS | | | | 316SS | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | |
| Cap B/N | B8/8 | | | | B8/8 | | | | B8/8 | | | | B8/8 | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | |
| Handle | DI/CS | | | | DI/CS | | | | | | | | | | | |
| Reference Page | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | | P-T Rating : Page BAL60 | | | |





| Type | 3TC (T60S) Series | | | | | | 3TC (T60S) Series | | | | 3TCR (T60S) Series | | | | 3TCR (T60S) Series | | | | | |
|-----------------------|---|-----------------------|-----|-----|-----|------|--|-------------------------|-----|------|---|-------------------------|-----|------|--|---------------------------|-----|--|--|--|
| Ball Valve | | | | | | | | | | | | | | | | | | | | |
| | Fig | 10UF3TCSM/G-10UF3TCSM | | | | | | 150UF3TCSM/G-150UF3TCSM | | | | 10UF3TCRSM/G-10UF3TCRSM | | | | 150UF3TCRSM/G-150UF3TCRSM | | | | |
| End Connection | JIS B2220 10K RF | | | | | | ASME B16.5 Class 150 RF | | | | JIS B2220 10K RF | | | | ASME B16.5 Class 150 RF | | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 2 | 50 | 178 | 159 | 300 | | 178 | 159 | 300 | | | | | | 203 | 159 | 300 | | | | |
| 3 | 80 | 203 | 201 | 400 | | 203 | 201 | 400 | | 203 | 159 | 300 | | 229 | 201 | 400 | | | | |
| 4 | 100 | 229 | 260 | 450 | | 229 | 260 | 450 | | 229 | 201 | 400 | | 229 | 201 | 400 | | | | |
| 6 | 150 | 394 | 326 | 750 | | 394 | 326 | 750 | | 394 | 260 | 450 | | 394 | 260 | 450 | | | | |
| 8 | 200 | 457 | 316 | 500 | 305 | 457 | 316 | 500 | 305 | 457 | 326 | 750 | | 457 | 326 | 750 | | | | |
| 10 | 250 | 533 | 372 | 600 | 396 | 533 | 372 | 600 | 396 | 533 | 316 | 500 | 305 | 533 | 316 | 500 | 305 | | | |
| 12 | 300 | 610 | 407 | 600 | 396 | 610 | 407 | 600 | 396 | 610 | 372 | 600 | 396 | 610 | 372 | 600 | 396 | | | |
| 14 | 350 | 686 | 441 | 600 | 396 | 686 | 441 | 600 | 396 | 686 | 407 | 600 | 396 | 686 | 407 | 600 | 396 | | | |
| 16 | 400 | 762 | 511 | 800 | 567 | 762 | 511 | 800 | 567 | 762 | 441 | 600 | 396 | 762 | 441 | 600 | 396 | | | |
| 18 | 450 | 864 | 551 | 800 | 567 | 864 | 551 | 800 | 567 | 864 | 511 | 800 | 567 | 864 | 511 | 800 | 567 | | | |
| 20 | 500 | 914 | 613 | 800 | 567 | 914 | 613 | 800 | 567 | 914 | 551 | 800 | 568 | 914 | 551 | 800 | 568 | | | |
| 24 | 600 | 1067 | 687 | 800 | 567 | 1067 | 687 | 800 | 567 | 1067 | 613 | 800 | 569 | 1067 | 613 | 800 | 569 | | | |
| Body/Cap | A182 Gr.F316 | | | | | | A182 Gr.F316 | | | | A182 Gr.F316 | | | | A182 Gr.F316 | | | | | |
| Stem/Bottom Stem | A479 Type 316 or A479 S31803 | | | | | | A479 Type 316 or A479 S31803 | | | | A479 Type 316 or A479 S31803 | | | | A479 Type 316 or A479 S31803 | | | | | |
| Ball | A182 Gr.F316 | | | | | | A182 Gr.F316 | | | | A182 Gr.F316 | | | | A182 Gr.F316 | | | | | |
| Gland Packing/O-ring | Flexible Graphite/FKM | | | | | | Flexible Graphite/FKM | | | | Flexible Graphite/FKM | | | | Flexible Graphite/FKM | | | | | |
| Gasket/O-ring | Flexible Graphite/FKM | | | | | | Flexible Graphite/FKM | | | | Flexible Graphite/FKM | | | | Flexible Graphite/FKM | | | | | |
| Ball Seat | G/F MoS2 PTFE | | | | | | G/F MoS2 PTFE | | | | G/F MoS2 PTFE | | | | G/F MoS2 PTFE | | | | | |
| Bore | Full Bore | | | | | | Full Bore | | | | Reduced Bore | | | | Reduced Bore | | | | | |
| Cap B/N | B8M/8M | | | | | | B8M/8M | | | | B8M/8M | | | | B8M/8M | | | | | |
| Seat Spring | B637 N07750 (INCONEL® X750) | | | | | | B637 N07750 (INCONEL® X750) | | | | B637 N07750 (INCONEL® X750) | | | | B637 N07750 (INCONEL® X750) | | | | | |
| Plug/Vent Valve | 316L/316L+WC (Tungsten Carbide) | | | | | | 316L/316L+WC (Tungsten Carbide) | | | | 316L/316L+WC (Tungsten Carbide) | | | | 316L/316L+WC (Tungsten Carbide) | | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | | |
| Handle | DI/CS/Gear Unit | | | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | | |
| Standard/Approval | | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | |
| Reference Page | P-T Rating : Page BAL54 | | | | | | P-T Rating : Page BAL54 | | | | P-T Rating : Page BAL54 | | | | P-T Rating : Page BAL54 | | | | | |
| Remarks | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | |

| Type | 3TC (T60S) Series | | | | | | 3TC (T60S) Series | | | | 3TCR (T60S) Series | | | | 3TCR (T60S) Series | | | | | |
|-----------------------|---|---------------------|-----|-----|-----|------|--|-----------------------|-----|------|---|-----------------------|-----|------|--|-------------------------|-----|--|--|--|
| Ball Valve | | | | | | | | | | | | | | | | | | | | |
| | Fig | 10SF3TCS/G-10SF3TCS | | | | | | 150SF3TCS/G-150SF3TCS | | | | 10SF3TCRS/G-10SF3TCRS | | | | 150SF3TCRS/G-150SF3TCRS | | | | |
| End Connection | JIS B2220 10K RF | | | | | | ASME B16.5 Class 150 RF | | | | JIS B2220 10K RF | | | | ASME B16.5 Class 150 RF | | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 2 | 50 | 178 | 159 | 300 | | 178 | 159 | 300 | | | | | | 203 | 159 | 300 | | | | |
| 3 | 80 | 203 | 201 | 400 | | 203 | 201 | 400 | | 203 | 159 | 300 | | 229 | 201 | 400 | | | | |
| 4 | 100 | 229 | 260 | 450 | | 229 | 260 | 450 | | 229 | 201 | 400 | | 229 | 201 | 400 | | | | |
| 6 | 150 | 394 | 326 | 750 | | 394 | 326 | 750 | | 394 | 260 | 450 | | 394 | 260 | 450 | | | | |
| 8 | 200 | 457 | 316 | 500 | 305 | 457 | 316 | 500 | 305 | 457 | 326 | 750 | | 457 | 326 | 750 | | | | |
| 10 | 250 | 533 | 372 | 600 | 396 | 533 | 372 | 600 | 396 | 533 | 316 | 500 | 305 | 533 | 316 | 500 | 305 | | | |
| 12 | 300 | 610 | 407 | 600 | 396 | 610 | 407 | 600 | 396 | 610 | 372 | 600 | 396 | 610 | 372 | 600 | 396 | | | |
| 14 | 350 | 686 | 441 | 600 | 396 | 686 | 441 | 600 | 396 | 686 | 407 | 600 | 396 | 686 | 407 | 600 | 396 | | | |
| 16 | 400 | 762 | 511 | 800 | 567 | 762 | 511 | 800 | 567 | 762 | 441 | 600 | 396 | 762 | 441 | 600 | 396 | | | |
| 18 | 450 | 864 | 551 | 800 | 567 | 864 | 551 | 800 | 567 | 864 | 511 | 800 | 567 | 864 | 511 | 800 | 567 | | | |
| 20 | 500 | 914 | 613 | 800 | 567 | 914 | 613 | 800 | 567 | 914 | 551 | 800 | 568 | 914 | 551 | 800 | 568 | | | |
| 24 | 600 | 1067 | 687 | 800 | 567 | 1067 | 687 | 800 | 567 | 1067 | 613 | 800 | 569 | 1067 | 613 | 800 | 569 | | | |
| Body/Cap | A105 | | | | | | A105 | | | | A105 | | | | A105 | | | | | |
| Stem/Bottom Stem | A479 Type 316 or A479 S31803 | | | | | | A479 Type 316 or A479 S31803 | | | | A479 Type 316 or A479 S31803 | | | | A479 Type 316 or A479 S31803 | | | | | |
| Ball | A105+ENP | | | | | | A105+ENP | | | | A105+ENP | | | | A105+ENP | | | | | |
| Gland Packing/O-ring | Flexible Graphite/H-NBR | | | | | | Flexible Graphite/H-NBR | | | | Flexible Graphite/H-NBR | | | | Flexible Graphite/H-NBR | | | | | |
| Gasket/O-ring | Flexible Graphite/H-NBR | | | | | | Flexible Graphite/H-NBR | | | | Flexible Graphite/H-NBR | | | | Flexible Graphite/H-NBR | | | | | |
| Ball Seat | G/F MoS2 PTFE | | | | | | G/F MoS2 PTFE | | | | G/F MoS2 PTFE | | | | G/F MoS2 PTFE | | | | | |
| Bore | Full Bore | | | | | | Full Bore | | | | Reduced Bore | | | | Reduced Bore | | | | | |
| Cap B/N | B7M/2HM | | | | | | B7M/2HM | | | | B7M/2HM | | | | B7M/2HM | | | | | |
| Seat Spring | B637 N07750 (INCONEL® X750) | | | | | | B637 N07750 (INCONEL® X750) | | | | B637 N07750 (INCONEL® X750) | | | | B637 N07750 (INCONEL® X750) | | | | | |
| Plug/Vent Valve | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | | |
| Handle | DI/CS/Gear Unit | | | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | | | |
| Standard/Approval | | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | |
| Reference Page | P-T Rating : Page BAL54 | | | | | | P-T Rating : Page BAL54 | | | | P-T Rating : Page BAL54 | | | | P-T Rating : Page BAL54 | | | | | |
| Remarks | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | |

| Type | 3TC (T60S) Series | | | | | 3TC (T60S) Series | | | | | 3TCR (T60S) Series | | | | | 3TCR (T60S) Series | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------|---|------------------|-----|-----|-----|--|-------------------------|-----|-----|------|---|------------------|-----|------|-----|--|-------------------------|------|-----|-----|---------------------------|--|--|--|--|--|--|--|--|--|-----------------------------|--|--|--|--|--|--|--|--|--|
| Ball Valve | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fig | 10SF3TCSBL/G-10SF3TCSBL | | | | | | | | | | 150SF3TCSBL/G-150SF3TCSBL | | | | | | | | | | 10SF3TCRSBL/G-10SF3TCRSBL | | | | | | | | | | 150SF3TCRSBL/G-150SF3TCRSBL | | | | | | | | | |
| End Connection | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | JIS B2220 10K RF | | | | | ASME B16.5 Class 150 RF | | | | | | | | | | | | | | | | | | | | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | | | | | | | | | | | | | | | | | |
| 2 | 50 | 178 | 159 | 300 | | 178 | 159 | 300 | | | | | | 203 | 159 | 300 | | 203 | 159 | 300 | | | | | | | | | | | | | | | | | | | | |
| 3 | 80 | 203 | 201 | 400 | | 203 | 201 | 400 | | 203 | 159 | 300 | | 229 | 201 | 400 | | 229 | 201 | 400 | | | | | | | | | | | | | | | | | | | | |
| 4 | 100 | 229 | 260 | 450 | | 229 | 260 | 450 | | 394 | 260 | 450 | | 394 | 260 | 450 | | 394 | 260 | 450 | | | | | | | | | | | | | | | | | | | | |
| 6 | 150 | 394 | 326 | 750 | | 394 | 326 | 750 | | 457 | 326 | 750 | | 457 | 326 | 750 | | 457 | 326 | 750 | | | | | | | | | | | | | | | | | | | | |
| 8 | 200 | 457 | 316 | 500 | 305 | 457 | 316 | 500 | 305 | 533 | 316 | 500 | 305 | 533 | 316 | 500 | 305 | 533 | 316 | 500 | 305 | | | | | | | | | | | | | | | | | | | |
| 10 | 250 | 533 | 372 | 600 | 396 | 533 | 372 | 600 | 396 | 610 | 372 | 600 | 396 | 610 | 372 | 600 | 396 | 610 | 372 | 600 | 396 | | | | | | | | | | | | | | | | | | | |
| 12 | 300 | 610 | 407 | 600 | 396 | 610 | 407 | 600 | 396 | 686 | 441 | 600 | 396 | 686 | 441 | 600 | 396 | 686 | 441 | 600 | 396 | | | | | | | | | | | | | | | | | | | |
| 14 | 350 | 686 | 441 | 600 | 396 | 686 | 441 | 600 | 396 | 762 | 511 | 800 | 567 | 762 | 511 | 800 | 567 | 762 | 511 | 800 | 567 | | | | | | | | | | | | | | | | | | | |
| 16 | 400 | 762 | 511 | 800 | 567 | 762 | 511 | 800 | 567 | 864 | 551 | 800 | 567 | 864 | 551 | 800 | 567 | 864 | 551 | 800 | 567 | | | | | | | | | | | | | | | | | | | |
| 18 | 450 | 864 | 551 | 800 | 567 | 864 | 551 | 800 | 567 | 914 | 613 | 800 | 567 | 914 | 613 | 800 | 567 | 914 | 613 | 800 | 567 | | | | | | | | | | | | | | | | | | | |
| 20 | 500 | 914 | 613 | 800 | 567 | 914 | 613 | 800 | 567 | 1067 | 613 | 800 | 569 | 1067 | 613 | 800 | 569 | 1067 | 613 | 800 | 567 | | | | | | | | | | | | | | | | | | | |
| 24 | 600 | 1067 | 687 | 800 | 567 | 1067 | 687 | 800 | 567 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Body/Cap | LF2 | | | | | LF2 | | | | | LF2 | | | | | LF2 | | | | | | | | | | | | | | | | | | | | | | | | |
| Stem/Bottom Stem | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | | | | | | | | | | | | | | | | | | | | |
| Ball | LF2+ENP | | | | | LF2+ENP | | | | | LF2+ENP | | | | | LF2+ENP | | | | | | | | | | | | | | | | | | | | | | | | |
| Gland Packing/O-ring | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | | | | | | | | | | | | | | | | | | | | | |
| Gasket/O-ring | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | | | | | | | | | | | | | | | | | | | | | |
| Ball Seat | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | | | | | | | | | | | | | | | | | | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Reduced Bore | | | | | Reduced Bore | | | | | | | | | | | | | | | | | | | | | | | | |
| Cap B/N | L7M/7M | | | | | L7M/7M | | | | | L7M/7M | | | | | L7M/7M | | | | | | | | | | | | | | | | | | | | | | | | |
| Seat Spring | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | | | | | | | | | | | | | | | | | | | | |
| Plug/Vent Valve | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | | | | | | | | | | | | | | | | | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | | | | | | | | | | | | | | | | | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | | | | | | | | | | | | | | | | | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | | | | | | | | | | | | | | | | | | | | |
| Standard/Approval | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | | | | | | | | | | | | | | | | | | | |
| Reference Page | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | | | | | | | | | | | | | | | | | | | | |
| Remarks | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | | | | | | | | | | | | | | | | | | | | |





| Type | 3TC (T60S) Series | | | | | 3TC (T60S) Series | | | | | 3TCR (T60S) Series | | | | | 3TCR (T60S) Series | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------------|---|------------------|-----|-----|-----|--|-------------------------|-----|-----|------|---|------------------|-----|------|-----|--|-------------------------|------|-----|-----|-------------------------|--|--|--|--|--|--|--|--|--|---------------------------|--|--|--|--|--|--|--|--|--|
| Ball Valve | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fig | 20UF3TCSM/G-20UF3TCSM | | | | | | | | | | 300UF3TCSM/G-300UF3TCSM | | | | | | | | | | 20UF3TCRSM/G-20UF3TCRSM | | | | | | | | | | 300UF3TCRSM/G-300UF3TCRSM | | | | | | | | | |
| End Connection | | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | | | | | | | | | | | | | | | | | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | | | | | | | | | | | | | | | | | |
| 2 | 50 | 216 | 159 | 300 | | 216 | 159 | 300 | | | | | | 283 | 159 | 300 | | 283 | 159 | 300 | | | | | | | | | | | | | | | | | | | | |
| 3 | 80 | 283 | 201 | 400 | | 283 | 198 | 400 | | 283 | 159 | 300 | | 305 | 198 | 400 | | 305 | 198 | 400 | | | | | | | | | | | | | | | | | | | | |
| 4 | 100 | 305 | 260 | 450 | | 305 | 254 | 450 | | 403 | 260 | 450 | | 403 | 254 | 450 | | 403 | 254 | 450 | | | | | | | | | | | | | | | | | | | | |
| 6 | 150 | 403 | 326 | 750 | | 403 | 326 | 750 | | 502 | 326 | 750 | | 502 | 326 | 750 | | 502 | 326 | 750 | | | | | | | | | | | | | | | | | | | | |
| 8 | 200 | 502 | 316 | 500 | 305 | 502 | 316 | 500 | 305 | 568 | 316 | 500 | 305 | 568 | 316 | 500 | 305 | 568 | 316 | 500 | 305 | | | | | | | | | | | | | | | | | | | |
| 10 | 250 | 568 | 372 | 600 | 396 | 568 | 372 | 600 | 396 | 648 | 372 | 600 | 396 | 648 | 372 | 600 | 396 | 648 | 372 | 600 | 396 | | | | | | | | | | | | | | | | | | | |
| 12 | 300 | 648 | 415 | 600 | 396 | 648 | 415 | 600 | 396 | 762 | 415 | 600 | 396 | 762 | 415 | 600 | 396 | 762 | 415 | 600 | 396 | | | | | | | | | | | | | | | | | | | |
| 14 | 350 | 762 | 441 | 600 | 396 | 762 | 441 | 600 | 396 | 838 | 441 | 600 | 396 | 838 | 441 | 600 | 396 | 838 | 441 | 600 | 396 | | | | | | | | | | | | | | | | | | | |
| 16 | 400 | 838 | 511 | 800 | 567 | 838 | 511 | 800 | 567 | 914 | 511 | 800 | 567 | 914 | 511 | 800 | 567 | 914 | 511 | 800 | 567 | | | | | | | | | | | | | | | | | | | |
| 18 | 450 | 914 | 551 | 800 | 567 | 914 | 551 | 800 | 567 | 991 | 613 | 800 | 567 | 991 | 613 | 800 | 567 | 991 | 613 | 800 | 567 | | | | | | | | | | | | | | | | | | | |
| 20 | 500 | 991 | 613 | 800 | 567 | 991 | 613 | 800 | 567 | 1143 | 613 | 800 | 567 | 1143 | 613 | 800 | 567 | 1143 | 613 | 800 | 567 | | | | | | | | | | | | | | | | | | | |
| 24 | 600 | 1143 | 695 | 800 | 581 | 1143 | 695 | 800 | 581 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Body/Cap | A182 Gr.F316 | | | | | A182 Gr.F316 | | | | | A182 Gr.F316 | | | | | A182 Gr.F316 | | | | | | | | | | | | | | | | | | | | | | | | |
| Stem/Bottom Stem | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | | | | | | | | | | | | | | | | | | | | |
| Ball | A182 Gr.F316 | | | | | A182 Gr.F316 | | | | | A182 Gr.F316 | | | | | A182 Gr.F316 | | | | | | | | | | | | | | | | | | | | | | | | |
| Gland Packing/O-ring | Flexible Graphite/FKM | | | | | Flexible Graphite/FKM | | | | | Flexible Graphite/FKM | | | | | Flexible Graphite/FKM | | | | | | | | | | | | | | | | | | | | | | | | |
| Gasket/O-ring | Flexible Graphite/FKM | | | | | Flexible Graphite/FKM | | | | | Flexible Graphite/FKM | | | | | Flexible Graphite/FKM | | | | | | | | | | | | | | | | | | | | | | | | |
| Ball Seat | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | | | | | | | | | | | | | | | | | | | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Reduced Bore | | | | | Reduced Bore | | | | | | | | | | | | | | | | | | | | | | | | |
| Cap B/N | B8M/8M | | | | | B8M/8M | | | | | B8M/8M | | | | | B8M/8M | | | | | | | | | | | | | | | | | | | | | | | | |
| Seat Spring | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | | | | | | | | | | | | | | | | | | | | |
| Plug/Vent Valve | 316L/316L+WC (Tungsten Carbide) | | | | | 316L/316L+WC (Tungsten Carbide) | | | | | 316L/316L+WC (Tungsten Carbide) | | | | | 316L/316L+WC (Tungsten Carbide) | | | | | | | | | | | | | | | | | | | | | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | | | | | | | | | | | | | | | | | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | | | | | | | | | | | | | | | | | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | | | | | | | | | | | | | | | | | | | | |
| Standard/Approval | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | | | | | | | | | | | | | | | | | | | |
| Reference Page | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | | | | | | | | | | | | | | | | | | | | |
| Remarks | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | | | | | | | | | | | | | | | | | | | | |





| Type | 3TC (T60S) Series | | | | | 3TC (T60S) Series | | | | | 3TCR (T60S) Series | | | | 3TCR (T60S) Series | | | |
|-----------------------|---|------|-----|-----|-----|--|-----|-----|-----|------|--|-----|-----|------|--|-----|-----|--|
| Ball Valve |  | | | | |  | | | | |  | | | |  | | | |
| | FB | | | | | FB | | | | | RB | | | | RB | | | |
| Fig | 20SF3TCS/G-20SF3TCS | | | | | 300SF3TCS/G-300SF3TCS | | | | | 20SF3TCRS/G-20SF3TCRS | | | | 300SF3TCRS/G-300SF3TCRS | | | |
| End Connection | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | | JIS B2220 20K RF | | | | ASME B16.5 Class 300 RF | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | |
| 2 | 50 | 216 | 159 | 300 | | 216 | 159 | 300 | | 283 | 159 | 300 | | 283 | 159 | 300 | | |
| 3 | 80 | 283 | 201 | 400 | | 283 | 198 | 400 | | 305 | 201 | 400 | | 305 | 201 | 400 | | |
| 4 | 100 | 305 | 260 | 450 | | 305 | 254 | 450 | | 403 | 260 | 450 | | 403 | 260 | 450 | | |
| 6 | 150 | 403 | 326 | 750 | | 403 | 326 | 750 | | 502 | 326 | 750 | | 502 | 326 | 750 | | |
| 8 | 200 | 502 | 316 | 500 | 305 | 502 | 316 | 500 | 305 | 648 | 372 | 600 | 396 | 648 | 372 | 600 | 396 | |
| 10 | 250 | 568 | 372 | 600 | 396 | 568 | 372 | 600 | 396 | 762 | 415 | 600 | 396 | 762 | 415 | 600 | 396 | |
| 12 | 300 | 648 | 415 | 600 | 396 | 648 | 415 | 600 | 396 | 838 | 441 | 600 | 396 | 838 | 441 | 600 | 396 | |
| 14 | 350 | 762 | 441 | 600 | 396 | 762 | 441 | 600 | 396 | 914 | 511 | 800 | 567 | 914 | 511 | 800 | 567 | |
| 16 | 400 | 838 | 511 | 800 | 567 | 838 | 511 | 800 | 567 | 991 | 551 | 800 | 567 | 991 | 551 | 800 | 567 | |
| 18 | 450 | 914 | 551 | 800 | 567 | 914 | 551 | 800 | 567 | 1143 | 613 | 800 | 567 | 1143 | 613 | 800 | 567 | |
| 20 | 500 | 991 | 613 | 800 | 567 | 991 | 613 | 800 | 567 | | | | | | | | | |
| 24 | 600 | 1143 | 695 | 800 | 580 | 1143 | 695 | 800 | 580 | | | | | | | | | |
| Body/Cap | A105 | | | | | A105 | | | | | A105 | | | | A105 | | | |
| Stem/Bottom Stem | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | A479 Type 316 or A479 S31803 | | | |
| Ball | A105+ENP | | | | | A105+ENP | | | | | A105+ENP | | | | A105+ENP | | | |
| Gland Packing/O-ring | Flexible Graphite/H-NBR | | | | | Flexible Graphite/H-NBR | | | | | Flexible Graphite/H-NBR | | | | Flexible Graphite/H-NBR | | | |
| Gasket/O-ring | Flexible Graphite/H-NBR | | | | | Flexible Graphite/H-NBR | | | | | Flexible Graphite/H-NBR | | | | Flexible Graphite/H-NBR | | | |
| Ball Seat | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | G/F MoS2 PTFE | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Reduced Bore | | | | Reduced Bore | | | |
| Cap B/N | B7M/2HM | | | | | B7M/2HM | | | | | B7M/2HM | | | | B7M/2HM | | | |
| Seat Spring | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | B637 N07750 (INCONEL® X750) | | | |
| Plug/Vent Valve | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | ISO 5211 | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | |
| Standard/Approval | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | |
| Reference Page | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | P-T Rating : Page BAL54 | | | |
| Remarks | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | |





| Type | 3TC (T60S) Series | | | | | 3TC (T60S) Series | | | | | 3TCR (T60S) Series | | | | 3TCR (T60S) Series | | | |
|-----------------------|---|------|-----|-----|-----|--|-----|-----|-----|------|--|-----|-----|------|--|-----|-----|--|
| Ball Valve |  | | | | |  | | | | |  | | | |  | | | |
| | FB | | | | | FB | | | | | RB | | | | RB | | | |
| Fig | 20SF3TCSBL/G-20SF3TCSBL | | | | | 300SF3TCSBL/G-300SF3TCSBL | | | | | 20SF3TCRSBL/G20SF3TCRSBL | | | | 300SF3TCRSBL/G-300SF3TCRSBL | | | |
| End Connection | JIS B2220 20K RF | | | | | ASME B16.5 Class 300 RF | | | | | JIS B2220 20K RF | | | | ASME B16.5 Class 300 RF | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | |
| 2 | 50 | 216 | 159 | 300 | | 216 | 159 | 300 | | 283 | 159 | 300 | | 283 | 159 | 300 | | |
| 3 | 80 | 283 | 201 | 400 | | 283 | 201 | 400 | | 305 | 201 | 400 | | 305 | 201 | 400 | | |
| 4 | 100 | 305 | 260 | 450 | | 305 | 260 | 450 | | 403 | 260 | 450 | | 403 | 260 | 450 | | |
| 6 | 150 | 403 | 326 | 750 | | 403 | 326 | 750 | | 502 | 326 | 750 | | 502 | 326 | 750 | | |
| 8 | 200 | 502 | 316 | 500 | 305 | 502 | 316 | 500 | 305 | 648 | 372 | 600 | 396 | 648 | 372 | 600 | 396 | |
| 10 | 250 | 568 | 372 | 600 | 396 | 568 | 372 | 600 | 396 | 762 | 415 | 600 | 396 | 762 | 415 | 600 | 396 | |
| 12 | 300 | 648 | 415 | 600 | 396 | 648 | 415 | 600 | 396 | 838 | 441 | 600 | 396 | 838 | 441 | 600 | 396 | |
| 14 | 350 | 762 | 441 | 600 | 396 | 762 | 441 | 600 | 396 | 914 | 511 | 800 | 567 | 914 | 511 | 800 | 567 | |
| 16 | 400 | 838 | 511 | 800 | 567 | 838 | 511 | 800 | 567 | 991 | 551 | 800 | 567 | 991 | 551 | 800 | 567 | |
| 18 | 450 | 914 | 551 | 800 | 567 | 914 | 551 | 800 | 567 | 1143 | 613 | 800 | 567 | 1143 | 613 | 800 | 567 | |
| 20 | 500 | 991 | 613 | 800 | 567 | 991 | 613 | 800 | 567 | | | | | | | | | |
| 24 | 600 | 1143 | 695 | 800 | 580 | 1143 | 695 | 800 | 580 | | | | | | | | | |
| Body/Cap | LF2 | | | | | LF2 | | | | | LF2 | | | | LF2 | | | |
| Stem/Bottom Stem | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | A479 Type 316 or A479 S31803 | | | |
| Ball | LF2+ENP | | | | | LF2+ENP | | | | | LF2+ENP | | | | LF2+ENP | | | |
| Gland Packing/O-ring | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | Flexible Graphite/L-NBR | | | |
| Gasket/O-ring | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | Flexible Graphite/L-NBR | | | |
| Ball Seat | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | G/F MoS2 PTFE | | | |
| Bore | Full Bore | | | | | Full Bore | | | | | Reduced Bore | | | | Reduced Bore | | | |
| Cap B/N | L7M/7M | | | | | L7M/7M | | | | | L7M/7M | | | | L7M/7M | | | |
| Seat Spring | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | B637 N07750 (INCONEL® X750) | | | |
| Plug/Vent Valve | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | ISO 5211 | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | DI/CS/Gear Unit | | | |
| Standard/Approval | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | |
| Reference Page | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | P-T Rating : Page BAL54 | | | |
| Remarks | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | |





| Type | 3TC (T60S) Series | | | | | 3TCR (T60S) Series | | | | | 3TC (T60S) Series | | | | | 3TCR (T60S) Series | | | | |
|-----------------------|--|------|-----|-----|-----|--|-----|-----|-----|------|--|-----|-----|------|-----|--|-----|--|--|--|
| Ball Valve | | | | | | | | | | | | | | | | | | | | |
| | 600 | | | | | 600 | | | | | 600 | | | | | 600 | | | | |
| Fig | 600UF3TCSM/G-600UF3TCSM | | | | | 600UF3TCRSM/G-600UF3TCRSM | | | | | 600SF3TCS/G-600SF3TCS | | | | | 600SF3TCRS/G-600SF3TCRS | | | | |
| End Connection | ASME B16.5 Class 600 RF | | | | | ASME B16.5 Class 600 RF | | | | | ASME B16.5 Class 600 RF | | | | | ASME B16.5 Class 600 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 2 | 50 | 292 | 182 | 400 | | | | | | 292 | 182 | 400 | | | | | | | | |
| 3 | 80 | 356 | 236 | 450 | | 356 | 182 | 400 | | 356 | 236 | 450 | | 356 | 182 | 400 | | | | |
| 4 | 100 | 432 | 263 | 800 | | 432 | 236 | 450 | | 432 | 263 | 800 | | 432 | 236 | 450 | | | | |
| 6 | 150 | 559 | 282 | 500 | 305 | 559 | 263 | 800 | 305 | 559 | 282 | 500 | 305 | 559 | 263 | 800 | 305 | | | |
| 8 | 200 | 660 | 335 | 600 | 396 | 660 | 282 | 500 | 305 | 660 | 335 | 600 | 396 | 660 | 282 | 500 | 305 | | | |
| 10 | 250 | 787 | 382 | 600 | 396 | 787 | 335 | 600 | 396 | 787 | 382 | 600 | 396 | 787 | 335 | 600 | 396 | | | |
| 12 | 300 | 838 | 448 | 800 | 567 | 838 | 382 | 600 | 396 | 838 | 448 | 800 | 567 | 838 | 382 | 600 | 396 | | | |
| 14 | 350 | 889 | 478 | 800 | 567 | 889 | 448 | 800 | 567 | 889 | 478 | 800 | 567 | 889 | 448 | 800 | 567 | | | |
| 16 | 400 | 991 | 540 | 800 | 567 | 991 | 478 | 800 | 567 | 991 | 540 | 800 | 567 | 991 | 478 | 800 | 567 | | | |
| 18 | 450 | 1092 | 588 | 800 | 581 | 1092 | 540 | 800 | 567 | 1092 | 588 | 800 | 581 | 1092 | 540 | 800 | 567 | | | |
| 20 | 500 | 1194 | 652 | 800 | 581 | 1194 | 588 | 800 | 581 | 1194 | 652 | 800 | 581 | 1194 | 588 | 800 | 581 | | | |
| 24 | 600 | 1397 | 749 | 800 | 570 | 1397 | 652 | 800 | 581 | 1397 | 749 | 800 | 570 | 1397 | 652 | 800 | 581 | | | |
| Body/Cap | A182 Gr.F316 | | | | | A182 Gr.F316 | | | | | A105 | | | | | A105 | | | | |
| Stem/Bottom Stem | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | |
| Ball | A182 Gr.F316 | | | | | A182 Gr.F316 | | | | | A105+ENP | | | | | A105+ENP | | | | |
| Gland Packing/O-ring | Flexible Graphite/FKM | | | | | Flexible Graphite/FKM | | | | | Flexible Graphite/H-NBR | | | | | Flexible Graphite/H-NBR | | | | |
| Gasket/O-ring | Flexible Graphite/FKM | | | | | Flexible Graphite/FKM | | | | | Flexible Graphite/H-NBR | | | | | Flexible Graphite/H-NBR | | | | |
| Ball Seat | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | |
| Bore | Full Bore | | | | | Reduced Bore | | | | | Full Bore | | | | | Reduced Bore | | | | |
| Cap B/N | B8M/8M | | | | | B8M/8M | | | | | B7M/2HM | | | | | B7M/2HM | | | | |
| Seat Spring | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | |
| Plug/Vent Valve | 316L/316L+WC (Tungsten Carbide) | | | | | 316L/316L+WC (Tungsten Carbide) | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | |
| Reference Page | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | |
| Remarks | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | |





| Type | 3TC (T60S) Series | | | | | 3TCR (T60S) Series | | | | | 3TC (T60S) Series | | | | | 3TC (T60S) Series | | | | |
|-----------------------|--|------|-----|-----|-----|--|-----|-----|-----|------|--|-----|-----|------|-----|--|-----|--|--|--|
| Ball Valve | | | | | | | | | | | | | | | | | | | | |
| | 600 | | | | | 600 | | | | | 900 | | | | | 900 | | | | |
| Fig | 600SF3TCSBL/G-600SF3TCSBL | | | | | 600SF3TCRBL/G-600SF3TCRBL | | | | | 900UF3TCSM/G-900UF3TCSM | | | | | 900SF3TCS/G-900SF3TCS | | | | |
| End Connection | ASME B16.5 Class 600 RF | | | | | ASME B16.5 Class 600 RF | | | | | ASME B16.5 Class 900 RF | | | | | ASME B16.5 Class 900 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | |
| 2 | 50 | 292 | 182 | 400 | | | | | | 368 | 211 | 700 | | 368 | 211 | 700 | | | | |
| 3 | 80 | 356 | 236 | 450 | | 356 | 182 | 400 | | 381 | 243 | 700 | | 381 | 243 | 700 | | | | |
| 4 | 100 | 432 | 263 | 800 | | 432 | 236 | 450 | | 457 | 276 | 900 | | 457 | 276 | 900 | | | | |
| 6 | 150 | 559 | 282 | 500 | 305 | 559 | 263 | 800 | 305 | 610 | 295 | 600 | 305 | 610 | 295 | 600 | 305 | | | |
| 8 | 200 | 660 | 335 | 600 | 396 | 660 | 282 | 500 | 305 | 737 | 355 | 600 | 396 | 737 | 355 | 600 | 396 | | | |
| 10 | 250 | 787 | 382 | 600 | 396 | 787 | 335 | 600 | 396 | 838 | 406 | 600 | 417 | 838 | 406 | 600 | 417 | | | |
| 12 | 300 | 838 | 448 | 800 | 567 | 838 | 382 | 600 | 396 | 965 | 480 | 800 | 567 | 965 | 480 | 800 | 567 | | | |
| 14 | 350 | 889 | 478 | 800 | 567 | 889 | 448 | 800 | 567 | 1029 | 547 | 800 | 581 | 1029 | 547 | 800 | 581 | | | |
| 16 | 400 | 991 | 540 | 800 | 567 | 991 | 478 | 800 | 567 | 1130 | 588 | 800 | 581 | 1130 | 588 | 800 | 581 | | | |
| 18 | 450 | 1092 | 588 | 800 | 581 | 1092 | 540 | 800 | 567 | 1219 | 673 | 800 | 570 | 1219 | 673 | 800 | 570 | | | |
| 20 | 500 | 1194 | 652 | 800 | 581 | 1194 | 588 | 800 | 581 | 1321 | 780 | 800 | 701 | 1321 | 780 | 800 | 701 | | | |
| 24 | 600 | 1397 | 749 | 800 | 570 | 1397 | 652 | 800 | 581 | 1549 | 930 | 800 | 701 | 1549 | 930 | 800 | 701 | | | |
| Body/Cap | LF2 | | | | | LF2 | | | | | A182 Gr.F316 | | | | | A105 | | | | |
| Stem/Bottom Stem | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | | A479 Type 316 or A479 S31803 | | | | |
| Ball | LF2+ENP | | | | | LF2+ENP | | | | | F316/CF8M or F5/S31803/CD3MN | | | | | F60+ENP | | | | |
| Gland Packing/O-ring | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | | Flexible Graphite/FKM | | | | | Flexible Graphite/H-NBR | | | | |
| Gasket/O-ring | Flexible Graphite/L-NBR | | | | | Flexible Graphite/L-NBR | | | | | Flexible Graphite/FKM | | | | | Flexible Graphite/H-NBR | | | | |
| Ball Seat | G/F MoS2 PTFE | | | | | G/F MoS2 PTFE | | | | | RNYLON | | | | | RNYLON | | | | |
| Bore | Full Bore | | | | | Reduced Bore | | | | | Full Bore | | | | | Full Bore | | | | |
| Cap B/N | L7M/7M | | | | | L7M/7M | | | | | B8M/8M | | | | | B7M/2HM | | | | |
| Seat Spring | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | | B637 N07750 (INCONEL® X750) | | | | |
| Plug/Vent Valve | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | 316L/316L+WC (Tungsten Carbide) | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | | ISO 5211 | | | | |
| Handle | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | | DI/CS/Gear Unit | | | | |
| Standard/Approval | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | |
| Reference Page | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | | P-T Rating : Page BAL54 | | | | |
| Remarks | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | |





| Type | 3TC (T60S) Series | | | | | | 3TC (T60S) Series | | | | | | 3TC (T60S) Series | | | | | | 3TC (T60S) Series | | | | | |
|-----------------------|--|------|-----|-----|-----|------|--|-----|-----|------|------|-----|--|------|------|-----|-----|--|--|--|--|--|--|--|
| Ball Valve |  | | | | | |  | | | | | |  | | | | | |  | | | | | |
| Fig | 900SF3TCSBL/G-900SF3TCSBL | | | | | | 1500UF3TCSM/G-1500UF3TCSM | | | | | | 1500SF3TCS/G-1500SF3TCS | | | | | | 1500SF3TCSBL/G-1500SF3TCSBL | | | | | |
| End Connection | ASME B16.5 Class 900 RF | | | | | | ASME B16.5 Class 1500 RF | | | | | | ASME B16.5 Class 1500 RF | | | | | | ASME B16.5 Class 1500 RF | | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | | | | | |
| 2 | 50 | 368 | 211 | 700 | | 368 | 211 | 700 | | 368 | 211 | 700 | | 368 | 211 | 700 | | | | | | | | |
| 3 | 80 | 381 | 243 | 700 | | 470 | 243 | 900 | | 470 | 243 | 900 | | 470 | 243 | 900 | | | | | | | | |
| 4 | 100 | 457 | 276 | 900 | | 546 | 262 | 500 | 305 | 546 | 262 | 500 | 305 | 546 | 262 | 500 | 305 | | | | | | | |
| 6 | 150 | 610 | 295 | 600 | 305 | 705 | 353 | 600 | 396 | 705 | 353 | 600 | 396 | 705 | 353 | 600 | 396 | | | | | | | |
| 8 | 200 | 737 | 355 | 600 | 396 | 832 | 435 | 600 | 567 | 832 | 435 | 600 | 567 | 832 | 435 | 600 | 567 | | | | | | | |
| 10 | 250 | 838 | 406 | 600 | 417 | 991 | 482 | 800 | 567 | 991 | 482 | 800 | 567 | 991 | 482 | 800 | 567 | | | | | | | |
| 12 | 300 | 965 | 480 | 800 | 567 | 1130 | 605 | 800 | 570 | 1130 | 605 | 800 | 570 | 1130 | 605 | 800 | 570 | | | | | | | |
| 14 | 350 | 1029 | 547 | 800 | 581 | 1257 | 625 | 800 | 570 | 1257 | 625 | 800 | 570 | 1257 | 625 | 800 | 570 | | | | | | | |
| 16 | 400 | 1130 | 588 | 800 | 581 | 1384 | 729 | 800 | 701 | 1384 | 729 | 800 | 701 | 1384 | 729 | 800 | 701 | | | | | | | |
| 18 | 450 | 1219 | 673 | 800 | 570 | 1537 | 806 | 800 | 701 | 1537 | 806 | 800 | 701 | 1537 | 806 | 800 | 701 | | | | | | | |
| 20 | 500 | 1321 | 780 | 800 | 701 | 1664 | 912 | 800 | 701 | 1664 | 912 | 800 | 701 | 1664 | 912 | 800 | 701 | | | | | | | |
| 24 | 600 | 1549 | 930 | 800 | 701 | 1972 | 1000 | 800 | 701 | 1972 | 1000 | 800 | 701 | 1972 | 1000 | 800 | 701 | | | | | | | |
| Body/Cap | LF2 | | | | | | A182 Gr.F316 | | | | | | A105 | | | | | | LF2 | | | | | |
| Stem/Bottom Stem | A479 Type 316 or A479 S31803 | | | | | | A479 Type 316 or A479 S31803 | | | | | | A479 Type 316 or A479 S31803 | | | | | | A479 Type 316 or A479 S31803 | | | | | |
| Ball | F60+ENP | | | | | | F316/CF8M or F5/S31803/CD3MN | | | | | | F60+ENP | | | | | | F60+ENP | | | | | |
| Gland Packing/O-ring | Flexible Graphite/H-NBR | | | | | | Flexible Graphite/FKM | | | | | | Flexible Graphite/H-NBR | | | | | | Flexible Graphite/H-NBR | | | | | |
| Gasket/O-ring | Flexible Graphite/H-NBR | | | | | | Flexible Graphite/FKM | | | | | | Flexible Graphite/H-NBR | | | | | | Flexible Graphite/H-NBR | | | | | |
| Ball Seat | RNYLON | | | | | | RNYLON | | | | | | RNYLON | | | | | | RNYLON | | | | | |
| Bore | Full Bore | | | | | | Full Bore | | | | | | Full Bore | | | | | | Full Bore | | | | | |
| Cap B/N | B7M/2HM | | | | | | B8M/8M | | | | | | B7M/2HM | | | | | | B7M/2HM | | | | | |
| Seat Spring | B637 N07750 (INCONEL® X750) | | | | | | B637 N07750 (INCONEL® X750) | | | | | | B637 N07750 (INCONEL® X750) | | | | | | B637 N07750 (INCONEL® X750) | | | | | |
| Plug/Vent Valve | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | | 316L/316L+WC (Tungsten Carbide) | | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | | ASME B16.10 | | | | | | ASME B16.10 | | | | | | ASME B16.10 | | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | | ISO 5211 | | | | | | ISO 5211 | | | | | | ISO 5211 | | | | | |
| Handle | DI/CS/Gear Unit | | | | | | DI/CS/Gear Unit | | | | | | DI/CS/Gear Unit | | | | | | DI/CS/Gear Unit | | | | | |
| Standard/Approval | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | |
| Reference Page | P-T Rating : Page BAL54 | | | | | | P-T Rating : Page BAL54 | | | | | | P-T Rating : Page BAL54 | | | | | | P-T Rating : Page BAL54 | | | | | |
| Remarks | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | |


| Type | 3TC (T60M) Series(Metal Seat(6H)) | | | | | | 3TCR (T60M) Series(Metal Seat(6H)) | | | | | | 3TC (T60M) Series(Metal Seat(6H)) | | | | | | 3TCR (T60M) Series(Metal Seat(6H)) | | | | | |
|-----------------------|--|------|-----|-----|-----|------|--|-----|-----|------|-----|-----|--|------|-----|-----|-----|--|--|--|--|--|--|--|
| Ball Valve |  | | | | | |  | | | | | |  | | | | | |  | | | | | |
| Fig | 150UF3TC6HM/G-150UF3TC6HM | | | | | | 150UF3TCR6HM/G-150UF3TCR6HM | | | | | | 150SF3TC6HM/G-150SF3TC6HM | | | | | | 150SF3TCR6HM/G-150SF3TCR6HM | | | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | | ASME B16.5 Class 150 RF | | | | | | ASME B16.5 Class 150 RF | | | | | | ASME B16.5 Class 150 RF | | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B | | | | | | | |
| 2 | 50 | 178 | 182 | 300 | | 178 | 182 | 300 | | 178 | 182 | 300 | | 178 | 182 | 300 | | | | | | | | |
| 3 | 80 | 203 | 188 | 200 | 215 | 203 | 187 | 300 | | 203 | 188 | 200 | 215 | 203 | 187 | 300 | | | | | | | | |
| 4 | 100 | 229 | 234 | 300 | 282 | 229 | 185 | 200 | 217 | 229 | 234 | 300 | 282 | 229 | 185 | 200 | 217 | | | | | | | |
| 6 | 150 | 394 | 283 | 500 | 305 | 394 | 233 | 300 | 282 | 394 | 283 | 500 | 305 | 394 | 233 | 300 | 282 | | | | | | | |
| 8 | 200 | 457 | 349 | 500 | 396 | 457 | 283 | 500 | 305 | 457 | 349 | 500 | 396 | 457 | 283 | 500 | 305 | | | | | | | |
| 10 | 250 | 533 | 398 | 600 | 567 | 533 | 345 | 500 | 396 | 533 | 398 | 600 | 567 | 533 | 345 | 500 | 396 | | | | | | | |
| 12 | 300 | 610 | 463 | 600 | 567 | 610 | 399 | 500 | 566 | 610 | 463 | 600 | 567 | 610 | 399 | 500 | 566 | | | | | | | |
| 14 | 350 | 686 | 483 | 600 | 567 | 686 | 464 | 600 | 566 | 686 | 483 | 600 | 567 | 686 | 464 | 600 | 566 | | | | | | | |
| 16 | 400 | 762 | 582 | 800 | 570 | 762 | 478 | 600 | 566 | 762 | 582 | 800 | 570 | 762 | 478 | 600 | 566 | | | | | | | |
| 18 | 450 | 864 | 612 | 800 | 570 | 864 | 583 | 800 | 571 | 864 | 612 | 800 | 570 | 864 | 583 | 800 | 571 | | | | | | | |
| 20 | 500 | 914 | 724 | 800 | 613 | 914 | 611 | 800 | 571 | 914 | 724 | 800 | 613 | 914 | 611 | 800 | 571 | | | | | | | |
| 24 | 600 | 1067 | 807 | 800 | 613 | 1067 | 712 | 800 | 531 | 1067 | 807 | 800 | 613 | 1067 | 712 | 800 | 531 | | | | | | | |
| Body/Cap | A182 Gr.F316 | | | | | | A182 Gr.F316 | | | | | | A105 | | | | | | A105 | | | | | |
| Stem/Bottom Stem | A564 Type 630 H1150D | | | | | | A564 Type 630 H1150D | | | | | | A564 Type 630 H1150D | | | | | | A564 Type 630 H1150D | | | | | |
| Ball | 316+SFNi (Ni-Cr Alloy Thermal Spraying) | | | | | | 316+SFNi (Ni-Cr Alloy Thermal Spraying) | | | | | | 316+SFNi (Ni-Cr Alloy Thermal Spraying) | | | | | | 316+SFNi (Ni-Cr Alloy Thermal Spraying) | | | | | |
| Gland Packing | Flexible Graphite | | | | | | Flexible Graphite | | | | | | Flexible Graphite | | | | | | Flexible Graphite | | | | | |
| Gasket | Flexible Graphite | | | | | | Flexible Graphite | | | | | | Flexible Graphite | | | | | | Flexible Graphite | | | | | |
| Ball Seat | 316+SFNi (Ni-Cr Alloy Thermal Spraying) | | | | | | 316+SFNi (Ni-Cr Alloy Thermal Spraying) | | | | | | 316+SFNi (Ni-Cr Alloy Thermal Spraying) | | | | | | 316+SFNi (Ni-Cr Alloy Thermal Spraying) | | | | | |
| Bore | Full Bore | | | | | | Reduced Bore | | | | | | Full Bore | | | | | | Reduced Bore | | | | | |
| Cap B/N | B8M/8M | | | | | | B8M/8M | | | | | | B7M/2HM | | | | | | B7M/2HM | | | | | |
| Seat Spring | B637 N07750 (INCONEL® X750) | | | | | | B637 N07750 (INCONEL® X750) | | | | | | B637 N07750 (INCONEL® X750) | | | | | | B637 N07750 (INCONEL® X750) | | | | | |
| Plug/Vent Valve | 316L/316L+WC (Tungsten Carbide) | | | | | | 316L/316L+WC (Tungsten Carbide) | | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | | LF2/LF2+316L+WC (Tungsten Carbide) | | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | | ASME B16.10 | | | | | | ASME B16.10 | | | | | | ASME B16.10 | | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | | | ISO 5211 | | | | | | ISO 5211 | | | | | | ISO 5211 | | | | | |
| Handle | DI/CS/Gear Unit | | | | | | DI/CS/Gear Unit | | | | | | DI/CS/Gear Unit | | | | | | DI/CS/Gear Unit | | | | | |
| Standard/Approval | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | | API 6D, ISO 14313 FS: API607/API6FA/ ISO 10497, FE: ISO15848-1, SIL2, PED/ATEX/CE TR-CU/EAC | | | | | |
| Reference Page | P-T Rating : Page BAL54 | | | | | | P-T Rating : Page BAL54 | | | | | | P-T Rating : Page BAL54 | | | | | | P-T Rating : Page BAL54 | | | | | |
| Remarks | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | | Anti-Static Design/Anti-Blowout Stem/ Fire Safe Design/NACE MR0175 | | | | | |

| Type | 14-K Series(-196°C) | | | | 14-K Series(-196°C) | | | | 14-K Series(-196°C) | | | | 67-K Series(-196°C) | | | | |
|-----------------------|---|-----|---|-----|---|-----|---|-----|---|-----|--|-----|---|-----|---|-----|-----|
| Ball Valve | 150 | |  | | 300 | |  | | 600 | |  | | 150 | |  | | |
| | FB | | FB | | FB | | FB | | FB | | FB | | FB | | FB | | |
| Fig | (G-)150UPG14K | | | | (G-)300UPG14K | | | | (G-)600UPG14K | | | | (G-)W150UPG67K | | | | |
| End Connection | ASME B16.5 Cl 150 RF | | | | ASME B16.5 Cl 300 RF | | | | ASME B16.5 Cl 600 RF | | | | ASME B16.25 (BW) | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 1 | 25 | | | | | | | | | | | | | TBA | TBA | TBA | TBA |
| 1 1/2 | 40 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 2 | 50 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 2 1/2 | 65 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 3 | 80 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 4 | 100 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 6 | 150 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 8 | 200 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 10 | 250 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | | | | |
| 12 | 300 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | | | | |
| 14 | 350 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | | | | |
| 16 | 400 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | | | | |
| Body/Cap/Bonnet | 316SS/CF8M | | | | 316SS/CF8M | | | | 316SS/CF8M | | | | CF8M/CF3M | | | | |
| Stem/Bottom Stem | 316SS | | | | 316SS | | | | 316SS | | | | UNS S66286 | | | | |
| Ball | 316SS/CF8M | | | | 316SS/CF8M | | | | 316SS/CF8M | | | | CF8M/CF3M | | | | |
| Gland Packing | PTFE | | | | PTFE | | | | PTFE | | | | Graphite | | | | |
| Gasket | PTFE | | | | PTFE | | | | PTFE | | | | Graphite | | | | |
| Ball Seat | UHMW-PE | | | | UHMW-PE | | | | UHMW-PE | | | | PCTFE | | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | |
| Standard/Approval | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | |
| Remarks | UHMW-PE: Ultra High Molecular Weight Polyethylene 2-piece Trunnion Mounted, Side Entry Double Brand (KITZ®/Perrin®) | | | | UHMW-PE: Ultra High Molecular Weight Polyethylene 2-piece Trunnion Mounted, Side Entry Double Brand (KITZ®/Perrin®) | | | | UHMW-PE: Ultra High Molecular Weight Polyethylene 2-piece Trunnion Mounted, Side Entry Double Brand (KITZ®/Perrin®) | | | | Uni-Body, Floating, Top Entry Double Brand (KITZ®/Perrin®) | | | | |


| Type | 67-K Series(-196°C) | | | | 67-K Series(-196°C) | | | | 67-K Series(-196°C) | | | | 66-K Series(-196°C) | | | | |
|-----------------------|---|-----|---|-----|---|-----|---|-----|---|-----|--|-----|---|-----|---|-----|-----|
| Ball Valve | 300 | |  | | 600 | |  | | 900 | |  | | 150 | |  | | |
| | FB | | FB | | FB | | FB | | FB | | FB | | FB | | FB | | |
| Fig | (G-)W300UPG67K | | | | (G-)W600UPG67K | | | | (G-)W900UPG67K | | | | (G-)W150UPG66K | | | | |
| End Connection | ASME B16.25 (BW) | | | | ASME B16.25 (BW) | | | | ASME B16.25 (BW) | | | | ASME B16.25 (BW) | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 1/2 | 15 | | | | | | | | | | | | | TBA | TBA | TBA | TBA |
| 3/4 | 20 | | | | | | | | | | | | | TBA | TBA | TBA | TBA |
| 1 | 25 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | | | | |
| 1 1/2 | 40 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | | | | |
| 2 | 50 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | | | | |
| 2 1/2 | 65 | TBA | TBA | TBA | TBA | | | | | | | | | | | | |
| 3 | 80 | TBA | TBA | TBA | TBA | | | | | | | | | | | | |
| 4 | 100 | TBA | TBA | TBA | TBA | | | | | | | | | | | | |
| 6 | 150 | TBA | TBA | TBA | TBA | | | | | | | | | | | | |
| 8 | 200 | TBA | TBA | TBA | TBA | | | | | | | | | | | | |
| Body/Cap/Bonnet | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | |
| Stem/Bottom Stem | UNS S66286 | | | | UNS S66286 | | | | UNS S66286 | | | | UNS S66286 | | | | |
| Ball | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | |
| Gland Packing | Graphite | | | | Graphite | | | | Graphite | | | | Graphite | | | | |
| Gasket | Graphite | | | | Graphite | | | | Graphite | | | | Graphite | | | | |
| Ball Seat | PCTFE | | | | PCTFE | | | | PCTFE | | | | PCTFE | | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | | |
| Cap B/N | | | | | | | | | | | | | | | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | |
| Standard/Approval | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | |
| Remarks | Uni-Body, Floating, Top Entry Double Brand (KITZ®/Perrin®) | | | | Uni-Body, Floating, Top Entry Double Brand (KITZ®/Perrin®) | | | | Uni-Body, Floating, Top Entry Double Brand (KITZ®/Perrin®) | | | | Uni-Body, Top Entry Trunnion Mounted Ball Valves with Ball & Stem Integrated Design Double Brand (KITZ®/Perrin®) | | | | |

| Type | 66-K Series(-196°C) | | | | 66-K Series(-196°C) | | | | 66-K Series(-196°C) | | | | 66-K Series(-196°C) | | | | |
|-----------------------|--|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| Ball Valve | 150  FB | | | | 300  FB | | | | 600  FB | | | | 150  FB | | | | |
| | NO IMAGE | | | | NO IMAGE | | | | NO IMAGE | | | | NO IMAGE | | | | |
| Fig | (G-)W300UPG66K | | | | (G-)W600UPG66K | | | | (G-)W900UPG66K | | | | (G-)W1500UPG66K | | | | |
| End Connection | ASME B16.25 (BW) | | | | ASME B16.25 (BW) | | | | ASME B16.25 (BW) | | | | ASME B16.25 (BW) | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 1/2 | 15 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 3/4 | 20 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 1 | 25 | | | | | | | | | | | | | TBA | TBA | TBA | TBA |
| 1 1/2 | 40 | | | | | | | | | | | | | TBA | TBA | TBA | TBA |
| 2 | 50 | | | | | | | | | | | | | TBA | TBA | TBA | TBA |
| Body/Cap/Bonnet | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | |
| Stem/Bottom Stem | UNS S66286 | | | | UNS S66286 | | | | UNS S66286 | | | | UNS S66286 | | | | |
| Ball | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | |
| Gland Packing | Graphite | | | | Graphite | | | | Graphite | | | | Graphite | | | | |
| Gasket | Graphite | | | | Graphite | | | | Graphite | | | | Graphite | | | | |
| Ball Seat | PCTFE | | | | PCTFE | | | | PCTFE | | | | PCTFE | | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | |
| Standard/Approval | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | |
| Remarks | Uni-Body, Top Entry Trunnion Mounted Ball Valves with Ball & Stem Integrated Design Double Brand (KITZ®/Perrin®) | | | | Uni-Body, Top Entry Trunnion Mounted Ball Valves with Ball & Stem Integrated Design Double Brand (KITZ®/Perrin®) | | | | Uni-Body, Top Entry Trunnion Mounted Ball Valves with Ball & Stem Integrated Design Double Brand (KITZ®/Perrin®) | | | | Uni-Body, Top Entry Trunnion Mounted Ball Valves with Ball & Stem Integrated Design Double Brand (KITZ®/Perrin®) | | | | |

| Type | 64-K Series(-196°C) | | | | 64-K Series(-196°C) | | | | 64-K Series(-196°C) | | | | 64-K Series(-196°C) | | | | |
|-----------------------|--|-----|-----|-----|--|-----|-----|-----|---|-----|-----|-----|--|-----|-----|-----|-----|
| Ball Valve | 150  FB | | | | 300  FB | | | | 600  FB | | | | 900  FB | | | | |
| | NO IMAGE | | | | NO IMAGE | | | | NO IMAGE | | | | NO IMAGE | | | | |
| Fig | (G-)W150UPG64K | | | | (G-)W300UPG64K | | | | (G-)W600UPG64K | | | | (G-)W900UPG64K | | | | |
| End Connection | ASME B16.25 (BW) | | | | ASME B16.25 (BW) | | | | ASME B16.25 (BW) | | | | ASME B16.25 (BW) | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 2 1/2 | 65 | | | | | | | | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 3 | 80 | | | | | | | | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 4 | 100 | | | | | | | | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 6 | 150 | | | | | | | | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 8 | 200 | | | | | | | | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 10 | 250 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 12 | 300 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 14 | 350 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 16 | 400 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| Body/Cap/Bonnet | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | |
| Stem/Bottom Stem | UNS S66286 | | | | UNS S66286 | | | | UNS S66286 | | | | UNS S66286 | | | | |
| Ball | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | CF8M/CF3M | | | | |
| Gland Packing | Graphite | | | | Graphite | | | | Graphite | | | | Graphite | | | | |
| Gasket | Graphite | | | | Graphite | | | | Graphite | | | | Graphite | | | | |
| Ball Seat | PCTFE | | | | PCTFE | | | | PCTFE | | | | PCTFE | | | | |
| Bore | Full Bore | | | | Full Bore | | | | Full Bore | | | | Full Bore | | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | |
| Actuator Mounting Pad | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | ISO 5211 | | | | |
| Standard/Approval | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | ASME B16.34, ISO 28921-1 | | | | |
| Remarks | Uni-Body, Trunnion Mounted, Top Entry Double Brand (KITZ®/Perrin®) | | | | Uni-Body, Trunnion Mounted, Top Entry Double Brand (KITZ®/Perrin®) | | | | Uni-Body, Trunnion Mounted, Top Entry Double Brand (KITZ®/Perrin®) | | | | Uni-Body, Trunnion Mounted, Top Entry Double Brand (KITZ®/Perrin®) | | | | |


| Type | | 64-K Series(-196°C) | | | | | |
|-----------------------|-----|---|-----|---|-----|-----------------|--|
| Ball Valve | | 1500 | |  | | FB | |
| | | Fig | | | | (G-)W1500UPG64K | |
| End Connection | | ASME B16.25 (BW) | | | | | |
| inch | mm | L | H | D | B | | |
| 21/2 | 65 | TBA | TBA | TBA | TBA | | |
| 3 | 80 | TBA | TBA | TBA | TBA | | |
| 4 | 100 | TBA | TBA | TBA | TBA | | |
| 6 | 150 | TBA | TBA | TBA | TBA | | |
| 8 | 200 | TBA | TBA | TBA | TBA | | |
| 10 | 250 | TBA | TBA | TBA | TBA | | |
| 12 | 300 | TBA | TBA | TBA | TBA | | |
| 14 | 350 | TBA | TBA | TBA | TBA | | |
| 16 | 400 | TBA | TBA | TBA | TBA | | |
| Body/Cap/Bonnet | | CF8M/CF3M | | | | | |
| Stem/Bottom Stem | | UNS S66286 | | | | | |
| Ball | | CF8M/CF3M | | | | | |
| Gland Packing | | Graphite | | | | | |
| Gasket | | Graphite | | | | | |
| Ball Seat | | PCTFE | | | | | |
| Bore | | Full Bore | | | | | |
| F-to-F Dimension | | ASME B16.10 | | | | | |
| Actuator Mounting Pad | | ISO 5211 | | | | | |
| Standard/Approval | | ASME B16.34, ISO 28921-1 | | | | | |
| Remarks | | Uni-Body, Trunnion Mounted, Top Entry Double Brand (KITZ®/Perrin®) | | | | | |

KITZ TB Series Split Body, End Entry, Floating Ball Valves

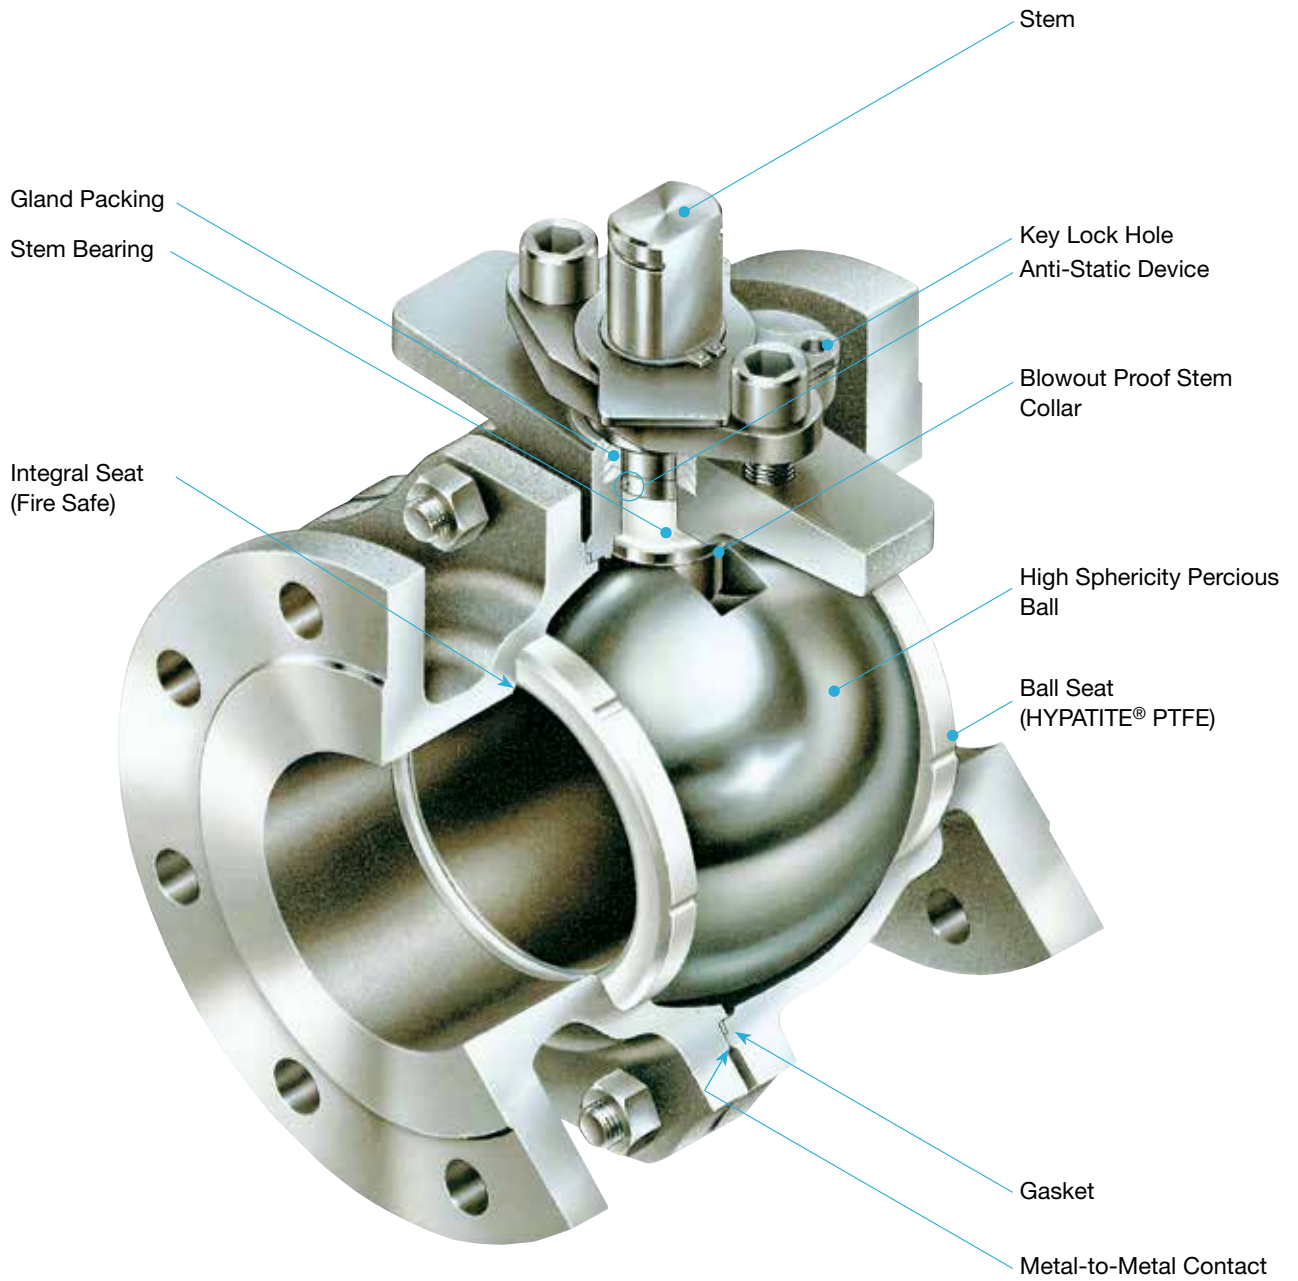

KITZ 150/300SCTDZ/UTDZM Series Full Bore, Split Body, Side Entry Ball Valves

This is an illustrated cross-section of typical KITZ split-body floating type full bore ball valve to exhibit basic design concept. Actual design of a valve may be slightly different from this illustration, depending on its size and pressure class.

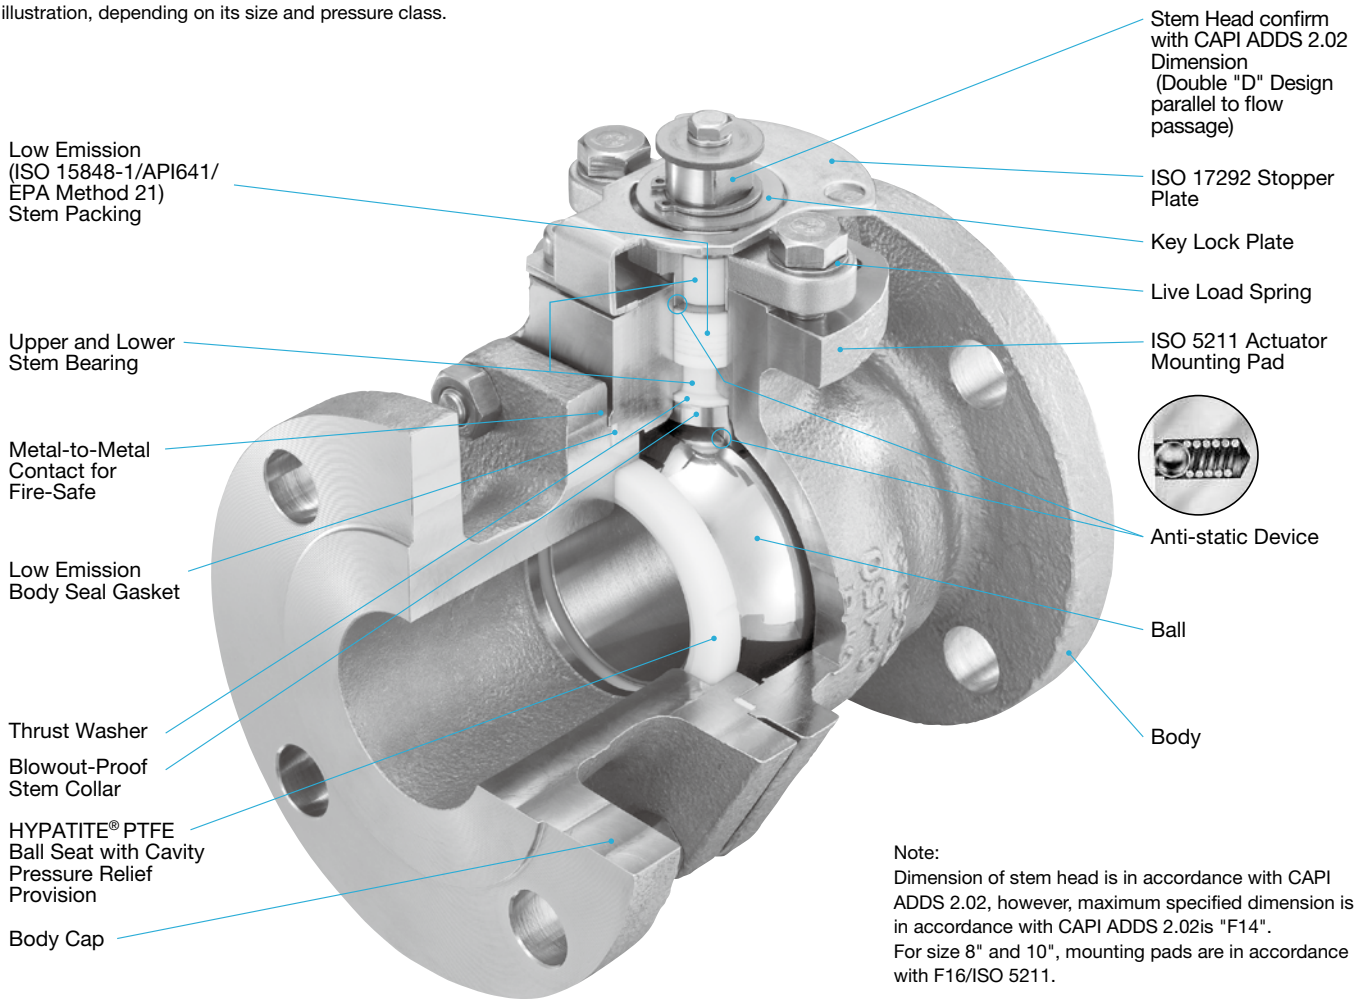

150UTDZ Size 2

Bubble-tight Sealing Performance with HYPATITE® PTFE Ball Seats

HYPATITE® PTFE Ball Seats, standard stem seals of KITZ Ball Valves, are made of denatured PTFE, molecularly reinforced PTFE copolymer. Specifically engineered for high bidirectional sealing performance and prolonged service life of valves. Its resistance to high or low temperature, creep or compression, abrasion and corrosion is all outstanding. As an option, KITZ **SWELLESS®** Seats, principally made of PFA is recommended specifically for monomer service. This epoch-making seat maximizes resistance to permeation of monomer into its molecular structure (generally known as "swelling" problem), which causes seat deformation and seriously affects shut-off function of valves in styrene and butadiene monomer service.

Simplified Actuator Mounting


For 150/300SCTDZ/UTDZM and SCTAZ/UTAZM Series Ball Valves, **ISO 5211** actuator mounting pad is integrally provided for uniformly simplified mounting of any actuators provided with valve mounting flanges designed to ISO 5211. 150UTBM Series Ball Valves are provided with KITZ Standard integral actuator mounting pad.

Easy Maintenance

Split Body Design for KITZ SCTDZ/UTDZM Series provides conveniences of easy maintenance critically required for process plants. In order to provide maintenance to KITZ 150/300SCTAZ/UTAZM, uni-body, side entry floating ball valves, its insert can be removed from the body by unscrewing.

**KITZ 150/300SCTAZ/UTAZM Series
Reduced Bore, Uni-Body, End Entry Ball Valves**

This is an illustrated cross-section of typical KITZ uni-body floating type reduced bore ball valve to exhibit basic design concept. Actual design of a valve may slightly be different from this illustration, depending on its sizes and pressure classes.

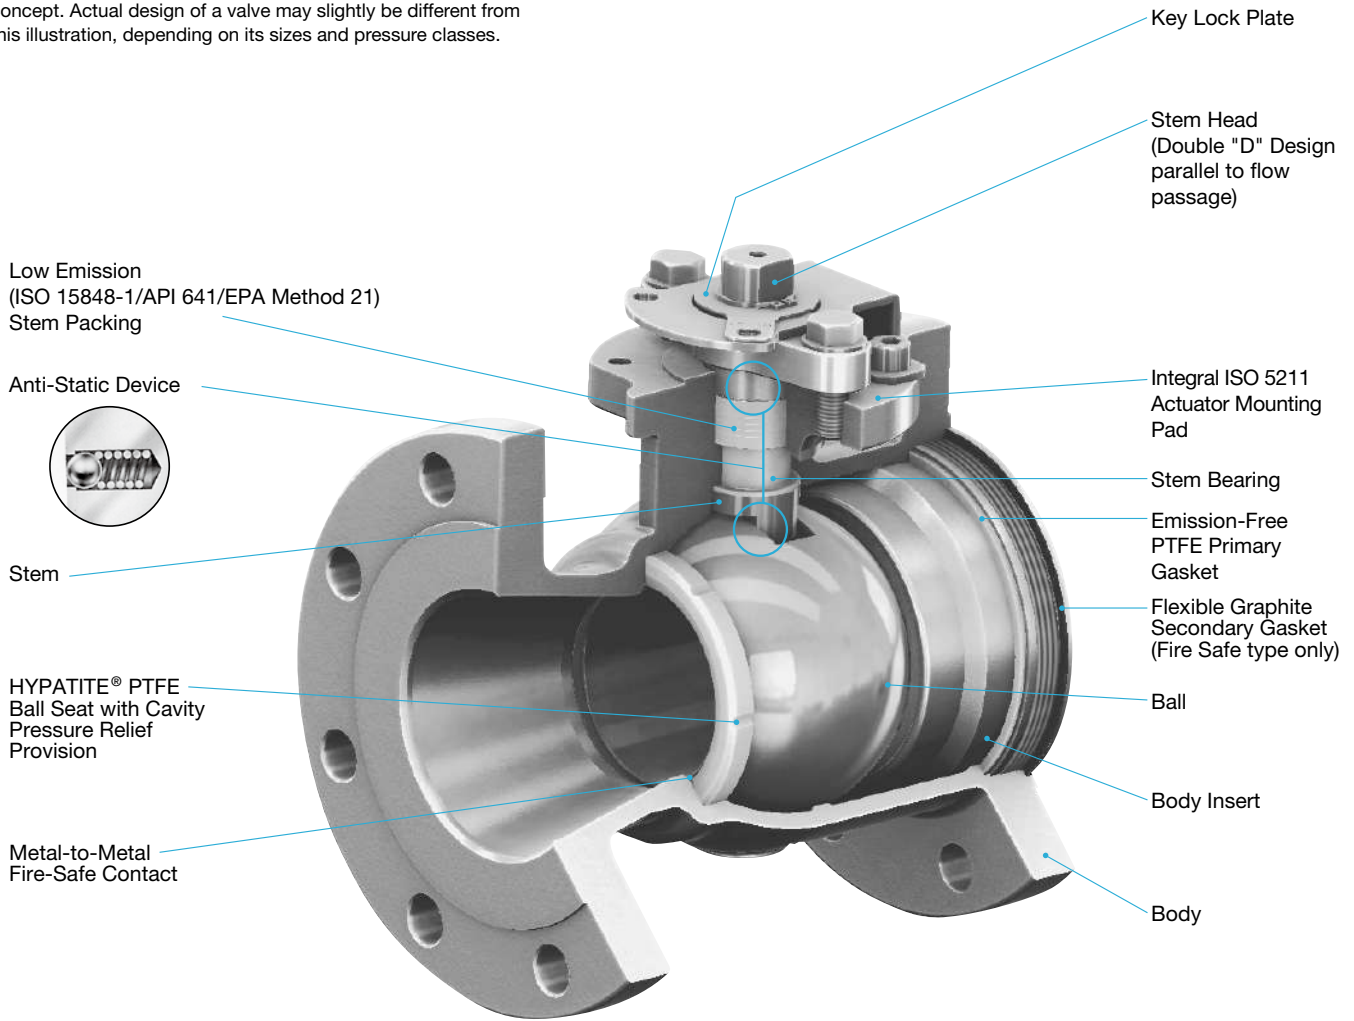

150SCTAZ Size 1 1/2

Extensive Safety Considerations

KITZ Ball Valves are designed with extensive safety considerations for users. Blow-out proof stem, provision of locking device and prevention of misalignment of lever handle provides safe operation in the field and trouble free operation in the plant. Anti-static device, fire-safe design and cavity pressure relief features all assure economic benefits of smooth and steady plant operation. KITZ advancements in low emission design features contribute to global battle against fugitive emission while greatly reducing costs caused by product loss.

For Sour Service
Hardness of Body, Body Cap/Insert, Ball and Stem materials of KITZ Class 150/300 Steel Ball Valves are controlled by appropriate heat treatment and conformed to the hardness requirements of NACE MR 0175, as standard. In addition following requirements are optionally available.
-Bolting for Valves exposed to sour environment
-NACE requirements for Steel Ball Valves in Class 600 and higher.
Kindly contact KITZ for these requirements.

Seven Safety Considerations

for KITZ 150/300SCTDZ/UTDZ(M) 150UTB(M) and 150/300SCTAZ/UTAZ(M) Series Ball Valves

1. Double "D" Stem Head Design provides mounting of lever handle always in parallel to the flow passage. This feature prevents lever handle from being installed in wrong orientation. (Fig. 1)
2. Lower end of the stem is designed with integral collar for blowout-proof. (Fig. 2)
3. Anti-Static Feature is provided to ensure electrical continuity between ball, stem and body. (Fig. 2)
4. Facility to mount locking device for preventing accidental valve operation is provided.
5. Plant fires are serious concern for soft-seated ball valves due to possible fluid leakage by deterioration of resilient sealing materials.

KITZ Ball Valves are engineered for fire-safety and successfully fire tested to minimize both external and internal fluid leakage after plant fires. Our Ball Valves have post-fire metal-to-metal contact of all sealing areas, such as:

- Contact between ball and valve shell (Fig. 3 and 4)
- Contact between stem and valve shell (Fig. 5 and 6)
- Valve shell coupling flanges of split body design (Fig. 7 and 8)
- Contact between valve body and insert of uni-body design (Fig. 9)

Problem with external fluid leakage is more serious than internal leakage through the valve bore due to fear of fueling fire. To prevent this, KITZ Ball Valves may be ordered with flexible gland packing and gasket, which are extremely heat resistant, and will not be affected by the fire.

6. Surfaces of stem and stuffing box, and interface clearance of stem-to-gland, stem-to-body and gland-to-stuffing box are precisely controlled by machining and assembly for low emission service. Belleville Spring Washer is employed for live loading gland bolts, to minimize needs of re-tightening bolts for low emission service.
7. Some amount of line fluid is usually left, trapped inside of ball-body cavity. This left-over fluid can expand under the influence of high ambient or line temperature. An excessive cavity pressure rise may sometimes damage the valve seats or ball, unless the valve has an adequate pressure relief mechanism. Trunnion Mounted Ball Valves generally provides perfect protection against this problem. Please contact KITZ for details.

With Floating Ball Valves, however, because of its rather simple seating principle, it require special protection from excessive cavity pressure rise, in highly volatile liquid service with frequent and large temperature variation, as the valve is not frequently operated. KITZ 150/300 SCTDZ/UTDZ(M) and 150/300 SCTAZ/UTAZ(M) Series Ball Valves offer self-relieving of excessive cavity pressure as standard feature engineered in HYPATITE® PTFE Ball Seats.

Other general solution for floating ball valves include employment of automatic pressure relief valve or drilling pressure equalization hole on the ball. If requirement of automatic cavity pressure relief is critical as in chlorine service, be sure to contact KITZ or its distributors for technical advice.

The capability is influenced by many variables, including: fluid characteristics, variations in pressure, temperature and thermal cycles.

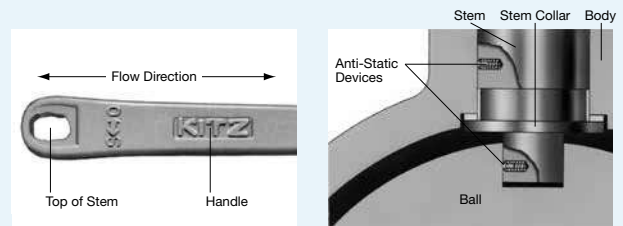


Fig. 1

Fig. 2




Fig. 3 (Before Fire)




Fig. 4 (After Fire)




Fig. 5 (Before Fire)




Fig. 6 (After Fire)




Fig. 7 (Before Fire)




Fig. 8 (After Fire)




Fig. 9 (Uni-Body Insert)


Emission Free PTFE Gasket is provided as standard for primary body seal. Flexible Graphite Gasket may be additionally employed as the secondary body seal for Fire-Safe Provision.

KITZ Steel Ball Valves for High Temperature

Design Features for Trim 3H, 5H, 6H


Split-Body, Side-Entry, Full-Bore Design

This is an illustrated cross-section of a typical KITZ High Performance Ball Valve for demonstrating the basic design concept. Actual design of a valve may slightly be different from this illustration, depending on its size and pressure class.

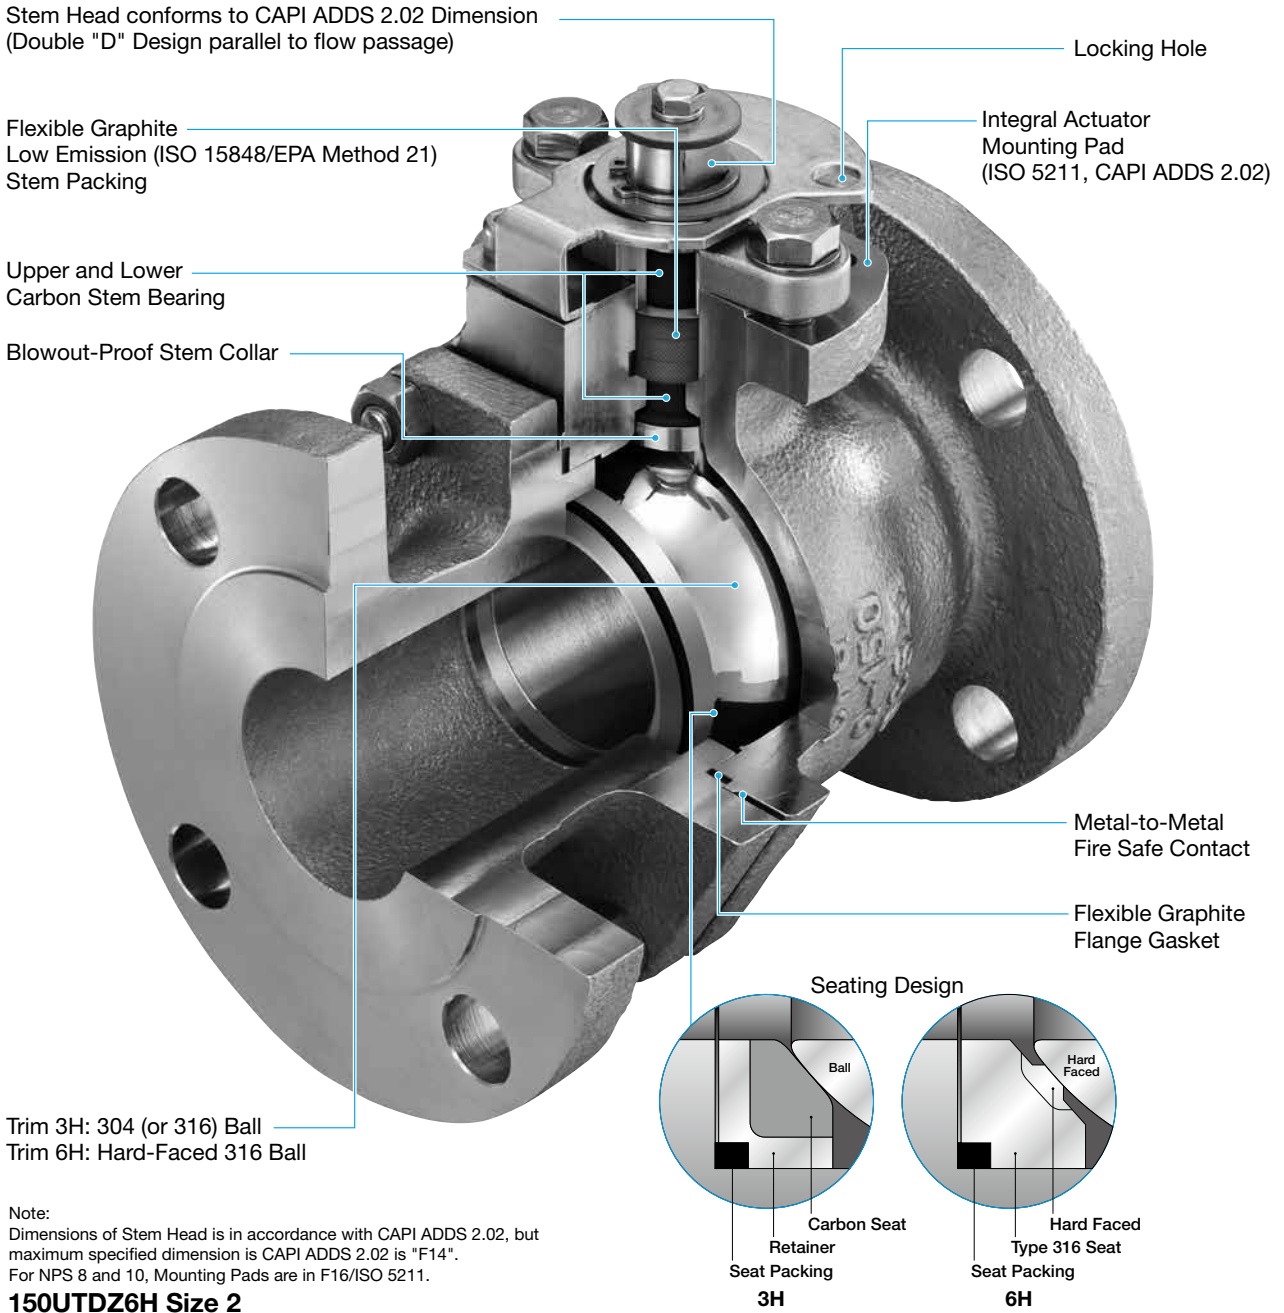

Λ (Lambda)-Port Control Valves

Design Features

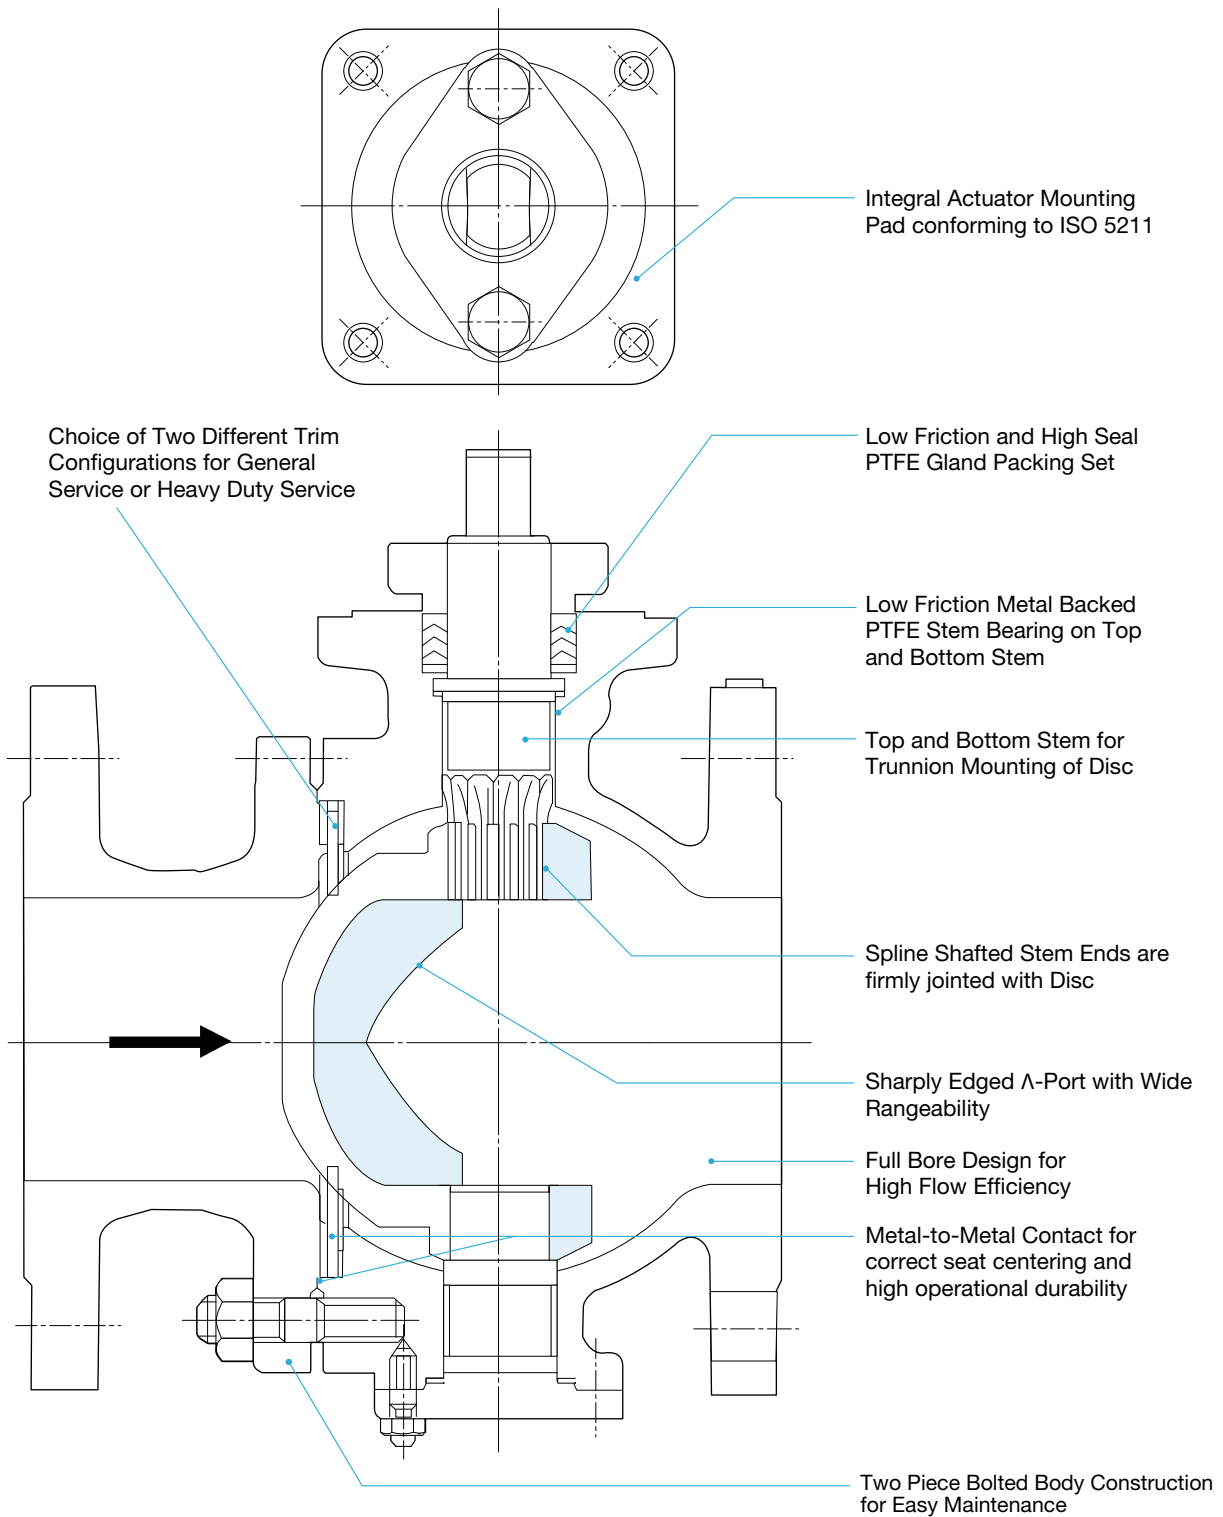

Design Features

1. Sharp Solid Cutting


Trunnion mounted disc is sharply edged for cutting solids and fibrous objects mixed in line fluids, preventing disturbance to valve closing operation and minimizing fluid residue within the valve bore.




2. Choice of Trims

Depending on the service conditions, choice of two different trim configurations are available.

FLEKSEAT, made of Spring in Stainless Steel Type 316, provides elasticity in its contact with hard-chromium plated CF8M Disc for higher sealing performance. This seat is recommended for pulp and paper mill process control and services where higher sealing performance is critically required for valve shut-off. This seat is suited for throttling service. (KITZ Fig. UVC)

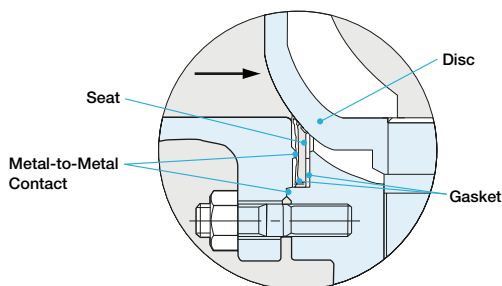

KNIFESEAT, made of Stellite Deposited Steel Type 316, contacts Hard-Chromium Plated CF8M Disc for heavy duty services. This seat is recommended for slurry service, and all other abrasion services. Also good for high viscosity services including pulp and paper mill processes. It is also recommended for throttling service. (KITZ Fig. UVCT)

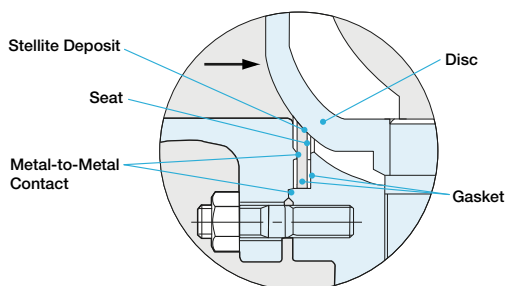

3. Structural Reliability

Metal-to-Metal Contact is accommodated between body and cap, and between seat and cap, for correct seat centering and adequate depressing force. Spline shafted stem ends are firmly jointed to the disc for correct disc centering and higher operational durability. In addition, trunnion mounting of disc to the body helps increase total structural reliability of the valve against extraordinary piping stress.

4. Stabilized Operating Torque

Metal Backed PTFE Stem Bearings are employed on Top and Bottom Stem for minimized and stabilized torque in valve operation. Fine finish of the disc surface and other sliding surfaces of components also helps smooth operation of the valve.

5. Maintenance Ease


Two-Piece Split Body Construction provides convenience of easy maintenance which is always critically required for handling viscous or fibrous line fluids.

6. High Flow Efficiency

Full Bore Design guarantees maximized and linear flow characteristics with minimized pressure loss, helping viscous or fibrous line fluids to pass through valve bore smoothly.

7. Valve Automation

Quarter-Turn Valve drive mechanism enables technically easier valve mounting measures such as electric and pneumatic actuators. Integral Mounting Pads are provided for easy, safe and assures on-the-spot actuator mounting without disassembly of valve glands, as required by ISO Standard. Note: Customers are requested to prepare mounting brackets and connectors for their valve actuation as illustrated below.

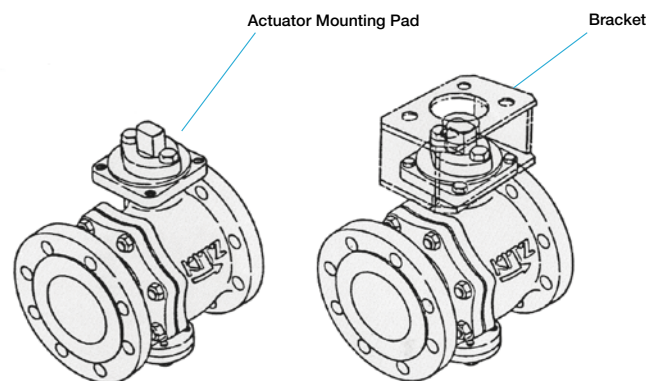

Caution: Caution: KITZ Λ -Port Control Valves are designed for uni-directional flow control. Be sure to install the valve correctly, so that the direction of line flow matches the direction of arrow mark casted out on the valve body.

Design Specifications

| | |
|------------------------|--|
| Valve Structure | Split Body, Side Entry, RF-Flanged, Full Bore, Trunnion Mounted Disc |
| Wall Thickness | ASME B16.34 Class 150/Class 300 |
| Face to Face Dimension | JIS B2002 or ASME B16.10 Class 150/Class 300 for Ball Valves |
| End Connection | RF-Flanged to JIS B22020 10K/20K or ASME B16.5 Class 150/Class 300 |
| Actuator Mounting Pad | ISO 5211 |
| P-T Rating | JIS B2220 10K/20K or ASME B16.34 Class 150/Class 300 |
| Operation | Quarter Turn |

Test Pressure

| | | |
|---|-------------------------------------|--|
| Seat Test Hydrostatic or Pneumatic at 0.39 MPa (4 kgf/cm ² or 60 psi) | FLEKSEAT for General Service | Allowable Leakage 0.0005% of Nominal Cv to IEC 534-4 Class IV-SI or ANSI FCI 70-2 Class IV×0.05 |
| | KNIFESEAT for Heavy Duty Service | Allowable Leakage 0.5% of Nominal Cv to IEC 534-4 Class II or ANSI FCI 70-2 Class II |

Maximum Allowable Seat Leakage (Per Minute under 0.4 MPa Test Pressure)

| Nominal Size | | FLEKSEAT (UVC) | | | KNIFESEAT (UVCT) | |
|--------------|-----|--------------------|----------------------|--------------------|--------------------|---------------------|
| NPS | DN | Cv at Full Opening | Hydrostatic (cc/min) | Pneumatic (NL/min) | Cv at Full Opening | Hydrostatic (L/min) |
| 1 | 25 | 25 | 3.6 | 1.08 | 31 | 4.45 |
| 1½ | 40 | 85 | 12.2 | 3.66 | 100 | 14.4 |
| 2 | 50 | 145 | 20.8 | 6.24 | 160 | 23.0 |
| 2½ | 65 | 240 | 34.5 | 10.35 | 265 | 38.1 |
| 3 | 80 | 380 | 54.6 | 16.38 | 400 | 57.5 |
| 4 | 100 | 550 | 79.0 | 23.70 | 585 | 84.1 |
| 5 | 125 | 960 | 138 | 41.40 | 1010 | 145 |
| 6 | 150 | 1500 | 216 | 46.80 | 1550 | 223 |
| 8 | 200 | 2700 | 388 | 116.40 | 2750 | 395 |
| 10 | 250 | 4300 | 618 | 185.40 | 4400 | 632 |
| 12 | 300 | 6200 | 891 | 267.30 | 6300 | 905 |
| 14 | 350 | 8200 | 1178 | 353.40 | 8300 | 1193 |

Conditions: Absolute Air Pressure of 0.1 MPa at 20°C

T60S Series Soft Seated 3-Piece Body Trunnion Mounted Ball Valves



Design Standards

- Basic Design: API 6D/ISO 14313
- Face to Face Dimension: API 6D/ASME B16.10
- End Connection: ASME B16.5
- Bore Diameter: API 6D/ISO 14313
- Wall Thickness: ASME PBVC Section V III

Product Range

- Nominal Pressure: ASME Class 150 to 1500
- Nominal Size: NPS 2 to NPS 24 (DN 50 to DN 600)
- Shell Materials:
 - Carbon Steel, Alloy Steel,
 - Austenitic Stainless Steel, Duplex Stainless Steel,
 - High Alloy Steel, Nickel Based Alloy
- Ball Seat Materials:
 - RPTFE (Reinforced PTFE), Modified PTFE,
 - RNylon (Reinforced Nylon), DEVLON V[®],
 - PEEK

Certification

- Fugitive Emission: ISO 15848-1 BH CO1
- Fire Test: API 607/API 6FA/ISO 10497
- PED: 2014/68/EU
- ATEX: 2014/34/EU
- SIL: IEC 61508 (SIL 2)

Design Features

- Structure: 3-piece Bolted Body and Cap
- Standard Materials: NACE MR0175, ASTM and others
- Tight Shut-off Sealing Mechanism
- Low Operating Torque
- Triple Stem Sealing System with 2-Orings & Packing
- Double Block and Bleed Function
- Self Relief of Excessive Cavity Pressure
- Fire Safe Tested
- Blowout-Proof Ball Seat & Stem Construction
- Anti-Static Provision Design
- Locking Device for Lever Operation
- ISO 5211 Actuator Mounting Pad
- Available for DPE (Double Piston Effect)/SPE (Single Piston Effect)


1. Fire Safe Design

(1) Internal Leakage Prevention

When resilient sealing materials are damaged or destroyed by plant fire, edges of upstream and downstream metal seat retainers preloaded by seat springs to come in contact with the ball to shut-off line fluid to minimize internal leakage through valve bore. And by flexible graphite seat retainer packing rings of KITZ original design prevents fluid leakage between valve cap and seat retainer during and after the plant fire.

(2) External Leakage Prevention

External leakage from valve stem area is prevented by double sealing mechanism with O-rings and flexible graphite gland packing rings. Leakage through valve body joint is protected by flexible graphite gaskets. Even after fire deteriorates O-rings, flexible graphite gland packing rings and gaskets remain intact to prevent external fluid leakage.

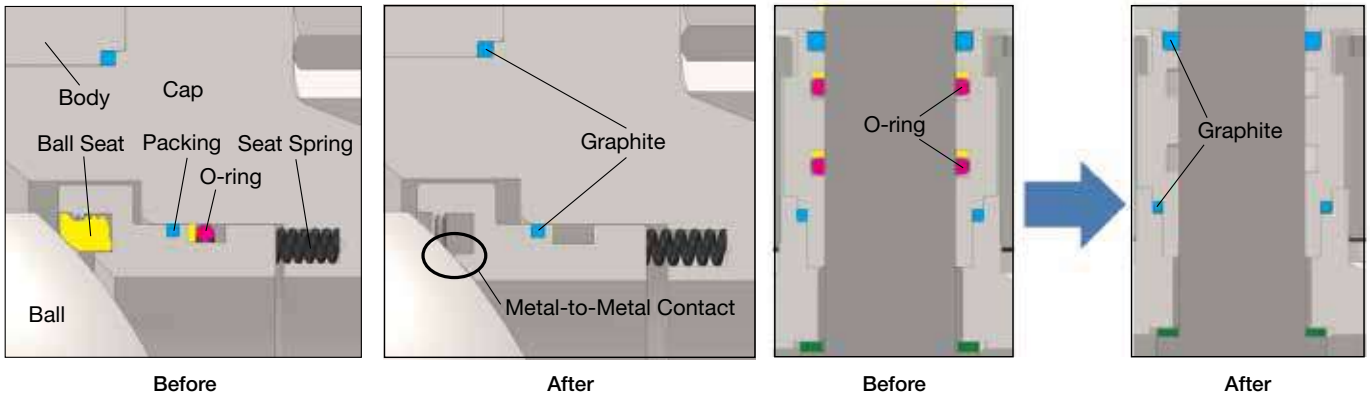


2. Tight Shut-off Sealing Mechanism

Resilient seat design maintains each upstream and downstream ball seats in contact with the ball adequately, by means of repulsing force of seat springs inserted behind seat retainers. Line fluid pressure also helps this contact method. This sealing mechanism features unflinching thru-the-bore sealing performance of upstream and downstream side ball seats at the same time.

3. Double Block and Bleed Function


Ball seats independently shuts off line fluid on upstream and downstream side of the ball. Valve bore and body cavity are isolated from each other when valve is fully open or closed. Under this condition, cavity pressure can be discharged with a vent valve and a drain plug. Vent valve is equipped with blowout-proof bleeder for safe discharge. Relieving cavity pressure with a vent valve is recommended for safe draining.

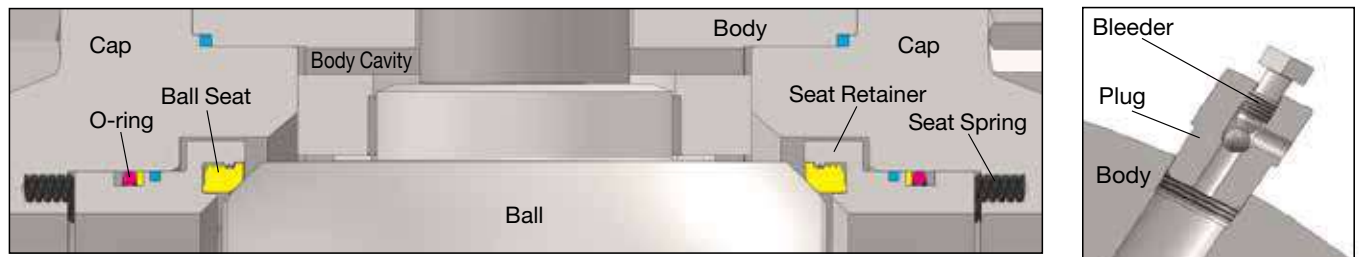

BAL
Steel Ball Valves


4. Blowout-proof Ball Seat Assembly

As illustrated below, ball seats are threaded into unthreaded back of seat retainers to reach inner walls and lower shoulders of seat retainers for tight sealing surface-to-surface contact. This unique design provides easy maintenance and blowout-proof seat assembly when ball seats are excessively loaded by back pressure, due to incidental cavity pressure rise.

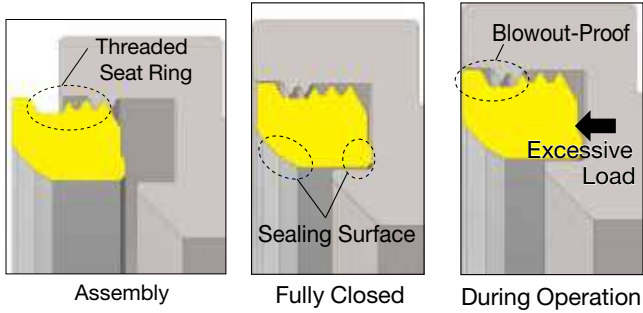


5. Antistatic Design

Spring loaded balls assembled between the stem and bonnet and the stem and ball permits electric conductivity through all metallic valve components.

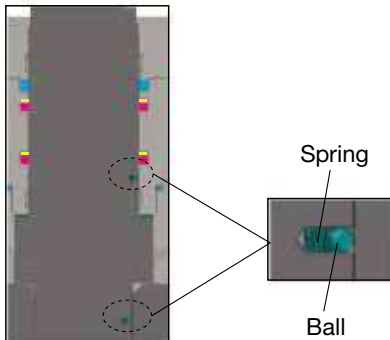

6. Cavity Pressure Relief

In case service or ambient temperature rises incidentally, liquefied gas or highly volatile liquid trapped within body cavity may vaporize and cause excessive rise in cavity pressure. For safety consideration, when cavity pressure exceeds line pressure, either one of ball seats will move slightly away from the ball surface together with seat retainers to relieve excessive cavity pressure into the valve bore.

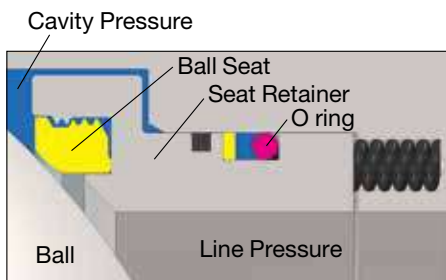


7. Low Emission Guaranteed Design

Fugitive Emission suppressing design for both resilient and metal seated valves are ISO 15848 Tightness Class "B" certified (Lower than 10^{-4} mg·s⁻¹·m⁻¹ for stem leakage and lower than 50 ppmv for body leakage). This verifies outstanding low emission performance of the whole sealing mechanism in the valve.

8. Options^{*1}

(1) Emergency Seal Restoration^{*2}

For accidental leakage from ball seats or stem sealing area, sealant supply mechanism may be provided as an option. Should sealing parts be damaged or decomposed by a fire or other accidental causes, leakage can be temporarily prevented or reduced by sealant injection into this mechanism.

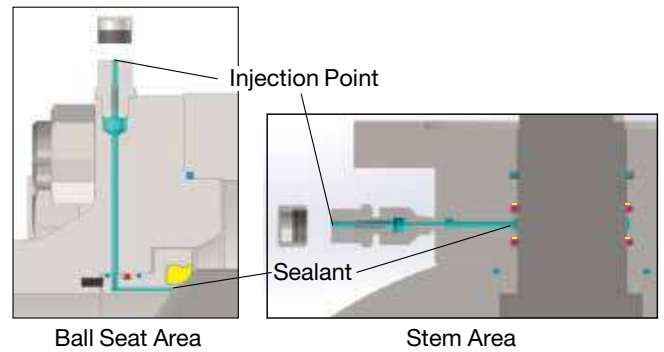

(2) Special Shell and Trim Materials

(3) Special Sealing Component Materials

(4) Butt-weld Piping Connection

(5) Pipe Pups Welded to Valve Ends

(6) DIB: Double Isolation and Bleed (Double Seal)^{*3}

(7) Stem Extension

(8) Overlay for Bore and Cavity

(9) Actuation (Pneumatic and Electric)

^{*1} For all optional provisions, please contact KITZ representative or local distributors.

^{*2} Standard design for North American market.

^{*3} Any combination of DPE (Double Piston Effect)/SPE (Single Piston Effect) is available.

T60M Series Metal Seated 3-Piece Body Trunnion Mounted Ball Valves



Design Standards

- Basic Design: API 6D/ISO 14313 (Except CL 600-24)
- Face to Face Dimension: API 6D/ASME B16.10
- End Connection: ASME B16.5
- Bore Diameter: API 6D/ISO 14313
- Wall Thickness: ASME PBVC Section V III

Product Range

- Nominal Pressure: Class 150 to 600
- Nominal Size: NPS 2 to 24 (DN 50 to 600)
- Shell Materials:
 - Carbon Steel, Alloy Steel,
 - Austenitic Stainless Steel, Duplex Stainless Steel,
 - High Alloy Steel, Nickel Based Alloy
- Seat Materials:
 - 316SS + Ni-Cr Alloy Thermal Spraying

Certification


- Fugitive Emission: ISO 15848-1 BH CO1
- Fire Test: API 6FA
- PED: 2014/68/EU
- ATEX: 2014/34/EU
- SIL: IEC 61508 (SIL 2)

Design Features

- Structure: 3-piece Bolted Body and Cap
- Standard Material: NACE MR0175, ASTM and others
- High Performance Sealing Mechanism
- Low Operating Torque
- Packing with Live Loaded Sealing Mechanism
- Double Block and Bleed Function
- Self-Relief of Excessive Cavity Pressure
- Fire Safe Design
- Blowout-Proof Ball Seat & Stem Construction
- Anti-Static Provision
- Locking Device for Lever Operation
- ISO 5211 Actuator Mounting Pad


1. High Performance Sealing Mechanism

Metal seat design, as with resilient seat design, adequately maintain each upstream and downstream ball seats in contact with the ball by means of repulsing force of seat springs inserted behind seat retainers. Line fluid pressure also helps this contact method. This sealing mechanism features unfailing thru-the-bore sealing performance of upstream and downstream side ball seats at the same time. In addition, by having surfaces of the ball and ball seats in contact thermally sprayed with high alloy material, this provides higher wear resistance and durability for high temperature and abrasive services.

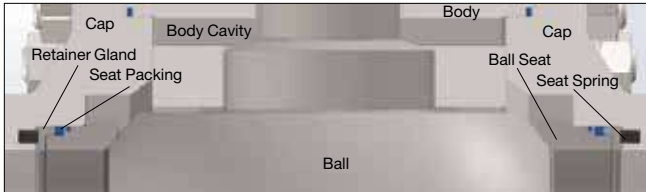


2. Double Block and Bleed Function

Ball seats independently shuts off the line fluid on upstream and downstream side of the ball. Valve bore and body cavity are isolated from each other when the valve is fully open or closed. Under this condition, the cavity pressure can be discharged with a vent valve and a drain plug. Vent valve is equipped with a blowout-proof bleeder for safe discharge. Relieving cavity pressure with a vent valve is recommended for safe draining.




3. High Performance Seat Packing

Unique graphite seat packing rings with retainer glands provide reliable shut-off sealing performance during the entire service life.




4. Live Loaded Packing Structure

Gland packing ring is compressed with coned disc spring to prevent stress relaxation. This live loaded packing system provides highly durable sealing performance with no need of packing re-tightening.

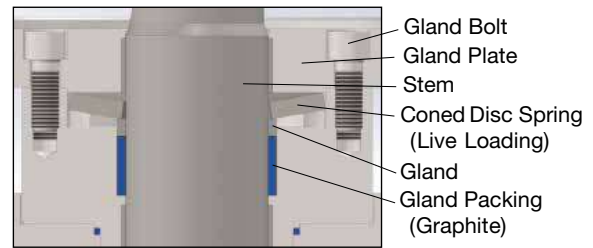

5. Cavity Pressure Relief

In case incidental rise of service or ambient temperature, liquefied gas or highly volatile liquid trapped within the body cavity may vaporize and cause excessive rise in cavity pressure. For safety consideration, when cavity pressure exceeds the line pressure, either one of ball seats will move slightly away from the ball surface together with seat retainers to relieve excessive cavity pressure into the valve bore.

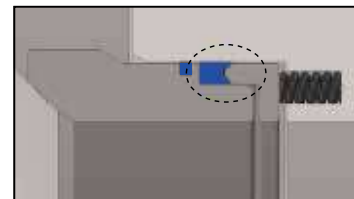

6. Low Emission Guaranteed Design

Fugitive emission suppressing design for both resilient and metal seated valves are certified to ISO 15848 tightness class "B" (lower than 10^{-4} mg.s⁻¹ m⁻¹ for stem leakage and lower than 50ppmv for body leakage). This verifies outstanding low emission performance of whole sealing mechanism of the valve.

7. Options*

- (1) Special Shell and Trim Materials
- (2) Special Sealing Component Materials
- (3) Butt-weld Piping Connection
- (4) Pipe Pups Welded on Valve Ends
- (5) Stem Extension
- (6) Overlay for Bore and Cavity
- (7) Actuation (Pneumatic and Electric)

*For all optional provisions, please contact KITZ representative or local distributors.

Following seat materials are available.

| Material | Features | Maximum Service Temperature |
|---|---|-----------------------------|
| Virgin PTFE | High chemical resistance and operation efficiency | 200°C |
| HYPATITE® PTFE | Monomer permeability is lower and resistance against compression and creeping is higher than other PTFE materials | 260°C/270°C *1 |
| Carbon filled PTFE | Excellent heat and abrasion resistance | 260°C/270°C *1 |
| FILLTITE* | Highest heat resistance among PTFE based materials | 300°C *2 |
| Graphite | Excellent for high temperature service | 500°C |
| Metal | Excellent for high temperature and abrasive service | 500°C/525°C *3 |
| PEEK | Higher heat resistance and mechanical strength | 270°C |
| Glass fiber filled PTFE with MoS ₂ | Higher abrasion resistance and operation efficiency | 230°C |
| Nylon with MoS ₂ | Higher mechanical strength | 140°C |

*: FILLTITE is specially reinforced ball seat, made by using more carbon based fillers into PTFE compared to conventional carbon filled PTFE, which generally improves heat and abrasion resistance. This material provides excellent operability, durability, chemical resistance and sealing performance at a high temperature of 300°C. In addition, ball seats are interchangeable with most of our conventional ball seats, and also have the cost advantage.

*1 270°C: SCTDZ/UTDZM Series only.

*2 Uni-body design: 260°C

*3 525°C: T60M/SF3TC 6H UF3TC6HM Series only.


HYPATITE® PTFE Ball Seats (Carbon and Stainless Steel Valves)

As manufacturer's standard, KITZ ball valves are furnished with HYPATITE® PTFE ball seats made of denatured PTFE, molecularly reinforced PTFE copolymer and specially engineered for high performance which includes:

■ Wide service temperature range of -29°C (-20°F) through 270°C (518°F) for SCTDZ/UTDZ(M) Series and 260°C (500°F) for UTB and SCTAZ/UTAZ(M) Series.

This is standard valve design and materials used for medium to high temperature services. Lower temperature range can be extended down to -196°C (-321°F) by means of extended bonnet design and special low temperature serviced materials.

- High chemical resistance comparable to virgin PTFE.
- Monomer permeability lower than other PTFE materials.
- High mechanical strength against compression, creeping (cold flow) and superior to other PTFE materials for long life cycle.
- Smooth operation, as it possesses specific gravity and friction coefficient equal to those of virgin PTFE.
- Prevents contamination in process line with its stability, the performance comparable to virgin PTFE.
- High sealing performance brought by its resiliency, the typical feature of PTFE.

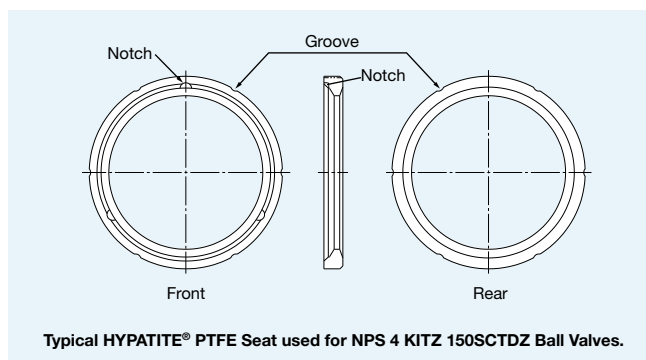

FILLTITE Ball Seats

Highest heat resistance among PTFE based materials.

- Service temperature range: -29°C to 300°C
- Trim symbol: 1H

1. Choice of Trim for Heated Abrasive Services

Metal seated ball valves are guaranteed for maximum service temperature of 300°C (572°F) for trim symbol 5H and 500°C (932°F) for trim symbol 6H^{*1*}. With hard graphite seated ball valves, maximum service temperature of 500°C (932°F) is also guaranteed for trim symbol 3H^{*2}. For heat resistant sealing and trim materials, quality of these valves for heated and abrasive service, which cannot be properly handled with conventional soft seated ball valves, due to the limited heat resistant characteristics and mechanical properties of the soft seats.

"FILLTITE" is specially reinforced ball seat, using more carbon based fillers into PTFE compared with conventional carbon filled PTFE, which improves heat and abrasion resistance greatly. This material performs excellent operability, durability, chemical resistance and sealing performance at high temperature of 300°C (572°F). In addition, ball seats are interchangeable with most of our conventional ball seats and also have the cost advantage.

^{*1} Temperature is limited to 450°C (842°F) for trunnion mounted ball valves with trim 6H
^{*2} WCB Shell Material: Upon prolonged exposure to temperatures above 425°C (797°F), carbide phase of steel may be converted to graphite.
 Permissible, but not recommended for prolonged usage above 425°C (797°F).

2. Unconditional Fire-Safe Provision

While metal and hard graphite seats are extremely heat resistant, other sealing components, such as gland packing and flange gaskets are made of flexible graphite, which is another heat resistant material, so no part of the valve be affected by extraordinarily heated environments. Also, provision of anti-static device is not required due to inter-component electric conductivity.

3. Maintenance Ease

Split body construction of the valve body provides convenience of easy maintenance, critical requirement for handling slurries and other viscous fluid.

4. Valve Automation

Quarter-turn valve drive mechanism makes mounting of valve automation measures such as electric and pneumatic actuators technically easier. KITZ floating ball valves employ integral actuator mounting pads, complying with ISO 5211 and CAPI, for easy, safe and assured on-the-spot actuator mounting without disassembly of valve glands.

8. Metal Seated Ball Valves (Trim 5H/6H)

Rigid construction with full metallic contact between the ball and seats, and high durability of trim materials make KITZ metal seated ball valves ideally suited to highly abrasive services handling slurries and other viscous fluids.

● **Trim Materials**

| Valve Design | Floating Ball Valve | | Trunnion Mounted Ball Valve | | |
|----------------------------|------------------------|---|--|---|--|
| | 5H | 6H ^{*3} | Split body | 3-piece body | |
| Trim Symbol | 5H | 6H ^{*3} | 6H | | |
| Temperature | 300°C | 500°C | 450°C | 525°C | |
| | 572°F | 932°F | 842°F | 977°F | |
| Seat Leakage ^{*1} | ANSI FCI 70-2 Class VI | | | ISO 5208 RateD/ ANSI FCI 70-2 Class VI ^{*4} | |
| Parts | Ball | ASTM A276 Type 316 or ASTM A351 CF8M + Cr plated | ASTM A276 Type 316 or A351 Gr.CF8M + SFNi ^{*2} | ASTM A276 Type 304 + SFNi ^{*2} | 316 Stainless Steel + SFNi ^{*2} |
| | Ball Seat | ASTM A276 Type 316 + SFNi ^{*2} | ASTM A276 Type 316 + SFNi ^{*2} | ASTM A276 Type304 + SFNi ^{*2} | 316 Stainless Steel + SFNi ^{*2} |
| | Stem | ASTM A 564 Type 630 | ASTM A 564 Type 630 | ASTM A276 Type304 + SFNi ^{*2} | ~343°C/649°F : ASTM A564 Type630 ~525°C/977°F : EN 1.4980 |

^{*1} Maximum allowable seat leakage ^{*2} Ni-Cr alloy thermal spraying
^{*3} WCB Shell Material: Upon prolonged exposure to temperature above 425°C (797°F), carbide phase of steel may be converted to graphite.
 Permissible, but not recommended for prolonged usage above 425°C (797°F).
^{*4} Please contact KITZ representative or distributors for details.

- Durable metal seat design and materials also provides fully guaranteed throttling service performance, which makes KITZ metal seated ball valves function as reliable control valve.
- Bi-directional flow.

Caution:

- Use gear operator or valve actuator to fix valve position when used for throttling service.

5. High Flow Efficiency

Full port design provides maximized and linear flow characteristic with minimal pressure loss as the line flow travels through the valve bore. This is necessary design requirement particularly for trouble-free service of slurries and other viscous fluids.

6. FILLTITE Seated Ball Valves (Trim1H)

- Highest heat resistance among PTFE based materials.

| Valve Design | | Floating Ball Valve | Trunnion Mounted Ball Valve |
|--------------|-----------|--|-----------------------------|
| Trim Symbol | | 1H | |
| Temperature | | 300°C | |
| | | 572°F | |
| Parts | Ball | ASTM A276 Type 304 ^{*1} or A351 Gr.CF8 ^{*1} | |
| | Ball Seat | FILLTITE [®] PTFE | |
| | Stem | ASTM A276 Type 304 ^{*2} ASTM A276 Type 316 ^{*2} | |

^{*1} CF8M Shell Material: Ball Type 316 or CF8M
^{*2} CF8M Shell Material: Stem Type 316



7. Hard Graphite Seated Ball Valves (Trim 3H)

- Bi-directional flow.
- Recommended for low abrasion service.

| Valve Design | | Floating Ball Valve |
|----------------------------|-----------|--|
| Trim Symbol | | 3H ^{*5} |
| Temperature | | 500°C |
| | | 932°F |
| Seat Leakage ^{*1} | | ANSI FCI 70-2 Class VI |
| Parts | Ball | ASTM A276 Type 304 ^{*1} or A351 Gr.CF8 ^{*2} |
| | Ball Seat | Carbon + JIS SUS329J1 ^{*3} |
| | Stem | ASTM A276 Type 304 ^{*4} |

^{*1} Maximum allowable seat leakage ^{*2} CF8M Shell Material: Ball Type 316 or CF8M
^{*3} Equivalent to AISI Type 329 ^{*4} CF8M Shell Material: Stem Type 316
^{*5} WCB Shell Material: Upon prolonged exposure to temperature above 425°C (797°F) carbide phase of steel may be converted to graphite.
 Permissible, but not recommended for prolonged usage above 425°C (797°F).



Caution:

- Not recommended for throttling service.
- Not recommended for high abrasion service.
- Maximum working temperature for oxidizing service, such as high temperature air, is 450°C (842°F).




Dimension of Actuator Mounting Pads



Integral Actuator Mounting Pads

KITZ 150/300 SCTDZ/UTDZ(M) Series and 150/300 SCTAZM/UTAZ(M) Series ball valves are furnished with integral actuator mounting pad designed and factory-drilled according to ISO 5211 Standard specification. This feature facilitates the installation of actuators with ISO 5211 mounting flange to the valves. Mounting pad and stem head dimension also conforms to CAPI ADDS 2.02.

Note: Customers are requested to prepare mounting brackets and connectors for the actuators chosen for their valve automation. Actuators can be mounted on KITZ ball valves without disassembly of valve glands.

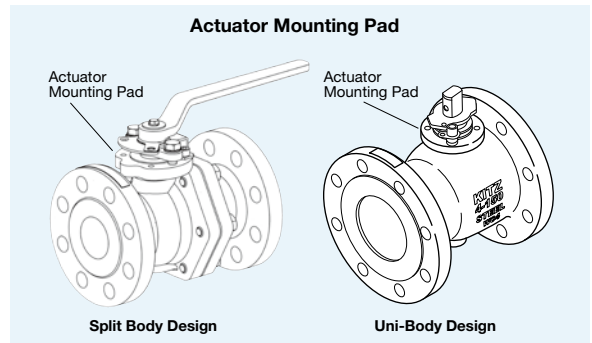

Dimensions of ISO 5211 Actuator Mounting Pad for Class 150 / 300 Full Port, Split Body, Side Entry Design Ball Valves

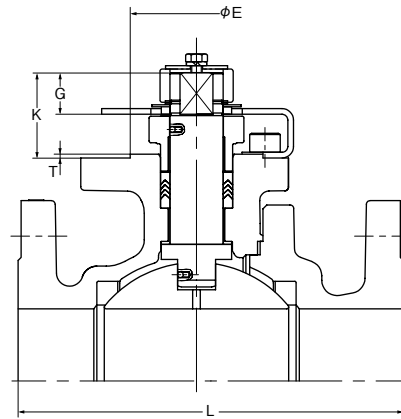

Dimensions

Unit: mm

| Nominal Pressure | Nominal Size (NPS) | -0.05 -0.10 A | -0.1 -0.2 φB | -0.1 -0.2 φE | ±0.2 φF | G | K | L | d | T | ISO 5211 Flange Type |
|------------------|--------------------|---------------------|--------------------|--------------------|------------|----|----|-----|----------|-----|----------------------|
| | | | | | | | | | M Thread | | |
| Class 150 | 1/2 | 9 | 12 | 25 | 36 | 9 | 22 | 108 | M5 | 1 | F03 |
| | 3/4 | 9 | 12 | 25 | 36 | 9 | 22 | 117 | M5 | 1 | F03 |
| | 1 | 14 | 18 | 35 | 50 | 14 | 30 | 127 | M6 | 1.5 | F05 |
| | 1 1/4 | 14 | 18 | 35 | 50 | 14 | 30 | 140 | M6 | 1.5 | F05 |
| | 1 1/2 | 17 | 22 | 55 | 70 | 17 | 34 | 165 | M8 | 1.5 | F07 |
| | 2 | 17 | 22 | 55 | 70 | 17 | 34 | 178 | M8 | 1.5 | F07 |
| | 2 1/2 | 22 | 28 | 70 | 102 | 22 | 45 | 190 | M10 | 2 | F10 |
| | 3 | 22 | 28 | 70 | 102 | 22 | 45 | 203 | M10 | 2 | F10 |
| | 4 | 27 | 36 | 85 | 125 | 27 | 52 | 229 | M12 | 2 | F12 |
| | 5 | 27 | 36 | 85 | 125 | 27 | 52 | 356 | M12 | 2 | F12 |
| Class 300 | 1/2 | 9 | 12 | 25 | 36 | 9 | 22 | 140 | M5 | 1 | F03 |
| | 3/4 | 9 | 12 | 25 | 36 | 9 | 22 | 152 | M5 | 1 | F03 |
| | 1 | 14 | 18 | 35 | 50 | 14 | 30 | 165 | M6 | 1.5 | F05 |
| | 1 1/2 | 17 | 22 | 55 | 70 | 17 | 34 | 190 | M8 | 1.5 | F07 |
| | 2 | 17 | 22 | 55 | 70 | 17 | 34 | 216 | M8 | 1.5 | F07 |
| | 2 1/2 | 22 | 28 | 70 | 102 | 22 | 45 | 241 | M10 | 2 | F10 |
| | 3 | 22 | 28 | 70 | 102 | 22 | 45 | 283 | M10 | 2 | F10 |
| | 4 | 27 | 36 | 85 | 125 | 27 | 52 | 305 | M12 | 2 | F12 |
| | 6 | 36 | 48 | 100 | 140 | 36 | 63 | 403 | M16 | 2 | F14 |
| | 8 | 46 | 60 | 130 | 165 | 46 | 79 | 502 | M20 | 2 | F16 |


*KITZ Product Codes:

- (1) 150UTDZ(M) (4) 300SCTDZ
 (2) 150SCTDZ (5) 150UTDZXL(M)
 (3) 300UTDZ(M) (6) 300UTDZXL(M)

Note: Dimension of stem head are in accordance with CAPI ADDS 2.02, but the maximum specified dimension in CAPI ADDS 2.02 is "F14". For NPS 8 and 10, mounting pads are F16/ISO 5211.

Dimension of Actuator Mounting Pads

Dimensions of ISO 5211 Actuator Mounting Pad for Class 150 / 300 Reduced Bore, Uni-Body, End Entry Design Ball Valves

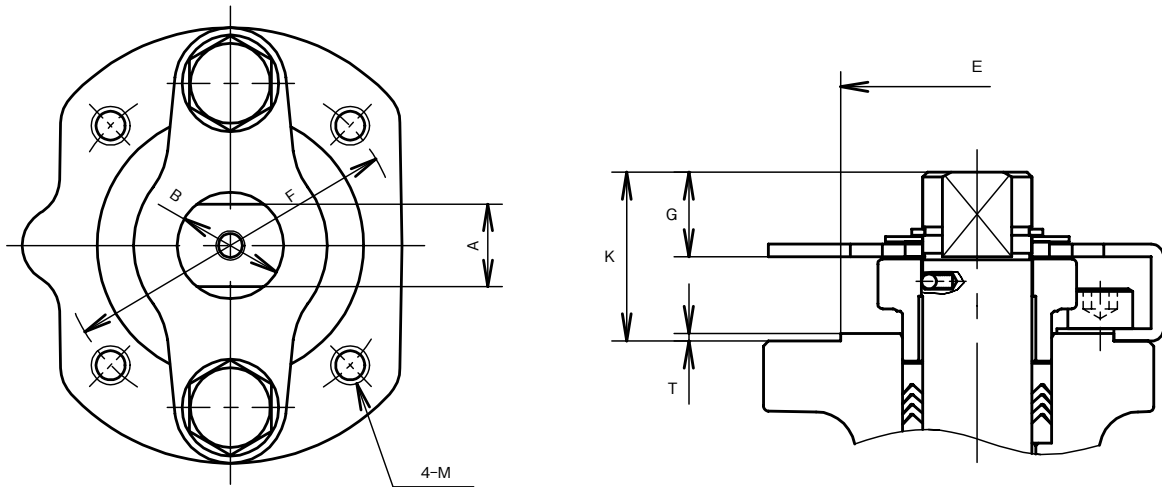

Dimensions

Unit: mm

| Nominal Pressure | Nominal Size (NPS) | Mounting Dimensions for Actuator | | | | | | | | ISO 5211 Flange Type |
|------------------|--------------------|----------------------------------|----|-----|-----|-----|----|-----|-----|----------------------|
| | | A | B | E | F | G | K | T | M | |
| Class 150 | 1/2 | 7 | 10 | 25 | 36 | 8.5 | 18 | 1 | M5 | F03(2) |
| | 3/4 | 7 | 10 | 25 | 36 | 8.5 | 18 | 1 | M5 | F03(2) |
| | 1 | 9 | 12 | 25 | 36 | 9 | 22 | 1 | M5 | F03 |
| | 1 1/2 | 14 | 18 | 35 | 50 | 14 | 30 | 1.5 | M6 | F05 |
| | 2 | 17 | 22 | 55 | 70 | 17 | 34 | 1.5 | M8 | F07 |
| | 3 | 22 | 28 | 70 | 102 | 22 | 45 | 2 | M10 | F10 |
| | 4 | 22 | 28 | 70 | 102 | 22 | 45 | 2 | M10 | F10 |
| | 6 | 27 | 36 | 85 | 125 | 27 | 52 | 2 | M12 | F12 |
| Class 300 | 8 | 36 | 48 | 100 | 140 | 36 | 63 | 2 | M16 | F14 |
| | 10 | 46 | 60 | 130 | 165 | 46 | 79 | 2 | M20 | F16 |
| | 1/2 | 7 | 10 | 25 | 36 | 8.5 | 18 | 1 | M5 | F03(2) |
| | 3/4 | 7 | 10 | 25 | 36 | 8.5 | 18 | 1 | M5 | F03(2) |
| | 1 | 9 | 12 | 25 | 36 | 9 | 22 | 1 | M5 | F03 |
| | 1 1/2 | 14 | 18 | 35 | 50 | 14 | 30 | 1.5 | M6 | F05 |
| | 2 | 17 | 22 | 55 | 70 | 17 | 34 | 1.5 | M8 | F07 |
| | 3 | 22 | 28 | 70 | 102 | 22 | 45 | 2 | M10 | F10 |
| | 4 | 22 | 28 | 70 | 102 | 22 | 45 | 2 | M10 | F10 |
| | 6 | 27 | 36 | 85 | 125 | 27 | 52 | 2 | M12 | F12 |

*These dimensions are specified as F03S by CAPI.

★UNC threads optionally available.

KITZ Product Codes:

- (1) 150SCTAZ (3) 300SCTAZ
- (2) 150UTAZ(M) (4) 300UTAZ(M)

Pressure-Temperature Ratings

Pressure-Temperature rating of ball valves are determined, not only by valve shell materials, but more essentially by sealing materials used for ball seats, gland packing and gaskets. Sealing materials may be high molecule or rubber, but the choice is limited by the characteristics of service fluid, working temperatures, working pressure, velocity of fluid and operation frequency of the valves.

As it is very difficult to predetermine the exact pressure-temperature rating for all kinds of fluid under all imaginable conditions, based on our past experiences, both in the field


and in our laboratory, we have prepared general rating charts for non-shock fluid service as below. In case of extraordinary service conditions as the following, kindly contact KITZ representative or its distributors for technical advice:

1. Valves shall be left fully closed for a long period of time under high temperature or high differential pressure.
2. Valves shall be frequently operated under high temperature or high differential pressure.
3. Frequent change of line pressure or temperature.

HYPATITE® PTFE is the standard seat material for KITZ ball valves. Specify virgin PTFE or carbon-filled PTFE when required. The body ratings shown here are for ASTM A216 Gr. WCB and A351 Gr. CF8M. For the pressure ratings of other valve shell materials, refer to the latest edition of ASME B16.34.


FILLTITE is specially reinforced ball seat using carbon based fillers into PTFE at higher rate than conventional carbon filled PTFE, which greatly improves heat and abrasion resistance. This material has excellent operability, durability, chemical resistance and sealing performance at high temperature of 300°C. In addition, the ball seat is interchangeable with most of our conventional ball seats and also has the cost advantage.

Soft Seated 3-Piece Trunnion Mounted Ball Valves

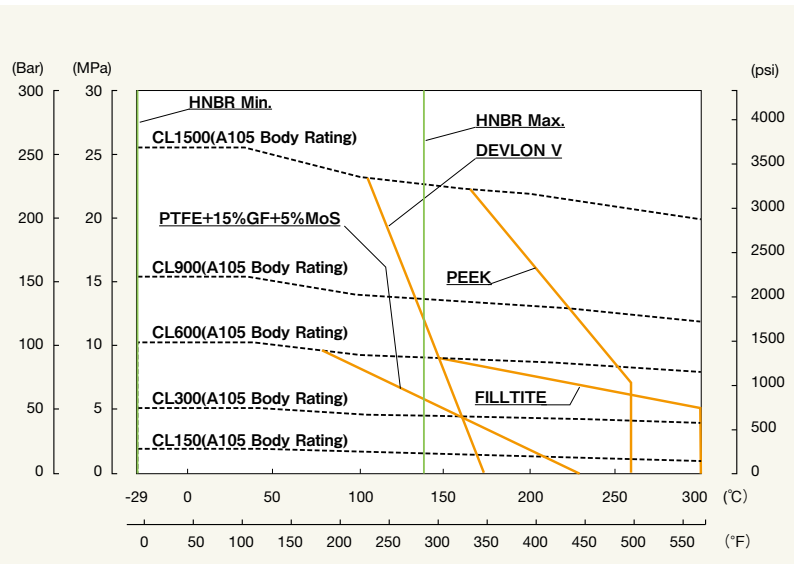

| O-ring Material | Min.Temp. (°C/°F) | Max.Temp. (°C/°F) |
|-----------------|-------------------|-------------------|
| NBR | -30/-22 | 80/176 |
| HNBR | -30/-22 | 140/284 |
| L-NBR | -50/-58 | 80/176 |
| L-HNBR | -46/-50 | 140/284 |
| FKM | -20/-4 | 200/392 |


Metal Seated 3-Piece Trunnion Mounted Ball Valves: Trim 6H

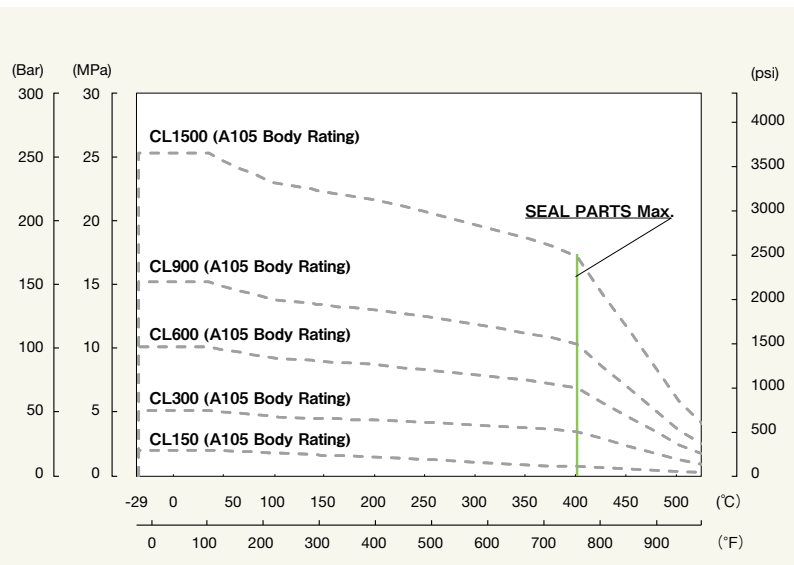


NOTE : In case of using at higher than 400°C please contact KITZ Corporation.

Pressure-Temperature Ratings


10/20/150/300UTDZ(M)/SCTDZ: NPS 1/2, 3/4

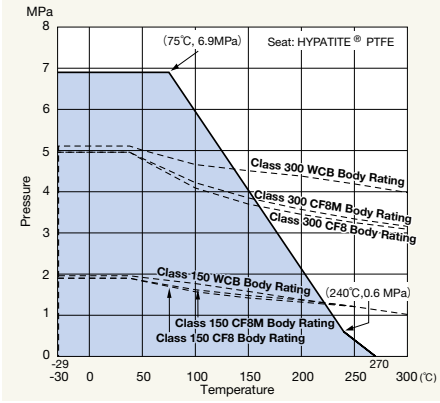


10/20/150/300UTDZ(M)/SCTDZ: NPS 1 to 2 1/2

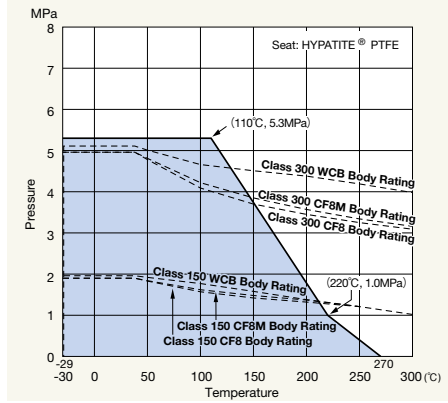


10/20/150/300UTDZ(M)/SCTDZ: NPS 3, 4

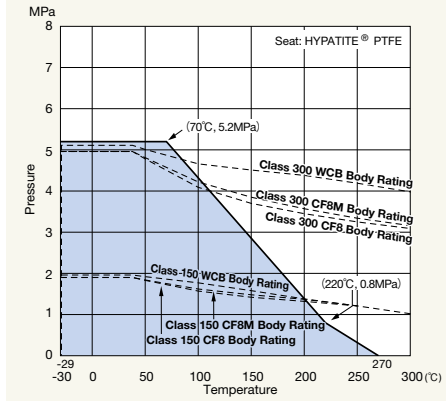

10/20/150/300UTDZ(M)/SCTDZ: NPS 5, 6
TDR series: NPS 6, 8

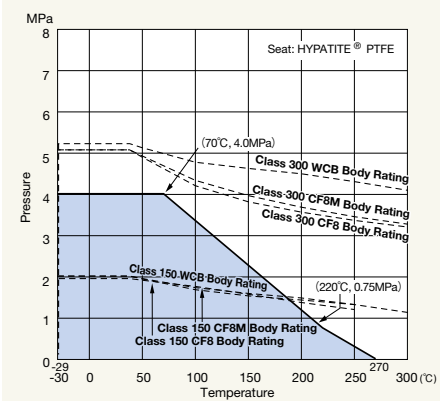


10/20/150/300UTDZ(M)/SCTDZ: NPS 8, 10
TDR series: NPS 10

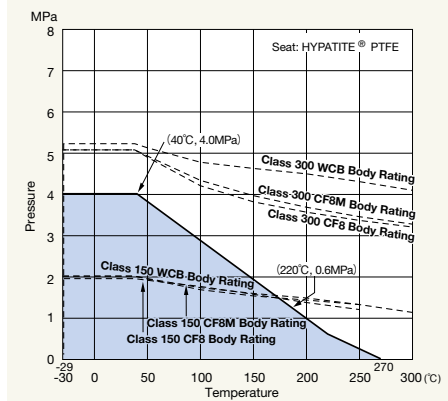


Note: Lowest working temperature for WCB is -29°C.


150/300UTAZ(M)/SCTAZ: NPS 1/2 to 1

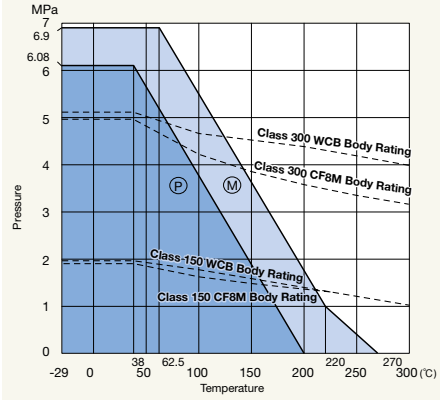


150/300UTAZ(M)/SCTAZ: NPS 1 1/2 to 3

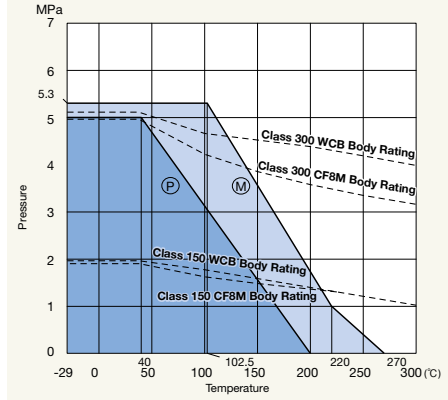

150/300UTAZ(M)/SCTAZ: NPS 4, 6

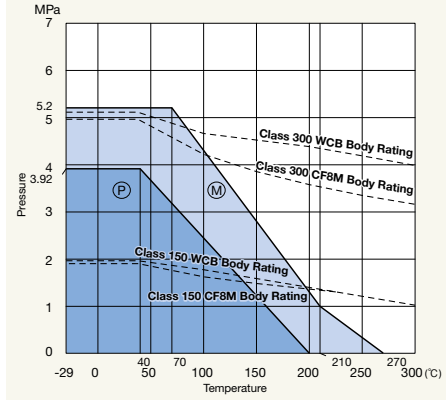


150/300UTAZ(M)/SCTAZ: NPS 8, 10

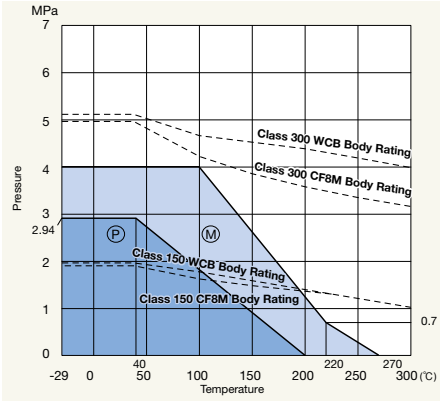


Seat: (P) Virgin PTFE
(M) HYPATITE® PTFE / Carbon-filled PTFE

Pressure-Temperature Ratings


FILLTITE Seated Floating Ball Valves: Trim 1H: NPS 1/2 to 2 1/2

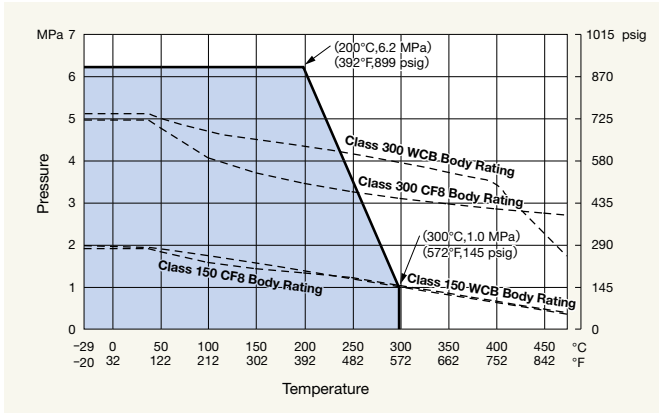


FILLTITE Seated Floating Ball Valves: Trim 1H: NPS 3, 4

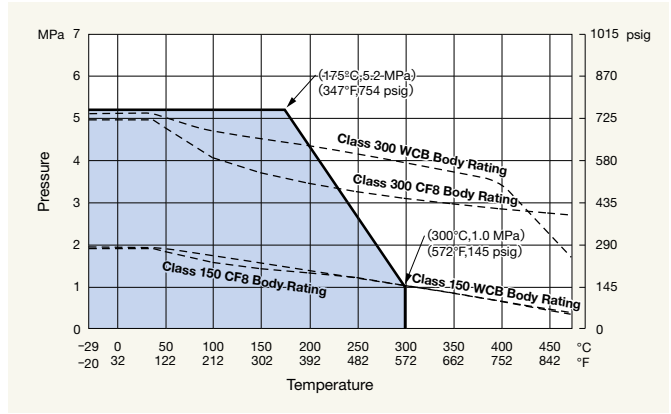


FILLTITE Seated Floating Ball Valves: Trim 1H: NPS 5, 6

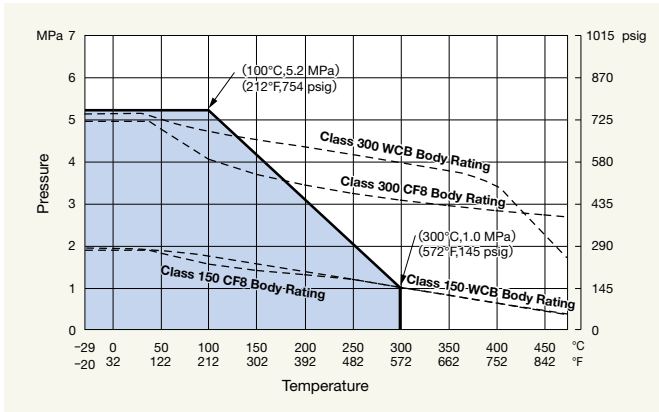

FILLTITE Seated Floating Ball Valves: Trim 1H: NPS 8, 10

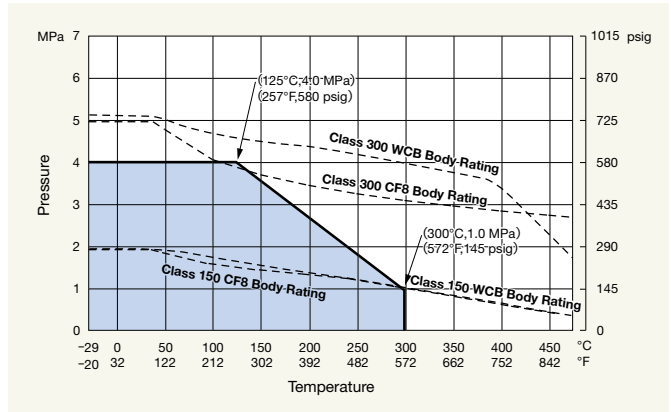

Hard Graphite Seated Floating Ball Valves: Trim 3H

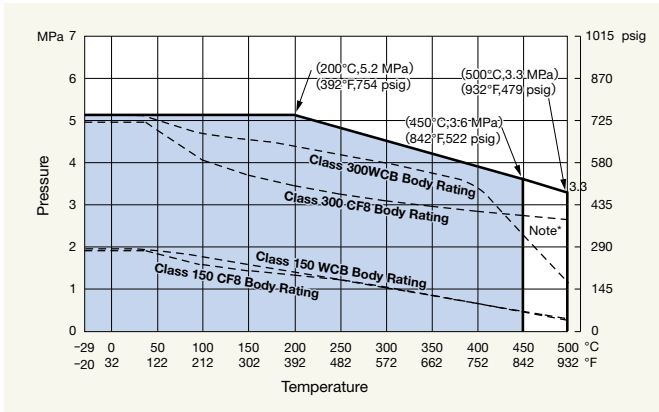

Note: **3H** Maximum working temperature for oxidizing service, such as high temperature air, is 450°C (842°F).


Note: **3H/6H** Serviceable temperature terminates at 300°C (572°F) for JIS 10K and at 425°C (797°F) for JIS 20K.

Note: **3H/6H** WCB Shell material: Upon prolonged exposure to temperatures above 425°C (797°F), the carbide phase of steel may be converted to graphite. Permissible, but not recommended for prolonged usage above 425°C (797°F).


Note: **3H/6H** WCB Shell Material: Upon prolonged exposure to temperatures above 425°C (797°F), carbide phase of steel may be converted to graphite.

Pressure-Temperature Ratings


■ Metal Seated Floating Ball Valves: Trim 5H: NPS 1/2 to 1 1/4

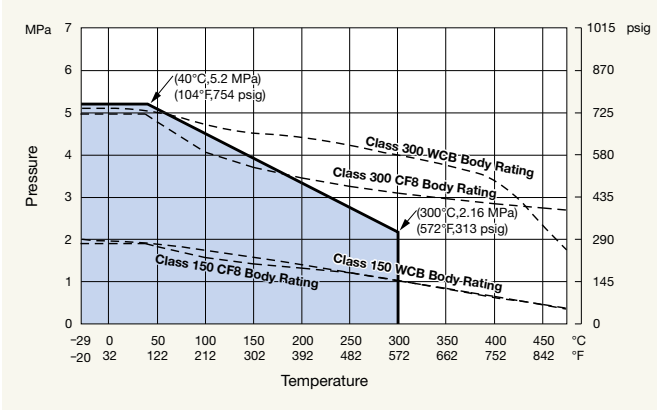


■ Metal Seated Floating Ball Valves: Trim 5H: NPS 1 1/2, 2

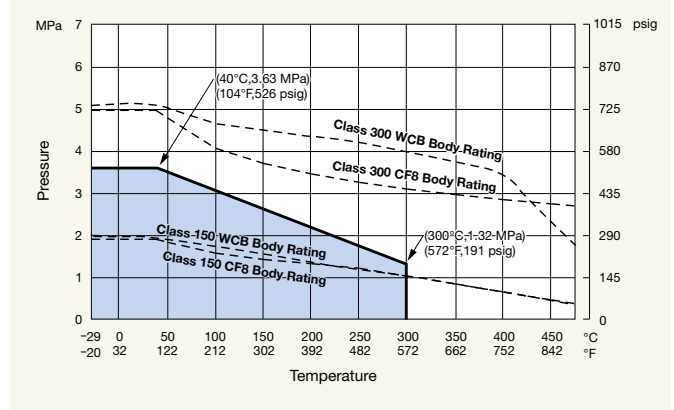


■ Metal Seated Floating Ball Valves: Trim 5H: NPS 2 1/2, 4

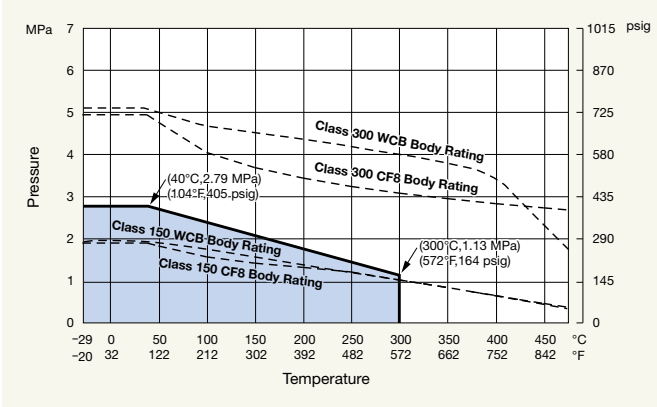


■ Metal Seated Floating Ball Valves: Trim 5H: NPS 5 to 8

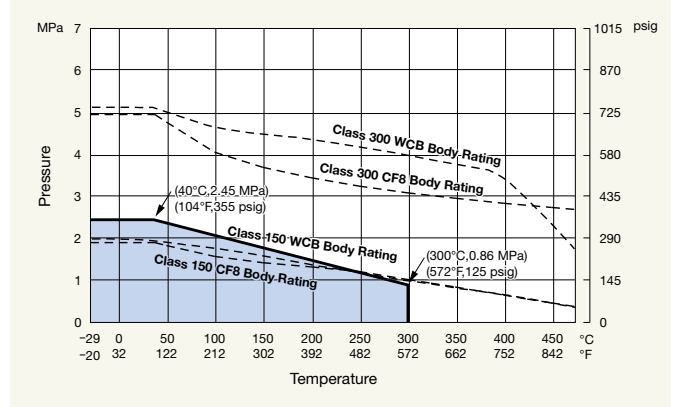

■ Metal Seated Floating Ball Valves: Trim 6H: NPS 1/2 to 5

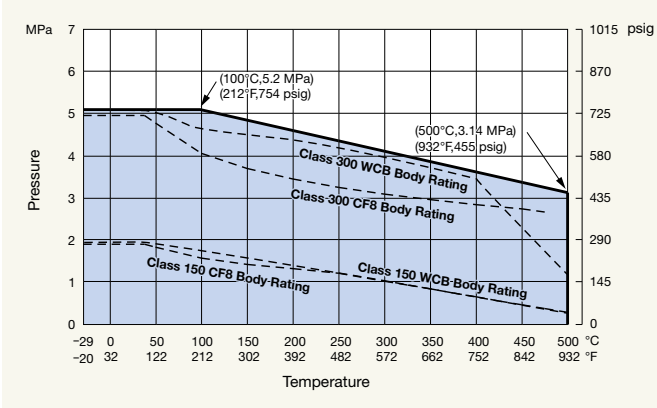


■ Metal Seated Floating Ball Valves: Trim 6H: NPS 6, 8

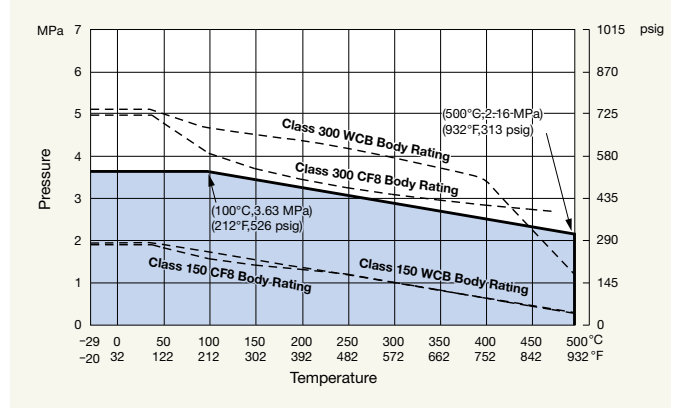


Pressure-Temperature Ratings


TB Series(*): NPS 1/2, 3/4
TR Series(*): NPS 1/2 to 1

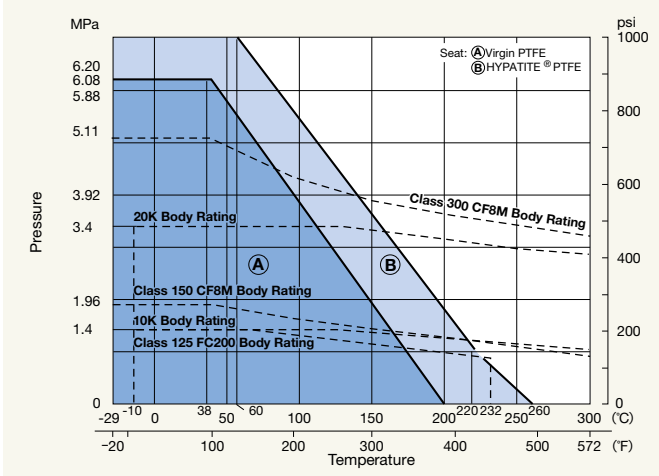


TB Series(*): NPS 1 to 2 1/2
TR Series(*): NPS 1 1/2 to 3

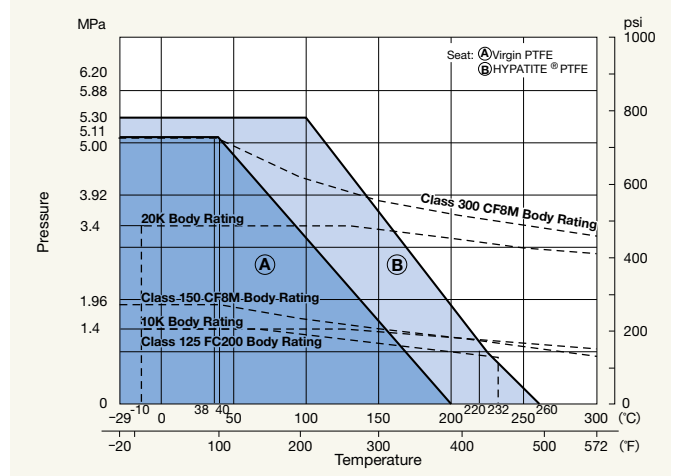


TB Series(*): NPS 3, 4
TR Series(*): NPS 4, 5

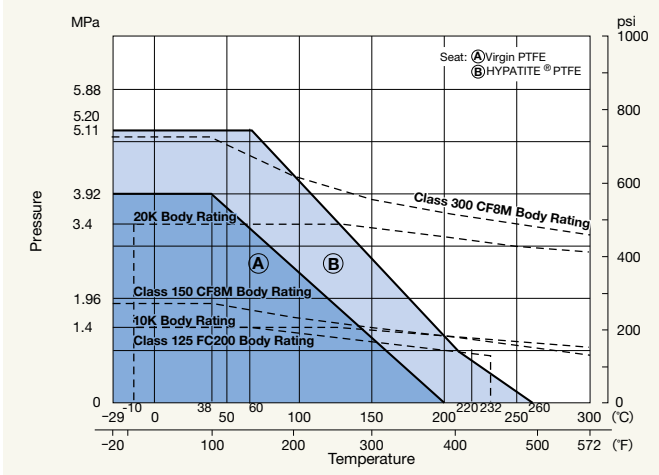

TB Series(*): NPS 5, 6
TR Series(*): NPS 6, 8

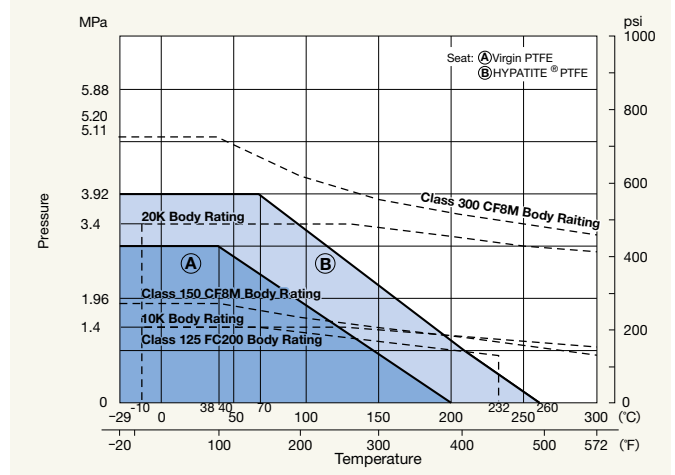


TB Series(*): NPS 8, 10
TR Series(*): NPS 10, 12

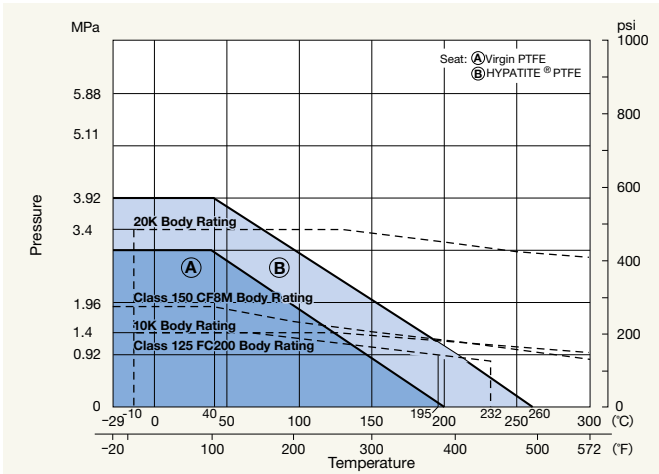

(*) except 600/1500, 3-way (4 seats) and PFA lined

Pressure-Temperature Ratings

600/1500SCTB(S)/UTB(M)(S)

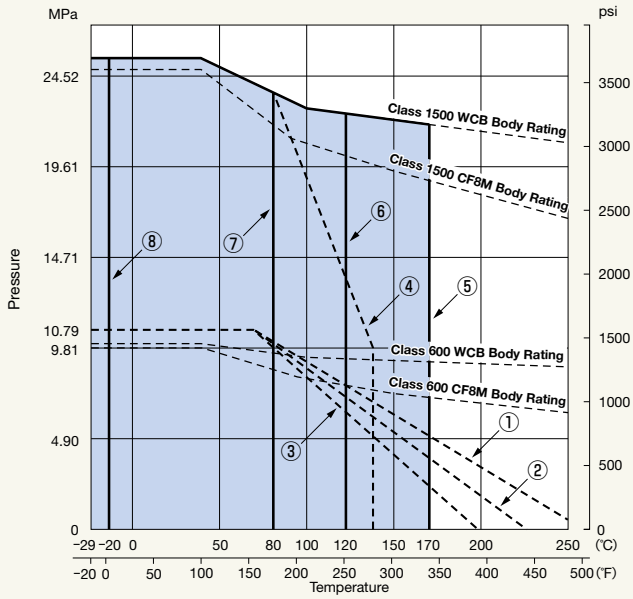

Ball Seat Materials

- ①: KITZ HYPATITE® or Carbon-filled PTFE
- ②: Glass-filled PTFE with MoS₂
- ③: Virgin PTFE
- ④: Nylon with MoS₂


O-ring Upper Limit

- ⑤: (1) FKM (2) Low Temperature FKM
- ⑥: (1) EPDM (2) ECO (Epichlorohydrin Copolymer)
- ⑦: (1) NBR (2) Low Temperature NBR

O-ring Lower Limit


- ⑧: FKM
- * O-rings made of others than FKM can with stand -29°C (-20°F)

150/300UTDZXL(M)

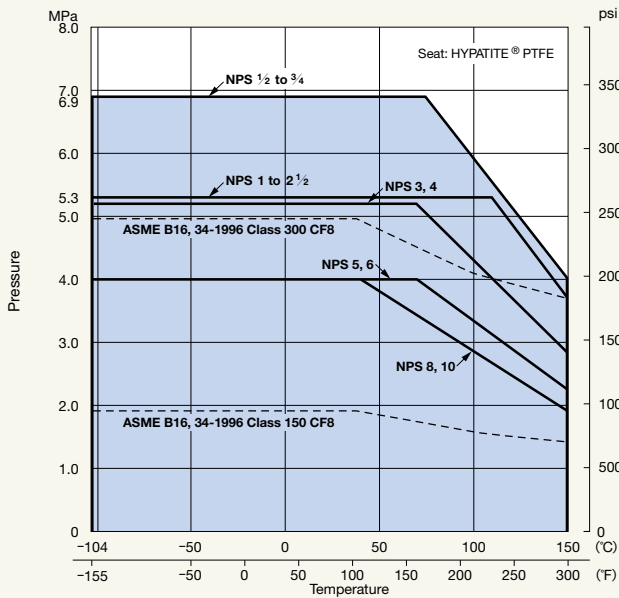


3-way: 150UTB/TR4LA(M)/4TA(M)


*Refer to 150UTBM Ratings for 150UTB2LM/2TM

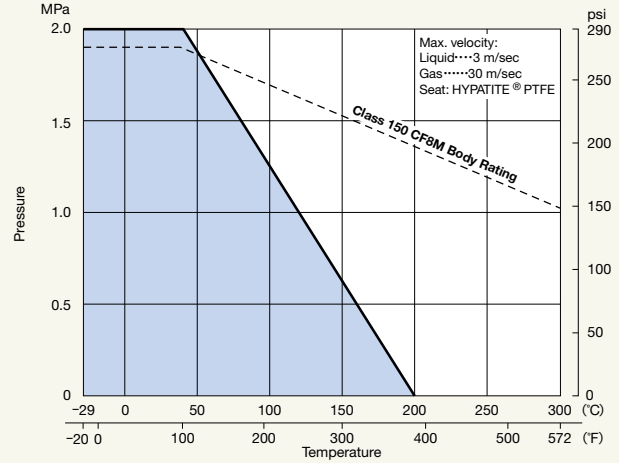

PFA Lined: 150UTBLN

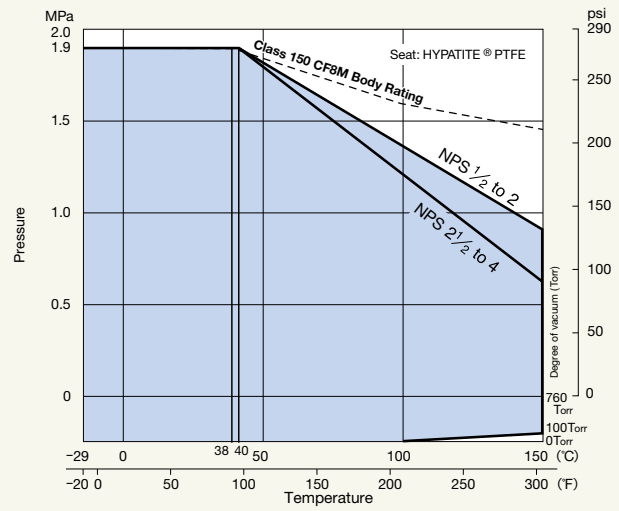


10/15010UTBDXK(M)

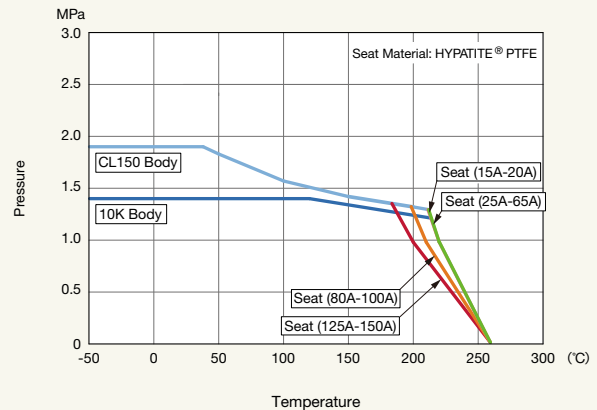


Pressure-Temperature Ratings

150/300UVC(M) 60/20UVC(M)

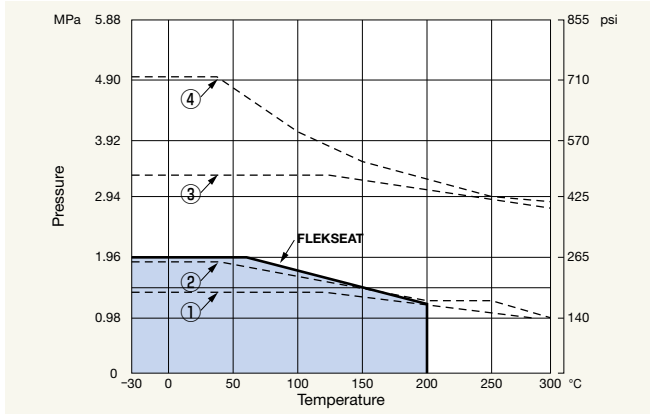

- ①: Valve Body Rating to JIS B2220 10K Steel
- ②: Valve Body Rating to ASME B16.34 Class 150 CF8
- ③: Valve Body Rating to JIS B2220 20K Steel
- ④: Valve Body Rating to ASME B16.34 Class 300 CF8

150/300UVCT(M) 10/20UVCT(M)

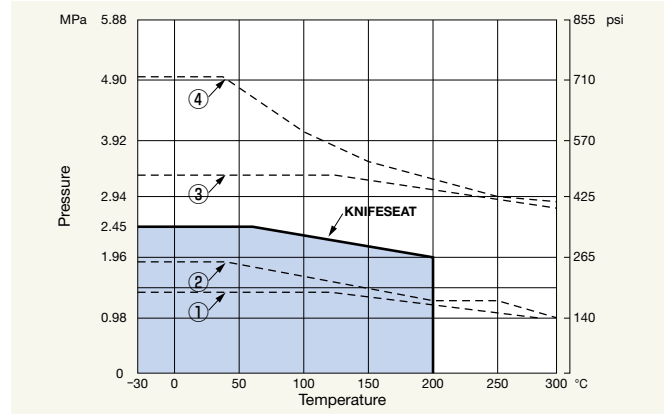

- ①: Valve Body Rating to JIS B2220 10K Steel
- ②: Valve Body Rating to ASME B16.34 Class 150 CF8
- ③: Valve Body Rating to JIS B2220 20K Steel
- ④: Valve Body Rating to ASME B16.34 Class 300 CF8



The products introduced in this catalog are all covered by the ISO 9001 Certification awarded KITZ Corporation in 1989, the earliest in the valve industry in Japan.

Pressure-Temperature Rating (Seat Rating)

Stainless Steel



- (A) UTAZLM : $\frac{1}{2}^B$ to 2^B
- (A) UTDZL : $\frac{1}{2}^B$ to $1\frac{1}{2}^B$
- (B) UTAXLM : $\frac{1}{2}^B$ to 1^B
- (B) UTDZXL : $\frac{1}{2}^B$ to $\frac{3}{4}^B$

- (A) UTAZLM : 3^B
- (A) UTDZL : 2^B to $2\frac{1}{2}^B$
- (B) UTAXLM : $1\frac{1}{2}^B$ to 3^B
- (B) UTDZXL : 1^B to $2\frac{1}{2}^B$

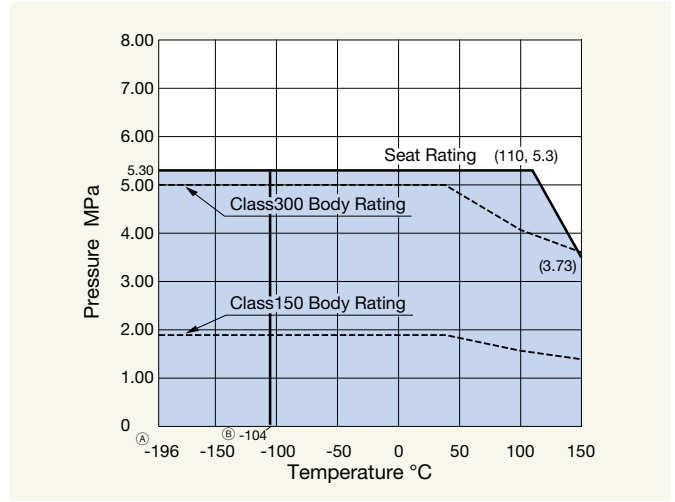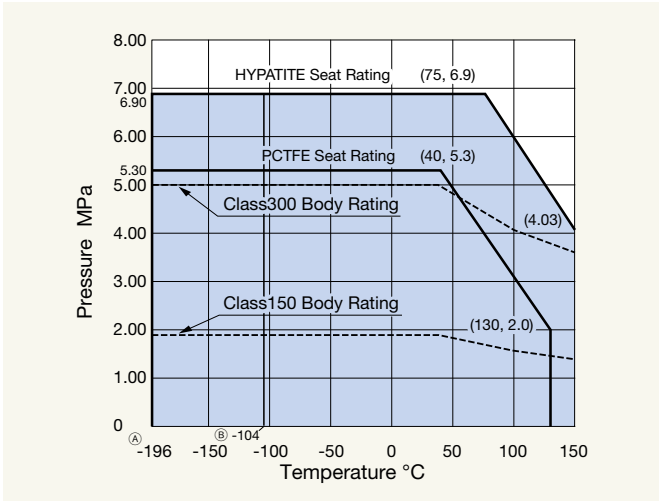


- (A) UTAZLM / (B) UTAXLM : 4^B to 6^B
- (A) UTDZL / (B) UTDZXL : 3^B to 4^B

- (A) UTAZLM / (B) UTAXLM : 8^B to 10^B
- (A) UTDZL / (B) UTDZXL : 5^B to 6^B

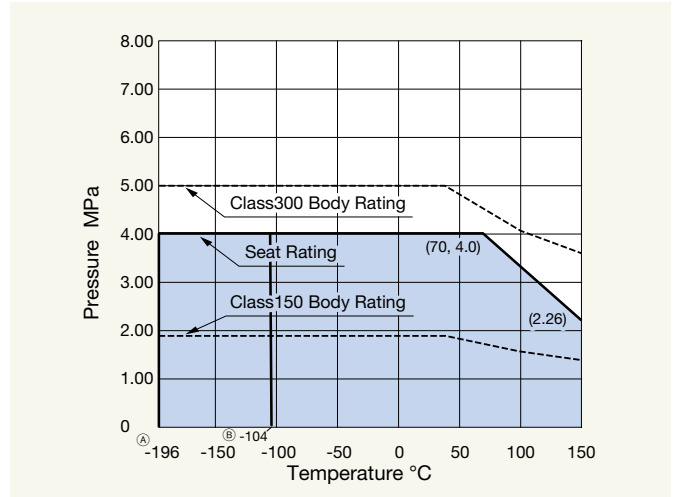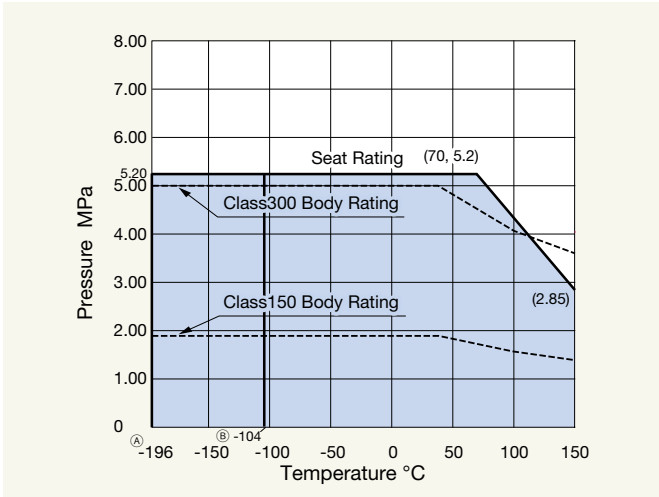

- (A) UTDZL / (B) UTDZXL : 8^B to 10^B


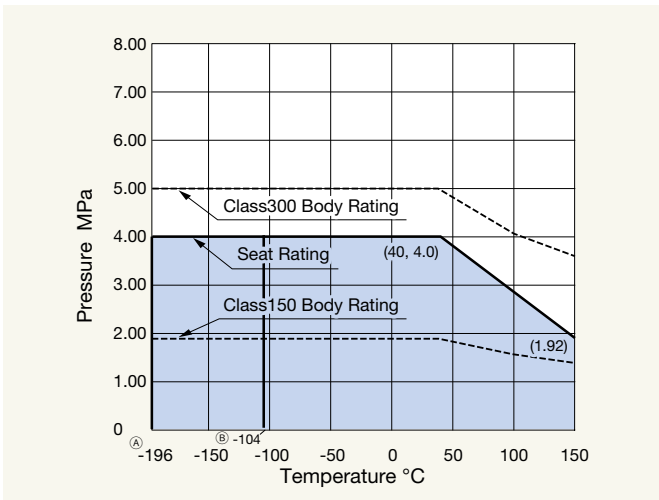


Pressure-Temperature Rating (Seat Rating)

Cast Carbon Steel



SCTAZXCL(BODY/LCC) : 1/2^B to 1^B
 SCTDZXCL(BODY/LCC) : 1/2^B • 3/4^B
 SCTDZXBL(BODY/LCB) : 1/2^B • 3/4^B

SCTAZXCL(BODY/LCC) : 1 1/2^B to 3^B
 SCTDZXCL(BODY/LCC) : 1^B to 2 1/2^B
 SCTDZXBL(BODY/LCB) : 1^B to 2 1/2^B

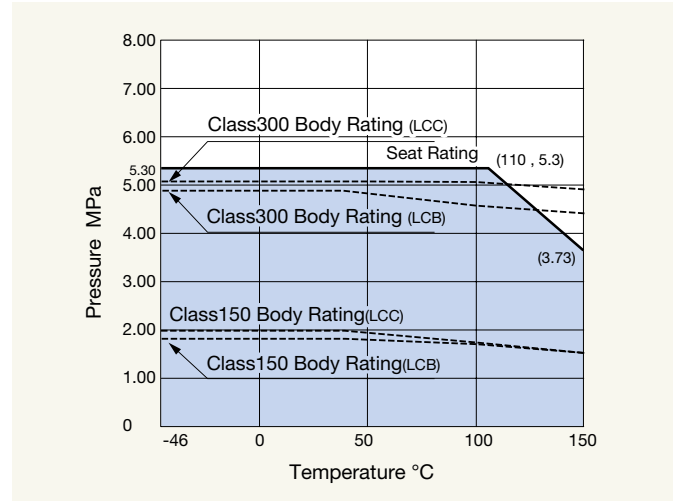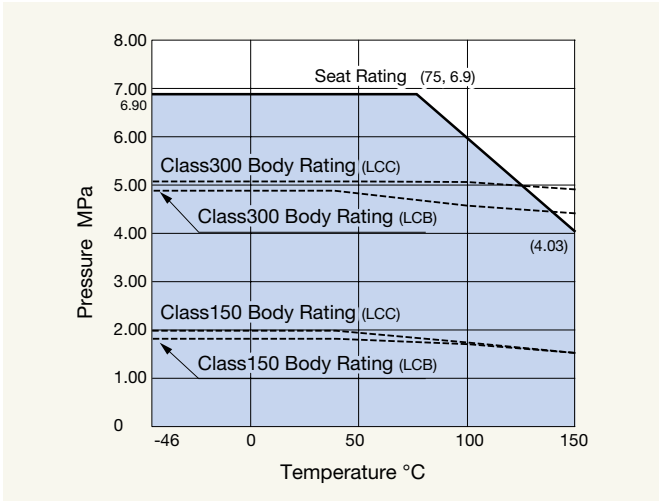


SCTAZXCL(BODY/LCC) : 4^B • 6^B
 SCTDZXCL(BODY/LCC) : 3^B • 4^B
 SCTDZXBL(BODY/LCB) : 3^B • 4^B

SCTAZXCL(BODY/LCC) : 8^B • 10^B
 SCTDZXCL(BODY/LCC) : 5^B • 6^B
 SCTDZXBL(BODY/LCB) : 5^B • 6^B

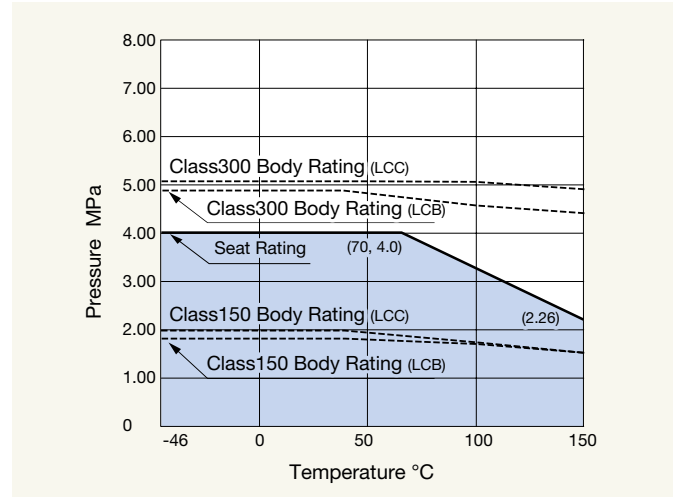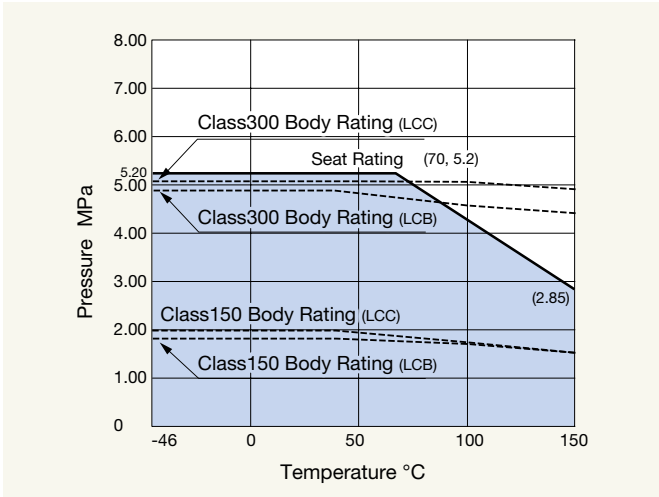

SCTDZXCL(BODY/LCC) : 8^B • 10^B
 SCTDZXBL(BODY/LCB) : 8^B • 10^B

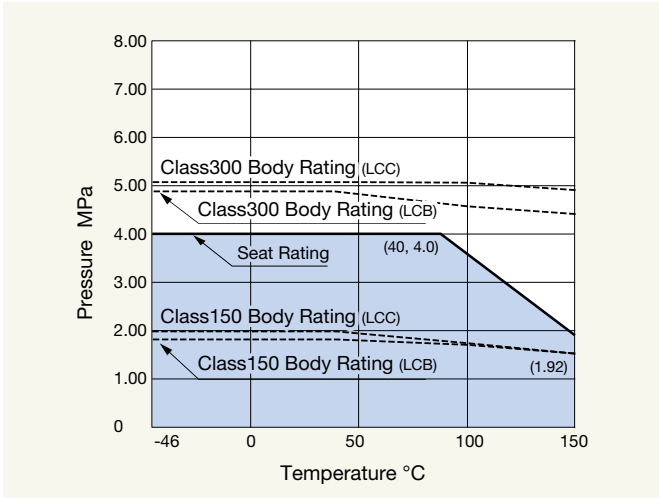

Allowable Port Orientation

| Valve Design | Form | Fluid Passage |
|--------------------------------|--|--|
| 3-Way 2-Seat L-Port Ball Valve | <p>Top View</p> <p>Form 1 Form 2</p> | <p>1 Flow in Form 1 is between Ports "A" and "C". Flow in Form 2 is between Ports "B" and "C". Flow paths in Form 1 and Form 2 can be exchanged.</p> <p>2 When fluid pressure P2 in closed path is higher than P1 in open path, slight fluid leakage may occur in P1 through the ball seat of closed path.</p> |
| 3-Way 4-Seat L-Port Ball Valve | <p>Top View</p> <p>Form 1 Form 2</p> | <p>1 Flow in Form 1 is between Ports "A" and "C". Flow in Form 2 is between Ports "B" and "C". Flow paths in Form 1 and Form 2 can be exchanged.</p> <p>2 When fluid press P2 in closed path is higher than P1 in open path, slight fluid leakage may occur to P1 through the ball seats of closed path.</p> |
| 3-Way 2-Seat T-Port Ball Valve | <p>Top View</p> <p>Form 1 Form 2</p> <p>Form 3 Form 4</p> <p>Not Available</p> | <p>1 In Form 1, all ports are open. Flow in Form 2 is between Ports "B" and "C". Flow in Form 4 is between Ports "A" and "C". Flow can be switched from Form 1 to Form 2, (standard operation pattern) or from Form 1 to Form 4 in either direction. Stopper is assembled for standard operation pattern.</p> <p>2 When fluid pressure P2 in closed path is higher than P1 in the open path, slight fluid leakage may occur to P1 through the ball seat in closed path.</p> <p>■ Available Operation Patterns</p> <ul style="list-style-type: none"> • Pattern 1: From Form 4 to Form 1 • Pattern 2: From Form 1 to Form 2 (Standard) <p>Please select one of the above operation patterns at the time of order.</p> |
| 3-Way 4-Seat T-Port Ball Valve | <p>Top View</p> <p>Form 1 Form 2</p> <p>Form 3 Form 4</p> | <p>1 In Form 1, all ports are open. Flow in Form 2 is between Ports "B" and "C". Flow in Form 3 is between Ports "A" and "B". Flow in Form 4 is between Ports "A" and "C". All forms are available for switching, diverging, or mixing of flows. Stopper is assembled for standard operational pattern to switch flow Form 1 to Form 2.</p> <p>2 When fluid pressure P2 in closed path is higher than P1 in the open path, slight leakage may occur to P1 through the ball seat of closed path.</p> <p>■ Available Operation Patterns</p> <ul style="list-style-type: none"> • Pattern 1: From Form 4 to Form 1 • Pattern 2: From Form 1 to Form 2 (Standard) • Pattern 3: From Form 3 to Form 4 • Pattern 4: From Form 2 to Form 3 <p>Please select one of the above operation patterns at the time of order.</p> |

1. Excessive Cavity Pressure

Refer to Page 8. Very important

2. High-Temperature and High-Pressure Service

Pressure-Temperature rating published by manufacturers are usually considered as an appropriate guide to maximum temperature and pressure ball valves may withstand. KITZ recommends references to valve distributor or manufacturer for an assurance or suitability when ball valves are to be in the following conditions:

- a: **Floating ball valves** are left closed for a long period of time under high temperature or high differential pressure.
- b: **Floating ball valves** are operated frequently for long period of time under high temperature or high differential pressure.
- c: **Floating ball valves** are subjected to frequent change of the line pressure or service temperature.

3. Liquids with High Velocity

When ball valves must be operated frequently on liquids with very high velocity, a check should be made with the valve by distributor or manufacturer for appropriate advice to minimize possibility or seat deformation, especially when valves are high pressurized on high-temperature lines.

4. Valve Selection

Be sure to select a valve with design specifications which meets the required pressure and temperature conditions. Take special care to select a valve to be used for fluid containing abrasives, since high molecular materials employed in the seats could suffer degradation.

5. Valve Mounting

Before mounting the valve, the pipe bore should be checked to confirm that no weld spatter, scale or rust particles remain inside. For mounting flanged valves, diagonally located flange bolts should be tightened evenly.

6. Degree of Valve Opening

Ball valves should basically be considered as ON/OFF valves only. And care should be taken to ensure valves are fully closed or open. Opening ball valves partially will result in seat erosion and cause seat leakage. Pipelines that require use of ball valves for throttling service should be designed in consideration for amount of seat leakage which may occur in its fully closed position. Note that ball valves should be stored in fully open position.

7. Valve Actuation

Two types of pneumatic valve actuators (KITZ B-Series and F-Series) are available for factory mounting. KITZ "KELMO" electric actuators are also available. Electric actuators or pneumatic actuators of any other specified brands are also available for factory mounting.

In case user to mount their own actuators on KITZ ball valves, all users are recommended to contact KITZ representative or its authorized distributors for adequate technical advice, since any improper sizing of actuator may cause serious problems on the field. It must be carefully noted that the actual value of operating torque of any given valve may vary depending on service conditions listed below:

- (1) Fluid
 - a. Type of Fluid
 - b. Line Pressure
 - c. Line Temperature
 - d. Fluid Volume
- (2) Ambient Temperature
- (3) Opening/Closing Degree
- (4) Type of Actuator
- (5) Frequency and pattern of change of line pressure
- (6) Frequency and pattern of change of line and ambient temperatures

8. Valve Disassembly

Line fluid should be completely removed from valve internal before dismantled from the pipeline for maintenance.

Even after the line fluid has been discharged through the pipeline, some fluid is always trapped inside the body and body cavity (space surrounded by body, ball and two seats).

Make sure to discharge pressure trapped in the body cavity completely before valve assembly.


Inspection and Warranty

Each KITZ ball valve is subjected to 100% in-house inspection designated by API 598 or BS 6755 Part 1. This includes hydrostatic shell tests and pneumatic low-pressure seat test. Manufacturer's material certificates and test reports are available upon request. Each KITZ ball valve is guaranteed for 12 months after placement in service, but not exceeding 18 months after shipment from KITZ factories.

Flow Characteristics


One of the best advantages of ball valves is that every flow per any given bore size is larger than other types of valves. Fluid is much less disturbed by eddy currents or pulsation. To obtain the figure of flow per valve opening, simply multiply the flow rate (%) by the corresponding value given in the table of Pressure Loss vs. Flow Rate.

Valve Opening vs. Cv

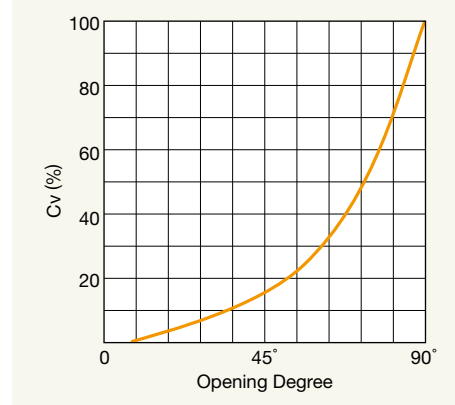


Pressure Loss vs. Flow Rate


Full Port Valves

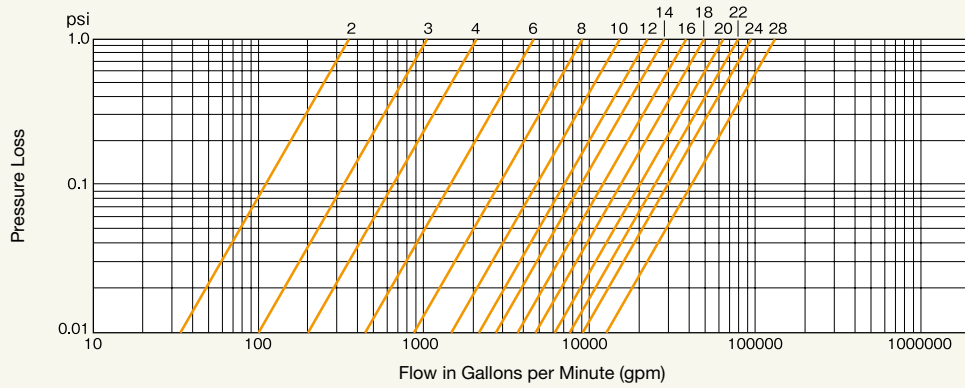

Reduced Port Valves

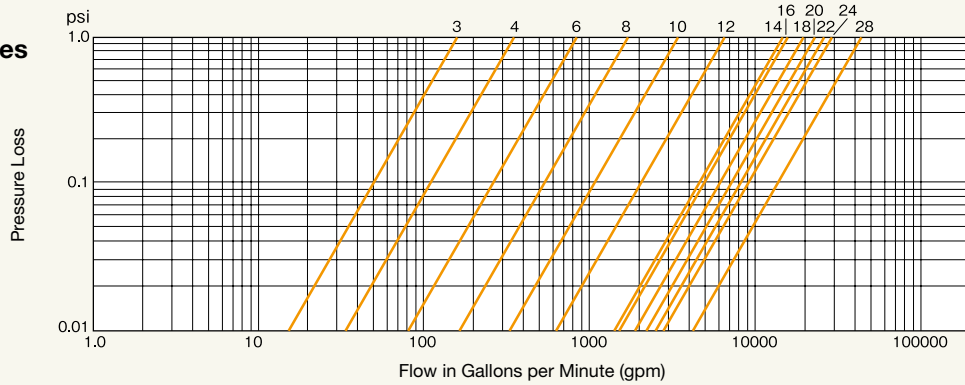


Schedule 40 Steel Pipe (10m)

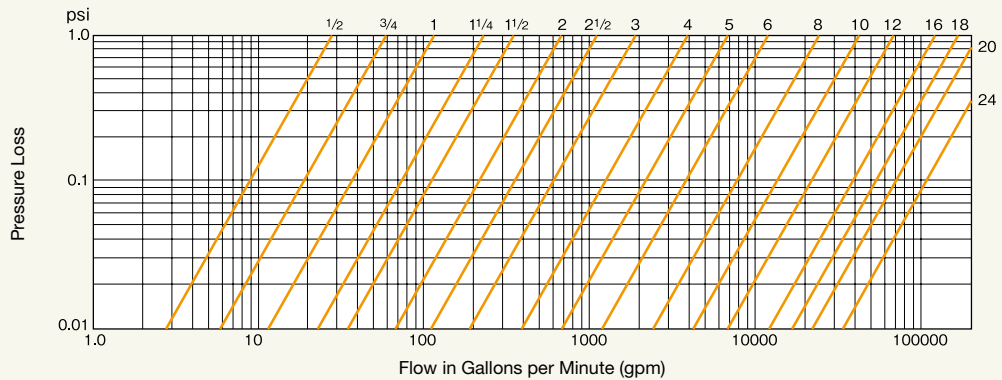

KITZ

GENERAL CATALOG

Stainless Steel

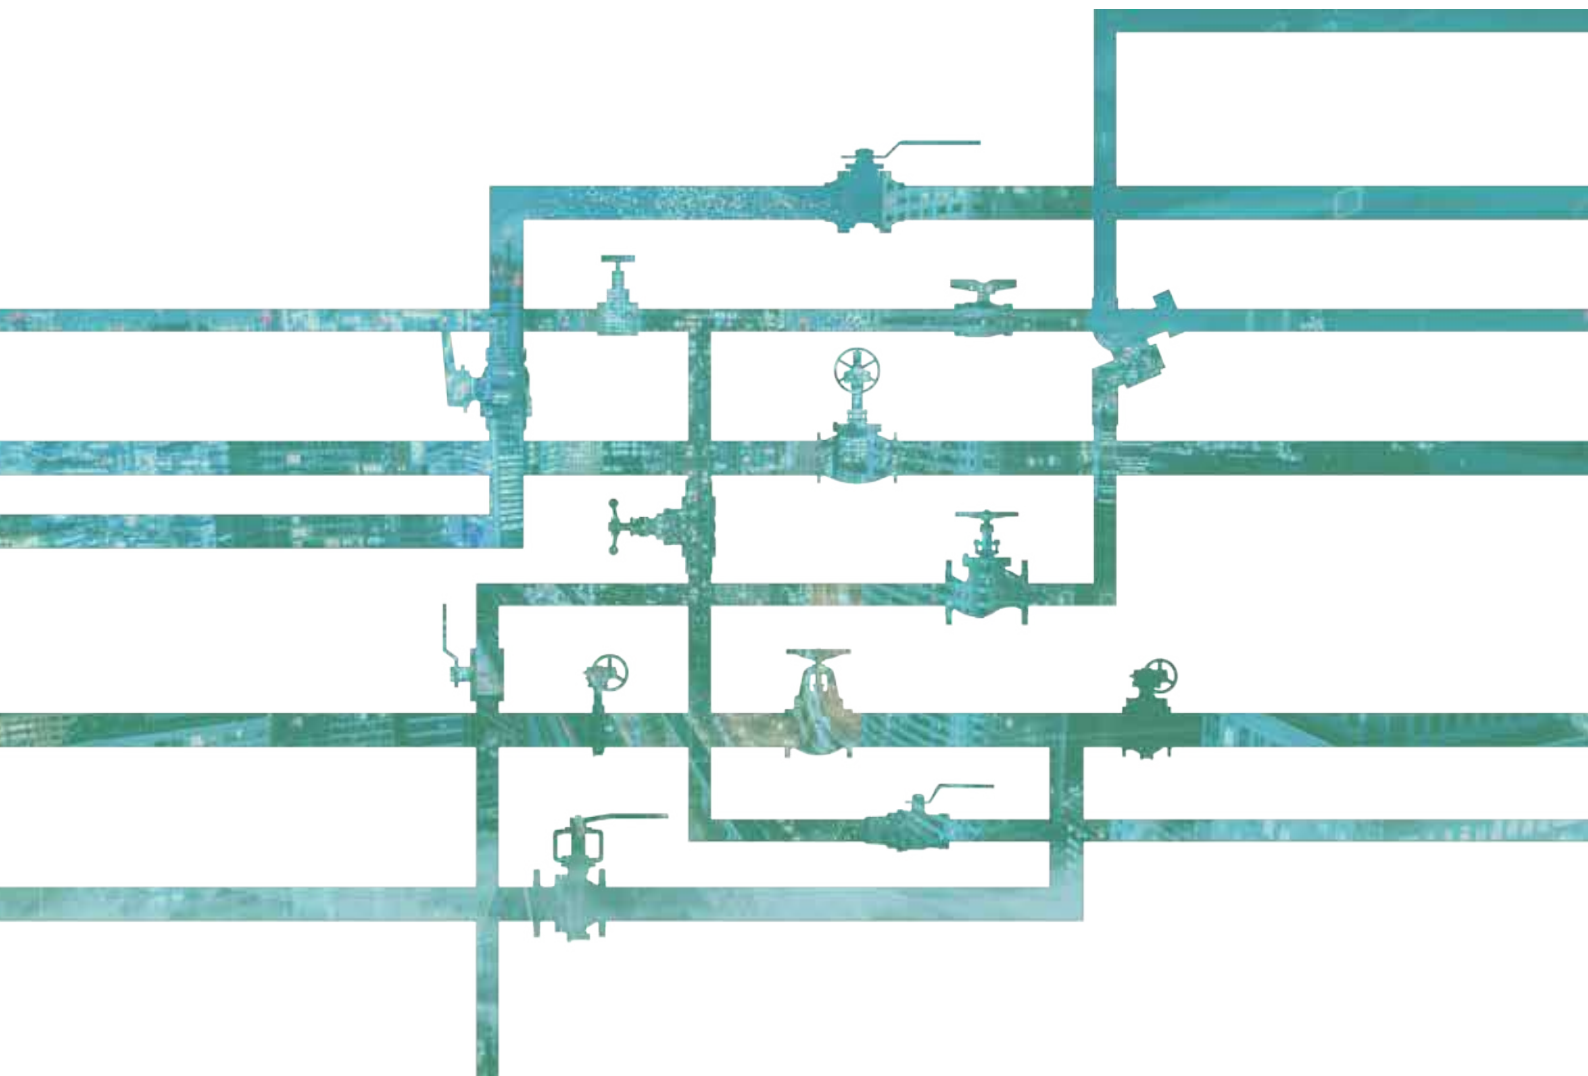

INDEX


| Series | Body Material | Type | Class | End Connection | Features/Design | Size Range | Fig | Page | | | | | | | | | |
|------------|--|--|---------------------|--|---|---|---|--------------------------------|-----------------------|-----------------------|------------|----------|-------------|----------|--|--|--|
| A | | Gate/Globe | 150 | | - | $\frac{1}{2}^B - 24^B / \frac{1}{2}^B - 12^B$ | 150UMAM/150UMAMT | 150UPAM/150UPAMT/ G-150UPAM | SS3 212 | | | | | | | | |
| | | Check | 300 | | Lift/Swing | ASME B16.34 | $\frac{1}{2}^B - 11\frac{1}{2}^B / 1\frac{1}{2}^B - 24^B$ | 150UNAM | | 150UOAM | | | | | | | |
| | | Gate/Globe | | | $\frac{1}{2}^B - 24^B / \frac{1}{2}^B - 10^B$ | | 300UMAM | 300UPAM/G-300UPAM | | | | | | | | | |
| | | Check | | | Lift/Swing | | $\frac{1}{2}^B - 11\frac{1}{2}^B / 1\frac{1}{2}^B - 18^B$ | 300UNAM | | 300UOAM | | | | | | | |
| Gate/Globe | 600 | - | | $\frac{1}{2}^B - 12^B / \frac{1}{2}^B - 8^B$ | 600UMAM | 600UPAM/G-600UPAM | SS4 213 | | | | | | | | | | |
| Check | 150/300 | Swing | API 603 | $\frac{1}{2}^B - 12^B$ | 600UOAM | | | | | | | | | | | | |
| Gate | | $\frac{1}{2}^B - 24^B$ | | 150UMHAM | 300UMHAM | | | | | | | | | | | | |
| Check | | - | | | | | | | | | | | | | | | |
| HA | | Gate/Globe | 10K | | Lift/Swing | $\frac{1}{2}^B - 24^B / \frac{1}{2}^B - 12^B$ | 10UMA/10UMAT | 10UPA/10UPAT/G-10UPA | SS5 214 | | | | | | | | |
| | | Check | | | ASME B16.34 | $\frac{1}{2}^B - 11\frac{1}{2}^B / 1\frac{1}{2}^B - 24^B$ | 10UNA | 10UOA | | | | | | | | | |
| | | Strainer | | | | $2\frac{1}{2}^B - 24^B$ | 10UYA | | | | | | | | | | |
| | | Gate/Globe | | | | $\frac{1}{2}^B - 24^B / \frac{1}{2}^B - 10^B$ | 20UMA/20UMAT | 20UPA/20UPAT/G-20UPA | | | | | | | | | |
| A | | Check | 20K | | Lift/Swing | $\frac{1}{2}^B - 11\frac{1}{2}^B / 1\frac{1}{2}^B - 18^B$ | 20UNA | 20UOA | SS6 215 | | | | | | | | |
| | | Strainer | | | $\frac{1}{2}^B - 12^B$ | 20UYA | | | | | | | | | | | |
| | | Gate/Globe | | | $\frac{1}{2}^B - 6^B$ | 150UPAWM | 150UPDAWM (Soft Seated/PTFE) | | | | | | | | | | |
| | | A | | Globe | 300 | | Bellows Seal | ASME B16.34 | 300UPAWM | | SS7 216 | | | | | | |
| 10K | $\frac{1}{2}^B - 6^B / \frac{1}{2}^B - 10^B$ | | | 10UPAW | 10UPDA/G-10UPDA (Soft Seated/PTFE) | | | | | | | | | | | | |
| 10K/20K | $\frac{1}{2}^B - 6^B$ | | | 10UPDAW (Soft Seated/PTFE) | 20UPAW | | | | | | | | | | | | |
| Gate/Globe | 150 | | | $\frac{1}{2}^B - 6^B / \frac{1}{2}^B - 4^B$ | 150UMAJM | | | | 150UPAJM | | | | | | | | |
| AJ | | Check | 300 | | Lift / Swing | $\frac{1}{2}^B - 11\frac{1}{2}^B / 2^B - 6^B$ | 150UNAJM | 150UOAJM | SS8 217 | | | | | | | | |
| | | Gate/Globe | | | $\frac{1}{2}^B - 6^B / \frac{1}{2}^B - 4^B$ | 300UMAJM | 300UPAJM | | | | | | | | | | |
| | | Check | | | Lift / Swing | $\frac{1}{2}^B - 11\frac{1}{2}^B / 2^B - 6^B$ | 300UNAJM | 300UOAJM | | | | | | | | | |
| | | Gate/Globe | 10K | | $\frac{1}{2}^B - 6^B / \frac{1}{2}^B - 4^B$ | 10UMAJ | 10UPAJ | | | | | | | | | | |
| AJ | | Check | 20K | | Lift / Swing | $\frac{1}{2}^B - 11\frac{1}{2}^B / 2^B - 6^B$ | 10UNAJ | 10UOAJ | SS9 218 | | | | | | | | |
| | | Gate/Globe | | | $\frac{1}{2}^B - 6^B / \frac{1}{2}^B - 4^B$ | 20UMAJ | 20UPAJ | | | | | | | | | | |
| | | Check | | | Lift / Swing | $\frac{1}{2}^B - 11\frac{1}{2}^B / 2^B - 6^B$ | 20UNAJ | 20UOAJ | | | | | | | | | |
| | | Gate/Globe | 150 | | $\frac{1}{2}^B - 24^B / \frac{1}{2}^B - 8^B$ | 150UMCM | 150UPCM | | | | | | | | | | |
| C | SS | Check | 300 | RF | Swing | BS1868 | $\frac{1}{2}^B - 24^B$ | 150UOCM | SS10 219 | | | | | | | | |
| | | Gate/Globe | | | $\frac{1}{2}^B - 24^B / \frac{1}{2}^B - 8^B$ | 300UMCM | 300UPCM | | | | | | | | | | |
| | | Check | | | BS1868 | $\frac{1}{2}^B - 24^B$ | 300UOCM | | | | | | | | | | |
| | | Gate/Globe | 600 | | $\frac{1}{2}^B - 12^B / \frac{1}{2}^B - 8^B$ | 600UMCM | 600UPCM/G-600UPCM | | | | | | | | | | |
| C | | Check | 900 | | Swing | BS1868 | $\frac{1}{2}^B - 12^B$ | 600UOCM | SS11 220 | | | | | | | | |
| | | Gate/Globe | | | $2^B - 12^B / 3^B - 8^B$ | 900UMCM | 900UPCM/G-900UPCM | | | | | | | | | | |
| | | Check | | | BS1868 | $3^B - 8^B$ | 900UOCM | | | | | | | | | | |
| | | Gate/Globe | 1500 | | $2^B - 8^B / 1^B - 8^B$ | 1500UMCM | 1500UPCM/G-1500UPCM | | | | | | | | | | |
| C | | Check | 150/300 600 | | Swing, Internal Hinge Pin | API 594/BS 1868 | $2^B - 12^B$ | 1500UOCM | SS12 221 | | | | | | | | |
| | | Gate/Globe | | | 1500UOCHM | 300UOCHM | | | | | | | | | | | |
| | | Check | | | 600UOCHM | | | | | | | | | | | | |
| | | Gate/Globe | 150 | | Category II, (-104°C / -155°F) | ASME B16.34 | $\frac{1}{2}^B - 16^B / \frac{1}{2}^B - 8^B$ | 150UMAXY/G-150UMAXY | | 150UPAXY/G-150UPAXY | | | | | | | |
| Check | 300 | $1\frac{1}{2}^B - 16^B$ | 150UOAXY | | | | | | | | | | | | | | |
| Gate/Globe | | $\frac{1}{2}^B - 14^B / \frac{1}{2}^B - 8^B$ | 300UMAXY/G-300UMAXY | 300UPAXY/G-300UPAXY | | | | | | | | | | | | | |
| Check | | $1\frac{1}{2}^B - 12^B$ | 300UOAXY | | | | | | | | | | | | | | |
| A | | Gate | 150/300 600 | | | | $2^B - 24^B$ | 150UMALMY/G-150UMALMY | 300UMALMY/G-300UMALMY | | | | | | | | |
| | | Gate/Globe | 150 | | | | $2^B - 12^B$ | 600UMALMY/G-600UMALMY | | | | | | | | | |
| | | Check | 300 | | | | $\frac{1}{2}^B - 24^B / \frac{1}{2}^B - 8^B$ | 150UMCLMY/G-150UMCLMY | 150UPCLMY/G-150UPCLMY | | | | | | | | |
| | | Gate/Globe | | | | | $\frac{1}{2}^B - 24^B$ | 150UOCLMY | | | | | | | | | |
| Check | $\frac{1}{2}^B - 24^B / \frac{1}{2}^B - 8^B$ | 300UMCLMY/G-300UMCLMY | | 300UPCLMY/G-300UPCLMY | | | | | | | | | | | | | |
| C | | Gate/Globe | 600 | | | | $\frac{1}{2}^B - 24^B$ | 300UOCLMY | | | | | | | | | |
| | | Check | 150/300 600 | | | | $\frac{1}{2}^B - 24^B / \frac{1}{2}^B - 8^B$ | 600UMCLMY/G-600UMCLMY | 600UPCLMY/G-600UPCLMY | | | | | | | | |
| | | Gate/Globe | | | | | $1^B - 12^B$ | 600UOCLMY | | | | | | | | | |
| | | Check | | | | | API 623 (ASME B16.34, MSS SP-134, ISO 28921-1) | $2^B - 8^B$ | 150UPCLMD/G-150UPCLMD | 300UPCLMD/G-300UPCLMD | | | | | | | |
| D | | Globe | 600 | | | | 600UPCLMD/G-600UPCLMD | | SS16 225 | | | | | | | | |
| | | Gate/Globe | 150 | | | | TE | | | | | AK150UMM | AK150UPM | | | | |
| | | Check | | | | | | | | | | AK150UOM | | | | | |
| | | Gate/Globe | | | | | | | | | | AW150UMM | AW150UPM | | | | |
| D | | Check | 300 | SW | | | | | AW150UOM | | | | SS17 226 | | | | |
| | | Gate/Globe | | | | | ASME B16.34 | $\frac{1}{2}^B - 2^B$ | AK300UMM | AK300UPM | | | | | | | |
| | | Check | | | | | | | AK300UOM | | | | | | | | |
| | | Gate/Globe | AW300UMM | | | | | | AW300UPM | | | | | | | | |
| D | | Check | 600 | TE/SW | | | AW300UOM | | SS18 227 | | | | | | | | |
| | | Gate/Globe | | | | | 600 | | | | | | AK600UMM | AW600UPM | | | |
| | | Check | | | | | | | | | | | 600 | | | | |
| | | Gate | | | | | | | | | | | | | | | |

*(Abbreviation) TE: Threaded Ends, FE: Flanged Ends, RF: Raised Face Ends, SW: Socket Welding Ends

PRODUCT CODING

Stainless & High Alloy Steel Valves

(Note: Some products do not follow this coding system)



1 Operation

- None Manual Handwheel
- G Gear

2 End Connection

- None RF Flanged Ends
- W Butt Welding Ends
- AK Threaded Ends (NPT)
- AW Socket Welding Ends

3 Pressure Class

- 10 10K
- 20 20K
- 150 Class 150
- 300 Class 300
- 600 Class 600
- 900 Class 900
- 1500 Class 1500

4 Shell Material Code

- U Stainless/High Alloy

5 Valve Type

- M Gate
- P Globe
- PD Soft Seated Globe
- O Swing Check
- N Lift Check
- Y Strainer

6 Valve Design Code Series

- None Series D
- A Series A
- HA Series HA
- C Series C

7 Special Design

- None Standard
- W Bellows Seal Globe
- H Internal Hinge Pin Swing Check
- X -104°C Service
- L -196°C Service
- J Jacketed

8 Shell Material

- None CF8 (304)
- M CF8M (316)
- O CF3M (316L)
- V CF3 (304L)
- CB CF8C (321)
- CG CG8M (317)
- CK CK20 (310)
- SD Super Duplex
- CN CN7M (Alloy20)
- HB N-12MV (Hastelloy B)
- HC CW-12MW (Hastelloy C)

9 Body/Disc Seat Surface Material

- None Same as Shell Material
- D Disc Seat Surface HF
- B Body Seat Surface HF
- Y Both Seat Surface HF

Note: Product codes suffixed "T" stands for valves provided with ceramic filled PTFE gaskets & PTFE packings. (Ex. 10UMAMT, 10UPAMT etc)

Design Specification

Stainless & High Alloy Steel Valves





| Series | A | AH | C | D |
|--|---|---------------------|---|---------------|
| Shell Wall Thickness & Valve Design | ASME B16.34 | API 603 | API 600/ISO 10434 (Gate) BS1873/API623*1 (Globe) BS 1868/API594*2 (Swing check) | ASME B16.34 |
| P-T Rating | ASME B16.34 (JIS B2220 for 10K & 20K) | | | ASME B16.34 |
| Face to Face Dimension | ASME B16.10 (JIS B2002 for 10K & 20K, KITZ Std for Jacketed valves) | | | KITZ Standard |
| Flanged Ends Dimension | ASME B16.5*3 (JIS B2220 for 10K & 20K) | | | - |
| Butt or Socket Welding Ends Dimension | - | - | ASME B16.25, ISO10434(Gate), BS1873(Globe)/1868(Check) | ASME B16.11 |
| Threaded Ends Dimension | - | - | - | ASME B1.20.1 |
| Pressure Test | API 598/ISO 5208 | | | - |
| Fugitive Emission Test (Up to Class 600) | ISO 15848-1 | API 624/ISO 15848-1 | | - |
| Cryogenic/Low Temperature Test*4 | ISO 28921-1 | - | ISO 28921-1 | - |





*1 API623 is for 150/300/600UPCRLM only




*2 API594 is for Internal Hinge Pin Swing Check only



*3 Pipe Connection Dimensions shall be indicated in millimeters converted from dimensions in inches according to ASME B16.5

*4 For X, L (Cryogenic Service Valves)

| Type | A Series (Gate) | | | | | A Series (Globe) | | | | A Series (Lift Check) | | | A Series (Swing Check) | | |
|--|---|-----|------|-----|-----|---|-----|-----|-----|--|---|------|---|---|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | |  | | |  | | |
| | 150UMAM/150UMAMT | | | | | 150UPAM/150UPAMT/G-150UPAM | | | | 150UNAM | | | 150UOAM | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 150 RF | | | ASME B16.5 Class 150 RF | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | |
| 1/2 | 15 | 108 | 201 | 90 | 108 | 166 | 90 | | 108 | 74 | | | | | |
| 3/4 | 20 | 117 | 210 | 90 | 117 | 168 | 90 | | 117 | 76 | | | | | |
| 1 | 25 | 127 | 224 | 100 | 127 | 173 | 100 | | 127 | 76 | | | | | |
| 1 1/2 | 40 | 165 | 284 | 140 | 165 | 204 | 140 | | 165 | 86 | | 165 | 109 | | |
| 2 | 50 | 178 | 336 | 160 | 203 | 235 | 160 | | | | | 203 | 119 | | |
| 2 1/2 | 65 | 190 | 374 | 180 | 216 | 248 | 180 | | | | | 216 | 134 | | |
| 3 | 80 | 203 | 444 | 200 | 241 | 292 | 200 | | | | | 241 | 148 | | |
| 4 | 100 | 229 | 523 | 225 | 292 | 324 | 225 | | | | | 292 | 164 | | |
| 5 | 125 | 254 | 606 | 250 | 356 | 382 | 250 | | | | | 330 | 192 | | |
| 6 | 150 | 267 | 711 | 250 | 406 | 453 | 350 | | | | | 356 | 214 | | |
| 8 | 200 | 292 | 924 | 300 | 495 | 556 | 400 | | | | | 495 | 264 | | |
| 10 | 250 | 330 | 1126 | 350 | 622 | 923 | 500 | 280 | | | | 622 | 286 | | |
| 12 | 300 | 356 | 1336 | 400 | 698 | 1013 | 500 | 280 | | | | 698 | 315 | | |
| 14 | 350 | 381 | 1491 | 450 | | | | | | | | 787 | 363 | | |
| 16 | 400 | 406 | 1692 | 600 | | | | | | | | 864 | 407 | | |
| 18 | 450 | 432 | 1891 | 600 | | | | | | | | 978 | 475 | | |
| 20 | 500 | 457 | 2102 | 680 | | | | | | | | 978 | 505 | | |
| 24 | 600 | 508 | 2463 | 760 | | | | | | | | 1295 | 595 | | |
| Body/Bonnet | CF8M | | | | | CF8M | | | | CF8M | | | CF8M | | |
| Stem | 316SS | | | | | 316SS | | | | | | | | | |
| Disc | CF8M | | | | | CF8M | | | | CF8M | | | CF8M | | |
| Gland Packing | Refer to Page SS22 | | | | | Refer to Page SS22 | | | | | | | | | |
| Gasket | Refer to Page SS22 | | | | | Refer to Page SS22 | | | | Refer to Page SS22 | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | | B8/8 | | | | B8/8 | | | B8/8 | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | | ASME B16.34 | | | JIS B2220 | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | ASME B16.10 | | | ASME B16.10 | | |
| Wall Thickness | ASME B16.34 | | | | | ASME B16.34 | | | | ASME B16.34 | | | ASME B16.34 | | |
| Approval | ISO15848-1, PED/CE TR-CU/EAC | | | | | ISO15848-1, PED/CE TR-CU/EAC | | | | PED/CE TR-CU/EAC | | | PED/CE TR-CU/EAC | | |
| Remarks | Flexible Wedge | | | | | | | | | | | | | | |





| Type | A Series (Gate) | | | | | A Series (Globe) | | | | A Series (Lift Check) | | | A Series (Swing Check) | | |
|--|---|------|------|-----|-----|---|-----|-----|-----|--|---|-----|---|---|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | |  | | |  | | |
| | 300UMAM | | | | | 300UPAM/G-300UPAM | | | | 300UNAM | | | 300UOAM | | |
| End Connection | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 300 RF | | | | ASME B16.5 Class 300 RF | | | ASME B16.5 Class 300 RF | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D | |
| 1/2 | 15 | 140 | 209 | 100 | 152 | 184 | 100 | | 152 | 80 | | | | | |
| 3/4 | 20 | 152 | 220 | 100 | 178 | 182 | 100 | | 178 | 78 | | | | | |
| 1 | 25 | 165 | 239 | 100 | 203 | 185 | 100 | | 203 | 80 | | | | | |
| 1 1/2 | 40 | 190 | 293 | 140 | 229 | 234 | 160 | | 229 | 100 | | | | | |
| 2 | 50 | 216 | 355 | 180 | 267 | 286 | 180 | | | | | 241 | 123 | | |
| 2 1/2 | 65 | 241 | 404 | 180 | 292 | 296 | 200 | | | | | 267 | 142 | | |
| 3 | 80 | 283 | 472 | 225 | 318 | 341 | 250 | | | | | 292 | 165 | | |
| 4 | 100 | 305 | 560 | 250 | 356 | 396 | 300 | | | | | 318 | 180 | | |
| 5 | 125 | 381 | 625 | 300 | 400 | 493 | 350 | | | | | 356 | 203 | | |
| 6 | 150 | 403 | 753 | 350 | 444 | 563 | 400 | | | | | 400 | 234 | | |
| 8 | 200 | 419 | 968 | 400 | 559 | 874 | 500 | 280 | | | | 444 | 259 | | |
| 10 | 250 | 457 | 1177 | 450 | 622 | 1048 | 600 | 350 | | | | 533 | 298 | | |
| 12 | 300 | 502 | 1378 | 500 | | | | | | | | 622 | 356 | | |
| 14 | 350 | 762 | 1590 | 600 | | | | | | | | 711 | 373 | | |
| 16 | 400 | 838 | 1810 | 600 | | | | | | | | 838 | 442 | | |
| 18 | 450 | 914 | 1980 | 680 | | | | | | | | 864 | 480 | | |
| 20 | 500 | 991 | 2190 | 760 | | | | | | | | 978 | 585 | | |
| 24 | 600 | 1143 | 2580 | 910 | | | | | | | | | | | |
| Body/Bonnet | CF8M | | | | | CF8M | | | | CF8M | | | CF8M | | |
| Stem | 316SS | | | | | 316SS | | | | 316SS | | | | | |
| Disc | CF8M | | | | | CF8M | | | | CF8M | | | CF8M | | |
| Gland Packing | Refer to Page SS22 | | | | | Refer to Page SS22 | | | | Refer to Page SS22 | | | Refer to Page SS22 | | |
| Gasket | Refer to Page SS22 | | | | | Refer to Page SS22 | | | | Refer to Page SS22 | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | | B8/8 | | | | B8/8 | | | B8/8 | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | | ASME B16.34 | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | ASME B16.10 | | | ASME B16.10 | | |
| Wall Thickness | ASME B16.34 | | | | | ASME B16.34 | | | | ASME B16.34 | | | ASME B16.34 | | |
| Approval | ISO15848-1, PED/CE TR-CU/EAC | | | | | ISO15848-1, PED/CE TR-CU/EAC | | | | PED/CE TR-CU/EAC | | | PED/CE TR-CU/EAC | | |
| Remarks | Flexible Wedge | | | | | | | | | | | | | | |


| Type | A Series (Gate) | | | | A Series (Globe) | | | | A Series (Swing Check) | | |
|--|---|-----|------|-----|---|-----|-----|-----|--|------|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | |  | | | |  | | |
| | 600UMAM | | | | 600UPAM/G-600UPAM | | | | 600UOAM | | |
| End Connection | ASME B16.5 Class 600 RF | | | | ASME B16.5 Class 300 RF | | | | ASME B16.5 Class 600 RF | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D |
| 1/2 | 15 | 165 | 211 | 100 | 165 | 213 | 120 | | 165 | 93.5 | |
| 3/4 | 20 | 190 | 224 | 100 | 190 | 210 | 120 | | 190 | 97.4 | |
| 1 | 25 | 216 | 251 | 140 | 216 | 246 | 160 | | 216 | 112 | |
| 1 1/2 | 40 | 241 | 334 | 180 | 241 | 283 | 200 | | 241 | 127 | |
| 2 | 50 | 292 | 452 | 200 | 292 | 374 | 225 | | 292 | 203 | |
| 2 1/2 | 65 | 330 | 483 | 225 | 330 | 413 | 250 | | 330 | 213 | |
| 3 | 80 | 356 | 546 | 250 | 356 | 492 | 350 | | 356 | 239 | |
| 4 | 100 | 432 | 677 | 350 | 432 | 586 | 400 | | 432 | 279 | |
| 6 | 150 | 559 | 905 | 450 | 559 | 750 | 600 | 280 | 559 | 339 | |
| 8 | 200 | 660 | 1129 | 500 | 660 | 864 | 600 | 350 | 660 | 414 | |
| 10 | 250 | 787 | 1330 | 600 | | | | | 787 | 430 | |
| 12 | 300 | 838 | 1522 | 680 | | | | | 838 | 470 | |
| Body/Bonnet | CF8M | | | | CF8M | | | | CF8M | | |
| Stem | 316SS | | | | 316SS | | | | | | |
| Disc | CF8M | | | | CF8M | | | | CF8M | | |
| Gland Packing | Refer to Page SS22 | | | | Refer to Page SS22 | | | | | | |
| Gasket | Refer to Page SS22 | | | | Refer to Page SS22 | | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | B8/8 | | | | B8/8 | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | |
| Wall Thickness | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | |
| Approval | ISO15848-1, PED/CE TR-CU/EAC | | | | ISO15848-1, PED/CE TR-CU/EAC | | | | PED/CE TR-CU/EAC | | |
| Remarks | Flexible Wedge | | | | | | | | | | |

| Type | HA Series (Gate) | | | | HA Series (Gate) | | |
|--|---|-----|------|-----|---|------|-----|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | |  | | |
| | 150UMHAM | | | | 300UMHAM | | |
| End Connection | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 300 RF | | |
| inch | mm | L | H | D | L | H | D |
| 1/2 | 15 | 108 | 216 | 100 | 140 | 207 | 100 |
| 3/4 | 20 | 117 | 220 | 100 | 152 | 217 | 100 |
| 1 | 25 | 127 | 231 | 100 | 165 | 270 | 160 |
| 1 1/2 | 40 | 165 | 277 | 140 | 190 | 325 | 180 |
| 2 | 50 | 178 | 335 | 160 | 216 | 356 | 180 |
| 2 1/2 | 65 | 190 | 373 | 180 | 241 | 405 | 180 |
| 3 | 80 | 203 | 443 | 200 | 283 | 472 | 225 |
| 4 | 100 | 229 | 522 | 225 | 305 | 560 | 250 |
| 6 | 150 | 267 | 710 | 250 | 403 | 753 | 350 |
| 8 | 200 | 292 | 924 | 300 | 419 | 968 | 400 |
| 10 | 250 | 330 | 1125 | 350 | 457 | 1177 | 450 |
| 12 | 300 | 356 | 1328 | 400 | 502 | 1378 | 500 |
| 14 | 350 | 381 | 1491 | 450 | 762 | 1590 | 600 |
| 16 | 400 | 406 | 1692 | 600 | 838 | 1750 | 600 |
| 18 | 450 | 432 | 1889 | 600 | 914 | 1930 | 680 |
| 20 | 500 | 457 | 2102 | 680 | 991 | 2140 | 760 |
| 24 | 600 | 508 | 2484 | 760 | 1143 | 2530 | 910 |
| Body/Bonnet | CF8M | | | | CF8M | | |
| Stem | 316SS | | | | 316SS | | |
| Disc | CF8M | | | | CF8M | | |
| Gland Packing | Refer to Page SS22 | | | | Refer to Page SS22 | | |
| Gasket | Refer to Page SS22 | | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | B8/8 | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | |
| Wall Thickness | API 603 | | | | API 603 | | |
| Approval | ISO15848-1, PED/CE TR-CU/EAC | | | | ISO15848-1, PED/CE TR-CU/EAC | | |
| Remarks | Flexible Wedge | | | | Flexible Wedge | | |

| Type | A Series (Gate) | | | | | A Series (Globe) | | | | A Series (Lift Check) | | | A Series (Swing Check) | | |
|--|--------------------|--------------|------|-----|--|--------------------|----------------------|-----|-----|-----------------------|-------|---|------------------------|-------|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) | | | | | | | | | | | | | | | |
| | Fig | 10UMA/10UMAT | | | | | 10UPA/10UPAT/G-10UPA | | | | 10UNA | | | 10UOA | |
| End Connection | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | JIS B2220 10K RF | | | JIS B2220 10K RF | | |
| inch | mm | L | H | D | | L | H | D | B | L | H | D | L | H | D |
| 1/2 | 15 | 108 | 201 | 90 | | 108 | 166 | 90 | | 108 | 74 | | | | |
| 3/4 | 20 | 117 | 210 | 90 | | 117 | 168 | 90 | | 117 | 76 | | | | |
| 1 | 25 | 127 | 224 | 100 | | 127 | 173 | 100 | | 127 | 76 | | | | |
| 1 1/4 | 32 | 140 | 240 | 100 | | | | | | | | | | | |
| 1 1/2 | 40 | 165 | 284 | 140 | | 165 | 204 | 140 | | 165 | 86 | | 165 | 109 | |
| 2 | 50 | 178 | 336 | 160 | | 203 | 235 | 160 | | | | | 203 | 119 | |
| 2 1/2 | 65 | 190 | 374 | 180 | | 216 | 248 | 180 | | | | | 216 | 134 | |
| 3 | 80 | 203 | 444 | 200 | | 241 | 292 | 200 | | | | | 241 | 148 | |
| 4 | 100 | 229 | 523 | 225 | | 292 | 324 | 225 | | | | | 292 | 164 | |
| 5 | 125 | 254 | 606 | 250 | | 356 | 382 | 250 | | | | | 330 | 192 | |
| 6 | 150 | 267 | 711 | 250 | | 406 | 453 | 350 | | | | | 356 | 214 | |
| 8 | 200 | 292 | 924 | 300 | | 495 | 556 | 400 | | | | | 495 | 264 | |
| 10 | 250 | 330 | 1126 | 350 | | 622 | 923 | 500 | 280 | | | | 622 | 286 | |
| 12 | 300 | 356 | 1336 | 400 | | 698 | 1013 | 500 | 280 | | | | 698 | 315 | |
| 14 | 350 | 381 | 1491 | 450 | | | | | | | | | 787 | 363 | |
| 16 | 400 | 406 | 1692 | 600 | | | | | | | | | 864 | 407 | |
| 18 | 450 | 432 | 1891 | 600 | | | | | | | | | 978 | 475 | |
| 20 | 500 | 457 | 2102 | 680 | | | | | | | | | 978 | 505 | |
| 24 | 600 | 508 | 2463 | 760 | | | | | | | | | 1295 | 595 | |
| Body/Bonnet | CF8 | | | | | CF8 | | | | CF8 | | | CF8 | | |
| Stem | 304SS | | | | | 304SS | | | | | | | | | |
| Disc | CF8 | | | | | CF8 | | | | CF8 | | | CF8 | | |
| Gland Packing | Refer to Page SS22 | | | | | Refer to Page SS22 | | | | | | | | | |
| Gasket | Refer to Page SS22 | | | | | Refer to Page SS22 | | | | Refer to Page SS22 | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | | B8/8 | | | | B8/8 | | | B8/8 | | |
| P-T Rating | JIS B2220 | | | | | JIS B2220 | | | | JIS B2220 | | | JIS B2220 | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | ASME B16.10 | | | ASME B16.10 | | |
| Wall Thickness | ASME B16.34 | | | | | ASME B16.34 | | | | ASME B16.34 | | | ASME B16.34 | | |
| Remarks | Flexible Wedge | | | | | | | | | | | | | | |

| Type | A Series (Y-Strainer) | | | | |
|--|--|-------|-----|-----|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) | | | | | |
| | Fig | 10UYA | | | |
| End Connection | JIS B2220 10K RF | | | | |
| inch | mm | L | H | H1* | |
| 2 1/2 | 65 | 270 | 154 | 214 | |
| 3 | 80 | 290 | 189 | 263 | |
| 4 | 100 | 350 | 227 | 320 | |
| 5 | 125 | 390 | 268 | 383 | |
| 6 | 150 | 440 | 316 | 451 | |
| 8 | 200 | 540 | 384 | 554 | |
| 10 | 250 | 760 | 536 | 753 | |
| 12 | 300 | 870 | 636 | 891 | |
| Body/Bonnet | CF8 | | | | |
| Disc/Screen | 304SS | | | | |
| Gasket | Refer to Page SS22 | | | | |
| Bonnet B/N | B8/8 | | | | |
| P-T Rating | JIS B2220 | | | | |
| F-to-F Dimension | KITZ Standard | | | | |
| Wall Thickness | KITZ Standard | | | | |
| Remarks | 40-mesh stainless wire net reinforced with punched stainless steel plate | | | | |
| | *Height for removing the screen | | | | |



| Type | A Series (Gate) | | | | A Series (Globe) | | | | A Series (Lift Check) | | | A Series (Swing Check) | | |
|--|---|--------------|------|-----|---|----------------------|-----|-----|--|-------|---|---|-------|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | |  | | | |  | | |  | | |
| | Fig | 20UMA/20UMAT | | | | 20UPA/20UPAT/G-20UPA | | | | 20UNA | | | 20UOA | |
| End Connection | JIS B2220 20K RF | | | | JIS B2220 20K RF | | | | JIS B2220 20K RF | | | JIS B2220 20K RF | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D |
| 1/2 | 15 | 140 | 209 | 100 | 152 | 184 | 100 | | 152 | 80 | | | | |
| 3/4 | 20 | 152 | 220 | 100 | 178 | 182 | 100 | | 178 | 78 | | | | |
| 1 | 25 | 165 | 239 | 100 | 203 | 185 | 100 | | 203 | 80 | | | | |
| 1 1/2 | 40 | 190 | 293 | 140 | 229 | 234 | 160 | | 229 | 100 | | 241 | 123 | |
| 2 | 50 | 216 | 355 | 180 | 267 | 286 | 180 | | | | | 267 | 142 | |
| 2 1/2 | 65 | 241 | 404 | 180 | 292 | 296 | 200 | | | | | 292 | 165 | |
| 3 | 80 | 283 | 472 | 225 | 318 | 341 | 250 | | | | | 318 | 180 | |
| 4 | 100 | 305 | 560 | 250 | 356 | 396 | 300 | | | | | 356 | 203 | |
| 5 | 125 | 381 | 625 | 300 | 400 | 493 | 350 | | | | | 400 | 234 | |
| 6 | 150 | 403 | 753 | 350 | 444 | 563 | 400 | | | | | 444 | 259 | |
| 8 | 200 | 419 | 968 | 400 | 559 | 874 | 500 | 280 | | | | 533 | 298 | |
| 10 | 250 | 457 | 1177 | 450 | 622 | 1048 | 600 | 350 | | | | 622 | 356 | |
| 12 | 300 | 502 | 1378 | 500 | | | | | | | | 711 | 373 | |
| 14 | 350 | 762 | 1590 | 600 | | | | | | | | 838 | 442 | |
| 16 | 400 | 838 | 1810 | 600 | | | | | | | | 864 | 480 | |
| 18 | 450 | 914 | 1980 | 680 | | | | | | | | 978 | 585 | |
| 20 | 500 | 991 | 2190 | 760 | | | | | | | | | | |
| 24 | 600 | 1143 | 2580 | 910 | | | | | | | | | | |
| Body/Bonnet | CF8 | | | | CF8 | | | | CF8 | | | CF8 | | |
| Stem | 304SS | | | | 304SS | | | | | | | | | |
| Disc | CF8 | | | | CF8 | | | | CF8 | | | CF8 | | |
| Gland Packing | Refer to Page SS22 | | | | Refer to Page SS22 | | | | | | | | | |
| Gasket | Refer to Page SS22 | | | | Refer to Page SS22 | | | | Refer to Page SS22 | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | B8/8 | | | | B8/8 | | | B8/8 | | |
| P-T Rating | JIS B2220 | | | | JIS B2220 | | | | JIS B2220 | | | JIS B2220 | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | ASME B16.10 | | |
| Wall Thickness | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | ASME B16.34 | | |
| Remarks | Flexible Wedge | | | | | | | | | | | | | |



| Type | A Series (Y-Strainer) | | | | |
|--|---|-------|-----|-----|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |
| | Fig | 20UYA | | | |
| End Connection | JIS B2220 20K RF | | | | |
| inch | mm | L | H | H1* | |
| 1/2 | 15 | 160 | 68 | 79 | |
| 3/4 | 20 | 160 | 77 | 90 | |
| 1 | 25 | 190 | 89 | 109 | |
| 1 1/2 | 40 | 240 | 123 | 145 | |
| 2 | 50 | 250 | 147 | 172 | |
| 2 1/2 | 65 | 300 | 182 | 223 | |
| 3 | 80 | 320 | 209 | 271 | |
| 4 | 100 | 380 | 245 | 325 | |
| 6 | 150 | 550 | 341 | 460 | |
| 8 | 200 | 600 | 430 | 607 | |
| 10 | 250 | 760 | 536 | 753 | |
| 12 | 300 | 870 | 636 | 894 | |
| Body/Bonnet | CF8 | | | | |
| Disc/Screen | 304SS | | | | |
| Gasket | Refer to Page SS22 | | | | |
| Bonnet B/N | B8/8 | | | | |
| P-T Rating | JIS B2220 | | | | |
| F-to-F Dimension | KITZ Standard | | | | |
| Wall Thickness | KITZ Standard | | | | |
| Remarks | 40-mesh stainless wire net reinforced with punched stainless steel plate | | | | |





*Height for removing the screen





| Type | A Series (Bellows Seal Globe) | | | A Series (Bellows Seal Globe) | | | A Series (Bellows Seal Globe) | | | |
|--|-------------------------------|-----|-----|-------------------------------|-----|-----|-------------------------------|-----|-----|-----|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) | | | | | | | | | | |
| | 150UPAWM | | | 150UPDAWM | | | 300UPAWM | | | |
| Fig | 150UPAWM | | | 150UPDAWM | | | 300UPAWM | | | |
| End Connection | ASME B16.5 Class 150 RF | | | ASME B16.5 Class 150 RF | | | ASME B16.5 Class 300 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 108 | 164 | 90 | 108 | 164 | 90 | 152 | 185 | 100 |
| 3/4 | 20 | 117 | 166 | 90 | 117 | 166 | 90 | 178 | 183 | 100 |
| 1 | 25 | 127 | 170 | 100 | 127 | 170 | 100 | 203 | 185 | 100 |
| 1 1/2 | 40 | 165 | 202 | 140 | 165 | 202 | 140 | 229 | 234 | 160 |
| 2 | 50 | 203 | 230 | 160 | 203 | 230 | 160 | 267 | 287 | 180 |
| 2 1/2 | 65 | 216 | 245 | 180 | 216 | 245 | 180 | 292 | 293 | 200 |
| 3 | 80 | 241 | 284 | 200 | 241 | 284 | 200 | 318 | 402 | 250 |
| 4 | 100 | 292 | 360 | 225 | 292 | 360 | 225 | 356 | 454 | 300 |
| 5 | 125 | 356 | 425 | 250 | 356 | 425 | 250 | 400 | 539 | 350 |
| 6 | 150 | 406 | 493 | 350 | 406 | 483 | 350 | 444 | 607 | 400 |
| Body/Bonnet | CF8M | | | CF8M | | | CF8M | | | |
| Stem | 316SS | | | 316SS | | | 316SS | | | |
| Disc | 316 or CF8M | | | PTFE | | | 316 or CF8M | | | |
| Gland Packing | Carbon Fiber Coil Packing | | | Carbon Fiber Coil Packing | | | Carbon Fiber Coil Packing | | | |
| Gasket | Flexible Graphite | | | Flexible Graphite | | | Flexible Graphite | | | |
| Bellows | 316L | | | 316L | | | 316L | | | |
| Bonnet B/N | B8/8 | | | B8/8 | | | B8/8 | | | |
| P-T Rating | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | |
| F-to-F Dimension | ASME B16.10 | | | ASME B16.10 | | | ASME B16.10 | | | |
| Wall Thickness | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | |







| Type | A Series (Bellows Seal Globe) | | | A Series (Soft Seated Globe) | | | | A Series (Bellows Seal Globe) | | | A Series (Bellows Seal Globe) | | | |
|--|-------------------------------|-----|-----|------------------------------|-----|-----|-----|-------------------------------|-----|-----|-------------------------------|-----|-----|-----|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) | | | | | | | | | | | | | | |
| | 10UPAW | | | 10UPDA/G-10UPDA | | | | 10UPDAW | | | 20UPAW | | | |
| Fig | 10UPAW | | | 10UPDA/G-10UPDA | | | | 10UPDAW | | | 20UPAW | | | |
| End Connection | JIS B2220 10K RF | | | JIS B2220 10K RF | | | | JIS B2220 10K RF | | | JIS B2220 20K RF | | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | L | H | D |
| 1/2 | 15 | 108 | 164 | 90 | 108 | 166 | 90 | | 108 | 164 | 90 | 152 | 185 | 100 |
| 3/4 | 20 | 117 | 166 | 90 | 117 | 168 | 90 | | 117 | 166 | 90 | 178 | 183 | 100 |
| 1 | 25 | 127 | 170 | 100 | 127 | 173 | 100 | | 127 | 170 | 100 | 203 | 185 | 100 |
| 1 1/4 | 32 | | | | 140 | 192 | 120 | | | | | | | |
| 1 1/2 | 40 | 165 | 202 | 140 | 165 | 204 | 140 | | 165 | 202 | 140 | 229 | 234 | 160 |
| 2 | 50 | 203 | 230 | 160 | 203 | 235 | 160 | | 203 | 230 | 160 | 267 | 287 | 180 |
| 2 1/2 | 65 | 216 | 245 | 180 | 216 | 248 | 180 | | 216 | 245 | 180 | 292 | 293 | 200 |
| 3 | 80 | 241 | 284 | 200 | 241 | 292 | 200 | | 241 | 284 | 200 | 318 | 402 | 250 |
| 4 | 100 | 292 | 360 | 225 | 292 | 324 | 225 | | 292 | 360 | 225 | 356 | 454 | 300 |
| 5 | 125 | 356 | 425 | 250 | 356 | 382 | 250 | | 356 | 425 | 250 | 400 | 539 | 350 |
| 6 | 150 | 406 | 493 | 350 | 406 | 453 | 350 | | 406 | 483 | 350 | 444 | 607 | 400 |
| 8 | 200 | | | | 495 | 556 | 400 | | | | | | | |
| 10 | 250 | | | | 622 | 923 | 500 | 280 | | | | | | |
| Body/Bonnet | CF8 | | | CF8 | | | | CF8 | | | CF8 | | | |
| Stem | 304SS | | | 304SS | | | | 304SS | | | 304SS | | | |
| Disc | 316 or CF8M | | | PTFE | | | | PTFE | | | 316 or CF8M | | | |
| Gland Packing | Carbon Fiber Coil Packing | | | Refer to Page SS22 | | | | Carbon Fiber Coil Packing | | | Carbon Fiber Coil Packing | | | |
| Gasket | Flexible Graphite | | | Refer to Page SS22 | | | | Flexible Graphite | | | Flexible Graphite | | | |
| Bellows | 316L | | | | | | | 316L | | | 316L | | | |
| Bonnet B/N | B8/8 | | | B8/8 | | | | B8/8 | | | B8/8 | | | |
| P-T Rating | JIS B2220 | | | JIS B2220 | | | | JIS B2220 | | | JIS B2220 | | | |
| F-to-F Dimension | ASME B16.10 | | | ASME B16.10 | | | | ASME B16.10 | | | ASME B16.10 | | | |
| Wall Thickness | ASME B16.34 | | | ASME B16.34 | | | | ASME B16.34 | | | ASME B16.34 | | | |







| Type | AJ Series (Jacketed Gate) | | | | | AJ Series (Jacketed Globe) | | | | | AJ Series (Jacketed Lift Check) | | | | | AJ Series (Jacketed Swing Check) | | | | |
|--|---|-----|-----|-----|-------|---|-----|-----|-------|-----|--|---|-------|-----|-----|---|----|--|--|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | | |  | | | | |  | | | | |
| | 150UOAJM | | | | | 150UPAJM | | | | | 150UNAJM | | | | | 150UOAJM | | | | |
| Fig | 150UOAJM | | | | | 150UPAJM | | | | | 150UNAJM | | | | | 150UOAJM | | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | |
| inch | mm | L | H | D | F* | L | H | D | F* | L | H | D | F* | L | H | D | F* | | | |
| 1/2 | 15 | 165 | 210 | 100 | 11/2 | 152 | 184 | 100 | 11/2 | 152 | 78 | | 11/2 | | | | | | | |
| 3/4 | 20 | 165 | 221 | 100 | 11/2 | 152 | 182 | 100 | 11/2 | 152 | 76 | | 11/2 | | | | | | | |
| 1 | 25 | 177 | 240 | 100 | 2 | 190 | 185 | 100 | 2 | 190 | 77 | | 2 | | | | | | | |
| 1 1/2 | 40 | 187 | 293 | 140 | 2 1/2 | 213 | 234 | 160 | 2 1/2 | 213 | 102 | | 2 1/2 | | | | | | | |
| 2 | 50 | 203 | 344 | 160 | 3 | 241 | 237 | 160 | 3 | | | | | 241 | 125 | | 3 | | | |
| 3 | 80 | 229 | 444 | 200 | 4 | 292 | 294 | 200 | 4 | | | | | 292 | 152 | | 4 | | | |
| 4 | 100 | 267 | 523 | 225 | 6 | 356 | 325 | 225 | 6 | | | | | 356 | 169 | | 6 | | | |
| 6 | 150 | 292 | 711 | 250 | 8 | | | | | | | | | 406 | 219 | | 8 | | | |
| Body/Bonnet | CF8M | | | | | CF8M | | | | | CF8M | | | | | CF8M | | | | |
| Stem | 3164SS | | | | | 3164SS | | | | | | | | | | | | | | |
| Disc | CF8M | | | | | CF8M | | | | | 316SS | | | | | 316SS | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | | | | | | | | | | |
| Hinge Pin/Plug | | | | | | | | | | | | | | | | 316SS | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Jacket | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | |
| Bonnet B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Wall Thickness | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | |
| Remarks | Rating for Jacket: 260°C/1.0MPa Flexible Wedge F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | |




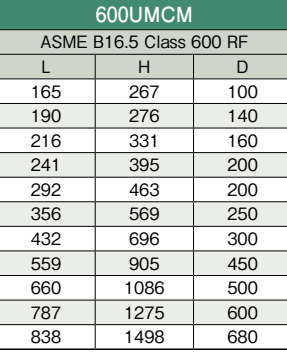
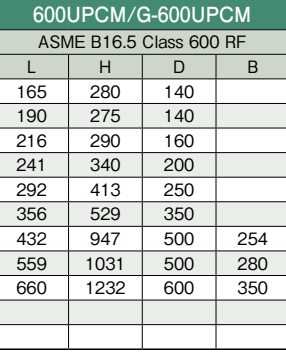
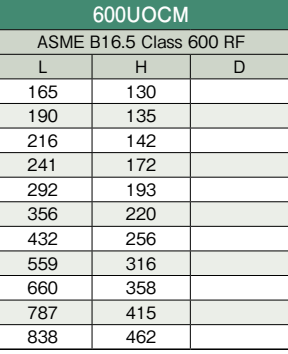
| Type | AJ Series (Jacketed Gate) | | | | | AJ Series (Jacketed Globe) | | | | | AJ Series (Jacketed Lift Check) | | | | | AJ Series (Jacketed Swing Check) | | | | |
|--|---|-----|-----|-----|-------|---|-----|-----|-------|-----|--|---|-------|-----|-----|---|----|--|--|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | | |  | | | | |  | | | | |
| | 300UOAJM | | | | | 300UPAJM | | | | | 300UNAJM | | | | | 300UOAJM | | | | |
| Fig | 300UOAJM | | | | | 300UPAJM | | | | | 300UNAJM | | | | | 300UOAJM | | | | |
| End Connection | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 300 RF | | | | |
| inch | mm | L | H | D | F* | L | H | D | F* | L | H | D | F* | L | H | D | F* | | | |
| 1/2 | 15 | 178 | 211 | 211 | 11/2 | 165 | 184 | 184 | 11/2 | 165 | 78 | | 11/2 | | | | | | | |
| 3/4 | 20 | 178 | 221 | 221 | 11/2 | 165 | 182 | 182 | 11/2 | 165 | 76 | | 11/2 | | | | | | | |
| 1 | 25 | 190 | 240 | 240 | 2 | 203 | 185 | 185 | 2 | 203 | 77 | | 2 | | | | | | | |
| 1 1/2 | 40 | 203 | 294 | 294 | 2 1/2 | 229 | 234 | 234 | 2 1/2 | 229 | 102 | | 2 1/2 | | | | | | | |
| 2 | 50 | 283 | 355 | 355 | 3 | 267 | 286 | 286 | 3 | | | | | 267 | 150 | | 3 | | | |
| 3 | 80 | 305 | 472 | 472 | 4 | 318 | 341 | 341 | 4 | | | | | 330 | 179 | | 4 | | | |
| 4 | 100 | 403 | 560 | 560 | 6 | 356 | 396 | 396 | 6 | | | | | 400 | 203 | | 6 | | | |
| 6 | 150 | 457 | 753 | 753 | 8 | | | | | | | | | 444 | 260 | | 8 | | | |
| Body/Bonnet | CF8M | | | | | CF8M | | | | | CF8M | | | | | CF8M | | | | |
| Stem | 3164SS | | | | | 3164SS | | | | | | | | | | | | | | |
| Disc | CF8M | | | | | CF8M | | | | | 316SS | | | | | 316SS | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | | | | | | | | | | |
| Hinge Pin/Plug | | | | | | | | | | | | | | | | 316SS | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Jacket | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | |
| Bonnet B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Wall Thickness | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | |
| Remarks | Rating for Jacket: 260°C/1.0MPa Flexible Wedge F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | |




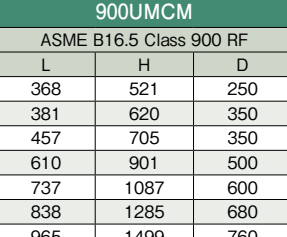
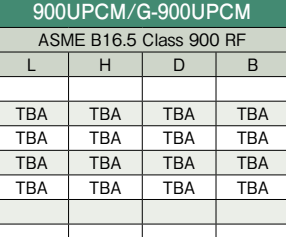
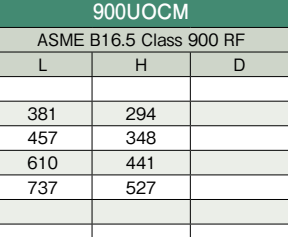
| Type | AJ Series (Jacketed Gate) | | | | | AJ Series (Jacketed Globe) | | | | | AJ Series (Jacketed Lift Check) | | | | | AJ Series (Jacketed Swing Check) | | | | |
|--|---|-----|-----|-----|-------|---|-----|-----|-------|-----|--|---|-------|-----|-----|---|----|--|--|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | | |  | | | | |  | | | | |
| | 10UMAJ | | | | | 10UPAJ | | | | | 10UNAJ | | | | | 10UOAJ | | | | |
| Fig | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | |
| End Connection | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | | JIS B2220 10K RF | | | | |
| inch | mm | L | H | D | F* | L | H | D | F* | L | H | D | F* | L | H | D | F* | | | |
| 1/2 | 15 | 169 | 210 | 100 | 11/2 | 156 | 184 | 100 | 11/2 | 156 | 83 | | 11/2 | | | | | | | |
| 3/4 | 20 | 169 | 221 | 100 | 11/2 | 156 | 182 | 100 | 11/2 | 156 | 76 | | 11/2 | | | | | | | |
| 1 | 25 | 177 | 240 | 100 | 2 | 190 | 185 | 100 | 2 | 190 | 76 | | 2 | | | | | | | |
| 1 1/2 | 40 | 188 | 293 | 140 | 2 1/2 | 214 | 234 | 160 | 2 1/2 | 214 | 101 | | 2 1/2 | | | | | | | |
| 2 | 50 | 201 | 343 | 160 | 3 | 239 | 237 | 160 | 3 | | | | | 239 | 125 | | 3 | | | |
| 3 | 80 | 217 | 444 | 200 | 4 | 280 | 294 | 200 | 4 | | | | | 280 | 152 | | 4 | | | |
| 4 | 100 | 260 | 523 | 225 | 6 | 349 | 325 | 225 | 6 | | | | | 349 | 169 | | 6 | | | |
| 6 | 150 | 279 | 711 | 250 | 8 | | | | | | | | | 393 | 219 | | 8 | | | |
| Body/Bonnet | CF8 | | | | | CF8 | | | | | CF8 | | | | | CF8 | | | | |
| Stem | 304SS | | | | | 304SS | | | | | | | | | | | | | | |
| Disc | CF8 | | | | | CF8 | | | | | 304SS | | | | | 304SS | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | | | | | | | | | | |
| Hinge Pin/Plug | | | | | | | | | | | | | | | | 304SS | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Jacket | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | |
| Bonnet B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | |
| P-T Rating | JIS B2220 | | | | | JIS B2220 | | | | | JIS B2220 | | | | | JIS B2220 | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Wall Thickness | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | |
| Remarks | Rating for Jacket: 260°C/1.0MPa Flexible Wedge F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | |







| Type | AJ Series (Jacketed Gate) | | | | | AJ Series (Jacketed Globe) | | | | | AJ Series (Jacketed Lift Check) | | | | | AJ Series (Jacketed Swing Check) | | | | |
|--|---|-----|-----|-----|-------|---|-----|-----|-------|-----|--|---|-------|-----|-----|---|----|--|--|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | | |  | | | | |  | | | | |
| | 20UMAJ | | | | | 20UPAJ | | | | | 20UNAJ | | | | | 20UOAJ | | | | |
| Fig | JIS B2220 20K RF | | | | | JIS B2220 20K RF | | | | | JIS B2220 10K RF | | | | | JIS B2220 20K RF | | | | |
| End Connection | JIS B2220 20K RF | | | | | JIS B2220 20K RF | | | | | JIS B2220 10K RF | | | | | JIS B2220 20K RF | | | | |
| inch | mm | L | H | D | F* | L | H | D | F* | L | H | D | F* | L | H | D | F* | | | |
| 1/2 | 15 | 173 | 210 | 100 | 11/2 | 160 | 184 | 100 | 11/2 | 160 | 78 | | 11/2 | | | | | | | |
| 3/4 | 20 | 173 | 221 | 100 | 11/2 | 160 | 182 | 100 | 11/2 | 160 | 76 | | 11/2 | | | | | | | |
| 1 | 25 | 181 | 240 | 100 | 2 | 194 | 185 | 100 | 2 | 194 | 77 | | 2 | | | | | | | |
| 1 1/2 | 40 | 192 | 294 | 140 | 2 1/2 | 218 | 234 | 160 | 2 1/2 | 218 | 102 | | 2 1/2 | | | | | | | |
| 2 | 50 | 270 | 355 | 180 | 3 | 254 | 286 | 180 | 3 | | | | | 254 | 150 | | 3 | | | |
| 3 | 80 | 289 | 472 | 225 | 4 | 302 | 341 | 250 | 4 | | | | | 314 | 179 | | 4 | | | |
| 4 | 100 | 386 | 560 | 250 | 6 | 339 | 396 | 300 | 6 | | | | | 383 | 203 | | 6 | | | |
| 6 | 150 | 434 | 753 | 350 | 8 | | | | | | | | | 421 | 262 | | 8 | | | |
| Body/Bonnet | CF8 | | | | | CF8 | | | | | CF8 | | | | | CF8 | | | | |
| Stem | 304SS | | | | | 304SS | | | | | | | | | | | | | | |
| Disc | CF8 | | | | | CF8 | | | | | 304SS | | | | | 304SS | | | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | | | | | | | | | | |
| Hinge Pin/Plug | | | | | | | | | | | | | | | | 304SS | | | | |
| Gasket | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | | Flexible Graphite | | | | |
| Jacket | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | | Carbon Steel | | | | |
| Bonnet B/N | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | | B8/8 | | | | |
| P-T Rating | JIS B2220 | | | | | JIS B2220 | | | | | JIS B2220 | | | | | JIS B2220 | | | | |
| F-to-F Dimension | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | | KITZ Standard | | | | |
| Wall Thickness | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | |
| Remarks | Rating for Jacket: 260°C/1.0MPa Flexible Wedge F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | | Rating for Jacket: 260°C/1.0MPa F*: Flange Size | | | | |







| Type | C Series (Gate) | | | | | C Series (Globe) | | | C Series (Swing Check) | | |
|--|---|-----|------|-----|-----|---|-----|------|--|---|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | |  | | |
| |  | | | | |  | | |  | | |
| Fig | 150UMCM | | | | | 150UPCM | | | 150UOCM | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | ASME B16.5 Class 150 RF | | |
| inch | mm | L | H | D | L | H | D | L | H | D | |
| 1/2 | 15 | 108 | 218 | 90 | 108 | 196 | 90 | 108 | 78 | | |
| 3/4 | 20 | 117 | 231 | 100 | 117 | 202 | 100 | 117 | 83 | | |
| 1 | 25 | 127 | 278 | 120 | 127 | 233 | 120 | 127 | 98 | | |
| 1 1/2 | 40 | 165 | 341 | 160 | 165 | 273 | 160 | 165 | 113 | | |
| 2 | 50 | 178 | 382 | 200 | 203 | 328 | 200 | 203 | 159 | | |
| 2 1/2 | 65 | 190 | 429 | 200 | 216 | 356 | 225 | 216 | 165 | | |
| 3 | 80 | 203 | 507 | 250 | 241 | 390 | 250 | 241 | 189 | | |
| 4 | 100 | 229 | 589 | 250 | 292 | 456 | 250 | 292 | 205 | | |
| 6 | 150 | 267 | 764 | 300 | 406 | 506 | 350 | 356 | 253 | | |
| 8 | 200 | 292 | 961 | 350 | 495 | 613 | 400 | 495 | 281 | | |
| 10 | 250 | 330 | 1172 | 400 | | | | 622 | 345 | | |
| 12 | 300 | 356 | 1371 | 450 | | | | 698 | 385 | | |
| 14 | 350 | 381 | 1524 | 500 | | | | 787 | 396 | | |
| 16 | 400 | 406 | 1692 | 600 | | | | 864 | 438 | | |
| 18 | 450 | 432 | 1888 | 600 | | | | 978 | 465 | | |
| 20 | 500 | 457 | 2123 | 680 | | | | 978 | 590 | | |
| 24 | 600 | 508 | 2490 | 760 | | | | 1295 | 670 | | |
| Body/Bonnet | CF8M | | | | | CF8M | | | CF8M | | |
| Stem | 316SS | | | | | 316SS | | | | | |
| Disc | CF8M | | | | | CF8M | | | CF8M | | |
| Gland Packing | Refer to Page SS22 | | | | | Refer to Page SS22 | | | | | |
| Gasket | Refer to Page SS22 | | | | | Refer to Page SS22 | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | | B8/8 | | | B8/8 | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | ASME B16.10 | | |
| Wall Thickness | API 600 | | | | | API 600 | | | API 600 | | |
| Approval | ISO15848-1, PED/CE TR-CU/EAC | | | | | ISO15848-1, PED/CE TR-CU/EAC | | | PED/CE TR-CU/EAC | | |
| Remarks | Solid Wedge $\leq 4^\circ$, Flexible Wedge $\geq 6^\circ$ | | | | | | | | | | |




| Type | C Series (Gate) | | | | | C Series (Globe) | | | C Series (Swing Check) | | |
|--|---|------|------|-----|-----|---|-----|------|--|---|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | |  | | |
| |  | | | | |  | | |  | | |
| Fig | 300UMCM | | | | | 300UPCM | | | 300UOCM | | |
| End Connection | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 300 RF | | | ASME B16.5 Class 300 RF | | |
| inch | mm | L | H | D | L | H | D | L | H | D | |
| 1/2 | 15 | 140 | 227 | 100 | 152 | 220 | 100 | 140 | 81 | | |
| 3/4 | 20 | 152 | 250 | 100 | 178 | 222 | 100 | 152 | 84 | | |
| 1 | 25 | 165 | 310 | 120 | 203 | 259 | 140 | 216 | 101 | | |
| 1 1/2 | 40 | 190 | 378 | 200 | 229 | 302 | 180 | 241 | 118 | | |
| 2 | 50 | 216 | 416 | 200 | 267 | 352 | 200 | 267 | 165 | | |
| 2 1/2 | 65 | 241 | 455 | 200 | 292 | 400 | 250 | 292 | 190 | | |
| 3 | 80 | 283 | 528 | 250 | 318 | 440 | 250 | 318 | 205 | | |
| 4 | 100 | 305 | 615 | 250 | 356 | 509 | 350 | 356 | 225 | | |
| 6 | 150 | 403 | 798 | 350 | 444 | 677 | 450 | | | | |
| 8 | 200 | 419 | 1020 | 400 | | | | 444 | 272 | | |
| 10 | 250 | 457 | 1222 | 450 | | | | 533 | 330 | | |
| 12 | 300 | 502 | 1442 | 500 | | | | 622 | 360 | | |
| 14 | 350 | 562 | 1575 | 600 | | | | 711 | 406 | | |
| 16 | 400 | 638 | 1745 | 600 | | | | 838 | 480 | | |
| 18 | 450 | 714 | 1945 | 680 | | | | 864 | 527 | | |
| 20 | 500 | 791 | 2155 | 760 | | | | 978 | 555 | | |
| 24 | 600 | 1143 | 2555 | 910 | | | | 1346 | 732 | | |
| Body/Bonnet | CF8M | | | | | CF8M | | | CF8 | | |
| Stem | 316SS | | | | | 316SS | | | | | |
| Disc | CF8M | | | | | CF8M | | | CF8 | | |
| Gland Packing | Refer to Page SS22 | | | | | Refer to Page SS22 | | | | | |
| Gasket | Refer to Page SS22 | | | | | Refer to Page SS22 | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | | B8/8 | | | B8/8 | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | ASME B16.10 | | |
| Wall Thickness | API 600 | | | | | API 600 | | | API 600 | | |
| Approval | ISO15848-1, PED/CE TR-CU/EAC | | | | | ISO15848-1, PED/CE TR-CU/EAC | | | PED/CE TR-CU/EAC | | |
| Remarks | Solid Wedge $\leq 4^\circ$, Flexible Wedge $\geq 6^\circ$ | | | | | | | | | | |

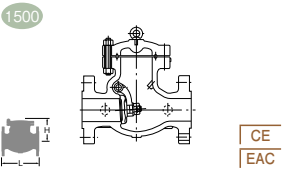


| Type | C Series (Gate) | | | | C Series (Globe) | | | | C Series (Swing Check) | | |
|--|---|-----|------|-----|---|------|-----|-----|--|-----|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | |  | | | |  | | |
| |  | | | |  | | | |  | | |
| Fig | 600UMCM | | | | 600UPCM/G-600UPCM | | | | 600UOCM | | |
| End Connection | ASME B16.5 Class 600 RF | | | | ASME B16.5 Class 600 RF | | | | ASME B16.5 Class 600 RF | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D |
| 1/2 | 15 | 165 | 267 | 100 | 165 | 280 | 140 | | 165 | 130 | |
| 3/4 | 20 | 190 | 276 | 140 | 190 | 275 | 140 | | 190 | 135 | |
| 1 | 25 | 216 | 331 | 160 | 216 | 290 | 160 | | 216 | 142 | |
| 1 1/2 | 40 | 241 | 395 | 200 | 241 | 340 | 200 | | 241 | 172 | |
| 2 | 50 | 292 | 463 | 200 | 292 | 413 | 250 | | 292 | 193 | |
| 3 | 80 | 356 | 569 | 250 | 356 | 529 | 350 | | 356 | 220 | |
| 4 | 100 | 432 | 696 | 300 | 432 | 947 | 500 | 254 | 432 | 256 | |
| 6 | 150 | 559 | 905 | 450 | 559 | 1031 | 500 | 280 | 559 | 316 | |
| 8 | 200 | 660 | 1086 | 500 | 660 | 1232 | 600 | 350 | 660 | 358 | |
| 10 | 250 | 787 | 1275 | 600 | | | | | 787 | 415 | |
| 12 | 300 | 838 | 1498 | 680 | | | | | 838 | 462 | |
| Body/Bonnet | CF8M | | | | CF8M | | | | CF8M | | |
| Stem | 316SS | | | | 316SS | | | | | | |
| Disc | CF8M | | | | CF8M | | | | CF8M | | |
| Gland Packing | Refer to Page SS22 | | | | Refer to Page SS22 | | | | | | |
| Gasket | Refer to Page SS22 | | | | Refer to Page SS22 | | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | B8/8 | | | | B8/8 | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | |
| Wall Thickness | API 600 | | | | API 600 | | | | API 600 | | |
| Approval | ISO15848-1, PED/CE TR-CU/EAC | | | | ISO15848-1, PED/CE TR-CU/EAC | | | | PED/CE TR-CU/EAC | | |
| Remarks | Solid Wedge $\leq 11/2^{\circ}$, Flexible Wedge $\geq 2^{\circ}$ | | | | | | | | | | |




| Type | C Series (Gate) | | | | C Series (Globe) | | | | C Series (Swing Check) | | |
|--|---|-----|------|-----|---|-----|-----|-----|--|-----|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | |  | | | |  | | |
| |  | | | |  | | | |  | | |
| Fig | 900UMCM | | | | 900UPCM/G-900UPCM | | | | 900UOCM | | |
| End Connection | ASME B16.5 Class 900 RF | | | | ASME B16.5 Class 900 RF | | | | ASME B16.5 Class 900 RF | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D |
| 2 | 50 | 368 | 521 | 250 | | | | | | | |
| 3 | 80 | 381 | 620 | 350 | TBA | TBA | TBA | TBA | 381 | 294 | |
| 4 | 100 | 457 | 705 | 350 | TBA | TBA | TBA | TBA | 457 | 348 | |
| 6 | 150 | 610 | 901 | 500 | TBA | TBA | TBA | TBA | 610 | 441 | |
| 8 | 200 | 737 | 1087 | 600 | TBA | TBA | TBA | TBA | 737 | 527 | |
| 10 | 250 | 838 | 1285 | 680 | | | | | | | |
| 12 | 300 | 965 | 1499 | 760 | | | | | | | |
| Body/Bonnet | CF8M | | | | CF8M | | | | CF8M | | |
| Stem | 316SS | | | | 316SS | | | | | | |
| Disc | CF8M | | | | CF8M | | | | CF8M | | |
| Gland Packing | Refer to Page SS22 | | | | Refer to Page SS22 | | | | | | |
| Gasket | Refer to Page SS22 | | | | Refer to Page SS22 | | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | B8/8 | | | | B8/8 | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | |
| Wall Thickness | API 600 | | | | API 600 | | | | API 600 | | |
| Approval | PED/CE TR-CU/EAC | | | | PED/CE TR-CU/EAC | | | | PED/CE TR-CU/EAC | | |
| Remarks | Flexible Wedge | | | | | | | | | | |




| Type | C Series (Gate) | | | | | C Series (Globe) | | | | C Series (Swing Check) | | |
|--|---|-----|------|-----|-----|---|-----|-----|-----|--|---|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | |  | | |
| |  | | | | |  | | | |  | | |
| Fig | 1500UMCM | | | | | 1500UPCM/G-1500UPCM | | | | 1500UOCM | | |
| End Connection | ASME B16.5 Class 1500 RF | | | | | ASME B16.5 Class 1500 RF | | | | ASME B16.5 Class 1500 RF | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D | |
| 2 | 50 | 368 | 562 | 250 | 368 | 546 | 350 | | 368 | 290 | | |
| 2 1/2 | 65 | 419 | 639 | 300 | | | | | 419 | 316 | | |
| 3 | 80 | 470 | 684 | 350 | TBA | TBA | TBA | TBA | 470 | 347 | | |
| 4 | 100 | 546 | 770 | 400 | TBA | TBA | TBA | TBA | 546 | 391 | | |
| 6 | 150 | 705 | 1040 | 600 | TBA | TBA | TBA | TBA | 705 | 515 | | |
| 8 | 200 | 832 | 1250 | 680 | | | | | 832 | 650 | | |
| Body/Bonnet | CF8M | | | | | CF8M | | | | CF8M | | |
| Stem | 316SS | | | | | 316SS | | | | | | |
| Disc | CF8M | | | | | CF8M | | | | CF8M | | |
| Gland Packing | Refer to Page SS22 | | | | | Refer to Page SS22 | | | | | | |
| Gasket | Refer to Page SS22 | | | | | Refer to Page SS22 | | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | | B8/8 | | | | B8/8 | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | ASME B16.10 | | |
| Wall Thickness | API 600 | | | | | API 600 | | | | API 600 | | |
| Approval | PED/CE TR-CU/EAC | | | | | PED/CE TR-CU/EAC | | | | PED/CE TR-CU/EAC | | |
| Remarks | Flexible Wedge | | | | | | | | | | | |




| Type | C Series (Swing Check) | | | | | C Series (Swing Check) | | | C Series (Swing Check) | | |
|--|---|-----|-----|---|-----|---|---|-----|--|---|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | |  | | |
| |  | | | | |  | | |  | | |
| Fig | 150UOCHM | | | | | 300UOCHM | | | 600UOCHM | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 300 RF | | | ASME B16.5 Class 600 RF | | |
| inch | mm | L | H | D | L | H | D | L | H | D | |
| 2 | 50 | 203 | 158 | | 267 | 162 | | 292 | 190 | | |
| 2 1/2 | 65 | 216 | 165 | | | | | | | | |
| 3 | 80 | 241 | 188 | | 318 | 203 | | 356 | 222 | | |
| 4 | 100 | 292 | 204 | | 356 | 233 | | 432 | 257 | | |
| 6 | 150 | 356 | 252 | | 444 | 280 | | 559 | 318 | | |
| 8 | 200 | 495 | 281 | | 533 | 330 | | 660 | 359 | | |
| 10 | 250 | 622 | 344 | | 622 | 367 | | 787 | 415 | | |
| 12 | 300 | 698 | 385 | | 711 | 423 | | 838 | 462 | | |
| Body/Bonnet | CF8M | | | | | CF8M | | | CF8M | | |
| Disc | CF8M | | | | | CF8M | | | CF8M | | |
| Gasket | Refer to Page SS22 | | | | | Refer to Page SS22 | | | Refer to Page SS22 | | |
| Bonnet B/N | B8/8 | | | | | B8/8 | | | B8/8 | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | ASME B16.10 | | |
| Wall Thickness | API 594 | | | | | API 594 | | | API 594 | | |
| Approval | PED/CE TR-CU/EAC | | | | | PED/CE TR-CU/EAC | | | PED/CE TR-CU/EAC | | |
| Remarks | Internal Hinge Pin as per API594 Type B | | | | | Internal Hinge Pin as per API594 Type B | | | Internal Hinge Pin as per API594 Type B | | |

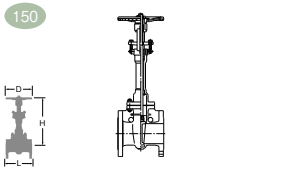
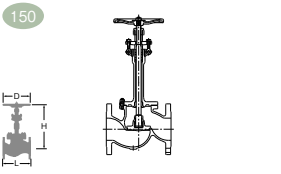
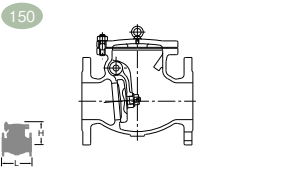
| Type | A Series (Gate(-104°C)) | | | | A Series (Globe(-104°C)) | | | | A Series (Swing Check(-104°C)) | | |
|--|---|-----|------|-----|---|-----|-----|---|--|-----|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | |  | | | |  | | |
| | 150UMAXY/G-150UMAXY | | | | 150UPAXY/G-150UPAXY | | | | 150UOAXY | | |
| End Connection | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 150 RF | | | | ASME B16.5 Class 150 RF | | |
| inch | mm | L | H | D | L | H | D | B | L | H | D |
| 1/2 | 15 | 108 | 343 | 90 | 108 | 302 | 90 | | | | |
| 3/4 | 20 | 117 | 352 | 90 | 117 | 315 | 90 | | | | |
| 1 | 25 | 127 | 375 | 100 | 127 | 331 | 100 | | | | |
| 1 1/2 | 40 | 165 | 436 | 140 | 165 | 366 | 140 | | 165 | 111 | |
| 2 | 50 | 178 | 497 | 160 | 203 | 416 | 160 | | 203 | 121 | |
| 2 1/2 | 65 | 190 | 536 | 180 | 216 | 422 | 180 | | 216 | 134 | |
| 3 | 80 | 203 | 630 | 200 | 241 | 481 | 200 | | 241 | 148 | |
| 4 | 100 | 229 | 722 | 225 | 292 | 535 | 225 | | 292 | 162 | |
| 5 | 125 | 254 | 828 | 250 | 356 | 610 | 250 | | 330 | 192 | |
| 6 | 150 | 267 | 935 | 250 | 406 | 675 | 350 | | 356 | 217 | |
| 8 | 200 | 292 | 1136 | 300 | 495 | 776 | 400 | | 495 | 264 | |
| 10 | 250 | 330 | 1367 | 350 | | | | | 622 | 287 | |
| 12 | 300 | 356 | 1571 | 400 | | | | | 698 | 315 | |
| 14 | 350 | 381 | 1747 | 450 | | | | | 787 | 363 | |
| 16 | 400 | 406 | 1921 | 600 | | | | | 864 | 407 | |
| Body | CF8+HF (Co-Cr-W Alloy) | | | | CF8+HF (Co-Cr-W Alloy) | | | | CF8+HF (Co-Cr-W Alloy) | | |
| Bonnet | CF8 | | | | CF8 | | | | CF8 | | |
| Cover | | | | | | | | | CF8 | | |
| Stem | 304SS | | | | 304SS | | | | | | |
| Disc | CF8+HF (Co-Cr-W Alloy) | | | | CF8+HF (Co-Cr-W Alloy) | | | | CF8+HF (Co-Cr-W Alloy) | | |
| Gland Packing | Flexible Graphite+PTFE Braided | | | | Flexible Graphite+PTFE Braided | | | | | | |
| Gasket | PTFE Spiral Wound | | | | PTFE Spiral Wound | | | | PTFE Spiral Wound | | |
| Bonnet B/N | B8 CL2/8 | | | | B8 CL2/8 | | | | B8 CL2/8 | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | |
| Wall Thickness | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | |
| Remarks | Gear for 8" & above | | | | Gear for 6" & above | | | | | | |

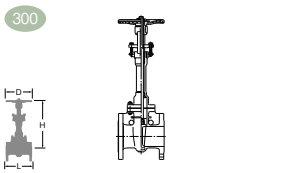
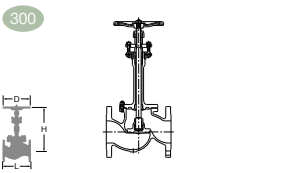
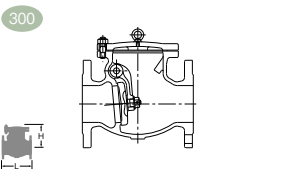
| Type | A Series (Gate(-104°C)) | | | | A Series (Globe(-104°C)) | | | | A Series (Swing Check(-104°C)) | | | |
|--|---|-----|------|-----|---|-----|-----|-----|--|-----|-----|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | |  | | | |  | | | |
| | 300UMAXY/G-300UMAXY | | | | 300UPAXY/G-300UPAXY | | | | 300UOAXY | | | |
| End Connection | ASME B16.5 Class 300 RF | | | | ASME B16.5 Class 300 RF | | | | ASME B16.5 Class 300 RF | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D |
| 1/2 | 15 | 140 | 338 | 100 | | 152 | 316 | 100 | | | | |
| 3/4 | 20 | 152 | 348 | 100 | | 178 | 325 | 100 | | | | |
| 1 | 25 | 165 | 377 | 100 | | 203 | 338 | 100 | | | | |
| 1 1/2 | 40 | 190 | 440 | 140 | | 229 | 387 | 160 | | 241 | 121 | |
| 2 | 50 | 216 | 515 | 180 | | 267 | 450 | 180 | | 267 | 143 | |
| 2 1/2 | 65 | | | | | 292 | 464 | 200 | | 292 | 163 | |
| 3 | 80 | 283 | 655 | 225 | | 318 | 533 | 250 | | 318 | 178 | |
| 4 | 100 | 305 | 751 | 250 | | 356 | 603 | 300 | | 356 | 201 | |
| 5 | 125 | 381 | 840 | 300 | | 400 | 714 | 350 | | 400 | 231 | |
| 6 | 150 | 403 | 961 | 350 | | 444 | 785 | 400 | | 444 | 259 | |
| 8 | 200 | 419 | 1180 | 400 | | 559 | 907 | 560 | | 533 | 292 | |
| 10 | 250 | 457 | 1414 | 450 | | | | | | 622 | 356 | |
| 12 | 300 | 502 | 1617 | 500 | | | | | | 711 | 373 | |
| 14 | 350 | 762 | TBA | TBA | | | | | | | | |
| Body | CF8+HF (Co-Cr-W Alloy) | | | | CF8+HF (Co-Cr-W Alloy) | | | | CF8+HF (Co-Cr-W Alloy) | | | |
| Bonnet | CF8 | | | | CF8 | | | | CF8 | | | |
| Cover | | | | | | | | | CF8 | | | |
| Stem | 304SS | | | | 304SS | | | | | | | |
| Disc | CF8+HF (Co-Cr-W Alloy) | | | | CF8+HF (Co-Cr-W Alloy) | | | | CF8+HF (Co-Cr-W Alloy) | | | |
| Gland Packing | Flexible Graphite+PTFE Braided | | | | Flexible Graphite+PTFE Braided | | | | | | | |
| Gasket | Ceramics PTFE | | | | Ceramics PTFE | | | | PTFE Spiral Wound | | | |
| Bonnet B/N | B8 CL2/8 | | | | B8 CL2/8 | | | | B8 CL2/8 | | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Wall Thickness | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | |
| Remarks | Gear for 8" & above | | | | Gear for 8" & above | | | | | | | |
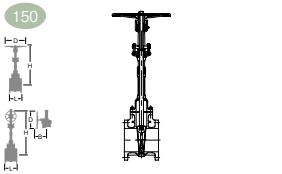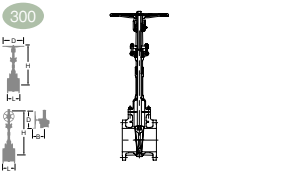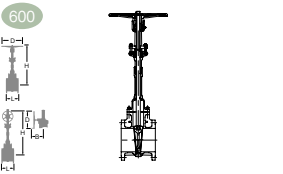
| Type | A Series (Gate(-196°C)) | | | | | A Series (Gate(-196°C)) | | | | | A Series (Gate(-196°C)) | | | | |
|--|---|-----------------------|------|-----|-----|---|-----------------------|-----|-----|-----|--|-----------------------|-----|--|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | | |  | | | | |
| | Fig | 150UMALMY/G-150UMALMY | | | | | 300UMALMY/G-300UMALMY | | | | | 600UMALMY/G-600UMALMY | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 600 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | | |
| 2 | 50 | 178 | 634 | 200 | | 216 | 634 | 200 | | 292 | 764 | 300 | | | |
| 3 | 80 | 203 | 761 | 200 | | 283 | 836 | 300 | | 356 | 926 | 300 | | | |
| 4 | 100 | 229 | 876 | 200 | | 305 | 955 | 300 | | 432 | 1121 | 600 | | | |
| 6 | 150 | 267 | 1138 | 350 | | 403 | 1210 | 600 | | 559 | 1348 | 500 | 253 | | |
| 8 | 200 | 292 | 1317 | 500 | | 419 | 1500 | 500 | 253 | 660 | 1547 | 500 | 253 | | |
| 10 | 250 | 330 | 1678 | 500 | 253 | 457 | 1669 | 500 | 253 | 787 | 2016 | 500 | 282 | | |
| 12 | 300 | 356 | 1802 | 500 | 253 | 502 | 1921 | 500 | 253 | 838 | 2112 | 600 | 350 | | |
| 14 | 350 | 381 | 2049 | 500 | 253 | 762 | 2109 | 500 | 281 | | | | | | |
| 16 | 400 | 406 | 2271 | 500 | 253 | 838 | 2296 | 500 | 281 | | | | | | |
| 18 | 450 | 432 | 2474 | 500 | 281 | 914 | 2532 | 500 | 281 | | | | | | |
| 20 | 500 | 457 | 2696 | 500 | 281 | 991 | 2857 | 600 | 350 | | | | | | |
| 24 | 600 | 508 | 3314 | 600 | 350 | 1143 | 3374 | 600 | 456 | | | | | | |
| Body | CF8M+HF (Co-Cr-W Alloy) | | | | | CF8M+HF (Co-Cr-W Alloy) | | | | | CF8M+HF (Co-Cr-W Alloy) | | | | |
| Bonnet/Cover | CF8M+HF (Co-Cr-W Alloy) | | | | | CF8M+HF (Co-Cr-W Alloy) | | | | | CF8M+HF (Co-Cr-W Alloy) | | | | |
| Stem | 316SS | | | | | 316SS | | | | | 316SS | | | | |
| Disc | CF8M+HF (Co-Cr-W Alloy) | | | | | CF8M+HF (Co-Cr-W Alloy) | | | | | CF8M+HF (Co-Cr-W Alloy) | | | | |
| Gland Packing | RTFE+Graphite | | | | | RTFE+Graphite | | | | | RTFE+Graphite | | | | |
| Gasket | Flexible Graphite Spiral Wound | | | | | Flexible Graphite Spiral Wound | | | | | Flexible Graphite Spiral Wound | | | | |
| Bonnet B/N | B8 CL2/8 | | | | | B8 CL2/8 | | | | | B8 CL2/8 | | | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Wall Thickness | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | |
| Remarks | Gear for 10 ^B & above | | | | | Gear for 8 ^B & above | | | | | Gear for 6 ^B & above | | | | |
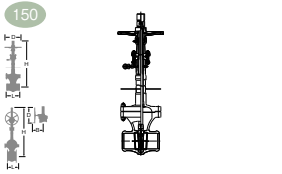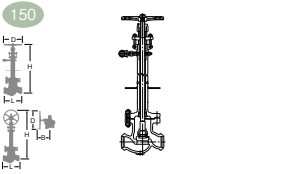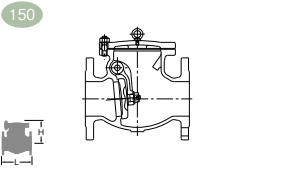
| Type | C Series (Gate(-196°C)) | | | | | C Series (Globe(-196°C)) | | | | | C Series (Swing Check(-196°C)) | | |
|--|---|-----------------------|------|-----|-----|---|-----------------------|-----|-----|------|--|-----------|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | | |  | | |
| | Fig | 150UMCLMY/G-150UMCLMY | | | | | 150UPCLMY/G-150UPCLMY | | | | | 150UOCLMY | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 150 RF | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | |
| 1/2 | 15 | 108 | 446 | 100 | | 108 | 425 | 100 | | 108 | TBA | | |
| 3/4 | 20 | 117 | 460 | 100 | | 117 | 434 | 120 | | 117 | TBA | | |
| 1 | 25 | 127 | 503 | 120 | | 127 | 461 | 160 | | 127 | TBA | | |
| 1 1/2 | 40 | 165 | 612 | 200 | | 165 | TBA | TBA | | 165 | TBA | | |
| 2 | 50 | 178 | 675 | 250 | | 203 | 595 | 200 | | 203 | 156 | | |
| 2 1/2 | 65 | 190 | 718 | 250 | | 216 | 703 | 250 | | 216 | 164 | | |
| 3 | 80 | 203 | 825 | 250 | | 241 | 713 | 250 | | 241 | TBA | | |
| 4 | 100 | 229 | 924 | 300 | | 292 | 807 | 350 | | 292 | TBA | | |
| 5 | 125 | 254 | TBA | TBA | | | | | | | | | |
| 6 | 150 | 267 | 1259 | 400 | | 406 | TBA | TBA | | 356 | TBA | | |
| 8 | 200 | 292 | 1444 | 500 | | 495 | 1283 | 500 | 254 | 495 | TBA | | |
| 10 | 250 | 330 | 1785 | 500 | 254 | | | | | 622 | TBA | | |
| 12 | 300 | 356 | 2041 | 500 | 254 | | | | | 698 | TBA | | |
| 14 | 350 | 381 | 2112 | 500 | 254 | | | | | 787 | TBA | | |
| 16 | 400 | 406 | 2311 | 500 | 280 | | | | | 864 | TBA | | |
| 18 | 450 | 432 | 2495 | 500 | 280 | | | | | 978 | TBA | | |
| 20 | 500 | 457 | 2782 | 600 | 350 | | | | | 978 | TBA | | |
| 24 | 600 | 508 | 3170 | 600 | 350 | | | | | 1295 | TBA | | |
| Body | CF8M+HF up to 11/2 ^B , CF8M | | | | | CF8M+HF up to 11/2 ^B , CF8M | | | | | CF8M+HF | | |
| Bonnet/Cover | CF8M+HF up to 1 ^B , CF8M | | | | | CF8M+HF up to 1 ^B , CF8M | | | | | CF8M | | |
| Stem | 316SS+HF | | | | | 316SS+HF | | | | | | | |
| Disc | CF8M+HF | | | | | CF8M+HF | | | | | CF8M+HF | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | | | |
| Gasket | PTFE Spiral Wound | | | | | Flexible Graphite Spiral Wound | | | | | Flexible Graphite Spiral Wound | | |
| Body Seat Ring | 316SS+HF | | | | | 316SS+HF | | | | | | | |
| Bonnet B/N | B8 CL2/8 | | | | | B8 CL2/8 | | | | | B8 CL2/8 | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | |
| Wall Thickness | API 600 | | | | | API 600 | | | | | API 600 | | |
| Remarks | Gear for 10 ^B & above | | | | | Gear for 8 ^B & above | | | | | | | |

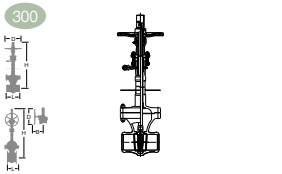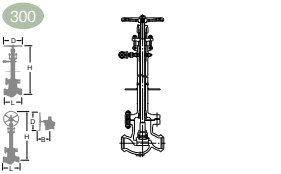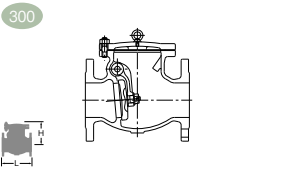

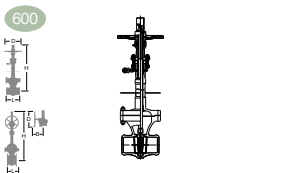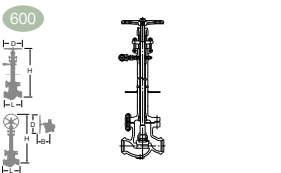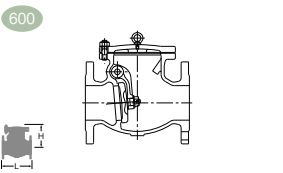
| Type | C Series (Gate(-196°C)) | | | | | C Series (Globe(-196°C)) | | | | C Series (Swing Check(-196°C)) | | |
|--|---|-----------------------|------|-----|-----|---|-----------------------|-----|-----|--|-----------|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | |  | | |
| | Fig | 300UMCLMY/G-300UMCLMY | | | | | 300UPCLMY/G-300UPCLMY | | | | 300UOCLMY | |
| End Connection | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 300 RF | | | | ASME B16.5 Class 300 RF | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D |
| 1/2 | 15 | 455 | 455 | 100 | | 152 | 426 | 100 | | 140 | TBA | |
| 3/4 | 20 | 456 | 456 | 100 | | 178 | 434 | 120 | | 152 | TBA | |
| 1 | 25 | 531 | 531 | 120 | | 203 | 461 | 160 | | 216 | TBA | |
| 1 1/2 | 40 | 639 | 639 | 250 | | 229 | TBA | TBA | | 241 | TBA | |
| 2 | 50 | 675 | 675 | 300 | | 267 | 592 | 225 | | 267 | 161 | |
| 2 1/2 | 65 | TBA | TBA | TBA | | 292 | TBA | TBA | | 292 | TBA | |
| 3 | 80 | 825 | 825 | 300 | | 318 | 736 | 350 | | 318 | 204 | |
| 4 | 100 | 957 | 957 | 350 | | 356 | 833 | 500 | | 356 | 292 | |
| 5 | 125 | 1259 | 1259 | 400 | | | | | | | | |
| 6 | 150 | 1259 | 1259 | 400 | | 444 | 1329 | 500 | 280 | 444 | TBA | |
| 8 | 200 | 1637 | 1637 | 500 | 254 | 559 | TBA | TBA | TBA | 533 | TBA | |
| 10 | 250 | 1785 | 1785 | 500 | 254 | | | | | 622 | TBA | |
| 12 | 300 | 2041 | 2041 | 500 | 280 | | | | | 711 | 423 | |
| 14 | 350 | 2435 | 2435 | 600 | 456 | | | | | 838 | TBA | |
| 16 | 400 | 2595 | 2595 | 600 | 456 | | | | | 864 | TBA | |
| 18 | 450 | 2755 | 2755 | 600 | 456 | | | | | 978 | TBA | |
| 20 | 500 | 2862 | 2862 | 600 | 456 | | | | | 1016 | TBA | |
| 24 | 600 | 3320 | 3320 | 610 | 456 | | | | | 1346 | TBA | |
| Body | CF8M+HF up to 11/2 ^o , CF8M | | | | | CF8M+HF up to 11/2 ^o , CF8M | | | | CF8M+HF | | |
| Bonnet/Cover | CF8M+HF up to 1 ^o , CF8M | | | | | CF8M+HF up to 1 ^o , CF8M | | | | CF8M | | |
| Stem | 316SS+HF | | | | | 316SS+HF | | | | | | |
| Disc | CF8M+HF | | | | | CF8M+HF | | | | CF8M+HF | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | | |
| Gasket | PTFE Spiral Wound | | | | | Flexible Graphite Spiral Wound | | | | Flexible Graphite Spiral Wound | | |
| Body seat ring | 316SS+HF | | | | | 316SS+HF | | | | | | |
| Bonnet B/N | B8 CL2/8 | | | | | B8 CL2/8 | | | | B8 CL2/8 | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | ASME B16.10 | | |
| Wall Thickness | API 600 | | | | | API 600 | | | | API 600 | | |
| Remarks | Gear for 8 ^o & above | | | | | Gear for 6 ^o & above | | | | | | |

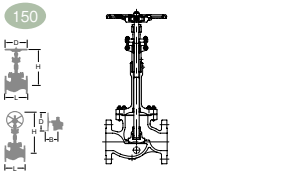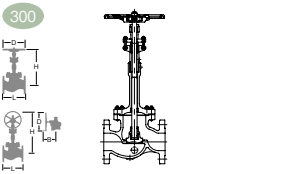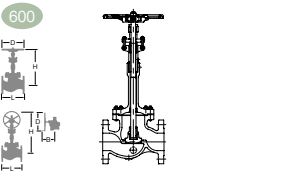


| Type | C Series (Gate(-196°C)) | | | | | C Series (Globe(-196°C)) | | | | C Series (Swing Check(-196°C)) | | |
|--|---|-----------------------|------|-----|-----|---|-----------------------|-----|-----|--|-----------|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | |  | | |
| | Fig | 600UMCLMY/G-600UMCLMY | | | | | 600UPCLMY/G-600UPCLMY | | | | 600UOCLMY | |
| End Connection | ASME B16.5 Class 600 RF | | | | | ASME B16.5 Class 600 RF | | | | ASME B16.5 Class 600 RF | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D |
| 1/2 | 15 | 165 | TBA | TBA | | 165 | 472 | 140 | | | | |
| 3/4 | 20 | 190 | TBA | TBA | | 190 | TBA | TBA | | | | |
| 1 | 25 | 216 | TBA | TBA | | 216 | TBA | TBA | | 216 | TBA | |
| 1 1/2 | 40 | 241 | TBA | TBA | | 241 | TBA | TBA | | 241 | TBA | |
| 2 | 50 | 292 | 750 | 300 | | 292 | 676 | 350 | | 292 | TBA | |
| 2 1/2 | 65 | 330 | TBA | TBA | | 330 | TBA | TBA | | | | |
| 3 | 80 | 356 | 886 | 350 | | 356 | 1091 | 500 | 254 | 356 | 210 | |
| 4 | 100 | 432 | 1111 | 500 | | 432 | 1181 | 500 | 254 | 432 | 248 | |
| 6 | 150 | 559 | 1600 | 500 | 254 | 559 | TBA | TBA | TBA | 559 | TBA | |
| 8 | 200 | 660 | 1546 | 500 | 254 | 660 | 1470 | 600 | 350 | 660 | TBA | |
| 10 | 250 | 787 | 2030 | 600 | 456 | | | | | 787 | TBA | |
| 12 | 300 | 838 | 2245 | 600 | 282 | | | | | 838 | 484 | |
| 14 | 350 | 889 | 2375 | 600 | 337 | | | | | | | |
| 16 | 400 | 991 | 2560 | 600 | 417 | | | | | | | |
| 18 | 450 | 1092 | 2623 | 600 | 456 | | | | | | | |
| 20 | 500 | 1194 | 2960 | 610 | 456 | | | | | | | |
| 24 | 600 | 1397 | 3158 | 610 | 456 | | | | | | | |
| Body | CF8M+HF up to 11/2 ^o , CF8M | | | | | CF8M+HF up to 11/2 ^o , CF8M | | | | CF8M+HF | | |
| Bonnet/Cover | CF8M+HF up to 1 ^o , CF8M | | | | | CF8M+HF up to 1 ^o , CF8M | | | | CF8M | | |
| Stem | 316SS+HF | | | | | 316SS+HF | | | | | | |
| Disc | CF8M+HF | | | | | CF8M+HF | | | | CF8M+HF | | |
| Gland Packing | Flexible Graphite | | | | | Flexible Graphite | | | | | | |
| Gasket | PTFE Spiral Wound | | | | | Flexible Graphite Spiral Wound | | | | Flexible Graphite Spiral Wound | | |
| Body Seat Ring | 316SS+HF | | | | | 316SS+HF | | | | | | |
| Bonnet B/N | B8 CL2/8 | | | | | B8 CL2/8 | | | | B8 CL2/8 | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | | ASME B16.34 | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | ASME B16.10 | | |
| Wall Thickness | API 600 | | | | | API 600 | | | | API 600 | | |
| Remarks | Gear for 6 ^o & above | | | | | Gear for 3 ^o & above | | | | | | |



| Type | CR Series (Globe(-196°C)) | | | | | CR Series (Globe(-196°C)) | | | | | CR Series (Globe(-196°C)) | | | | |
|--|---|-----|------|-----|-----|---|------|-----|-----|-----|--|-----|-----|--|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | | |  | | | | |  | | | | |
| | 150UPCRLMD/G-150UPCRLMD | | | | | 300UPCRLMD/G-300UPCRLMD | | | | | 600UPCRLMD/G-600UPCRLMD | | | | |
| End Connection | ASME B16.5 Class 150 RF | | | | | ASME B16.5 Class 300 RF | | | | | ASME B16.5 Class 600 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | | |
| 2 | 50 | 203 | 580 | 152 | | 267 | 576 | 165 | | 292 | 624 | 165 | | | |
| 2 1/2 | 65 | 216 | TBA | TBA | | 292 | TBA | TBA | | 330 | TBA | TBA | | | |
| 3 | 80 | 241 | 698 | 190 | | 318 | 727 | 210 | | 356 | 791 | 210 | | | |
| 4 | 100 | 292 | 743 | 229 | | 356 | 791 | 254 | | 432 | 1152 | 273 | 253 | | |
| 6 | 150 | 406 | 900 | 279 | | 444 | 1252 | 318 | 281 | 559 | 1243 | 356 | 281 | | |
| 8 | 200 | 495 | 1272 | 343 | 253 | 559 | 1302 | 381 | 281 | 660 | 1430 | 419 | 350 | | |
| Body | CF8M | | | | | CF8M | | | | | CF8M | | | | |
| Bonnet/Cover | CF8M | | | | | CF8M | | | | | CF8M | | | | |
| Stem | 316SS | | | | | 316SS | | | | | 316SS | | | | |
| Disc | CF8+HF (Co-Cr-W Alloy) | | | | | CF8+HF (Co-Cr-W Alloy) | | | | | CF8+HF (Co-Cr-W Alloy) | | | | |
| Gland Packing | RTFE+Graphite | | | | | RTFE+Graphite | | | | | RTFE+Graphite | | | | |
| Gasket | Flexible Graphite Spiral Wound | | | | | Flexible Graphite Spiral Wound | | | | | Flexible Graphite Spiral Wound | | | | |
| Bonnet B/N | B8 CL2/8 | | | | | B8 CL2/8 | | | | | B8 CL2/8 | | | | |
| P-T Rating | ASME B16.34 | | | | | ASME B16.34 | | | | | ASME B16.34 | | | | |
| F-to-F Dimension | ASME B16.10 | | | | | ASME B16.10 | | | | | ASME B16.10 | | | | |
| Wall Thickness | API 623 | | | | | API 623 | | | | | API 623 | | | | |
| Remarks | Gear for 8 th & above | | | | | Gear for 6 th & above | | | | | Gear for 4 th & above | | | | |

| Type | D Series (Gate) | | | D Series (Globe) | | | D Series (Swing Check) | | | |
|--|-----------------------------|-----|-----|-----------------------------|-----|-----|------------------------|-----|-----|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) | | | | | | | | | | |
| | AK150UMM | | | AK150UPM | | | AK150UOM | | | |
| Fig | AK150UMM | | | AK150UPM | | | AK150UOM | | | |
| End Connection | ASME B1.20.1 (NPT) | | | ASME B1.20.1 (NPT) | | | ASME B1.20.1 (NPT) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 70 | 197 | 90 | 86 | 164 | 90 | 95 | 75 | |
| 3/4 | 20 | 76 | 204 | 90 | 95 | 166 | 90 | 95 | 80 | |
| 1 | 25 | 89 | 220 | 100 | 108 | 169 | 100 | 127 | 85 | |
| 1 1/2 | 40 | 114 | 276 | 140 | 140 | 198 | 140 | 152 | 107 | |
| 2 | 50 | 121 | 336 | 160 | 165 | 228 | 160 | 165 | 115 | |
| Body | CF3M | | | CF3M | | | CF3M | | | |
| Bonnet/Cover | CF8M | | | CF8M | | | CF8M | | | |
| Stem/Hinge Pin | 316SS | | | 316SS | | | | | | |
| Disc | CF8M | | | CF8M | | | CF8M | | | |
| Gland Packing | Refer to Page SS22 | | | Refer to Page SS22 | | | | | | |
| Gasket | Refer to Page SS22 | | | Refer to Page SS22 | | | Refer to Page SS22 | | | |
| Bonnet B/N | B8/8 | | | B8/8 | | | B8/8 | | | |
| P-T Rating | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | |
| F-to-F Dimension | KITZ Standard | | | KITZ Standard | | | KITZ Standard | | | |
| Wall Thickness | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | |
| Remarks | TR-CU/EAC Flexible Wedge | | | TR-CU/EAC Flexible Wedge | | | TR-CU/EAC | | | |

| Type | D Series (Gate) | | | D Series (Globe) | | | D Series (Swing Check) | | | |
|--|-----------------------------|-----|-----|--------------------|-----|-----|------------------------|-----|-----|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) | | | | | | | | | | |
| | AW150UMM | | | AW150UPM | | | AW150UOM | | | |
| Fig | AW150UMM | | | AW150UPM | | | AW150UOM | | | |
| End Connection | ASME B16.11 | | | ASME B16.11 | | | ASME B16.11 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 67 | 197 | 90 | 83 | 164 | 90 | 92 | 75 | |
| 3/4 | 20 | 73 | 204 | 90 | 92 | 166 | 90 | 92 | 80 | |
| 1 | 25 | 86 | 220 | 100 | 105 | 169 | 100 | 124 | 85 | |
| 1 1/2 | 40 | 111 | 276 | 140 | 137 | 198 | 140 | 149 | 107 | |
| 2 | 50 | 118 | 336 | 160 | 162 | 228 | 160 | 162 | 115 | |
| Body | CF3M | | | CF3M | | | CF3M | | | |
| Bonnet/Cover | CF8M | | | CF8M | | | CF8M | | | |
| Stem | 316SS | | | 316SS | | | | | | |
| Disc | CF8M | | | CF8M | | | CF8M | | | |
| Gland Packing | Refer to Page SS22 | | | Refer to Page SS22 | | | | | | |
| Gasket | Refer to Page SS22 | | | Refer to Page SS22 | | | Refer to Page SS22 | | | |
| Bonnet B/N | B8/8 | | | B8/8 | | | B8/8 | | | |
| P-T Rating | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | |
| F-to-F Dimension | KITZ Standard | | | KITZ Standard | | | KITZ Standard | | | |
| Wall Thickness | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | |
| Remarks | TR-CU/EAC Flexible Wedge | | | TR-CU/EAC | | | TR-CU/EAC | | | |

| Type | D Series (Gate) | | | D Series (Globe) | | | D Series (Swing Check) | | | |
|--|---|-----|-----|---|-----|-----|--|-----|-----|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | |  | | |  | | | |
| | AK300UMM | | | AK300UPM | | | AK300UOM | | | |
| Fig | AK300UMM | | | AK300UPM | | | AK300UOM | | | |
| End Connection | ASME B1.20.1 (NPT) | | | ASME B1.20.1 (NPT) | | | ASME B1.20.1 (NPT) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 76 | 202 | 100 | 95 | 184 | 100 | 114 | 81 | |
| 3/4 | 20 | 83 | 212 | 100 | 108 | 182 | 100 | 127 | 87 | |
| 1 | 25 | 95 | 230 | 100 | 127 | 185 | 100 | 140 | 91 | |
| 1 1/2 | 40 | 127 | 285 | 140 | 165 | 233 | 160 | 152 | 117 | |
| 2 | 50 | 146 | 355 | 180 | 190 | 289 | 180 | 165 | 139 | |
| Body | CF3M | | | CF3M | | | CF3M | | | |
| Bonnet/Cover | CF8M | | | CF8M | | | CF8M | | | |
| Stem/Hinge Pin | 316SS | | | 316SS | | | 316SS | | | |
| Disc | CF8M | | | CF8M | | | CF8M | | | |
| Gland Packing | Refer to Page SS22 | | | Refer to Page SS22 | | | | | | |
| Gasket | Refer to Page SS22 | | | Refer to Page SS22 | | | Refer to Page SS22 | | | |
| Bonnet B/N | B8/8 | | | B8/8 | | | B8/8 | | | |
| P-T Rating | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | |
| F-to-F Dimension | KITZ Standard | | | KITZ Standard | | | KITZ Standard | | | |
| Wall Thickness | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | |
| Remarks | TR-CU/EAC Flexible Wedge | | | TR-CU/EAC | | | TR-CU/EAC | | | |

| Type | D Series (Gate) | | | D Series (Globe) | | | D Series (Swing Check) | | | |
|--|---|-----|-----|---|-----|-----|--|-----|-----|---|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | |  | | |  | | | |
| | AW300UMM | | | AW300UPM | | | AW300UOM | | | |
| Fig | AW300UMM | | | AW300UPM | | | AW300UOM | | | |
| End Connection | ASME B16.11 | | | ASME B16.11 | | | ASME B16.11 | | | |
| inch | mm | L | H | D | L | H | D | L | H | D |
| 1/2 | 15 | 73 | 202 | 100 | 92 | 184 | 100 | 111 | 81 | |
| 3/4 | 20 | 80 | 212 | 100 | 105 | 182 | 100 | 124 | 87 | |
| 1 | 25 | 92 | 230 | 100 | 124 | 185 | 100 | 137 | 91 | |
| 1 1/2 | 40 | 124 | 285 | 140 | 162 | 230 | 160 | 149 | 117 | |
| 2 | 50 | 143 | 355 | 180 | 187 | 284 | 180 | 162 | 139 | |
| Body | CF3M | | | CF3M | | | CF3M | | | |
| Bonnet/Cover | CF8M | | | CF8M | | | CF8M | | | |
| Stem/Hinge Pin | 316SS | | | 316SS | | | 316SS | | | |
| Disc | CF8M | | | CF8M | | | CF8M | | | |
| Gland Packing | Refer to Page SS22 | | | Refer to Page SS22 | | | | | | |
| Gasket | Refer to Page SS22 | | | Refer to Page SS22 | | | Refer to Page SS22 | | | |
| Bonnet B/N | B8/8 | | | B8/8 | | | B8/8 | | | |
| P-T Rating | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | |
| F-to-F Dimension | KITZ Standard | | | KITZ Standard | | | KITZ Standard | | | |
| Wall Thickness | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | |
| Remarks | TR-CU/EAC Flexible Wedge | | | TR-CU/EAC | | | TR-CU/EAC | | | |

| Type | D Series (Gate) | | | | D Series (Gate) | | | |
|--|---|-----|-----|-----|---|-----|-----|--|
| Stainless Steel & High Alloy Steel Valves (GGC & Strainer) |  | | | |  | | | |
| | AK600UMM | | | | AW600UMM | | | |
| Fig | ASME B1.20.1 (NPT) | | | | ASME B16.11 | | | |
| End Connection | ASME B1.20.1 (NPT) | | | | ASME B16.11 | | | |
| inch | mm | L | H | D | L | H | D | |
| 1/2 | 15 | 76 | 201 | 100 | 73 | 201 | 100 | |
| 3/4 | 20 | 83 | 215 | 100 | 80 | 215 | 100 | |
| 1 | 25 | 95 | 240 | 140 | 92 | 240 | 140 | |
| 1 1/2 | 40 | 127 | 325 | 180 | 124 | 325 | 180 | |
| 2 | 50 | 146 | 385 | 200 | 143 | 385 | 200 | |
| Body | CF3M | | | | CF3M | | | |
| Bonnet | CF8M | | | | CF8M | | | |
| Stem | 316SS | | | | 316SS | | | |
| Disc | CF8M | | | | CF8M | | | |
| Gland Packing | Refer to Page SS22 | | | | Refer to Page SS22 | | | |
| Gasket | Refer to Page SS22 | | | | Refer to Page SS22 | | | |
| Bonnet B/N | B8/8 | | | | B8/8 | | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | | |
| F-to-F Dimension | KITZ Standard | | | | KITZ Standard | | | |
| Wall Thickness | ASME B16.34 | | | | ASME B16.34 | | | |
| Remarks | TR-CU/EAC Flexible Wedge | | | | TR-CU/EAC Flexible Wedge | | | |

Corrosion Resistance of KITZ Stainless and High Alloy Steel Valves

KITZ stainless and high alloy steel valves are widely utilized in chemical, petrochemical, food and beverage, pulp and paper, pharmaceutical and other industrial processing plants throughout the world, constitute one of the major product lines of KITZ Corporation, Japan's largest manufacturer of industrial valves.

KITZ stainless and high alloy steel valves are designed, manufactured, and inspected to strictly conform with the requirements of ASTM, ASME, API, BS, JIS and other internationally recognized standards, with all quality elements meeting the critical service conditions needed for corrosive industrial applications.

KITZ stainless and high alloy steel valves are characterized by unsurpassed corrosion resistance and reliability, providing users with the lowest cost of ownership and the longest total life cycle performance in the industry. As an ISO 9001 certified valve manufacturer, KITZ Corporation has achieved a high degree of product standardization by the ideal combination of its updated technical know-how and uniquely integrated system of production adopted at its Nagasaka Plant, Yamanashi, Japan, the home of KITZ stainless and high alloy steel valves.

Electronically controlled steel foundries, multi-station transfer machining systems and state-of-the-art test and inspection facilities, are all put together at KITZ Nagasaka Plant, to ensure the quality and reliability of all products that it releases to the global market.



KITZ Nagasaka Plant, Japan



KITZ Corporation of Taiwan



KITZ Corporation of Kunshan

Features of Austenitic Stainless Steel as Valve Material


Stainless steel is divided into three main categories depending on its chemical composition. They are martensitic stainless steel containing 13% chromium, ferritic stainless steel containing 18% chromium, and austenitic stainless steel containing 18% chromium and 8% nickel. Among them, austenitic stainless steel is widely used for both valve shells and trims, which require high pressure resistant characteristic. Martensitic stainless steel is used mainly for trims of carbon steel valves. The features and characteristics of these stainless steels are compared below:

Features of Stainless Steel by Types


| Types | Martensitic | Ferritic | Austenitic |
|----------------------------------|--------------------|----------|----------------|
| Typical Material | AISI 410 | AISI 430 | ASTM CF8M/F316 |
| Magnetization | Yes | | No |
| Hardening by Heat Treatment | Yes | No | |
| Hardening by Machining | Same as soft steel | | |
| Corrosion and Acid Resistance | Good | | Excellent |
| Impact Resistance and Elongation | Good | | Excellent |
| Weldability | Poor | Fair | Good |
| Lowest Service Temperature | -29°C | -10°C | -269°C |

As shown below, austenitic stainless steel has an excellent impact value in subzero temperature range and been almost exclusively used for cryogenic service applications. It also features higher heat resistance than carbon steel. Its tensile strength is also superior to other valve materials and its high resistance against destructive tensile load in a wide range of service temperatures is unrivaled by other valve materials. Corrosive fluid cannot generally affect these excellent mechanical properties of austenitic stainless steel.


Compared Impact Values

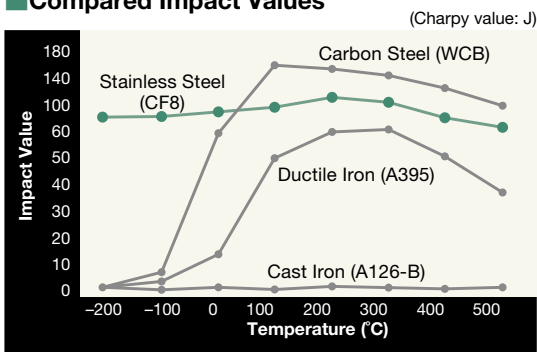

Compared Tensile Strength

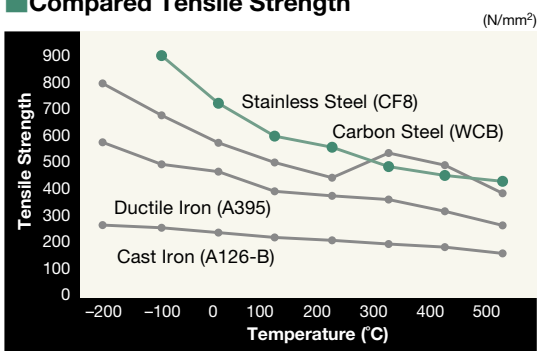

Steel Castings: Maximum Working Temperature Range

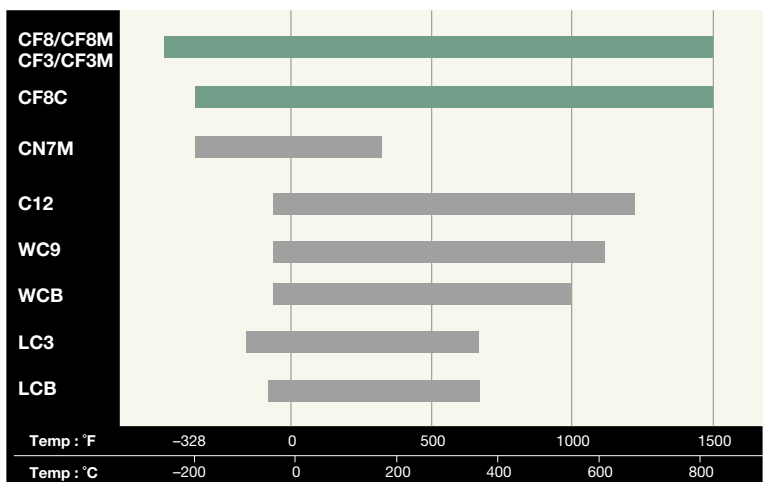

This data reflects ASTM specifications for general steel castings, and does not necessarily apply to valves made of these materials, which are subject to highly demanding service conditions as pressure containing vessels.

On the other hand, austenitic stainless steel is known as a very mild metal having no effect on the quality of the materials it comes into contact with. Line fluid is not contaminated while traveling through austenitic stainless steel pipelines. This advantages makes austenitic stainless steel valves the important fluid handling media for food, beverage and pharmaceutical processing plants. In addition, austenitic stainless steel CF8M or F316 has higher resistance to sea water erosion and is widely used for the valves installed in seawater desalination plants, offshore exploration facilities and ocean structures.

General Design Specifications

| Series | Normal Pressure | Pressure-Temperature Ratings* | Face to Face Dimensions | End Connection Dimensions | Wall Thickness |
|--------|----------------------------|-------------------------------|-------------------------|--|------------------------|
| A | 10K | JIS B2220 | JIS B2002 | JIS B2220 10K Flanged | ASME B16.34 Class 150 |
| | 20K | | | JIS B2220 20K Flanged | ASME B16.34 Class 300 |
| | Class 150/300/600 | ASME B16.34 | ASME B16.10 | ASME B16.5 Flanged | ASME B16.34 |
| HA | Class 150/300 | ASME B16.34 | ASME B16.10 | ASME B16.5 Flanged | API 603 |
| C | Class 150/300/600/900/1500 | ASME B16.34 | ASME B16.10 | ASME B16.5 Flanged | API 600/API594 |
| B | 5K | 0.5 MPa 150°C | JIS B2011 KITZ Std. | JIS B0203 Threaded JIS B2220 5K 10K Flanged | JIS B2011 KITZ Std. |
| | 10K | 1.0 MPa 180°C | | | |
| | 20K | 2.0 MPa 180°C | | | |
| | Type 200 | KITZ Std. | | ASME B1.20.1 Threaded | |
| D | Class 150/300/600 | ASME B16.34 | KITZ Std. | ASME B1.20.1 Threaded ASME B16.11 Socket Welded | ASME B16.34 |
| AJ | 10K | JIS B2220 | | KITZ Std. | JIS B2220 10K Flanged |
| | 20K | | JIS B2220 20K Flanged | | ASME B16.34 Class 300 |
| | Class 150/300 | ASME B16.34 | ASME B16.5 Flanged | ASME B16.34 | |

*Actual pressure-temperature rating in service depends on the materials of gland packing and gasket chosen for valves.

Bonnet Gasket Materials

Depending on class ratings and service conditions, following gasket materials are available* for body/bonnet flange gaskets of KITZ stainless and high alloy steel valves. Specify your gasket material in your purchase order.

| Series | Class | Material | Maximum Service Temperature |
|----------------|------------------------------|---|-----------------------------|
| A, D | 10K, 20K, 150, 300 | Ceramics PTFE | 200°C |
| | | Stainless Foil Inserted Flexible Graphite | 400°C |
| | 600 | PTFE Spiral Wound | 300°C |
| | | Flexible Graphite Spiral Wound | 450°C |
| HA | 150 | Ceramics PTFE | 200°C |
| | | Stainless Foil Inserted Flexible Graphite | 400°C |
| | 300 | PTFE Spiral Wound | 260°C |
| | | Flexible Graphite Spiral Wound | 450°C |
| C | 150 | Ceramics PTFE | 200°C |
| | | Stainless Foil Inserted Flexible Graphite | 400°C |
| | 300, 600 | PTFE Spiral Wound | 300°C |
| | | Non-Asbestos Spiral Wound | 450°C |
| | | Flexible Graphite Spiral Wound | 450°C |
| 600, 900, 1500 | Stainless Steel (Ring Joint) | 500°C | |
| B | 5K, 10K | Reinforced PTFE | 180°C |
| AJ | 10K, 150 20K, 300 | Flexible Graphite | 400°C |

Note: Refer to Page SS23 for bonnet gaskets used for KITZ low emission service valves.

Gland Packing Materials




Following packing materials can be chosen for KITZ stainless and high alloy steel valves, depending on service conditions, or market requirements. Specify your packing material in your purchase order.

| Series | Class | Material | Maximum Service Temperature |
|--------|---------------------------|--|-----------------------------|
| A, D | 10K, 20K 150, 300, 600 | Flexible Graphite + PTFE Braided Packing | 300°C |
| | | PTFE Cup & Cone | 150°C |
| | | Flexible Graphite | 500°C |
| | | Carbon Core + PTFE Braided Packing | 260°C |
| HA | 150, 300 | Flexible Graphite | 500°C |
| | | Carbon Core + PTFE Braided Packing | 260°C |
| C | 150, 300 | Flexible Graphite + PTFE Braided Packing | 300°C |
| | | Flexible Graphite | 500°C |
| | | Flexible Graphite | 500°C |
| B | 5K, 10K, Type200 | Plastic Graphite Packing | 180°C |
| AJ | 10K, 150 20K, 300 | Flexible Graphite + PTFE Braided Packing | 300°C |

Note: Refer to Page SS23 for gland packing sets used for KITZ low emission service valves. *455°C (850°F) for oxidizing atmosphere.

Contact KITZ Corporation or your KITZ distributors for optional requirement of gasket or gland packing materials other than listed above.

Disc Construction

| Series | Nominal Pressure | Solid Wedge  | Flexible Wedge   |
|--------|----------------------------|---|--|
| A | 10K/20K, Class 150/300/600 | — | All sizes |
| HA | Class 150/300 | — | All sizes |
| C | Class 150/300 | 4 and smaller | 6 and larger |
| | Class 600 | 1½ and smaller | 2 and larger |
| | Class 900/1500 | — | All sizes |
| B | 5K/10K/20K, Type 200 | All sizes | — |
| D | Class 150/300/600 | — | All sizes |
| AJ | 10K/20K, Class 150/300 | — | All sizes |

Pressure-Temperature Ratings for Series B (KITZ Standard)


| Temperature | MPa | | |
|-------------|------------------|-------------------------------|-------------------------------|
| | W 120°C below | G ₁ 150°C below | G ₂ 180°C below |
| 5K | 0.7 | 0.5 | — |
| 10K | 1.4 | 1.1 | 1.0 |
| 20K | 2.0 | 1.2 | 1.0 |

W: Static water without pressure variation

G₁, G₂: Steam, air, non-inflammable gas and oil (lubricant and machining oil)

Note: Actual pressure-temperature rating in service depends on the materials of gland packing and gasket chosen for valves.


Pressure-Temperature Ratings for Globe Valves with A Series Disc

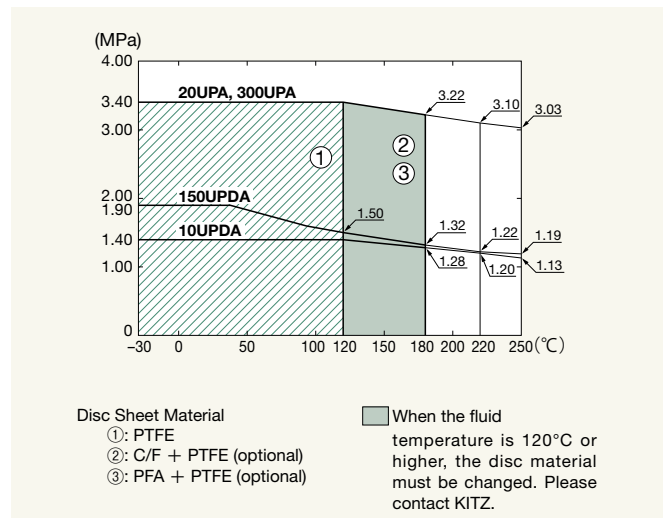

Usage Range of Bellows Seal Globe Valves


• Pressure-Temperature Ratings

Although valve bodies are designed to comply with the pressure and temperature standard of JIS B 2220/ASME B16.34, pressure and durability of bellows should be considered. If you are using products beyond this usage range, please contact KITZ. The standard may not be applicable depending on the fluid state.

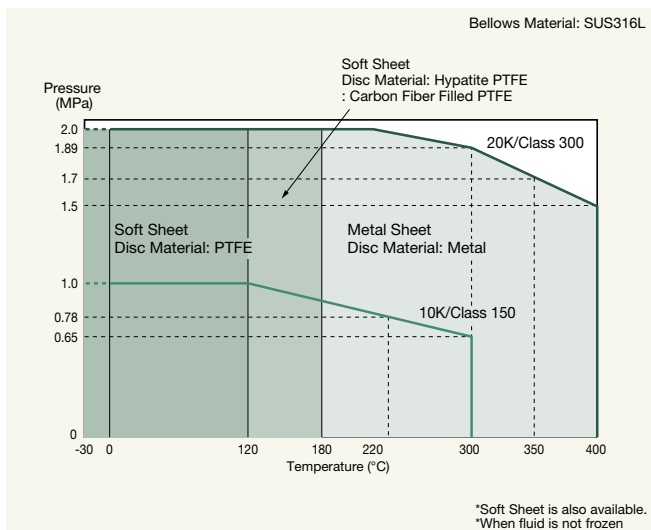

• Relation between Pressure and Service Duration

The value shown below which was obtained by the bellows valve durability test indicates the repeated opening and closing durability. If you need a longer product usage, please consult us. (Conforming to MSS SP 117)

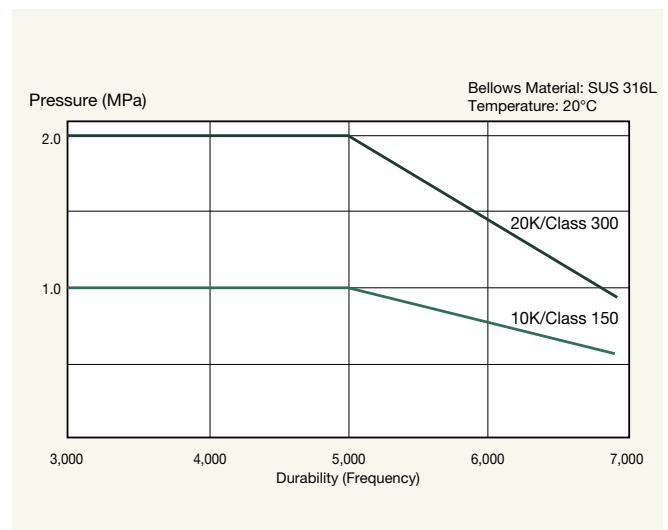

| Class | | 600 | | | | | | | | | | | | | | | | | | | | | |
|---------------------|-------------------|--------------|-------------------|-------------------|---------------|-------------------|-------------------|--------------------------|-------------------|-------------------|--------------|-------------------|-------------------|--------------|-------------------|-------------------|--------------|-------------------|-------------------|-------------------------------------|-------------------|-------------------|------|
| Service Temperature | | CF8 [SCS13A] | | | CF8M [SCS14A] | | | CF3M-CF3 [SCS16A-SCS19A] | | | CF8C [SCS21] | | | CK20 [SCS18] | | | CN7M [SCS23] | | | SDPV [®] SASV [™] | | | |
| °C | °F | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | |
| -29 to 38 | -20.2 to 100.4 | 99.3 | 1440.2 | 9.93 | 99.3 | 1440.2 | 9.93 | 82.7 | 1199.5 | 8.27 | 99.3 | 1440.2 | 9.93 | 92.7 | 1344.5 | 9.27 | 82.7 | 1199.5 | 8.27 | 103.4 | 1499.7 | 10.34 | |
| 50 | 122 | 95.6 | 1386.6 | 9.56 | 96.2 | 1395.3 | 9.62 | 80.0 | 1160.3 | 8.00 | 97.5 | 1414.1 | 9.75 | 89.0 | 1290.8 | 8.90 | 80.3 | 1164.7 | 8.03 | 103.4 | 1499.7 | 10.34 | |
| 100 | 212 | 81.7 | 1185.0 | 8.17 | 84.4 | 1224.1 | 8.44 | 69.6 | 1009.5 | 6.96 | 90.6 | 1314.0 | 9.06 | 75.1 | 1089.2 | 7.51 | 70.6 | 1024.0 | 7.06 | 101.3 | 1469.2 | 10.13 | |
| 150 | 302 | 74.0 | 1073.3 | 7.40 | 77.0 | 1116.8 | 7.70 | 62.8 | 910.8 | 6.28 | 84.9 | 1231.4 | 8.49 | 69.8 | 1012.4 | 6.98 | 64.1 | 929.7 | 6.41 | 91.9 | 1332.9 | 9.19 | |
| 200 | 392 | 69.0 | 1000.8 | 6.90 | 71.3 | 1034.1 | 7.13 | 58.3 | 845.6 | 5.83 | 79.9 | 1158.9 | 7.99 | 67.1 | 973.2 | 6.71 | 58.7 | 851.4 | 5.87 | 85.3 | 1237.2 | 8.53 | |
| 250 | 482 | 65.0 | 942.7 | 6.50 | 66.8 | 968.9 | 6.68 | 54.9 | 796.3 | 5.49 | 75.6 | 1096.5 | 7.56 | 65.2 | 945.6 | 6.52 | 54.4 | 789.0 | 5.44 | 80.9 | 1173.4 | 8.09 | |
| 300 | 572 | 61.8 | 896.3 | 6.18 | 63.2 | 916.6 | 6.32 | 52.1 | 755.6 | 5.21 | 72.2 | 1047.2 | 7.22 | 63.4 | 919.5 | 6.34 | 50.8 | 736.8 | 5.08 | 77.7 | 1126.9 | 7.77 | |
| 325 | 617 | 60.4 | 876.0 | 6.04 | 61.8 | 896.3 | 6.18 | 51.0 | 739.7 | 5.10 | 70.7 | 1025.4 | 7.07 | 62.4 | 905.0 | 6.24 | 48.8 | 707.8 | 4.88 | | 76.3 | 1106.6 | 7.63 |
| 350 | 662 | 59.3 | 860.1 | 5.93 | 60.7 | 880.4 | 6.07 | 50.1 | 726.6 | 5.01 | 69.5 | 1008.0 | 6.95 | 61.2 | 887.6 | 6.12 | | | | | 75.3 | 1092.1 | 7.53 |
| 375 | 707 | 58.1 | 842.7 | 5.81 | 59.8 | 867.3 | 5.98 | 49.5 | 717.9 | 4.95 | 68.4 | 992.1 | 6.84 | 59.7 | 865.9 | 5.97 | | | | | 74.7 | 1083.4 | 7.47 |
| 400 | 752 | 56.9 | 825.3 | 5.69 | 58.9 | 854.3 | 5.89 | 48.6 | 704.9 | 4.86 | 67.8 | 983.4 | 6.78 | 58.2 | 844.1 | 5.82 | | | | | 73.3 | 1063.1 | 7.33 |
| 425 | 797 | 56.0 | 812.2 | 5.60 | 58.3 | 845.6 | 5.83 | 47.7 | 691.8 | 4.77 | 67.2 | 974.7 | 6.72 | 56.7 | 822.4 | 5.67 | | | | | | | |
| 450 ^{*2} | 842 ^{*2} | 54.8 | 794.8 | 5.48 | 57.7 | 836.9 | 5.77 | 46.8 | 678.8 | 4.68 | 66.9 | 970.3 | 6.69 | 55.2 | 800.6 | 5.52 | | | | | | | |
| 475 | 887 | 53.9 | 781.8 | 5.39 | 57.3 | 831.1 | 5.73 | | | | 63.4 | 919.5 | 6.34 | 53.5 | 776.0 | 5.35 | | | | | | | |
| 500 | 932 | 53.0 | 768.7 | 5.30 | 56.5 | 819.5 | 5.65 | | | | 56.5 | 819.5 | 5.65 | 51.7 | 749.8 | 5.17 | | | | | | | |
| 538 | 1000.4 | 48.9 | 709.2 | 4.89 | 50.0 | 725.2 | 5.00 | | | | 50.0 | 725.2 | 5.00 | 46.6 | 675.9 | 4.66 | | | | | | | |
| 550 | 1022 | 47.1 | 683.1 | 4.71 | 49.8 | 722.3 | 4.98 | | | | 49.8 | 722.3 | 4.98 | 45.9 | 665.7 | 4.59 | | | | | | | |
| 575 | 1067 | 41.7 | 604.8 | 4.17 | 47.9 | 694.7 | 4.79 | | | | 47.9 | 694.7 | 4.79 | 43.3 | 628.0 | 4.33 | | | | | | | |
| 600 | 1112 | 33.8 | 490.2 | 3.38 | 39.8 | 577.3 | 3.98 | | | | 42.9 | 622.2 | 4.29 | 38.8 | 562.7 | 3.88 | | | | | | | |
| 625 | 1157 | 27.6 | 400.3 | 2.76 | 31.6 | 458.3 | 3.16 | | | | 36.6 | 530.8 | 3.66 | 33.7 | 488.8 | 3.37 | | | | | | | |
| 650 | 1202 | 22.5 | 326.3 | 2.25 | 25.3 | 366.9 | 2.53 | | | | 28.1 | 407.6 | 2.81 | 28.1 | 407.6 | 2.81 | | | | | | | |
| 675 | 1247 | 18.7 | 271.2 | 1.87 | 20.6 | 298.8 | 2.06 | | | | 25.2 | 365.5 | 2.52 | 23.0 | 333.6 | 2.30 | | | | | | | |
| 700 | 1292 | 16.1 | 233.5 | 1.61 | 16.8 | 243.7 | 1.68 | | | | 20.0 | 290.1 | 2.00 | 17.5 | 253.8 | 1.75 | | | | | | | |
| 725 | 1337 | 13.5 | 195.8 | 1.35 | 14.0 | 203.1 | 1.40 | | | | 15.4 | 223.4 | 1.54 | 12.7 | 184.2 | 1.27 | | | | | | | |
| 750 | 1382 | 11.6 | 168.2 | 1.16 | 11.7 | 169.7 | 1.17 | | | | 11.7 | 169.7 | 1.17 | 8.9 | 129.1 | 0.89 | | | | | | | |
| 775 | 1427 | 9.0 | 130.5 | 0.90 | 9.0 | 130.5 | 0.90 | | | | 9.0 | 130.5 | 0.90 | 6.3 | 91.4 | 0.63 | | | | | | | |
| 800 | 1472 | 7.0 | 101.5 | 0.70 | 7.0 | 101.5 | 0.70 | | | | 7.0 | 101.5 | 0.70 | 4.6 | 66.7 | 0.46 | | | | | | | |
| 816 | 1500.8 | 5.9 | 85.6 | 0.59 | 5.9 | 85.6 | 0.59 | | | | 5.9 | 85.6 | 0.59 | 3.8 | 55.1 | 0.38 | | | | | | | |

*1: Figures shown in psi/MPa columns are calculated values.
 *2: Use beyond 450°C (842°F) is not allowed.
 *3: SDPV[®] is the trademark registered for KITZ Super Duplex Stainless Steel, which is comparable to 25Cr-7Ni-4Mo-N castings. Ratings terminate at 300°C (572°F).
 *4: SASV is the trademark registered for KITZ Super Austenite Stainless Steel, which is comparable to 21Cr-25Ni-6.5Mo-N castings.

| Class | | 900 | | | | | | | | | | | | | | | | | | | | |
|---------------------|-------------------|--------------|-------------------|-------------------|---------------|-------------------|-------------------|--------------------------|-------------------|-------------------|--------------|-------------------|-------------------|--------------|-------------------|-------------------|--------------|-------------------|-------------------|-------------------------------------|-------------------|-------------------|
| Service Temperature | | CF8 [SCS13A] | | | CF8M [SCS14A] | | | CF3M-CF3 [SCS16A-SCS19A] | | | CF8C [SCS21] | | | CK20 [SCS18] | | | CN7M [SCS23] | | | SDPV [®] SASV [™] | | |
| °C | °F | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} |
| -29 to 38 | -20.2 to 100.4 | 148.9 | 2159.6 | 14.89 | 148.9 | 2159.6 | 14.89 | 124.1 | 1799.9 | 12.41 | 148.9 | 2159.6 | 14.89 | 139.0 | 2016.0 | 13.90 | 124.1 | 1799.9 | 12.41 | 155.1 | 2249.5 | 15.51 |
| 50 | 122 | 143.5 | 2081.3 | 14.35 | 144.3 | 2092.9 | 14.43 | 120.1 | 1741.9 | 12.01 | 146.3 | 2121.9 | 14.63 | 133.4 | 1934.8 | 13.34 | 120.4 | 1746.3 | 12.04 | 155.1 | 2249.5 | 15.51 |
| 100 | 212 | 122.6 | 1778.2 | 12.26 | 126.6 | 1836.2 | 12.66 | 104.4 | 1514.2 | 10.44 | 135.9 | 1971.1 | 13.59 | 112.6 | 1633.1 | 11.26 | 105.9 | 1535.9 | 10.59 | 152.0 | 2204.6 | 15.20 |
| 150 | 302 | 111.0 | 1609.9 | 11.10 | 115.5 | 1675.2 | 11.55 | 94.2 | 1366.3 | 9.42 | 127.4 | 1847.8 | 12.74 | 104.7 | 1518.5 | 10.47 | 96.1 | 1393.8 | 9.61 | 137.8 | 1998.6 | 13.78 |
| 200 | 392 | 103.4 | 1499.7 | 10.34 | 107.0 | 1551.9 | 10.70 | 87.5 | 1269.1 | 8.75 | 119.8 | 1737.6 | 11.98 | 100.6 | 1459.1 | 10.06 | 88.1 | 1277.8 | 8.81 | 128.0 | 1856.5 | 12.80 |
| 250 | 482 | 97.5 | 1414.1 | 9.75 | 100.1 | 1451.8 | 10.01 | 82.4 | 1195.1 | 8.24 | 113.4 | 1644.7 | 11.34 | 97.8 | 1418.5 | 9.78 | 81.7 | 1185.0 | 8.17 | 121.4 | 1760.8 | 12.14 |
| 300 | 572 | 92.7 | 1344.5 | 9.27 | 94.9 | 1376.4 | 9.49 | 78.2 | 1134.2 | 7.82 | 108.3 | 1570.8 | 10.83 | 95.2 | 1380.8 | 9.52 | 76.1 | 1103.7 | 7.61 | 116.6 | 1691.1 | 11.66 |
| 325 | 617 | 90.7 | 1315.5 | 9.07 | 92.7 | 1344.5 | 9.27 | 76.4 | 1108.1 | 7.64 | 106.1 | 1538.9 | 10.61 | 93.6 | 1357.6 | 9.36 | 73.3 | 1063.1 | 7.33 | 114.5 | 1660.7 | 11.45 |
| 350 | 662 | 88.9 | 1289.4 | 8.89 | 91.0 | 1319.8 | 9.10 | 75.2 | 1090.7 | 7.52 | 104.3 | 1512.7 | 10.43 | 91.7 | 1330.0 | 9.17 | | | | 112.9 | 1637.5 | 11.29 |
| 375 | 707 | 87.1 | 1263.3 | 8.71 | 89.6 | 1299.5 | 8.96 | 74.3 | 1077.6 | 7.43 | 102.6 | 1488.1 | 10.26 | 89.5 | 1298.1 | 8.95 | | | | 112.1 | 1625.9 | 11.21 |
| 400 | 752 | 85.3 | 1237.2 | 8.53 | 88.3 | 1280.7 | 8.83 | 72.9 | 1057.3 | 7.29 | 101.7 | 1475.0 | 10.17 | 87.3 | 1266.2 | 8.73 | | | | 109.8 | 1592.5 | 10.98 |
| 425 | 797 | 84.0 | 1218.3 | 8.40 | 87.4 | 1267.6 | 8.74 | 71.6 | 1038.5 | 7.16 | 100.8 | 1462.0 | 10.08 | 85.0 | 1232.8 | 8.50 | | | | | | |
| 450 ^{*2} | 842 ^{*2} | 82.2 | 1192.2 | 8.22 | 86.5 | 1254.6 | 8.65 | 70.2 | 1018.2 | 7.02 | 100.4 | 1456.2 | 10.04 | 82.8 | 1200.9 | 8.28 | | | | | | |
| 475 | 887 | 80.8 | 1171.9 | 8.08 | 86.0 | 1247.3 | 8.60 | | | | 95.1 | 1379.3 | 9.51 | 80.2 | 1163.2 | 8.02 | | | | | | |
| 500 | 932 | 79.5 | 1153.1 | 7.95 | 84.7 | 1228.5 | 8.47 | | | | 84.7 | 1228.5 | 8.47 | 77.5 | 1124.0 | 7.75 | | | | | | |
| 538 | 1000.4 | 73.3 | 1063.1 | 7.33 | 75.2 | 1090.7 | 7.52 | | | | 75.2 | 1090.7 | 7.52 | 70.0 | 1015.3 | 7.00 | | | | | | |
| 550 | 1022 | 70.7 | 1025.4 | 7.07 | 74.8 | 1084.9 | 7.48 | | | | 74.8 | 1084.9 | 7.48 | 68.8 | 997.9 | 6.88 | | | | | | |
| 575 | 1067 | 62.5 | 906.5 | 6.25 | 71.8 | 1041.4 | 7.18 | | | | 71.8 | 1041.4 | 7.18 | 65.0 | 942.7 | 6.50 | | | | | | |
| 600 | 1112 | 50.6 | 733.9 | 5.06 | 59.7 | 865.9 | 5.97 | | | | 64.2 | 931.1 | 6.42 | 58.2 | 844.1 | 5.82 | | | | | | |
| 625 | 1157 | 41.4 | 600.5 | 4.14 | 47.4 | 687.5 | 4.74 | | | | 54.9 | 796.3 | 5.49 | 50.5 | 732.4 | 5.05 | | | | | | |
| 650 | 1202 | 33.8 | 490.2 | 3.38 | 38.0 | 551.1 | 3.80 | | | | 42.5 | 616.4 | 4.25 | 42.2 | 612.1 | 4.22 | | | | | | |
| 675 | 1247 | 28.0 | 406.1 | 2.80 | 31.0 | 449.6 | 3.10 | | | | 37.6 | 545.3 | 3.76 | 34.6 | 501.8 | 3.46 | | | | | | |
| 700 | 1292 | 24.1 | | | | | | | | | | | | | | | | | | | | |

| Class | | 1500 | | | | | | | | | | | | | | | | | | | | |
|---------------------|----------------|-------------------------------|-------------------|-------------------|--------------------------------|-------------------|-------------------|---|-------------------|-------------------|-------------------------------|-------------------|-------------------|-------------------------------|-------------------|-------------------|-----------------|-------------------|-------------------|--|-------------------|-------------------|
| Service Temperature | | CF8 ^{*2} [SCS13A] | | | CF8M ^{*2} [SCS14A] | | | CF3M-CF3 ^{*3} [SCS16A-SCS19A] | | | CF8C ^{*2} [SCS21] | | | CK20 ^{*2} [SCS18] | | | CN7M [SCS23] | | | SDPV ^{*4} SASV ^{*5} | | |
| °C | °F | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} | bar | psi ^{*1} | MPa ^{*1} |
| -29 to 38 | -20.2 to 100.4 | 248.2 | 3599.8 | 24.82 | 248.2 | 3599.8 | 24.82 | 206.8 | 2999.4 | 20.68 | 248.2 | 3599.8 | 24.82 | 231.7 | 3360.5 | 23.17 | 206.8 | 2999.4 | 20.68 | 258.6 | 3750.7 | 25.86 |
| 50 | 122 | 239.1 | 3467.9 | 23.91 | 240.6 | 3489.6 | 24.06 | 200.1 | 2902.2 | 20.01 | 243.8 | 3536.0 | 24.38 | 222.4 | 3225.6 | 22.24 | 200.7 | 2910.9 | 20.07 | 258.6 | 3750.7 | 25.86 |
| 100 | 212 | 204.3 | 2963.1 | 20.43 | 211.0 | 3060.3 | 21.1 | 173.9 | 2522.2 | 17.39 | 226.5 | 3285.1 | 22.65 | 187.7 | 2722.4 | 18.77 | 176.5 | 2559.9 | 17.65 | 253.3 | 3673.8 | 25.33 |
| 150 | 302 | 185.0 | 2683.2 | 18.50 | 192.5 | 2792.0 | 19.25 | 157.0 | 2277.1 | 15.7 | 212.4 | 3080.6 | 21.24 | 174.4 | 2529.5 | 17.44 | 160.2 | 2323.5 | 16.02 | 229.6 | 3330.1 | 22.96 |
| 200 | 392 | 172.4 | 2500.5 | 17.24 | 178.3 | 2586.0 | 17.83 | 145.8 | 2114.7 | 14.58 | 199.7 | 2896.4 | 19.97 | 167.7 | 2432.3 | 16.77 | 146.8 | 2129.2 | 14.68 | 213.3 | 3093.7 | 21.33 |
| 250 | 482 | 162.4 | 2355.4 | 16.24 | 166.9 | 2420.7 | 16.69 | 137.3 | 1991.4 | 13.73 | 189.1 | 2742.7 | 18.91 | 163.1 | 2365.6 | 16.31 | 136.1 | 1974.0 | 13.61 | 202.3 | 2934.1 | 20.23 |
| 300 | 572 | 154.6 | 2242.3 | 15.46 | 158.1 | 2293.1 | 15.81 | 130.3 | 1889.8 | 13.03 | 180.4 | 2616.5 | 18.04 | 158.6 | 2300.3 | 15.86 | 126.9 | 1840.5 | 12.69 | 194.3 | 2818.1 | 19.43 |
| 325 | 617 | 151.1 | 2191.5 | 15.11 | 154.4 | 2239.4 | 15.44 | 127.4 | 1847.8 | 12.74 | 176.8 | 2564.3 | 17.68 | 156.1 | 2264.0 | 15.61 | 122.1 | 1770.9 | 12.21 | 190.8 | 2767.3 | 19.08 |
| 350 | 662 | 148.1 | 2148.0 | 14.81 | 151.6 | 2198.8 | 15.16 | 125.4 | 1818.8 | 12.54 | 173.8 | 2520.8 | 17.38 | 152.9 | 2217.6 | 15.29 | | | | 188.2 | 2729.6 | 18.82 |
| 375 | 707 | 145.2 | 2106.0 | 14.52 | 149.4 | 2166.9 | 14.94 | 123.8 | 1795.6 | 12.38 | 171.0 | 2480.1 | 17.1 | 149.2 | 2164.0 | 14.92 | | | | 186.8 | 2709.3 | 18.68 |
| 400 | 752 | 142.2 | 2062.4 | 14.22 | 147.2 | 2135.0 | 14.72 | 121.5 | 1762.2 | 12.15 | 169.5 | 2458.4 | 16.95 | 145.5 | 2110.3 | 14.55 | | | | 183.1 | 2655.6 | 18.31 |
| 425 | 797 | 140.0 | 2030.5 | 14.00 | 145.7 | 2113.2 | 14.57 | 119.3 | 1730.3 | 11.93 | 168.1 | 2438.1 | 16.81 | 141.7 | 2055.2 | 14.17 | | | | | | |
| 450 | 842 | 137.0 | 1987.0 | 13.70 | 144.2 | 2091.4 | 14.42 | 117.1 | 1698.4 | 11.71 | 167.3 | 2426.5 | 16.73 | 138.0 | 2001.5 | 13.8 | | | | | | |
| 475 | 887 | 134.7 | 1953.7 | 13.47 | 143.4 | 2079.8 | 14.34 | | | | 158.2 | 2294.5 | 15.82 | 133.7 | 1939.2 | 13.37 | | | | | | |
| 500 | 932 | 132.4 | 1920.3 | 13.24 | 140.9 | 2043.6 | 14.09 | | | | 140.9 | 2043.6 | 14.09 | 129.2 | 1873.9 | 12.92 | | | | | | |
| 538 | 1000.4 | 122.1 | 1770.9 | 12.21 | 125.5 | 1820.2 | 12.55 | | | | 125.5 | 1820.2 | 12.55 | 116.6 | 1691.1 | 11.66 | | | | | | |
| 550 | 1022 | 117.8 | 1708.5 | 11.78 | 124.9 | 1811.5 | 12.49 | | | | 124.9 | 1811.5 | 12.49 | 114.7 | 1663.6 | 11.47 | | | | | | |
| 575 | 1067 | 104.2 | 1511.3 | 10.42 | 119.7 | 1736.1 | 11.97 | | | | 119.7 | 1736.1 | 11.97 | 108.3 | 1570.8 | 10.83 | | | | | | |
| 600 | 1112 | 84.4 | 1224.1 | 8.44 | 99.5 | 1443.1 | 9.95 | | | | 107.0 | 1551.9 | 10.7 | 97.1 | 1408.3 | 9.71 | | | | | | |
| 625 | 1157 | 68.9 | 999.3 | 6.89 | 79.1 | 1147.3 | 7.91 | | | | 91.2 | 1322.7 | 9.12 | 84.1 | 1219.8 | 8.41 | | | | | | |
| 650 | 1202 | 56.3 | 816.6 | 5.63 | 63.3 | 918.1 | 6.33 | | | | 70.7 | 1025.4 | 7.07 | 70.4 | 1021.1 | 7.04 | | | | | | |
| 675 | 1247 | 46.7 | 677.3 | 4.67 | 51.6 | 748.4 | 5.16 | | | | 62.7 | 909.4 | 6.27 | 57.6 | 835.4 | 5.76 | | | | | | |
| 700 | 1292 | 40.1 | 581.6 | 4.01 | 41.9 | 607.7 | 4.19 | | | | 49.7 | 720.8 | 4.97 | 43.8 | 635.3 | 4.38 | | | | | | |
| 725 | 1337 | 33.8 | 490.2 | 3.38 | 34.9 | 506.2 | 3.49 | | | | 38.6 | 559.8 | 3.86 | 31.7 | 459.8 | 3.17 | | | | | | |
| 750 | 1382 | 28.9 | 419.2 | 2.89 | 29.3 | 425.0 | 2.93 | | | | 29.6 | 429.3 | 2.96 | 22.3 | 323.4 | 2.23 | | | | | | |
| 775 | 1427 | 22.8 | 330.7 | 2.28 | 22.8 | 330.7 | 2.28 | | | | 22.8 | 330.7 | 2.28 | 15.7 | 227.7 | 1.57 | | | | | | |
| 800 | 1472 | 17.4 | 252.4 | 1.74 | 17.4 | 252.4 | 1.74 | | | | 17.4 | 252.4 | 1.74 | 11.4 | 165.3 | 1.14 | | | | | | |
| 816 | 1500.8 | 14.1 | 204.5 | 1.41 | 14.1 | 204.5 | 1.41 | | | | 14.1 | 204.5 | 1.41 | 9.5 | 137.8 | 0.95 | | | | | | |

* 1: Figures in psi/MPa columns are calculated values.
* 2: Flanged end valve ratings terminate at 538°C (1000°F).
* 3: Use beyond 425°C is not allowed.
* 4: SDPV[®] is the trademark registered for KITZ Super Duplex Stainless Steel, which is comparable to 25Cr-7Ni-4Mo-N castings. Ratings terminate at 300°C (572°F).
* 5: SASV is the trademark registered for KITZ Super Austenite Stainless Steel, which is comparable to 21Cr-25Ni-6.5Mo-N castings.


Valve Closure Test Pressures

| Series | Temperature | B (KITZ Std.) | | |
|--------|-------------|---------------|------|------|
| | | Hydrostatic | | Air |
| | | Shell | Seat | Seat |
| 5K | | 1.05 | 0.7 | 0.6 |
| 10K | | 2.10 | 1.4 | |
| 20K | | 3.00 | 2.0 | |


Note: Test pressure for check valves to JIS B2003

Sand Molds for Stainless Steel Valve Castings

Silica Sand

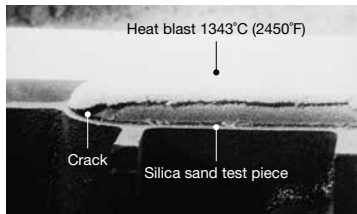


Chromite Sand

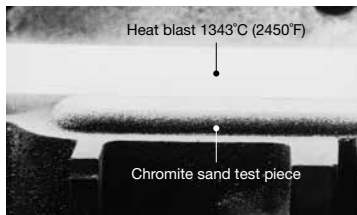


Unlike its competitors, KITZ Corporation employs casting molds made of mixture of chromite sand and silica sand at its Nagasaka stainless and high alloy steel foundries, instead of 100% silica sand which is rather common in the industry. The specific gravity of chromite sand is twice as much as that of silica sand and loading 1.5 MPa (210 psi) surface pressure during molding enables uncomparably solid, hard and uniform structure of casting molds with high precision.

Mold Sands: Cooling Effect

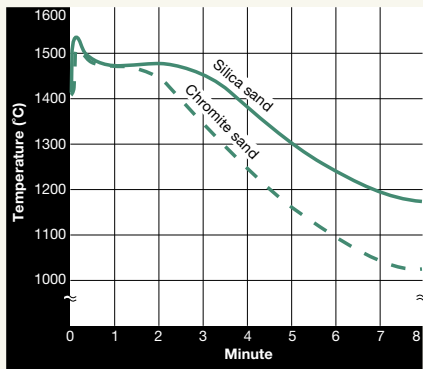

Much higher cooling effect of chromite sand solidifies the molten metal faster to result in very sound castings without concern of blowholes and other casting defects.

Mold Sands: Decarbonization

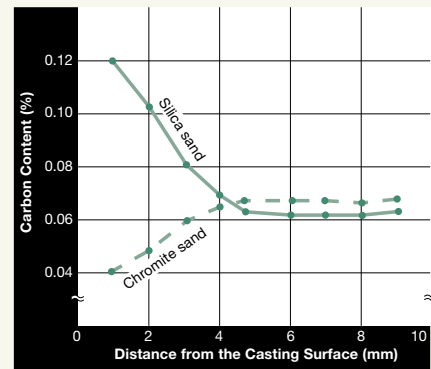

Chromite sand decarbonizes the surface area of stainless steel castings is much better. So, the fine casting surface and high corrosion resistance are guaranteed.

KITZ Low Emission Service Valves

In the United States, the Federal Clean Air Act was dramatically amended in 1990, to realize the new environmental protection policy of 95% reduction in fugitive emission or leak levels of toxic gases and chemicals from plant equipment. Promulgated in April, 1994, the new law requires all plants handling the toxic gas specified by the Environmental Protection Agency, to periodically monitor their plant equipment for detection of leaks exceeding 500 ppm, and repair or replace all defective parts immediately. California has exceeded the Federal law with state regulation requiring 100 ppm maximum leak level for astonishing 99% reduction of such an environmental pollution for the Northern California Region after 1997.

Our low emission valves, the proud fruits of several years of trial and error at our laboratory, are designed, engineered, manufactured and tested to now meet the 100 ppm maximum emission level. This is the standard specification in North America for KITZ Class 150, 300 and 600 Series A and C stainless and high alloy steel valves. In other markets, all these low emission valves are optionally available. Major design considerations for having upgraded our standard valves to the low emission performers are introduced below.

Gland packing

Series A: Choice of PTFE or flexible graphite packing.

- (1) Braided PTFE fiber packing with spun carbon core
- (2) KITZ original "SEALEVER®" packing set consisting of 4 dieformed flexible graphite rings* and 2 braided flexible graphite wiper rings with a pure carbon spacer bush for Class 300 and 600.

Series HA:

- (1) Braided PTFE fiber packing with spun carbon core
- (2) KITZ original "SEALEVER®" packing set consisting of 4 dieformed flexible graphite rings* and 2 braided flexible graphite wiper rings with a pure carbon spacer bush for Class 300.

Series C: KITZ original "SEALEVER®" graphite packing set with a pure carbon spacer bush for Class 300 and 600.

*US Patent No.5522603 & 5573253. Other patents registered or pending worldwide.

Bonnet gaskets and check valve cover gaskets

Series A: Choice of PTFE or flexible graphite gasket.

- (1) Class 150: Reinforced PTFE, Class 300: PTFE filled spiral wound with inner ring. Class 600: PTFE filled spiral wound
- (2) Class 150: S/S inserted flexible graphite sheet designed with permeation protective barrier
Class 300: Spiral wound flexible graphite with inner ring. Class 600: Spiral wound flexible graphite

Series HA: Choice of PTFE or flexible graphite gasket.

- (1) Class 150: Reinforced PTFE, Class 300: PTFE filled spiral wound with inner ring.
- (2) Class 150: S/S inserted flexible graphite sheet designed with permeation protective barrier, corrugated metal flexible graphite (6B OVER).
Class 300: Spiral wound flexible graphite with inner ring.

Series C:

- Class 150: Flexible graphite sheet with stainless steel insert and permeation protective barrier for low emission service.
- Class 300: Spiral wound (flexible graphite filler and stainless steel hoop) with a stainless steel inner ring
- Class 600: Ring joint metal gasket

Diametrical Interface Clearance

- 20 to 32 mils (0.5 to 0.8 mm): Stem to Gland
- 20 to 32 mils (0.5 to 0.8 mm): Stem to Bonnet Bushing (Series C)
- 16 to 28 mils (0.4 to 0.7 mm): Stem to Backseat (Series A, HA)
- 4 to 12 mils (0.1 to 0.3 mm): Gland to Stuffing Box

Stem

16 to 32 RMS surface finish. Straightness and roundness are precisely controlled according to KITZ design and manufacturing standards.

Stuffing Box

Maximum 125 RMS surface finish. Cylindricity and verticality are precisely controlled according to KITZ design and manufacturing standards.

Product Identification

Stainless steel ID plate with the letters “LOW EMISSION” is welded on the bonnet flange.



Inspection and Warranty Policy of KITZ Corporation

Every piece of KITZ stainless and high alloy steel valves are subjected to 100% pressure tests, according to API 598 or BS 6755 Part 1 requirements. Manufacturer's material test reports and inspection certificates are available on request, while each valve is guaranteed for 12 months after placement in service, but not exceeding 18 months after shipment from the factories of KITZ Corporation.

Various tests and inspection of valves made by KITZ Corporation include the following. Unless otherwise specified, all KITZ stainless and high alloy steel valves shall be subjected to these test or inspection methods and evaluation criteria.

| Test/Inspection Item | Method | Evaluation |
|----------------------------------|-----------------------------|----------------------|
| Chemical Composition Analysis | | Relevant ASTM Stds. |
| Mechanical Property Test | ASTM A370 | Relevant ASTM Stds. |
| Pressure Tests | API 598 or BS 6755 Part 1 | API 598 |
| Radiographic Inspection | ASTM E186/280/446 | ASME B16.34 |
| Wet Magnetic Particle Inspection | ASTM E709 | |
| Liquid Penetrant Inspection | ASTM E165 | |
| Low Temperature Impact Test | ASTM E23 | ASTM A352 |
| Dimensional Inspection | | Relevant Valve Stds. |
| Visual Inspection | | MSS SP-55 |
| Emission Test* | EPA Method 21 and KITZ Std. | KITZ Std. |

*Applicable to low emission service valves

KITZ Low Temperature and Cryogenic Service Valves

KITZ Corporation offers Series A and C stainless steel gate, globe and check valves for processing, storage, shipment and distribution of ethylene, LPG, LNG and other low temperature or cryogenic services down to -196°C (-321°F). Here, extended bonnets are provided as an insulation vapor column to protect gland packing rings from freezing or shrinking for their trouble-free sealing function. Detailed design information and cryogenic test reports are available on request.

Please refer to our "Low Temperature and Cryogenic Valves" catalog. (No. E-426)



KITZ cryogenic service gate valve



Cryogenic pressure test



KITZ cryogenic service globe valve


SS

Stainless Steel

KITZ

GENERAL CATALOG

Carbon Steel

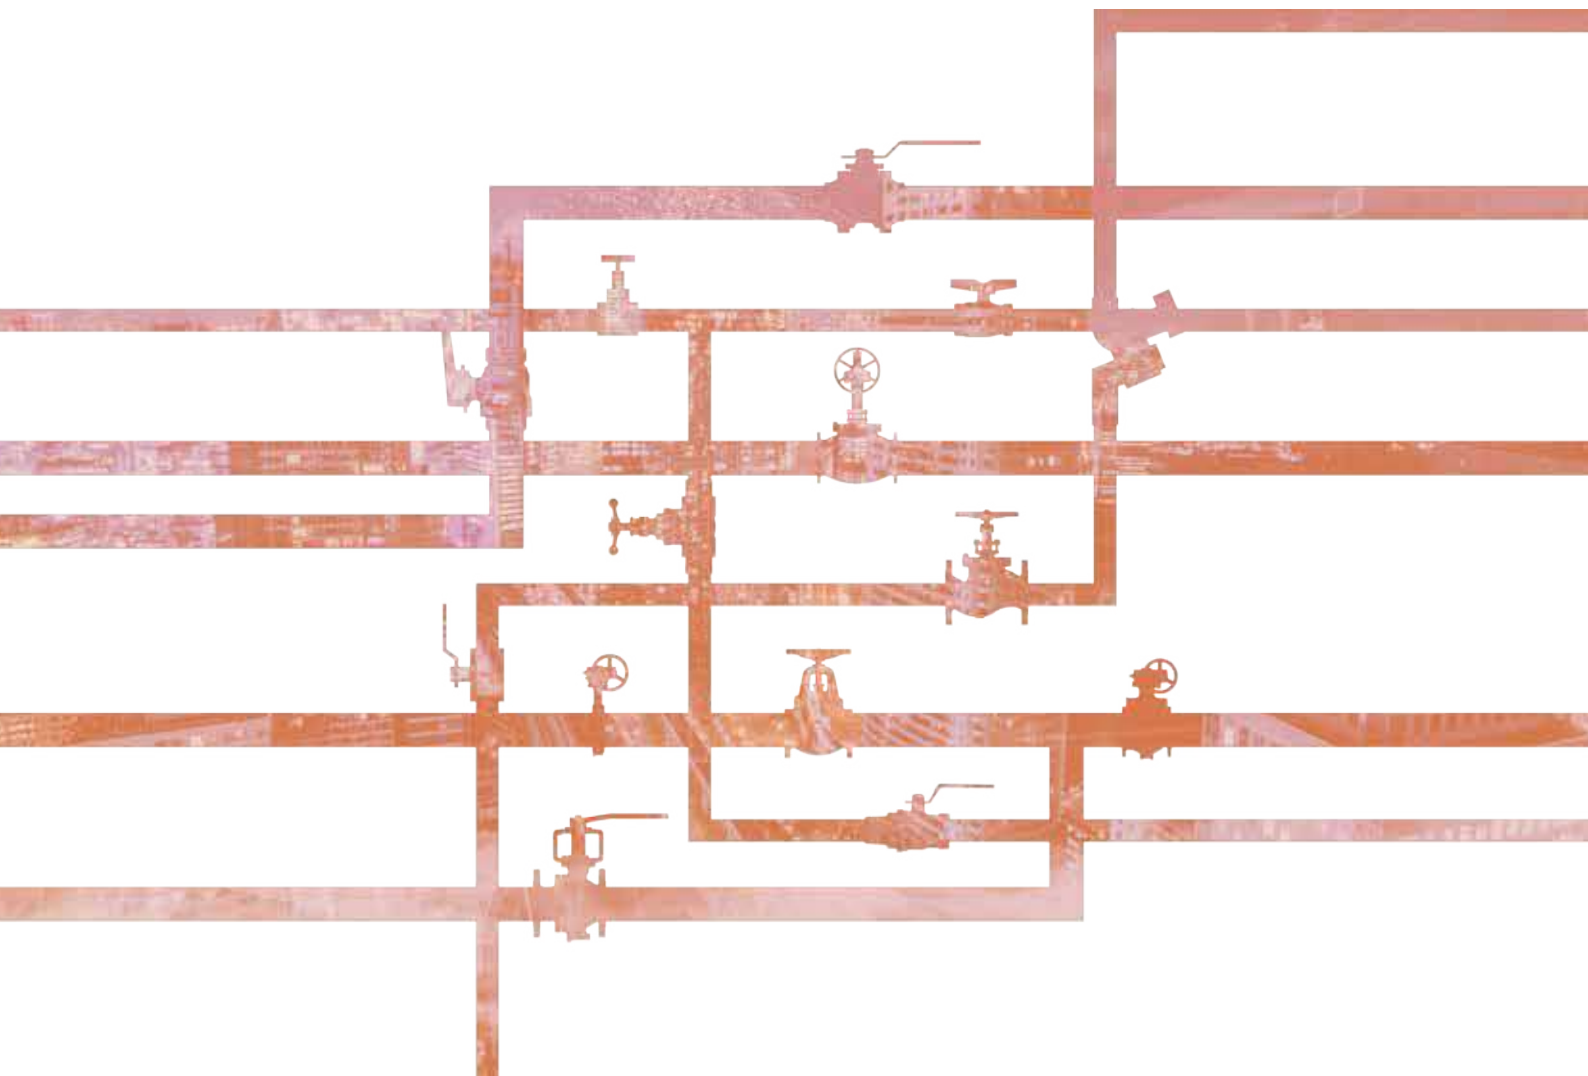

INDEX


| Title | Body Material | Type | Class | End Connection | Features/Design | Size Range | Fig | Page | | | | | | | | | |
|---|---------------|--|--------------------------------------|---|----------------------------------|---|--------------------------------------|---|------------|--------------------------------------|---|---|------------|--|--|---|------------|
| Carbon Steel Valves (Bolted Bonnet/ Bolted Cover, Outside Screw & Yoke) | CS | Gate | 150 | FE/RF | | API 600/ISO 10434 | 1 1/2 ^B - 36 ^B | 150SCLS/G-150SCLS 300SCLS/G-300SCLS 600SCLS/G-600SCLS 900SCLS/G-900SCLS 1500SCLS/G-1500SCLS | CS3 242 | | | | | | | | |
| | | | 300 | | | | 2 ^B - 24 ^B | | | | | | | | | | |
| | | | 600 | | | | | | | | | | | | | | |
| | | | 900 | | | | | | | | | | | | | | |
| | | | 1500 | | | | BS 1873 | | | 1 1/2 ^B - 18 ^B | 150SCJS/G-150SCJS 300SCJS/G-300SCJS 600SCJS/G-600SCJS 900SCJS/G-900SCJS 1500SCJS/G-1500SCJS | | | | | | |
| | | 300 | 1 1/2 ^B - 16 ^B | | | | | | | | | | | | | | |
| | | 600 | 2 ^B - 12 ^B | | | | | | | | | | | | | | |
| | | 900 | 3 ^B - 8 ^B | | | | | | | | | | | | | | |
| | | 1500 | 2 ^B - 8 ^B | | | | | | | | | | | | | | |
| | | Carbon Steel Valves (Pressure Seal Bonnet/Pressure Seal Cover, Outside Screw & Yoke) | CS | | | Check | 150 | FE/RF or BW | Swing | BS 1868 | 1 1/2 ^B - 30 ^B | 150SCOS 150SCOHS 300SCOS 300SCOHS 600SCOS 600SCOHS | CS4 243 | | | | |
| | | | | | | | 300 | | | API 594 | 1 1/2 ^B - 18 ^B | | | | | | |
| | | | | | | | 600 | | | BS 1868 | 1 1/2 ^B - 30 ^B | | | | | | |
| | | | | | | | 900 | | | API 594 | 1 1/2 ^B - 16 ^B | | | | | | |
| | | | | | | | 1500 | | | BS 1868 | 2 ^B - 24 ^B | | | | | | |
| | | | | | | Carbon Steel Valves (Bolted Bonnet/ Bolted Cover, Outside Screw & Yoke) | CS | | | Gate | 900 | FE/RF or BW | | | | (G-)(W)900SCLSPSY (G-)(W)1500SCLSPSY (G-)(W)2500SCLSPSY | CS5 244 |
| | | | | | | | | | | | 1500 | | | | | | |
| 2500 | | | | | | | | | | | | | | | | | |
| Globe | 900 | | | ASME B16.34 | 2 ^B - 24 ^B | | | | | | (G-)(W)900SCJSPSY (G-)(W)1500SCJSPSY (G-)(W)2500SCJSPSY | | | | | | |
| | 1500 | | | | | | | | | | | | | | | | |
| Check | 900 | Swing | | (W)900SCOSPSY (W)1500SCOSPSY (W)2500SCOSPSY | | | | | | | | | | | | | |
| | 1500 | | | | | | | | | | | | | | | | |
| | 2500 | | | | | | | | | | | | | | | | |

* (Abbreviation) FE: Flanged Ends, RF: Raised Face Ends, BW: Butt welding Ends

PRODUCT CODING

Carbon & Low Alloy Steel Valves

(Note: Some products do not follow this coding system)



1 Operation

None Manual Handwheel
G Gear

2 End Connection

None Raised Face Flanged Ends
W Butt weld Ends

3 Pressure Class

10 10K
20 20K
150 Class 150
300 Class 300
600 Class 600
900 Class 900
1500 Class 1500
2500 Class 2500

4 Shell Material Code

SC Carbon/Low Alloy

5 Valve Type

L Gate
J Globe
O Swing Check
OH Internal Hinge Pin Swing Check

6 Body Seat Ring

S Mounted on Body by Seal Welding.
Class 900/1500 Globe Valves are Integral Seat Type

7 Special Design

None Standard
PS Pressure Seal Bonnet/Cap
X -46°C service

8 Shell Material

None A216 WCB/WCC
WC6 A217 WC6
WC9 A217 WC9
C5 A217 C5
C12 A217 C12
LCB A352 LCB
LCC A352 LCC

9 Body/Disc Seat Surface Material

None Body Seat Surface Hard Face
Y Body/Body Seat Surfaces both Hard Faced

Design Specification

Carbon & Low Alloy Steel Valves

| | |
|---|--|
| Shell Wall Thickness & General Valve Design | API 600/ISO 10434 (Gate) BS1873 (Globe) BS 1868/API594*1 (Swing Check) |
| P-T Rating | ASME B16.34 (JIS B2220 for 10K & 20K) |
| Face to Face Dimension | ASME B16.10 (JIS B2002 for 10K & 20K) |
| Flanged Ends Dimension | ASME B16.5 ² /MSS SP-44 (22 ^B)/ASME B16.47 Series B (26 ^B & above) (JIS B2220 for 10K & 20K) |
| Butt weld Ends Dimension | ASME B16.25, ISO10434 (Gate), BS1873 (Globe)/1868 (Check) |
| Pressure Test | API 598/ISO 5208 |
| Fugitive Emission Test (Up to Class 600) | API 624/ISO 15848-1 |
| Cryogenic/Low Temperature Test*3 | ISO 28921-1 |





*1 API 594 is for Internal Hinge Pin Check Valves (except 1 1/2^B)





*2 Pipe Connection Dimensions shall be indicated in millimeters converted from dimensions in inches according to ASME B16.5





*3 For X (Low Temperature Service Valves)

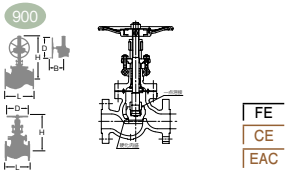
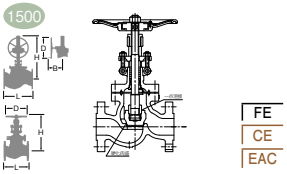


| Type | Gate | | | | Gate | | | | Gate | | | | Gate | | | | |
|---------------------------------------|---|-----|------|-----|---|------|------|-----|---|------|------|-----|--|------|------|-----|-----|
| Carbon & Low Alloy Steel Valves (GGC) | | | | | | | | | | | | | | | | | |
| | API600 FE CE EAC | | | | API600 FE CE EAC | | | | API600 FE CE EAC | | | | API600 FE CE EAC | | | | |
| Fig | 150SCLS/G-150SCLS | | | | 300SCLS/G-300SCLS | | | | 600SCLS/G-600SCLS | | | | 900SCLS/G-900SCLS | | | | |
| End Connection | ASME B16.5 Class 150 RF* | | | | ASME B16.5 Class 300 RF* | | | | ASME B16.5 Class 600 RF* | | | | ASME B16.5 Class 900 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 11/2 | 40 | 165 | 385 | 200 | | 190 | 414 | 200 | | 292 | 446 | 200 | | 368 | 520 | 250 | |
| 2 | 50 | 178 | 385 | 200 | | 216 | 414 | 200 | | 330 | 497 | 250 | | 381 | 621 | 300 | |
| 21/2 | 65 | 190 | 432 | 200 | | 241 | 457 | 200 | | 356 | 545 | 250 | | 457 | 706 | 350 | |
| 3 | 80 | 203 | 509 | 250 | | 283 | 531 | 250 | | 432 | 667 | 300 | | 610 | 900 | 500 | |
| 4 | 100 | 229 | 592 | 250 | | 305 | 618 | 250 | | 559 | 893 | 450 | | 737 | 1087 | 600 | |
| 5 | 125 | 254 | 658 | 300 | | 381 | 694 | 300 | | 660 | 1094 | 500 | | 838 | 1285 | 680 | |
| 6 | 150 | 267 | 758 | 300 | | 403 | 794 | 350 | | 838 | 1464 | 680 | | 1029 | 1714 | 600 | 456 |
| 8 | 200 | 292 | 958 | 350 | | 419 | 1015 | 400 | | 889 | 1593 | 760 | | 1130 | 1830 | 600 | TBA |
| 10 | 250 | 330 | 1162 | 400 | | 457 | 1216 | 450 | | 991 | 1779 | 760 | | 1219 | 2180 | 600 | TBA |
| 12 | 300 | 356 | 1362 | 450 | | 502 | 1458 | 600 | | 1092 | 2070 | 910 | | 1321 | 2435 | 610 | TBA |
| 14 | 350 | 381 | 1572 | 600 | | 522 | 1564 | 600 | | 1295 | 2500 | 600 | 456 | | | | |
| 16 | 400 | 406 | 1692 | 600 | | 838 | 1767 | 680 | | 1397 | 2730 | 610 | 417 | | | | |
| 18 | 450 | 432 | 1888 | 600 | | 914 | 1933 | 680 | | | | | | | | | |
| 20 | 500 | 457 | 2123 | 680 | | 991 | 2137 | 760 | | | | | | | | | |
| 22 | 550 | 483 | 2326 | 680 | | 1092 | 2364 | 760 | | | | | | | | | |
| 24 | 600 | 508 | 2498 | 760 | | 1143 | 2544 | 910 | | | | | | | | | |
| 26 | 650 | 559 | 2835 | 500 | 280 | 1245 | 2848 | 600 | 350 | | | | | | | | |
| 28 | 700 | 610 | 3022 | 600 | 350 | 1346 | 3151 | 600 | 456 | | | | | | | | |
| 30 | 750 | 610 | 3154 | 600 | 350 | 1397 | 3341 | 600 | 456 | | | | | | | | |
| 32 | 800 | 660 | 3267 | 600 | 350 | 1524 | 3650 | 600 | 456 | | | | | | | | |
| 34 | 850 | 711 | 3507 | 600 | 350 | 1626 | 3826 | 600 | 456 | | | | | | | | |
| 36 | 900 | 711 | 3785 | 600 | 456 | 1727 | 3926 | 600 | 456 | | | | | | | | |
| Body/Bonnet | WCB | | | | WCB | | | | WCB | | | | WCB | | | | |
| Stem | F6a | | | | F6a | | | | F6a | | | | F6a | | | | |
| Disc | 13Cr or Carbon Steel+13Cr | | | | 13Cr or Carbon Steel+13Cr | | | | 13Cr or Carbon Steel+13Cr | | | | 13Cr or Carbon Steel+13Cr | | | | |
| Body Seat Ring | Carbon Steel+HF | | | | Carbon Steel+HF | | | | Carbon Steel+HF | | | | Carbon Steel+HF | | | | |
| Gland Packing | Flexible Graphite | | | | Flexible Graphite | | | | Flexible Graphite | | | | Flexible Graphite | | | | |
| Gasket | Refer to Page CS9 | | | | Refer to Page CS9 | | | | Refer to Page CS9 | | | | Refer to Page CS9 | | | | |
| Bonnet Bolt/Nut | B7/2H | | | | B7/2H | | | | B7/2H | | | | B7/2H | | | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | |
| Wall Thickness | API 600 | | | | API 600 | | | | API 600 | | | | API 600 | | | | |
| Approval | ISO15848-1 API 624, PED/CE TR-CU/EAC | | | | ISO15848-1 API 624, PED/CE TR-CU/EAC | | | | ISO15848-1 API 624, PED/CE TR-CU/EAC | | | | ISO15848-1 API 624, PED/CE TR-CU/EAC | | | | |
| Remarks | Flexible Wedge, *MSS SP-44 (22 ^b)/ ASME B16.47 Series B (26 ^b & above) | | | | Flexible Wedge, *MSS SP-44 (22 ^b)/ ASME B16.47 Series B (26 ^b & above) | | | | Flexible Wedge, *MSS SP-44 (22 ^b)/ ASME B16.47 Series B (26 ^b & above) | | | | Solid Wedge ≤4 ^b , Flexible Wedge ≥6 ^b | | | | |




| Type | Gate | | | | Globe | | | | Globe | | | | Globe | | | | |
|---------------------------------------|--|------|------|-----|--------------------------------------|-----|------|-----|--------------------------------------|-----|------|-----|--------------------------------------|-----|------|-----|-----|
| Carbon & Low Alloy Steel Valves (GGC) | | | | | | | | | | | | | | | | | |
| | API600 FE CE EAC | | | | API600 FE CE EAC | | | | API600 FE CE EAC | | | | API600 FE CE EAC | | | | |
| Fig | 1500SCLS/G-1500SCLS | | | | 150SCJS/G-150SCJS | | | | 300SCJS/G-300SCJS | | | | 600SCJS/G-600SCJS | | | | |
| End Connection | ASME B16.5 Class 1500 RF | | | | ASME B16.5 Cassl 150 RF | | | | ASME B16.5 Class 300 RF | | | | ASME B16.5 Class 600 RF | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 11/2 | 40 | | | | | 165 | 331 | 200 | | 229 | 362 | 200 | | 292 | 406 | 250 | |
| 2 | 50 | 368 | 559 | 250 | | 203 | 331 | 200 | | 267 | 362 | 200 | | 330 | 474 | 300 | |
| 21/2 | 65 | 419 | 635 | 300 | | 216 | 380 | 250 | | 292 | 428 | 250 | | 356 | 508 | 350 | |
| 3 | 80 | 470 | 685 | 350 | | 241 | 390 | 250 | | 318 | 436 | 250 | | 432 | 597 | 500 | 254 |
| 4 | 100 | 546 | 772 | 400 | | 292 | 459 | 250 | | 356 | 510 | 350 | | 508 | 930 | 500 | 280 |
| 5 | 125 | | | | | 356 | 485 | 300 | | 400 | 608 | 400 | | 559 | 993 | 500 | 280 |
| 6 | 150 | 705 | 1031 | 600 | | 406 | 513 | 350 | | 444 | 989 | 500 | 254 | 660 | 1121 | 600 | 350 |
| 8 | 200 | 832 | 1248 | 680 | | 495 | 929 | 500 | 280 | 559 | 1064 | 500 | 280 | 787 | 1420 | 610 | 417 |
| 10 | 250 | 991 | 1475 | 910 | | 622 | 975 | 500 | 280 | 622 | 1142 | 600 | 350 | 838 | 1575 | 610 | 417 |
| 12 | 300 | 1130 | 1656 | 910 | | 698 | 1049 | 500 | 280 | 711 | 1187 | 600 | 350 | | | | |
| 14 | 350 | 1257 | 1750 | 600 | TBA | 787 | 1106 | 500 | 280 | 838 | 1766 | 680 | 350 | | | | |
| 16 | 400 | 1384 | 2060 | 610 | TBA | 914 | 1224 | 600 | 350 | 864 | 1932 | 680 | 350 | | | | |
| 18 | 450 | | | | | 978 | 1275 | 600 | TBA | | | | | | | | |
| Body/Bonnet | WCB | | | | WCB | | | | WCB | | | | WCB | | | | |
| Stem | F6a | | | | 403SS | | | | 403SS | | | | 403SS | | | | |
| Disc | 13Cr or Carbon Steel+13Cr | | | | 13Cr or Carbon Steel+13Cr | | | | 13Cr or Carbon Steel+13Cr | | | | 13Cr or Carbon Steel+13Cr | | | | |
| Body Seat Ring | Carbon Steel+HF | | | | Carbon Steel+HF | | | | Carbon Steel+HF | | | | Carbon Steel+HF | | | | |
| Gland Packing | Flexible Graphite | | | | Flexible Graphite | | | | Flexible Graphite | | | | Flexible Graphite | | | | |
| Gasket | Refer to Page CS9 | | | | Refer to Page CS9 | | | | Refer to Page CS9 | | | | Refer to Page CS9 | | | | |
| Bonnet Bolt/Nut | B7/2H | | | | B7/2H | | | | B7/2H | | | | B7/2H | | | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | |
| Wall Thickness | API 600 | | | | API 623 | | | | API 623 | | | | API 623 | | | | |
| Approval | ISO15848-1 API 624, PED/CE TR-CU/EAC | | | | ISO15848-1 API 624, PED/CE TR-CU/EAC | | | | ISO15848-1 API 624, PED/CE TR-CU/EAC | | | | ISO15848-1 API 624, PED/CE TR-CU/EAC | | | | |
| Remarks | Solid Wedge ≤4 ^b , Flexible Wedge ≥6 ^b | | | | | | | | | | | | | | | | |

| Type | Globe | | | | Globe | | | | Swing Check | | | Swing Check | | | |
|---------------------------------------|---|-----|------|-----|---|-----|------|-----|--|------|-----|---|-----|-----|---|
| Carbon & Low Alloy Steel Valves (GGC) |  | | | |  | | | |  | | |  | | | |
| | 900 | | | | 1500 | | | | 150 | | | 150 | | | |
| Fig | 900SCJS/G-900SCJS | | | | 1500SCJS/G-1500SCJS | | | | 150SCOS | | | 150SCOHS | | | |
| End Connection | ASME B16.5 Class 600 RF | | | | ASME B16.5 Class 1500 RF | | | | ASME B16.5 Cassl 150 RF* | | | ASME B16.5 Cassl 150 RF | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | L | H | D |
| 11/2 | 40 | | | | | | | | | 165 | 132 | | 165 | 132 | |
| 2 | 50 | | | | | 368 | 557 | 350 | | 203 | 156 | | 203 | 156 | |
| 21/2 | 65 | | | | | 419 | 920 | 500 | TBA | 216 | 168 | | 216 | 168 | |
| 3 | 80 | 381 | 900 | 500 | 254 | 470 | 969 | 500 | 332 | 241 | 185 | | 241 | 185 | |
| 4 | 100 | 457 | 957 | 500 | 280 | 546 | 1092 | 600 | 417 | 292 | 210 | | 292 | 210 | |
| 5 | 125 | | | | | | | | | 330 | 239 | | | | |
| 6 | 150 | 610 | 1173 | 600 | 350 | 705 | 1336 | 600 | 456 | 356 | 250 | | 356 | 250 | |
| 8 | 200 | 737 | 1381 | 600 | 456 | 832 | 1400 | 610 | TBA | 495 | 293 | | 495 | 293 | |
| 10 | 250 | | | | | | | | | 622 | 340 | | 622 | 340 | |
| 12 | 300 | | | | | | | | | 698 | 377 | | 698 | 375 | |
| 14 | 350 | | | | | | | | | 787 | 415 | | 787 | 415 | |
| 16 | 400 | | | | | | | | | 864 | 455 | | 864 | 455 | |
| 18 | 450 | | | | | | | | | 978 | 508 | | 978 | 508 | |
| 20 | 500 | | | | | | | | | 978 | 585 | | | | |
| 24 | 600 | | | | | | | | | 1295 | 670 | | | | |
| 26 | 650 | | | | | | | | | 1295 | 740 | | | | |
| 28 | 700 | | | | | | | | | 1448 | 810 | | | | |
| 30 | 750 | | | | | | | | | 1524 | 871 | | | | |
| Body/Bonnet/Cover | WCB | | | | WCB | | | | WCB | | | WCB | | | |
| Stem/Hinge Pin | 403SS | | | | 403SS | | | | 403SS | | | 403SS | | | |
| Disc | 13Cr or Carbon Steel+13Cr | | | | 13Cr or Carbon Steel+13Cr | | | | 13Cr or Carbon Steel+13Cr | | | 13Cr or Carbon Steel+13Cr | | | |
| Body Seat Ring | Carbon Steel+HF | | | | Carbon Steel+HF | | | | Carbon Steel+HF | | | Carbon Steel+HF | | | |
| Gland Packing | Flexible Graphite | | | | Flexible Graphite | | | | | | | | | | |
| Gasket | Refer to Page CS9 | | | | Refer to Page CS9 | | | | Refer to Page CS9 | | | Refer to Page CS9 | | | |
| Bonnet Bolt/Nut | B7/2H | | | | B7/2H | | | | B7/2H | | | B7/2H | | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | ASME B16.34 | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | ASME B16.10 | | | |
| Wall Thickness | API 623 | | | | API 623 | | | | API 600 | | | API 594 | | | |
| Approval | ISO15848-1 API 624, PED/CE TR-CU/EAC | | | | ISO15848-1 API 624, PED/CE TR-CU/EAC | | | | PED/CE TR-CU/EAC | | | PED/CE TR-CU/EAC | | | |
| Remarks | | | | | | | | | *ASME B16.47 Series B (26" & above) | | | Internal Hinge Pin | | | |

| Type | Swing Check | | | Swing Check | | | Swing Check | | | Swing Check | | | |
|---------------------------------------|---|------|-----|---|-----|-----|--|------|-----|---|-----|-----|---|
| Carbon & Low Alloy Steel Valves (GGC) |  | | |  | | |  | | |  | | | |
| | 300 | | | 300 | | | 600 | | | 600 | | | |
| Fig | 300SCOS | | | 300SCOHS | | | 600SCOS | | | 600SCOHS | | | |
| End Connection | ASME B16.5 Class 300 RF* | | | ASME B16.5 Class 300 RF | | | ASME B16.5 Class 600 RF | | | ASME B16.5 Class 600 RF | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | L | H | D |
| 11/2 | 40 | 241 | 155 | | 241 | 155 | | | | | | | |
| 2 | 50 | 267 | 164 | | 267 | 164 | | 292 | 194 | | 292 | 195 | |
| 21/2 | 65 | 292 | 190 | | 292 | 190 | | 330 | 216 | | 330 | 216 | |
| 3 | 80 | 318 | 205 | | 318 | 205 | | 356 | 235 | | 356 | 240 | |
| 4 | 100 | 356 | 230 | | 356 | 230 | | 432 | 260 | | 432 | 255 | |
| 5 | 125 | 400 | 250 | | | | | 508 | 293 | | | | |
| 6 | 150 | 444 | 280 | | 444 | 280 | | 559 | 332 | | 559 | 338 | |
| 8 | 200 | 533 | 330 | | 533 | 330 | | 660 | 381 | | 660 | 383 | |
| 10 | 250 | 622 | 370 | | 622 | 370 | | 787 | 447 | | 787 | 447 | |
| 12 | 300 | 711 | 415 | | 711 | 415 | | 838 | 518 | | 838 | 508 | |
| 14 | 350 | 838 | 491 | | 838 | 491 | | 889 | 599 | | | | |
| 16 | 400 | 864 | 543 | | 864 | 543 | | 991 | 674 | | | | |
| 18 | 450 | 978 | 582 | | | | | 1092 | 694 | | | | |
| 20 | 500 | 1016 | 645 | | | | | 1194 | 760 | | | | |
| 24 | 600 | 1346 | 866 | | | | | 1397 | 929 | | | | |
| 28 | 700 | 1499 | 930 | | | | | | | | | | |
| 30 | 750 | 1594 | 975 | | | | | | | | | | |
| Body/Bonnet/Cover | WCB | | | WCB | | | WCB | | | WCB | | | |
| Stem/Hinge Pin | 403SS | | | 403SS | | | 403SS | | | 403SS | | | |
| Disc | 13Cr or Carbon Steel+13Cr | | | 13Cr or Carbon Steel+13Cr | | | 13Cr or Carbon Steel+13Cr | | | 13Cr or Carbon Steel+13Cr | | | |
| Body Seat Ring | Carbon Steel+HF | | | Carbon Steel+HF | | | Carbon Steel+HF | | | Carbon Steel+HF | | | |
| Gasket | Refer to Page CS9 | | | Refer to Page CS9 | | | Refer to Page CS9 | | | Refer to Page CS9 | | | |
| Bonnet Bolt/Nut | B7/2H | | | B7/2H | | | B7/2H | | | B7/2H | | | |
| P-T Rating | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | | |
| F-to-F Dimension | ASME B16.10 | | | ASME B16.10 | | | ASME B16.10 | | | ASME B16.10 | | | |
| Wall Thickness | API 600 | | | API 594 | | | API 600 | | | API 594 | | | |
| Approval | PED/CE TR-CU/EAC | | | PED/CE TR-CU/EAC | | | PED/CE TR-CU/EAC | | | PED/CE TR-CU/EAC | | | |
| Remarks | *ASME B16.47 Series B (26" & above) | | | Internal Hinge Pin | | | | | | Internal Hinge Pin | | | |

| Type | Swing Check | | | | Swing Check | | | | Pressure Seal Bonnet Gate | | | | Pressure Seal Bonnet Gate | | | |
|---------------------------------------|---|------|------|---|---|------|---|-----|--|-----|-----|-----|---|-----|-----|--|
| Carbon & Low Alloy Steel Valves (GGC) |  | | | |  | | | |  | | | |  | | | |
| | 900 | | | | 1500 | | | | 900 | | | | 1500 | | | |
| Fig | 900SCOS | | | | 1500SCOS | | | | (G-)(W)900SCLSPSY | | | | (G-)(W)1500SCLSPSY | | | |
| End Connection | ASME B16.5 Class 900 RF | | | | ASME B16.5 Class 1500 RF | | | | ASME B16.25(BW) or B16.5(RF) | | | | ASME B16.25(BW) or B16.5(RF) | | | |
| inch | mm | L | H | D | L | H | D | L | H | D | B | L | H | D | B | |
| 2 | 50 | | | | 368 | 293 | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 2 1/2 | 65 | | | | 419 | 318 | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 3 | 80 | 381 | 296 | | 470 | 339 | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 4 | 100 | 457 | 349 | | 546 | 388 | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 6 | 150 | 610 | 443 | | 705 | 514 | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 8 | 200 | 737 | 524 | | 832 | 648 | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 10 | 250 | 838 | 619 | | 991 | 736 | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 12 | 300 | 965 | 716 | | 1130 | 875 | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 14 | 350 | 1029 | 794 | | 1257 | 955 | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 16 | 400 | 1130 | 871 | | 1384 | 1082 | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 18 | 450 | 1219 | 952 | | | | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 20 | 500 | 1321 | 1042 | | | | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| 24 | 600 | | | | | | | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | |
| Body/Bonnet | WCB | | | | WCB | | | | A105 or WCB | | | | A105 or WCB | | | |
| Cover | | | | | | | | | 403SS or OHTARON®1* | | | | 403SS or OHTARON®1* | | | |
| Disc | 13Cr or Carbon Steel+13Cr | | | | 13Cr or Carbon Steel+13Cr | | | | A105+HF or WCB+HF | | | | A105+HF or WCB+HF | | | |
| Body Seat Ring | Carbon Steel+HF | | | | Carbon Steel+HF | | | | A105+HF or WCB+HF | | | | A105+HF or WCB+HF | | | |
| Hinge Pin | 403SS | | | | 403SS | | | | Flexible Graphite | | | | Flexible Graphite | | | |
| Gasket | Refer to Page CS9 | | | | Refer to Page CS9 | | | | Flexible Graphite | | | | Flexible Graphite | | | |
| Bonnet Bolt/Nut | B7/2H | | | | B7/2H | | | | | | | | | | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | |
| Wall Thickness | API 600 | | | | API 600 | | | | ASME B16.34 | | | | ASME B16.34 | | | |
| Approval | PED/CE TR-CU/EAC | | | | PED/CE TR-CU/EAC | | | | | | | | | | | |
| Remarks | | | | | | | | | * Equivalent to SUS431 | | | | * Equivalent to SUS431 | | | |

| Type | Pressure Seal Bonnet Gate | | | | Pressure Seal Bonnet Globe | | | | Pressure Seal Bonnet Globe | | | | Pressure Seal Bonnet Globe | | | | |
|---------------------------------------|---|-----|-----|-----|---|-----|-----|-----|--|-----|-----|-----|---|-----|-----|-----|-----|
| Carbon & Low Alloy Steel Valves (GGC) |  | | | |  | | | |  | | | |  | | | | |
| | 2500 | | | | 900 | | | | 1500 | | | | 2500 | | | | |
| Fig | (G-)(W)2500SCLSPSY | | | | (G-)(W)900SCJSPSY | | | | (G-)(W)1500SCJSPSY | | | | (G-)(W)2500SCJSPSY | | | | |
| End Connection | ASME B16.25(BW) or B16.5(RF) | | | | ASME B16.25(BW) or B16.5(RF) | | | | ASME B16.25(BW) or B16.5(RF) | | | | ASME B16.25(BW) or B16.5(RF) | | | | |
| inch | mm | L | H | D | B | L | H | D | B | L | H | D | B | L | H | D | B |
| 2 | 50 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 2 1/2 | 65 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 3 | 80 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 4 | 100 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 6 | 150 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 8 | 200 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 10 | 250 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 12 | 300 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 14 | 350 | TBA | TBA | TBA | TBA | | | | | | | | | | | | |
| 16 | 400 | TBA | TBA | TBA | TBA | | | | | | | | | | | | |
| 18 | 450 | TBA | TBA | TBA | TBA | | | | | | | | | | | | |
| 20 | 500 | TBA | TBA | TBA | TBA | | | | | | | | | | | | |
| 24 | 600 | TBA | TBA | TBA | TBA | | | | | | | | | | | | |
| Body/Bonnet | A105 or WCB | | | | A105 or WCB | | | | A105 or WCB | | | | A105 or WCB | | | | |
| Stem | 403SS or OHTARON®1* | | | | 403SS or OHTARON®1* | | | | 403SS or OHTARON®1* | | | | 403SS or OHTARON®1* | | | | |
| Disc | A105+HF or WCB+HF | | | | A105+HF or WCB+HF | | | | A105+HF or WCB+HF | | | | A105+HF or WCB+HF | | | | |
| Body Seat Ring | A105+HF or WCB+HF | | | | A105+HF or WCB+HF | | | | A105+HF or WCB+HF | | | | A105+HF or WCB+HF | | | | |
| Gland Packing | Flexible Graphite | | | | Flexible Graphite | | | | Flexible Graphite | | | | Flexible Graphite | | | | |
| Gasket | Flexible Graphite | | | | Flexible Graphite | | | | Flexible Graphite | | | | Flexible Graphite | | | | |
| P-T Rating | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | | |
| F-to-F Dimension | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | ASME B16.10 | | | | |
| Wall Thickness | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | | ASME B16.34 | | | | |
| Remarks | * Equivalent to SUS431 | | | | * Equivalent to SUS431 | | | | * Equivalent to SUS431 | | | | * Equivalent to SUS431 | | | | |

| Type | | Pressure Seal Bonnet Check | | | Pressure Seal Bonnet Check | | | Pressure Seal Bonnet Check | | |
|---------------------------------------|-----|---|-----|-----|--|-----|-----|---|-----|-----|
| Carbon & Low Alloy Steel Valves (GGC) | | 900  PSB | | | 1500  PSB | | | 2500  PSB | | |
| | | (W)900SCOSPSY | | | (W)1500SCOSPSY | | | (W)2500SCOSPSY | | |
| Fig | | (W)900SCOSPSY | | | (W)1500SCOSPSY | | | (W)2500SCOSPSY | | |
| End Connection | | ASME B16.25(BW) or B16.5(RF) | | | ASME B16.25(BW) or B16.5(RF) | | | ASME B16.25(BW) or B16.5(RF) | | |
| inch | mm | L | H | D | L | H | D | L | H | D |
| 2 | 50 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 2 1/2 | 65 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 3 | 80 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 4 | 100 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 6 | 150 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 8 | 200 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 10 | 250 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 12 | 300 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 14 | 350 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 16 | 400 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 18 | 450 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 20 | 500 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| 24 | 600 | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA | TBA |
| Body | | WCB | | | WCB | | | WCB | | |
| Bonnet/Cover | | A105 | | | A105 | | | A105 | | |
| Hinge Pin | | 403SS or OHTARON®1* | | | 403SS or OHTARON®1* | | | 403SS or OHTARON®1* | | |
| Disc | | A105+HF or F11+HF | | | A105+HF or F11+HF | | | A105+HF or F11+HF | | |
| Body Seat Ring | | A105+HF or F11+HF | | | A105+HF or F11+HF | | | A105+HF or F11+HF | | |
| Gasket | | Flexible Graphite | | | Flexible Graphite | | | Flexible Graphite | | |
| P-T Rating | | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | |
| F-to-F Dimension | | ASME B16.10 | | | ASME B16.10 | | | ASME B16.10 | | |
| Wall Thickness | | ASME B16.34 | | | ASME B16.34 | | | ASME B16.34 | | |
| Remarks | | * Equivalent to SUS431 | | | * Equivalent to SUS431 | | | * Equivalent to SUS431 | | |

General Design Specifications

| Items | American Standard | | British Standard |
|--|-------------------------------|-----------------|---|
| | Bolted Bonnet | Pressure Seal | |
| Shell Wall Thickness and General Valve Design | API 600 API 623 API 594 | ASME B 16.34 | BS/ISO 10434 (Gate Valve) BS 1873 (Globe Valve) BS 1868 (Check Valve) |
| Pressure-Temperature Rating | ASME B16.34 | | BS EN 1759-1 |
| Face to Face Dimensions End to End Dimensions | ASME B16.10 | | BS EN 558-1 |
| End Flange Dimensions Gasket Contact Facing | ASME B16.5* | | BS EN 1759-1 |
| Weld End Dimensions | ASME B16.25 | | BS/ISO 10434 (Gate Valve) BS 1873 (Globe Valve) BS 1868 (Check Valve) |

* End Flange Dimensions of Nominal Size 22 is MSS SP-44 and ASME B16.47 Series B for Nominal Size 26 and larger.

Valve Shell Materials

Besides the standard material of ASTM A216 WCB, KITZ cast steel valves are optionally available in materials listed below.

| ASTM Specification | Material Designation | Working Temperature ^{*1} °F (°C) | KITZ Code |
|---------------------|----------------------|---|-----------|
| A216 WCB / A216 WCC | Carbon Steel | 1000 (538) Maximum | - |
| A217 WC1 | C-1/2 Mo | | 1C |
| A217 WC6 | 11/4 Cr-1/2 Mo | 1100 (593) Maximum | 6C |
| A217 WC9 | 21/4 Cr-1Mo | | 9C |
| A217 C5 | 5Cr-1/2 Mo | 1200 (649) Maximum | 5C |
| A217 C12 | 9Cr-1Mo | | 12C |
| A352 LCB | Carbon Steel | -50 (-46) Minimum | BL |
| A352 LCC | Carbon Steel | | CL |
| A352 LC1 | C-1/2 Mo | -75 (-59) Minimum | 1L |
| A352 LC2 | 21/2 Ni -100 | -100 (-73) Minimum | 2L |
| A352 LC3 | 31/2 Ni -150 | -150 (-101) Minimum | 3L |

For ASTM A351 Austenitic Stainless Steel, refer to Stainless Steel Section (SS).

*1 Refer to ASME B16.34 for details of ASTM A216, A217 and A352 Pressure-temperature ratings. (See page CS15 for A216 and A217)

Minimum Working Temperature of ASTM A352 is in accordance with ASME B31.3.

*2 Maximum and minimum temperature of the valve will vary, depending on the pressure class and temperature range of the seal material.

KITZ Low Temperature Service Valves

KITZ Corporation offers Class 150, 300 and 600 API 600 design low alloy steel valves for low temperature service down to -150°F (-101°C). Detailed design information is available on request.

Valve Trim Materials

API 600/623/594 specifies the following valve components as valve trim:

| Description | Gate Valve | Globe Valve | Check Valve |
|------------------------|----------------------|-------------|-------------|
| Disc seat Surface | ● | ● | ● |
| Body seat Surface | ● | ● | ● |
| Bonnet Bush (Backseat) | ● | ● | - |
| Stem | ● | ● | - |
| Others | Internal Small Parts | Lock Nut | Hinge Pin |
| Specified by | API 600 | API 623 | API 594 |

Disc Seat and Body Seat

Following trims specified in API 600 Table 8 are available with KITZ, either as standard or an option. Composition of combination in trims, which employs different seating surface materials for disc seat and body seat, shall be arranged at manufacturer's discretion, unless specified in advance.

| Combination Number | Material Description | Brinell Hardness |
|--------------------|---------------------------|----------------------------|
| 5. | HF / HF | 350HB min. |
| 8. | 13Cr / HF | 250HB min. / 350HB min. |
| 11.* | Ni-Cu alloy (Monel) / HF | Not specified / 350HB min. |
| 12.* | 18Cr-8Ni-Mo (316) / HF | Not specified / 350HB min. |
| 14.* | 19Cr-29Ni (Alloy 20) / HF | Not specified / 350HB min. |

*Optionally available.


HF: Co-Cr-W Alloy (Stellite No.6) deposited.

Stems and Bonnet Bushing (Backseat Bushing)

ASTM A182 (F6a) is our standard material for stems and bonnet bushing. Other materials including ASTM A182 (F304), A182 (F316), Monel and Alloy 20 are available on your specific request.

Body Seat Rings

Body seat rings of KITZ cast steel valves are mounted on the valve body by seal welding as illustrated in below typical examples of gate valves. Unless specifically requested in advance, mounting of body seat rings shall be made at manufacturer's discretion. Please specify method of mounting, by mentioning adequate KITZ product code in your purchase orders.

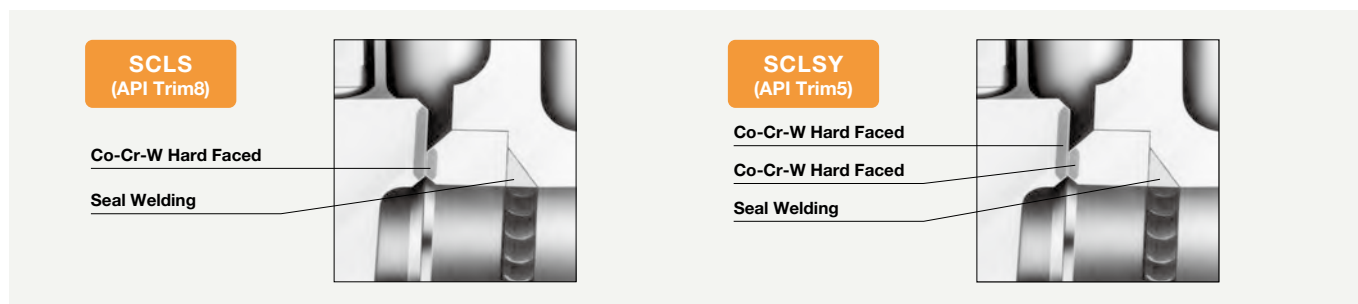

For standard shell material in KITZ cast steel valves made of ASTM A216 WCB, disc seats and body seat rings are provided to below. (Refer to Page CS2 for Product Coding)

| KITZ Product Code | Standard Disc Seat | Standard Body Seat | Mounting of Body Seat Rings |
|--|---|---|-----------------------------|
| SCLS (Gate) SCJS (Globe) SCOS (Check) SCOHS (Check) | F6a or WCB + 13Cr or A105 + 13Cr or CA15 | A105 + HF* or A106 Gr. B + HF* or AISI 1022 + HF* or Direct HF** | Seal Welded or Direct HF** |
| SCLSY (Gate) SCJSY (Globe) SCOSY (Check) SCOHSY (Check) | A105 + HF* or WCB + HF* or CA15 + HF* | A105 + HF* or A106 Gr. B + HF* or AISI 1022 + HF* or Direct HF** | Seal Welded or Direct HF** |

* Co-Cr-W Alloy deposited for hard facing.

** Co-Cr-W Alloy is directly deposited on valve body for hard facing.

KITZ Product Code 900SCJS, 900SCJSY, 1500SCJS and 1500SCJSY globe valves employ this hard facing.

Bonnet Gasket Materials

Depending on class ratings and servicing conditions, following gasket materials are available for body/bonnet flange gaskets of KITZ cast steel valves. Please specify gasket material required in purchase order.


| Gasket Material | Class | | | | |
|--|-------|-----|-----|-----|------|
| | 150 | 300 | 600 | 900 | 1500 |
| Corrugated Metal with Flexible Graphite | ● | | | | |
| Ring Joint Material | | | ● | ● | ● |
| Spiral Wound Metal, Flexible Graphite Filled | | ● | ●* | | |
| Stainless Steel Inserted Flexible Graphite | ● | | | | |

Note: Refer to Page CS11 for bonnet gaskets used for KITZ low emission service valves.

*600 SCOHS: Spiral wound metal, graphite filled only.

Contact Face of Flanges

ASME B16.5 specifies several different types of contact face of flanges as illustrated below. Among them, KITZ cast steel valves employ 0.06 Raised Face (RF) for Class 150 and 300, and 0.25 Raised Face (RF) for higher pressure classes with an optional employment of ring-joint contact.

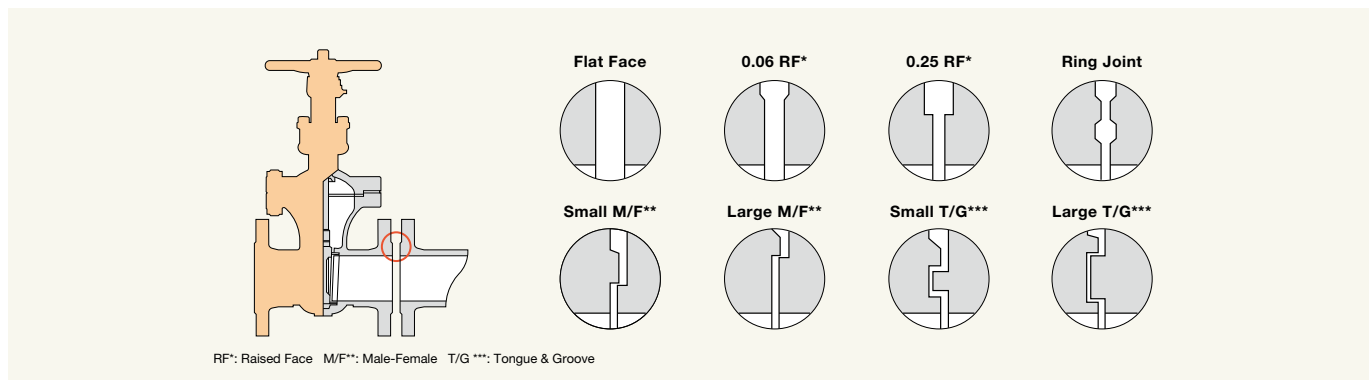

Gasket contact surface finish of end flanges as well as body-bonnet flanges depends on the materials selected for flange gaskets.

NACE Valves

For sour gas services and other hydrogen sulfide bearing hydrocarbon fluids, KITZ offers NACE valves made of component materials specially heat-treated and hardness-controlled to conform with NACE MR0103, KITZ Standard, or optionally NACE MR0175 Standard.

Typical NACE material configuration is shown below for KITZ cast steel gate valves.

KITZ NACE steel valves are available only as a specified option.

Note: NACE hardness requirements conflicts with the valve trim.

| Valve Parts | ASTM Specification | NACE Hardness |
|-------------------|--|-------------------|
| Body/bonnet | A216 WCB | ≤ HRC 22 (237 HB) |
| Disc | A216 WCB or AISI Type 410 or A217 CA15 | |
| Disc seat | *13Cr deposit or AISI Type 410 | |
| Gland | *AISI Type 410 | |
| Stem | | |
| Bonnet bushing | | |
| Body seat surface | HF** | ≥ 350 HB |
| Bonnet bolts | A193 B7 | - |
| | A193 B7M*** | ≤ HRC 22 |
| Bonnet nuts | A194 2H | - |
| | A194 2HM*** | ≤ HRC 22 |

*Double tempered. (Three step process)

**Co-Cr-W Alloy deposited for hard facing.

***General requirements to conform with NACE MR0175 Standard.

Users shall be aware its necessity to lower equipment pressure rating when using SSC-Resistant bolts and nuts.

Please contact KITZ for more information.

Inspection and Warranty Policy of KITZ Corporation


Every piece of KITZ cast carbon and low alloy steel valves is subjected to 100% pressure test, according to API 598 requirements. Manufacturer's material test reports and inspection certificates are available on request, while each valve is guaranteed for 12 months after installation in service, but not exceeding 18 months after shipment from the factories of KITZ Corporation.

Various tests and inspections of valves made by KITZ Corporation includes below. Unless otherwise specified, all KITZ cast steel valves shall be subjected to these tests or inspection methods and evaluation criteria.

| Test/Inspection Item | Method | Evaluation |
|----------------------------------|-----------------------------|----------------------|
| Chemical Composition Analysis | | Relevant ASTM Stds. |
| Mechanical Property Test | ASTM A370 / E8 | Relevant ASTM Stds. |
| Pressure Tests | API 598 | API 598 |
| Radiographic Inspection | ASTM E94 | ASME B16.34 |
| Wet Magnetic Particle Inspection | ASTM E709 | |
| Liquid Penetrant Inspection | ASTM E165 | |
| Low Temperature Impact Test | ASTM A370 / E23 | ASTM A352 |
| Dimensional Inspection | | Relevant Valve Stds. |
| Valve Inspection | | MSS SP-55 |
| Emission Test* | EPA Method 21 and KITZ Std. | KITZ Std. |

*Applicable to low emission service valves.

Typical KITZ Inspection Flow

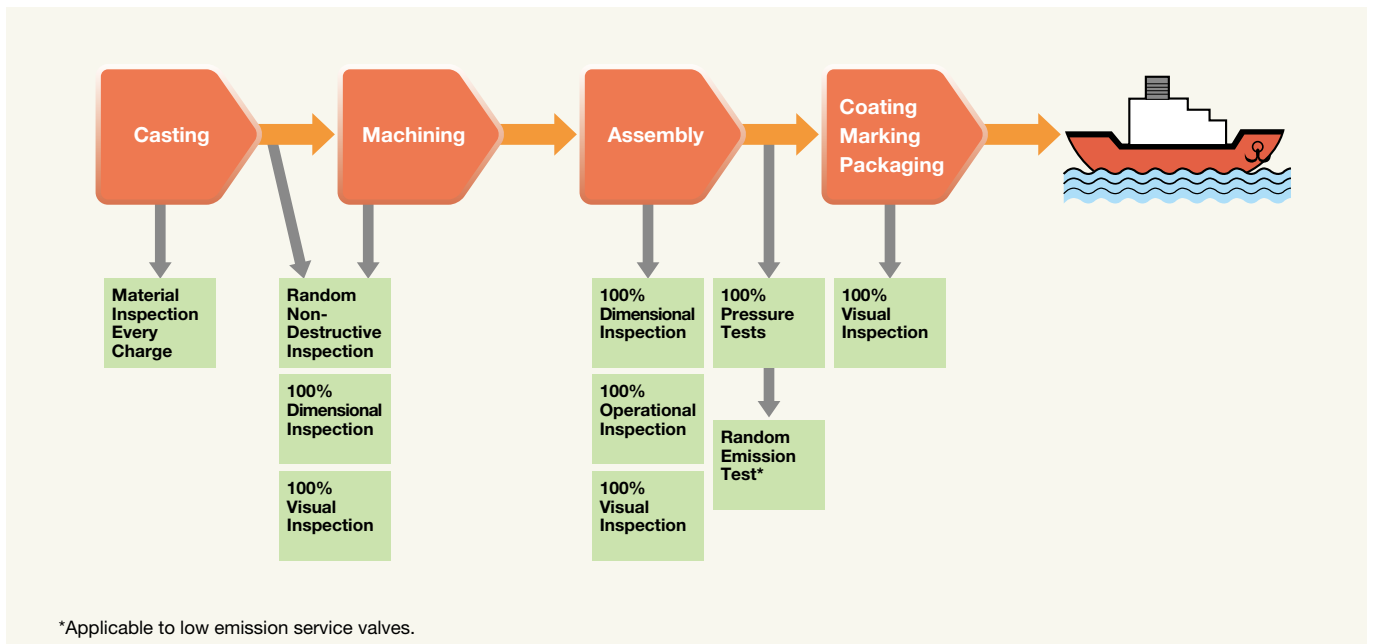

KITZ Low Emission Service Valves

In the United States, the Federal Clean Air Act was dramatically amended in 1990, to realize the new environmental protection policy of 95% reduction in fugitive emission or leak levels of toxic gases and chemicals from plant equipment. Promulgated in April, 1994, the new law requires all plants handling toxic gas specified by the Environmental Protection Agency, to periodically monitor their plant equipment for detection of leaks exceeding 500 ppm, and repair or replace all defective parts immediately. California has exceeded the Federal Law with State Regulation requiring 100 ppm maximum leak level for astonishing 99% reduction of such environmental pollution for the Northern California Region after 1997.

Our low emission valves, the proud fruits of several years of trial and error at our laboratory, are designed, engineered, manufactured and tested to now meet the 100 ppm maximum emission level. This is the standard specification in North America for KITZ flanged and butt-welding end carbon or low alloy steel valves rated Class 150, 300 and 600. In other markets, all these low emission valves are optionally available. Major design considerations for having upgraded our standard valves to the low emission performers are introduced below.

Gland Packing

KITZ's original "SEALEVER[®]" flexible graphite packing set, consisting of 4 dieformed flexible graphite rings* and 2 braided flexible graphite rings, combined with a spacer bush for Class 300 and above rated valves.

*US Patent No. 5522603 & 5573253. Other patents registered or pending worldwide.

Bonnet Gaskets (Including Check Valve Cover Gaskets)

Class 150 : Corrugated metal with flexible graphite and permeation protective barrier for low emission service

Class 300 : Spiral wound (flexible graphite filler and stainless steel hoop) with a stainless steel inner ring

Class 600 & above : Ring joint metal gasket

*Class 600 SCOHS: Spiral wound. (flexible graphite filler and stainless steel hoop)

Diametrical Interface Clearance

20 to 32 mils (0.5 to 0.8 mm) : Stem to gland

20 to 32 mils (0.5 to 0.8 mm) : Stem to bonnet bushing

4 to 12 mils (0.1 to 0.3 mm) : Gland to stuffing boxes

Stem

16 to 32 RMS surface finish. Straightness and roundness are precisely controlled according to KITZ design and manufacturing standards.

Stuffing Box

Maximum 125 RMS surface finish. Cylindricity and verticality are precisely controlled according to KITZ design and manufacturing standards.

Plug Gaskets for Check Valves

Class 150/300 : Flexible graphite sheet with stainless steel insert and permeation protective barrier.

Class 600 & above : Spiral wound metal with flexible graphite filled

*Except for the 150-600 SCOHS.

Product Identification

Stainless steel ID plate with the letters "LOW EMISSION" in orange is welded on the bonnet flanges.





YRT Emission Test Results

In addition to our in-house lab tests and certifications by Lloyd's Register of Shipping, a third-party performance test was carried out on a KITZ nominal size 6 Class 300 gate valve at Yarmouth Research and Technology, Maine, USA, according to one user's testing specifications. The test conditions included an unprecedented 3500 cycle operation of a 99% methane pressurized valve through thermal cycles at 350°F (177°C), with the valve stem positioned horizontally to the ground, and the leak level was monitored at every 100 cycles, from an aluminum foil housing sealed the valve gland area. In spite of these severe test conditions, the results were in close agreement with findings from the tests made at our laboratory over the last several years.

Design Features of KITZ Gate Valve Wedges (Discs)

Among four different shapes of wedge gates recognized by API 600 Paragraph 5.6.1.1 and 5.6.1.2, KITZ has adopted solid wedges for smaller valves such as nominal size 2 to 4 of Class 900/1500 gate valves, and flexible wedges for all other sizes of all pressure classes.

H-shaped flexible wedges are featured with mechanical flexibility to adjust its own shape following the shape of body seats for tightly secured mutual contact. This is particularly important when larger gate valves are served in extremely high pressure and temperature, where temporary deformation of the valve body always occurs. Operational torque is smaller, seat wear is less and valve closure is tighter when H-shaped flexible wedges are adopted.

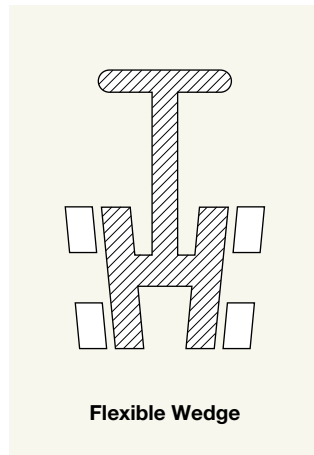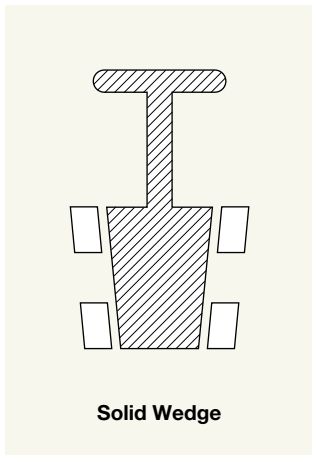

Solidly designed KITZ wedge gates are forged or cast solid, single piece of steel without any welding work. Specially heat-treated wedges are firmly coupled with integral T-head of the valve stems, which are also ruggedly designed and specially heat-treated for the highest possible durability of stem to wedge connection. API 600 Paragraph 5.8.7 particularly emphasizes the importance of the mechanical strength of this connection.

As another unique feature, KITZ wedge gates are designed for always accurately maintained concentricity and carefully lapped for leakfree contact.



Side View





Front View



Stem-to-Wedge Connection

Design

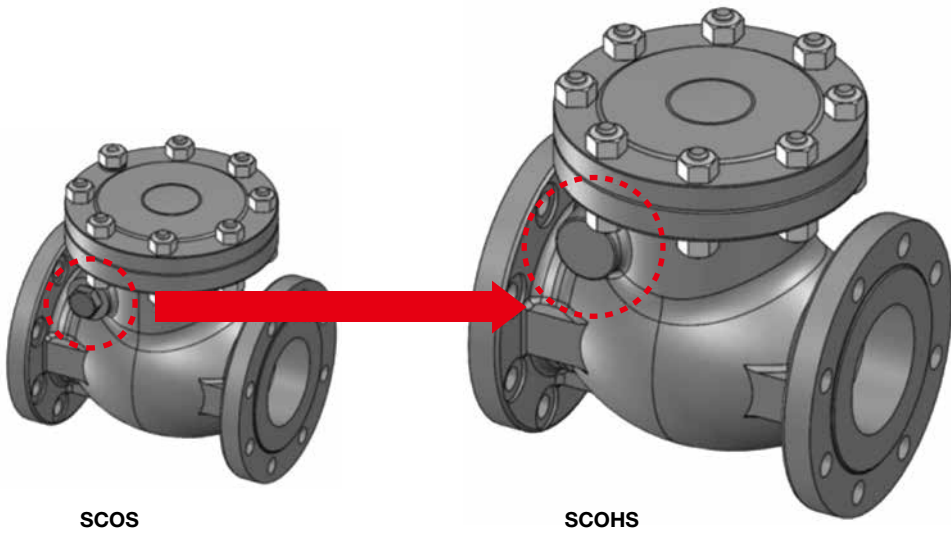


Features

- Designed according to **API594 (2017) (except 11/2^B)**
- No risk of leakage from hinge pin plug
- Anti-Rotation disc design
- Same F to F dimension with current KITZ check valves
- Same flow rate as SCOS


Body Disc Connection

Disc Hanger Type



6^B and smaller


Body Fix Type




8^B and larger

Pressure Seal Bonnet Valve


Gate Valve

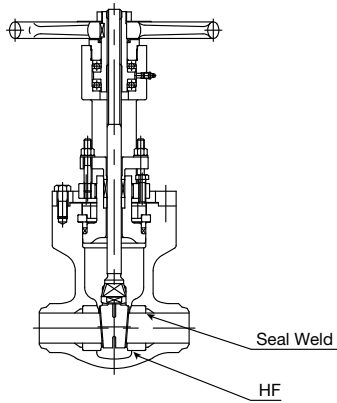

Globe Valve

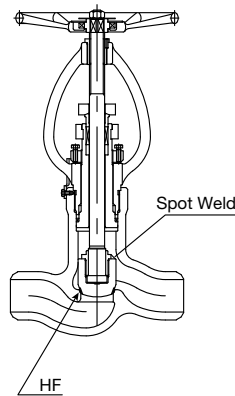

Check Valve



| Parts | Materials |
|----------------|--|
| Body | A216 Gr.WCB |
| Bonnet | Up to 200A: A105 250A & over: A216 Gr.WCB |
| Stem | SUS403 or OHTARON®1 |
| Disc | Up to 250A: A105+HF* 300A & over: A216 Gr.WCB+HF* |
| Gland Packing | Flexible Graphite |
| Gasket | Flexible Graphite |
| Body Seat Ring | A105+HF* |
| Handwheel | Ductile Iron |

| Parts | Materials |
|-----------|---------------------|
| Body | A216 Gr.WCB+ HF* |
| Bonnet | A105 |
| Stem | OHTARON®1 |
| Disc | A182 F11+ HF* |
| Packing | Flexible Graphite |
| Gasket | Flexible Graphite |
| Handwheel | SCPH2+SF440A |

| Parts | Materials |
|----------------|--|
| Body | A216 Gr.WCB |
| Cover | A105 |
| Disc | Up to 125A: 105+ HF* 150A and Over: A182 F11+ HF* |
| Gasket | Flexible Graphite |
| Body Seat Ring | Up to 125A A105+ HF* 150A and over: A182 F11+ HF* |

*HF: Hard facing with Co-Cr-W alloy
OHTARON® is a registered trademark of TVE Co.,Ltd.

Product Range

| Fig. | Nominal Size | DN | NPS | Valve Type | (mm) | | | | | | | | | | | | | | |
|-------------|--------------|----|-----|------------|------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|---|
| | | | | | 50 | 65 | 80 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 650 | | |
| | | | | | 2 | 2½ | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 24 | | |
| 900SCLSPSY | Gate | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| 1500SCLSPSY | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 2500SCLSPSY | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 900SCJSPSY | Globe | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | |
| 1500SCJSPSY | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | |
| 2500SCJSPSY | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | | | | | | |
| 900SCOSPSY | Check | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | |
| 1500SCOSPSY | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 2500SCOSPSY | | | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

For specification of gear operation, please contact KITZ for more information.

■ Design Standard: ASME B16.34
P-T rating: ASME B16.34
■ In case of gear operation, "G-" will be added in front of product codes

**Pressure - Temperature Ratings <For Reference Only>
Valves - Flanged and Welding End : Standard Class**

ASTM Material Standard-to ASME B16.34 2013

| Temperature | | Working Pressures by Class, psig | | | | | | | | | | | | | | |
|-------------|-----------|----------------------------------|---------|--------|---------|---------|-----------|---------|--------|---------|---------|-----------|---------|--------|---------|---------|
| | | Class 150 | | | | | Class 300 | | | | | Class 600 | | | | |
| °F | °C | WCB (a) | WC6 (b) | C5 (c) | C12 (c) | LCC (d) | WCB (a) | WC6 (b) | C5 (c) | C12 (c) | LCC (d) | WCB (a) | WC6 (b) | C5 (c) | C12 (c) | LCC (d) |
| -20 to 100 | -29 to 38 | 285 | 290 | 290 | 290 | 290 | 740 | 750 | 750 | 750 | 750 | 1,480 | 1,500 | 1,500 | 1,500 | 1,500 |
| 200 | 93 | 260 | 260 | 260 | 260 | 260 | 680 | 750 | 750 | 750 | 750 | 1,360 | 1,500 | 1,500 | 1,500 | 1,500 |
| 300 | 149 | 230 | 230 | 230 | 230 | 230 | 655 | 720 | 730 | 730 | 730 | 1,310 | 1,445 | 1,455 | 1,455 | 1,455 |
| 400 | 204 | 200 | 200 | 200 | 200 | 200 | 635 | 695 | 705 | 705 | 705 | 1,265 | 1,385 | 1,410 | 1,410 | 1,405 |
| 500 | 260 | 170 | 170 | 170 | 170 | 170 | 605 | 665 | 665 | 665 | 665 | 1,205 | 1,330 | 1,330 | 1,330 | 1,330 |
| 600 | 316 | 140 | 140 | 140 | 140 | 140 | 570 | 605 | 605 | 605 | 605 | 1,135 | 1,210 | 1,210 | 1,210 | 1,210 |
| 650 | 343 | 125 | 125 | 125 | 125 | 125 | 550 | 590 | 590 | 590 | 590 | 1,100 | 1,175 | 1,175 | 1,175 | 1,175 |
| 700 | 371 | 110 | 110 | 110 | 110 | 110 | 530 | 570 | 570 | 570 | 555 | 1,060 | 1,135 | 1,135 | 1,135 | 1,110 |
| 750 | 399 | 95 | 95 | 95 | 95 | 95 | 505 | 530 | 530 | 530 | 505 | 1,015 | 1,065 | 1,065 | 1,065 | 1,015 |
| 800 | 427 | 80 | 80 | 80 | 80 | 80 | 410 | 510 | 510 | 510 | 410 | 825 | 1,015 | 1,015 | 1,015 | 825 |
| 850 | 454 | 65 | 65 | 65 | 65 | 65 | 320 | 485 | 485 | 485 | 320 | 640 | 975 | 975 | 975 | 640 |
| 900 | 482 | 50 | 50 | 50 | 50 | 50 | 230 | 450 | 375 | 450 | 225 | 460 | 900 | 745 | 900 | 445 |
| 950 | 510 | 35 | 35 | 35 | 35 | 35 | 135 | 320 | 275 | 375 | 135 | 275 | 640 | 550 | 755 | 275 |
| 1000 | 538 | 20 | 20 | 20 | 20 | 20 | 85 | 215 | 200 | 255 | 85 | 170 | 430 | 400 | 505 | 170 |
| 1050 | 566 | | 20 | 20 | 20 | | | 145 | 145 | 170 | | | 290 | 290 | 345 | |
| 1100 | 593 | | 20 | 20 | 20 | | | 95 | 100 | 115 | | | 190 | 200 | 225 | |
| 1150 | 621 | | 20 | 20 | 20 | | | 65 | 60 | 75 | | | 130 | 125 | 150 | |
| 1200 | 649 | | 15 | 15 | 20 | | | 40 | 35 | 50 | | | 80 | 70 | 105 | |

| Temperature | | Working Pressures by Class, psig | | | | | | | | | | | | | | |
|-------------|-----------|----------------------------------|---------|--------|---------|---------|------------|---------|--------|---------|---------|------------|---------|--------|---------|---------|
| | | Class 900 | | | | | Class 1500 | | | | | Class 2500 | | | | |
| °F | °C | WCB (a) | WC6 (b) | C5 (c) | C12 (c) | LCC (d) | WCB (a) | WC6 (b) | C5 (c) | C12 (c) | LCC (d) | WCB (a) | WC6 (b) | C5 (c) | C12 (c) | LCC (d) |
| -20 to 100 | -29 to 38 | 2,220 | 2,250 | 2,250 | 2,250 | 2,250 | 3,705 | 3,750 | 3,750 | 3,750 | 3,750 | 6,170 | 6,250 | 6,250 | 6,250 | 6,250 |
| 200 | 93 | 2,035 | 2,250 | 2,250 | 2,250 | 2,250 | 3,395 | 3,750 | 3,750 | 3,750 | 3,750 | 5,655 | 6,250 | 6,250 | 6,250 | 6,250 |
| 300 | 149 | 1,965 | 2,165 | 2,185 | 2,185 | 2,185 | 3,270 | 3,610 | 3,640 | 3,640 | 3,640 | 5,450 | 6,015 | 6,070 | 6,070 | 6,070 |
| 400 | 204 | 1,900 | 2,080 | 2,115 | 2,115 | 2,110 | 3,170 | 3,465 | 3,530 | 3,530 | 3,520 | 5,280 | 5,775 | 5,880 | 5,880 | 5,865 |
| 500 | 260 | 1,810 | 1,995 | 1,995 | 1,995 | 1,995 | 3,015 | 3,325 | 3,325 | 3,325 | 3,325 | 5,025 | 5,540 | 5,540 | 5,540 | 5,540 |
| 600 | 316 | 1,705 | 1,815 | 1,815 | 1,815 | 1,815 | 2,840 | 3,025 | 3,025 | 3,025 | 3,025 | 4,730 | 5,040 | 5,040 | 5,040 | 5,040 |
| 650 | 343 | 1,650 | 1,765 | 1,765 | 1,765 | 1,765 | 2,745 | 2,940 | 2,940 | 2,940 | 2,940 | 4,575 | 4,905 | 4,905 | 4,905 | 4,905 |
| 700 | 371 | 1,590 | 1,705 | 1,705 | 1,705 | 1,665 | 2,665 | 2,840 | 2,840 | 2,840 | 2,775 | 4,425 | 4,730 | 4,730 | 4,730 | 4,630 |
| 750 | 399 | 1,520 | 1,595 | 1,595 | 1,595 | 1,520 | 2,535 | 2,660 | 2,660 | 2,660 | 2,535 | 4,230 | 4,430 | 4,430 | 4,430 | 4,230 |
| 800 | 427 | 1,235 | 1,525 | 1,525 | 1,525 | 1,235 | 2,055 | 2,540 | 2,540 | 2,540 | 2,055 | 3,430 | 4,230 | 4,230 | 4,230 | 3,430 |
| 850 | 454 | 955 | 1,460 | 1,460 | 1,460 | 955 | 1,595 | 2,435 | 2,435 | 2,435 | 1,595 | 2,655 | 4,060 | 4,060 | 4,060 | 2,655 |
| 900 | 482 | 690 | 1,350 | 1,120 | 1,350 | 670 | 1,150 | 2,245 | 1,870 | 2,245 | 1,115 | 1,915 | 3,745 | 3,115 | 3,745 | 1,855 |
| 950 | 510 | 410 | 955 | 825 | 1,130 | 410 | 685 | 1,595 | 1,370 | 1,885 | 685 | 1,145 | 2,655 | 2,285 | 3,145 | 1,145 |
| 1000 | 538 | 255 | 650 | 595 | 760 | 255 | 430 | 1,080 | 995 | 1,270 | 430 | 715 | 1,800 | 1,655 | 2,115 | 715 |
| 1050 | 566 | | 430 | 430 | 515 | | | 720 | 720 | 855 | | | 1,200 | 1,200 | 1,430 | |
| 1100 | 593 | | 290 | 300 | 340 | | | 480 | 495 | 565 | | | 800 | 830 | 945 | |
| 1150 | 621 | | 195 | 185 | 225 | | | 325 | 310 | 375 | | | 545 | 515 | 630 | |
| 1200 | 649 | | 125 | 105 | 155 | | | 205 | 170 | 255 | | | 345 | 285 | 430 | |


- (a) Upon prolonged exposure to temperatures above 800°F, the carbide phase of steel may be converted to graphite. Permissible, but not recommended for prolonged use above 800°F
- (b) Use normalized and tempered material only. Permissible, but not recommended for prolonged use above 1100°F
- (c) Use normalized and tempered material only.
- (d) Not to be used over 650°F.

CS Carbon Steel





KITZ

GENERAL CATALOG





Technical Information

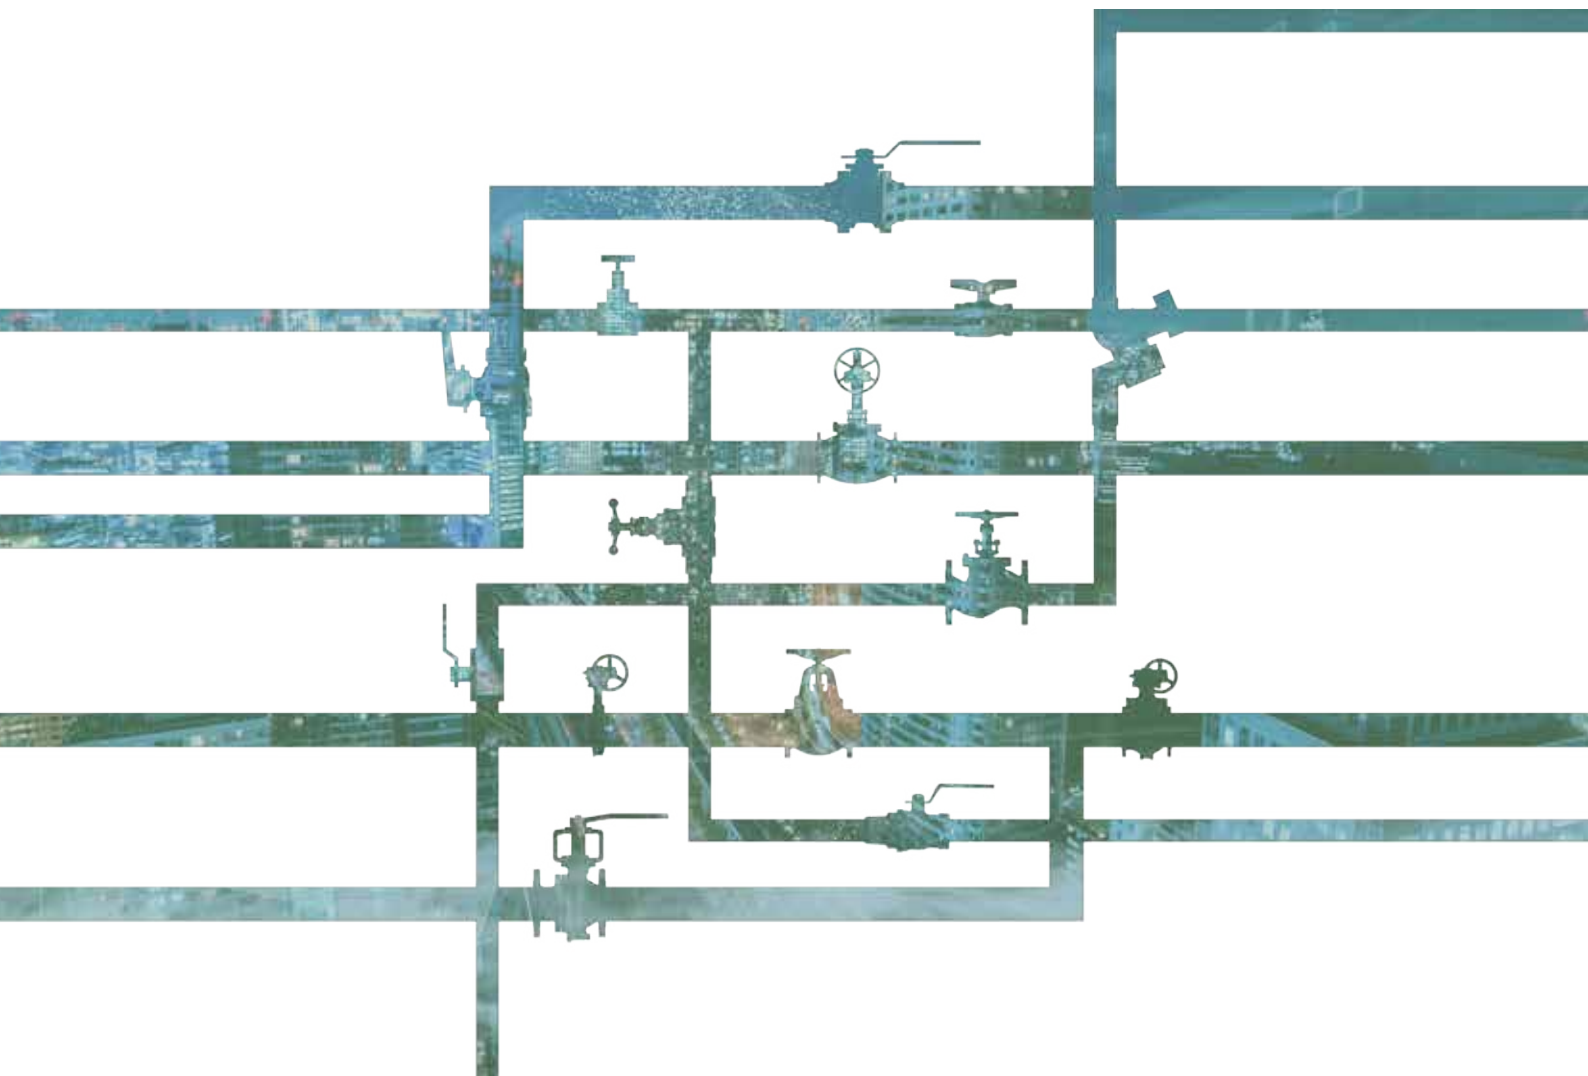

3-way Ball Valve Switching Form and Fluid Flow
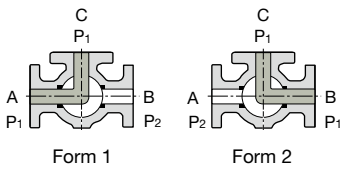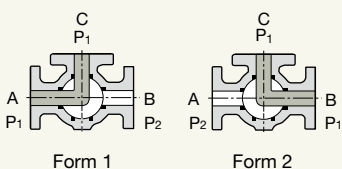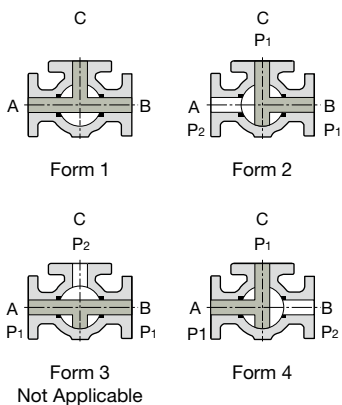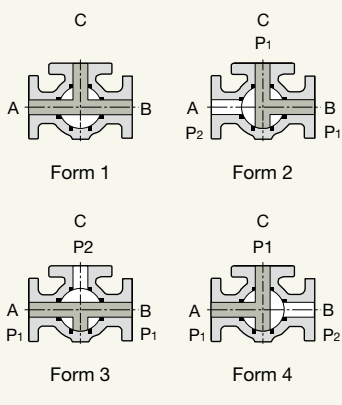
| Valve Design | Form | Fluid Passage |
|---------------------------------------|--|---|
| 3-Way 2-Seat L-Port Ball Valve | <p style="text-align: center;">Top View</p>  <p style="text-align: center;">Form 1 Form 2</p> | <p>1 Flow in Form 1 is between Ports "A" and "C". Flow in Form 2 is between Ports "B" and "C". The flow paths in Form 1 and Form 2 can be exchanged.</p> <p>2 When the fluid pressure P2 in the closed path is higher than P1 in the open path, slight fluid leakage may occur to P1 through the ball seat of the closed path.</p> |
| 3-Way 4-Seat L-Port Ball Valve | <p style="text-align: center;">Top View</p>  <p style="text-align: center;">Form 1 Form 2</p> | <p>1 Flow in Form 1 is between Ports "A" and "C". Flow in Form 2 is between Ports "B" and "C". The flow paths in Form 1 and Form 2 can be exchanged.</p> <p>2 When the fluid pressure P2 in the closed path is higher than P1 in the open path, slight fluid leakage may occur to P1 through the ball seat of the closed path.</p> |
| 3-Way 2-Seat T-Port Ball Valve | <p style="text-align: center;">Top View</p>  <p style="text-align: center;">Form 1 Form 2</p> <p style="text-align: center;">Form 3 Form 4</p> <p style="text-align: center;">Not Applicable</p> | <p>1 In Form 1, all ports are open. Flow in Form 2 is between Ports "B" and "C". Flow in Form 4 is between Ports "A" and "C". Flow can be switched from Form 1 to Form 2, (standard operation pattern) or from Form 1 to Form 4 in either direction. The stopper is assembled for the standard operation pattern.</p> <p>2 When the fluid pressure P2 in the closed path is higher than P1 in the open path, slight fluid leakage may occur to P1 through the ball seat of the closed path.</p> <p>Available operation patterns</p> <ul style="list-style-type: none"> • Pattern 1: From Form 4 to Form 1 • Pattern 2: From Form 1 to Form 2 (Standard) <p>Please select one of the above operation patterns when ordering.</p> |
| 3-Way 4-Seat T-Port Ball Valve | <p style="text-align: center;">Top View</p>  <p style="text-align: center;">Form 1 Form 2</p> <p style="text-align: center;">Form 3 Form 4</p> | <p>1 In Form 1, all ports are open. Flow in Form 2 is between Ports "B" and "C". Flow in Form 3 is between Ports "A" and "B". Flow in Form 4 is between Ports "A" and "C". All forms are available for switching, diverging, or mixing of flows. The stopper is assembled for a standard operation pattern to switch flow from Form 1 to Form 2.</p> <p>2 When the fluid pressure P2 in the closed path is higher than P1 in the open path, slight fluid leakage may occur to P1 through the ball seat of the closed path.</p> <p>Available operation patterns</p> <ul style="list-style-type: none"> • Pattern 1: From Form 4 to Form 1 • Pattern 2: From Form 1 to Form 2 (Standard) • Pattern 3: From Form 3 to Form 4 • Pattern 4: From Form 2 to Form 3 <p>Please select one of the above operation patterns when ordering.</p> |

3-way Ball Valve Switching Form and Fluid Flow
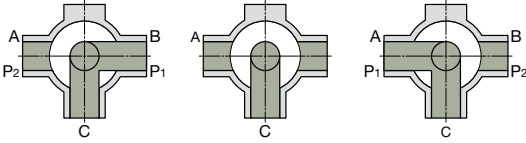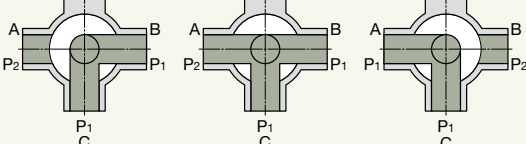
| Valve Design | Form | Fluid Passage |
|--|--|---|
| <p>Vertical 3-Way 2-Seated L-Port</p> | <p style="text-align: center;">Plane View</p>  <p style="text-align: center;">Front View</p>  <p style="text-align: center;">Form 1 Form 2 Form 3</p> <p style="text-align: center;">0° Position 90° Position 180° Position</p> | <ol style="list-style-type: none"> 1 Switch from Form 1 to Form 3 in turning the ball 180 deg., B ⇔ C become A ⇔ C. 2 Switch from Form 1 to Form 2 in turning the ball 90 deg., C port become close. Seat leakage will occur when C port pressure is higher than other port. 3 Seat leakage will occur when P₂ pressure is higher than P₁ pressure on Form. 1 and Form 3. |
| <p>Vertical 3-Way 2-Seated T-Port</p> | <p style="text-align: center;">Plane View</p>  <p style="text-align: center;">Front View</p>  <p style="text-align: center;">Form 1 Form 2 Form 3</p> <p style="text-align: center;">0° Position 90° Position 180° Position</p> | <ol style="list-style-type: none"> 1 Switch from Form 1 to Form 3 in turning the ball 180 deg., B ⇔ C become A ⇔ C. 2 Switch from Form 1 to Form 2 in turning the ball 90 deg., Port A, B and C will be able to flow any direction. 3 Seat leakage will occur when P₂ pressure is higher than P₁ pressure on Form. 1 and Form 3. |

Specification of Standard Strainer Screen

| Strainer Type | Standard Specification | Option |
|--|---|---|
| Bronze Strainer | 60° Perforated Stainless Steel Sheet | 40 · 60 · 80 · 100 · 120 · 150 · 200 Mesh (Stainless Steel Wired Mesh reinforced by perforated sheet.) |
| Casi Iron, Ductile Iron (Excluding Class 20K) Y Strainer | 60° Perforated Stainless Steel Sheet | 20 · 30 · 40 · 60 · 80 · 100 Mesh (Stainless Steel Wired Mesh reinforced by perforated sheet.) |
| Ductile Iron (Class 20K), Stainless Steel, Carbon Steel Y Strainer | 40 Mesh (Stainless Steel Wired Mesh reinforced by perforated sheet.) | 20 · 30 · 60 · 80 · 100 Mesh (Stainless Steel Wired Mesh reinforced by perforated sheet.) |
| Casi Iron U Strainer | 60° Perforated Stainless Steel Sheet | 20 · 40 · 60 · 80 · 100 · 120 Mesh |

* Please inquire separately for other mesh support than those listed below.

Please refer to following perforation diameter, pitch and screen opening for 60° Perforated SS Sheet & SS Wired Mesh reinforced by Perforated Sheet

| | Nominal Size | | 60° Perforated SS Sheet | | | SS Wired Mesh reinforced by perforated sheet | | |
|--------|--------------|-----------|-------------------------|--------|--------------------|--|--------|--------------------|
| | mm | inch | A (φ) | P (mm) | Screen Opening (%) | A (φ) | P (mm) | Screen Opening (%) |
| Y Type | 8 ~ 20 | 1/4 ~ 3/4 | 1.4 | 2.4 | 28.5 | 2.0 | 3.0 | 40.3 |
| | 25 ~ 50 | 1 ~ 2 | | | | 3.0 | 4.0 | 51.0 |
| | 65 ~ 125 | 2 1/2 ~ 5 | 1.5 | 2.5 | 32.7 | 6.0 | 8.0 | 51.0 |
| | 150 ~ 200 | 6 ~ 8 | 3.0 | 5.0 | 32.7 | 8.0 | 10.0 | 58.0 |
| | 250 ~ 350 | 10 ~ 14 | 5.0 | 7.0 | 46.4 | 10.0 | 13.0 | 53.7 |
| U Type | 50 ~ 100 | 2 ~ 4 | 1.5 | 2.5 | 32.7 | - | - | - |



* Please refer to the drawing for A (φ) & P (mm) of the multi-perforation.

Selecting Y-Strainer · Screen

Strainer is designed to remove foreign objects with a screen equipped inside the strainer. However, it is necessary to select mesh of screen depending on service conditions for each fluid. Screens in Y-Strainers are perforated SS sheet and SS wired mesh reinforced by perforated sheet.


60° Perforated SS Sheet

Fineness is not referred to mesh number.
Perforated SS Sheet expressed in A x P.



SS Wired Mesh reinforced by Perforated Sheet

Mesh number indicates the number of wires per linear inch of wire filter cloth.

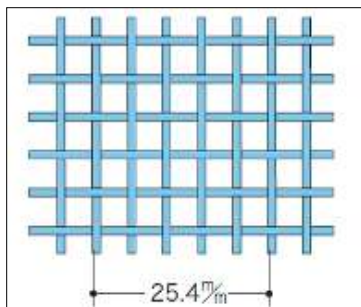

Mesh wire diameter and screen opening (Sizes of KITZ use)

| Mesh | Wire Number (SWG) | Wire Diameter (mm φ) | Sieve Size Opening (mm) | Open Area* (%) |
|------|-------------------|----------------------|-------------------------|----------------|
| 10 | 22 | 0.40 | 2.14 | 71.0 |
| 20 | 32 | 0.26 | 1.01 | 63.2 |
| 30 | 35 | 0.22 | 0.62 | 59.4 |
| 40 | 36.5 | 0.16 | 0.47 | 55.7 |
| 60 | 38 | 0.15 | 0.27 | 41.3 |
| 80 | 40 | 0.12 | 0.20 | 39.1 |
| 100 | 42 | 0.10 | 0.15 | 36.0 |

* Open area is the proportion of total screen area that is open space. It is given as a percentage.

Standard Velocity of Fluids

| | Fluid | Velocity (m/s) | Pressure Loss (kPa) |
|--------|------------------|----------------|---------------------|
| Liquid | Water | 1.5~2.5 | 0.5~15 |
| | Industrial Water | 1.0~3.0 | 2.0~20 |
| | Sea Water | 1.5~2.0 | 0.5~10 |
| | Piston Pump | 0.5~1.0 | 0.5~3 |
| | Centrifugal Pump | 2.0~2.5 | 10~15 |
| Gas | Compressed Air | 0.2~0.4MPa (G) | 15 |
| | | 0.2~0.4MPa (G) | 30 |
| | | 1.0~2.0MPa (G) | 15 |
| | | 1.0~2.0MPa (G) | 30 |
| Vapor | Saturation Vapor | 0.2~1.0MPa (G) | 15 |
| | | 0.2~1.0MPa (G) | 30 |

*1 For reference

*2 Compressed air is normal temperature (20°C).

MPa → kgf/cm²
(1MPa=10.19716kgf/cm²)

| 0.1~50 | | 5.1~10.0 | | 10.5~35.0 | | 35.5~60.0 | | 60.5~85.0 | |
|--------|---------------------|----------|---------------------|-----------|---------------------|-----------|---------------------|-----------|---------------------|
| MPa | kgf/cm ² | MPa | kgf/cm ² | MPa | kgf/cm ² | MPa | kgf/cm ² | MPa | kgf/cm ² |
| 0.1 | 1.0197 | 5.1 | 52.006 | 10.5 | 107.07 | 35.5 | 362.00 | 60.5 | 616.93 |
| 0.2 | 2.0394 | 5.2 | 53.025 | 11.0 | 112.17 | 36.0 | 367.10 | 61.0 | 622.03 |
| 0.3 | 3.0591 | 5.3 | 54.045 | 11.5 | 117.27 | 36.5 | 372.20 | 61.5 | 627.13 |
| 0.4 | 4.0789 | 5.4 | 55.065 | 12.0 | 122.37 | 37.0 | 377.29 | 62.0 | 632.22 |
| 0.5 | 5.0986 | 5.5 | 56.084 | 12.5 | 127.46 | 37.5 | 382.39 | 62.5 | 637.32 |
| 0.6 | 6.1183 | 5.6 | 57.104 | 13.0 | 132.56 | 38.0 | 387.49 | 63.0 | 642.42 |
| 0.7 | 7.1380 | 5.7 | 58.124 | 13.5 | 137.66 | 38.5 | 392.59 | 63.5 | 647.52 |
| 0.8 | 8.1557 | 5.8 | 59.144 | 14.0 | 142.76 | 39.0 | 397.69 | 64.0 | 652.62 |
| 0.9 | 9.1774 | 5.9 | 60.163 | 14.5 | 147.86 | 39.5 | 402.79 | 64.5 | 657.72 |
| 1.0 | 10.197 | 6.0 | 61.163 | 15.0 | 152.96 | 40.0 | 407.89 | 65.0 | 662.82 |
| 1.1 | 11.217 | 6.1 | 62.203 | 15.5 | 158.06 | 40.5 | 412.98 | 65.5 | 667.91 |
| 1.2 | 12.237 | 6.2 | 63.222 | 16.0 | 163.15 | 41.0 | 418.08 | 66.0 | 673.01 |
| 1.3 | 13.256 | 6.3 | 64.242 | 16.5 | 168.25 | 41.5 | 423.18 | 66.5 | 678.11 |
| 1.4 | 14.276 | 6.4 | 65.262 | 17.0 | 173.35 | 42.0 | 428.28 | 67.0 | 683.21 |
| 1.5 | 15.296 | 6.5 | 66.282 | 17.5 | 178.45 | 42.5 | 433.38 | 67.5 | 688.31 |
| 1.6 | 16.315 | 6.6 | 67.301 | 18.0 | 183.55 | 43.0 | 438.48 | 68.0 | 693.41 |
| 1.7 | 17.335 | 6.7 | 68.321 | 18.5 | 188.65 | 43.5 | 443.58 | 68.5 | 698.51 |
| 1.8 | 18.355 | 6.8 | 69.341 | 19.0 | 193.75 | 44.0 | 448.68 | 69.0 | 703.60 |
| 1.9 | 19.375 | 6.9 | 70.360 | 19.5 | 198.84 | 44.5 | 453.77 | 69.5 | 708.70 |
| 2.0 | 20.394 | 7.0 | 71.380 | 20.0 | 203.94 | 45.0 | 458.87 | 70.0 | 713.80 |
| 2.1 | 21.414 | 7.1 | 72.400 | 20.5 | 209.04 | 45.5 | 463.97 | 70.5 | 718.90 |
| 2.2 | 22.434 | 7.2 | 73.420 | 21.0 | 214.14 | 46.0 | 469.07 | 71.0 | 724.00 |
| 2.3 | 23.453 | 7.3 | 74.439 | 21.5 | 219.24 | 46.5 | 474.17 | 71.5 | 729.10 |
| 2.4 | 24.473 | 7.4 | 75.459 | 22.0 | 224.34 | 47.0 | 479.27 | 72.0 | 734.20 |
| 2.5 | 25.493 | 7.5 | 76.479 | 22.5 | 229.44 | 47.5 | 484.37 | 72.5 | 739.29 |
| 2.6 | 26.513 | 7.6 | 77.498 | 23.0 | 234.53 | 48.0 | 489.46 | 73.0 | 744.39 |
| 2.7 | 27.532 | 7.7 | 78.518 | 23.5 | 239.63 | 48.5 | 494.56 | 73.5 | 749.49 |
| 2.8 | 28.552 | 7.8 | 79.538 | 24.0 | 244.73 | 49.0 | 499.66 | 74.0 | 754.59 |
| 2.9 | 29.572 | 7.9 | 80.558 | 24.5 | 249.83 | 49.5 | 504.75 | 74.5 | 759.69 |
| 3.0 | 30.591 | 8.0 | 81.577 | 25.0 | 254.93 | 50.0 | 509.85 | 75.0 | 764.79 |
| 3.1 | 31.611 | 8.1 | 82.597 | 25.5 | 260.03 | 50.5 | 514.95 | 75.5 | 769.89 |
| 3.2 | 32.631 | 8.2 | 83.617 | 26.0 | 265.13 | 51.0 | 520.05 | 76.0 | 774.98 |
| 3.3 | 33.651 | 8.3 | 84.636 | 26.5 | 270.22 | 51.5 | 525.15 | 76.5 | 780.08 |
| 3.4 | 34.670 | 8.4 | 85.656 | 27.0 | 275.32 | 52.0 | 530.25 | 77.0 | 785.18 |
| 3.5 | 35.690 | 8.5 | 86.676 | 27.5 | 280.42 | 52.5 | 535.35 | 77.5 | 790.28 |
| 3.6 | 36.710 | 8.6 | 87.696 | 28.0 | 285.52 | 53.0 | 540.45 | 78.0 | 795.38 |
| 3.7 | 37.729 | 8.7 | 88.715 | 28.5 | 290.62 | 53.5 | 545.55 | 78.5 | 800.48 |
| 3.8 | 38.749 | 8.8 | 89.735 | 29.0 | 295.72 | 54.0 | 550.65 | 79.0 | 805.58 |
| 3.9 | 39.769 | 8.9 | 90.755 | 29.5 | 300.82 | 54.5 | 555.75 | 79.5 | 810.67 |
| 4.0 | 40.789 | 9.0 | 91.774 | 30.0 | 305.91 | 55.0 | 560.84 | 80.0 | 815.77 |
| 4.1 | 41.808 | 9.1 | 92.794 | 30.5 | 311.01 | 55.5 | 565.94 | 80.5 | 820.87 |
| 4.2 | 42.828 | 9.2 | 93.814 | 31.0 | 316.11 | 56.0 | 571.04 | 81.0 | 825.97 |
| 4.3 | 43.848 | 9.3 | 94.834 | 31.5 | 321.21 | 56.5 | 576.14 | 81.5 | 831.07 |
| 4.4 | 44.868 | 9.4 | 95.853 | 32.0 | 326.31 | 57.0 | 581.24 | 82.0 | 836.17 |
| 4.5 | 45.887 | 9.5 | 96.873 | 32.5 | 331.41 | 57.5 | 586.34 | 82.5 | 841.27 |
| 4.6 | 46.907 | 9.6 | 97.892 | 33.0 | 336.51 | 58.0 | 591.44 | 83.0 | 846.36 |
| 4.7 | 47.927 | 9.7 | 98.912 | 33.5 | 341.60 | 58.5 | 596.53 | 83.5 | 851.46 |
| 4.8 | 48.946 | 9.8 | 99.932 | 34.0 | 346.70 | 59.0 | 601.63 | 84.0 | 856.56 |
| 4.9 | 49.966 | 9.9 | 100.95 | 34.5 | 351.80 | 59.5 | 606.73 | 84.5 | 861.66 |
| 5.0 | 50.986 | 10.0 | 101.97 | 35.0 | 356.90 | 60.0 | 611.83 | 85.0 | 866.76 |

Pressure Conversion Table

$$\text{lb/in}^2 \rightarrow \text{kgf/cm}^2$$

$$(1\text{lb/in}^2=0.070307\text{kgf/cm}^2)$$

| 1~50 | | 51~100 | | 105~400 | | 410~900 | | 910~1700 | |
|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|---------------------|
| lb/in ² | kgf/cm ² | lb/in ² | kgf/cm ² | lb/in ² | kgf/cm ² | lb/in ² | kgf/cm ² | lb/in ² | kgf/cm ² |
| 1 | 0.07 | 51 | 3.59 | 105 | 7.38 | 410 | 28.83 | 910 | 63.98 |
| 2 | 0.14 | 52 | 3.66 | 110 | 7.73 | 420 | 29.53 | 920 | 64.68 |
| 3 | 0.21 | 53 | 3.73 | 115 | 8.09 | 430 | 30.23 | 930 | 65.39 |
| 4 | 0.28 | 54 | 3.80 | 120 | 8.44 | 440 | 30.93 | 940 | 66.09 |
| 5 | 0.35 | 55 | 3.87 | 125 | 8.79 | 450 | 31.64 | 950 | 66.79 |
| 6 | 0.42 | 56 | 3.94 | 130 | 9.14 | 460 | 32.34 | 960 | 67.49 |
| 7 | 0.49 | 57 | 4.01 | 135 | 9.49 | 470 | 33.04 | 970 | 68.20 |
| 8 | 0.56 | 58 | 4.08 | 140 | 9.84 | 480 | 33.75 | 980 | 68.90 |
| 9 | 0.63 | 59 | 4.15 | 145 | 10.19 | 490 | 34.45 | 990 | 69.60 |
| 10 | 0.70 | 60 | 4.22 | 150 | 10.55 | 500 | 35.15 | 1000 | 70.31 |
| 11 | 0.77 | 61 | 4.29 | 155 | 10.90 | 510 | 35.86 | 1010 | 71.01 |
| 12 | 0.84 | 62 | 4.36 | 160 | 11.25 | 520 | 36.56 | 1020 | 71.71 |
| 13 | 0.91 | 63 | 4.43 | 165 | 11.60 | 530 | 37.26 | 1030 | 72.42 |
| 14 | 0.98 | 64 | 4.50 | 170 | 11.95 | 540 | 37.97 | 1040 | 73.12 |
| 15 | 1.05 | 65 | 4.57 | 175 | 12.30 | 550 | 38.67 | 1050 | 73.82 |
| 16 | 1.12 | 66 | 4.64 | 180 | 12.66 | 560 | 39.37 | 1060 | 74.52 |
| 17 | 1.20 | 67 | 4.71 | 185 | 13.01 | 570 | 40.07 | 1070 | 75.23 |
| 18 | 1.27 | 68 | 4.78 | 190 | 13.36 | 580 | 40.78 | 1080 | 75.93 |
| 19 | 1.34 | 69 | 4.85 | 195 | 13.71 | 590 | 41.48 | 1090 | 76.63 |
| 20 | 1.41 | 70 | 4.92 | 200 | 14.06 | 600 | 42.18 | 1100 | 77.34 |
| 21 | 1.48 | 71 | 4.99 | 205 | 14.41 | 610 | 42.89 | 1120 | 78.74 |
| 22 | 1.55 | 72 | 5.06 | 210 | 14.76 | 620 | 43.59 | 1140 | 80.15 |
| 23 | 1.62 | 73 | 5.13 | 215 | 15.12 | 630 | 44.29 | 1160 | 81.56 |
| 24 | 1.69 | 74 | 5.20 | 220 | 15.47 | 640 | 45.00 | 1180 | 82.96 |
| 25 | 1.76 | 75 | 5.27 | 225 | 15.82 | 650 | 45.70 | 1200 | 84.37 |
| 26 | 1.83 | 76 | 5.34 | 230 | 16.17 | 660 | 46.40 | 1220 | 85.77 |
| 27 | 1.90 | 77 | 5.41 | 235 | 16.52 | 670 | 47.11 | 1240 | 87.18 |
| 28 | 1.97 | 78 | 5.48 | 240 | 16.87 | 680 | 47.81 | 1260 | 88.59 |
| 29 | 2.04 | 79 | 5.55 | 245 | 17.23 | 690 | 48.51 | 1280 | 89.99 |
| 30 | 2.11 | 80 | 5.62 | 250 | 17.58 | 700 | 49.21 | 1300 | 91.40 |
| 31 | 2.18 | 81 | 5.69 | 255 | 17.93 | 710 | 49.92 | 1320 | 92.80 |
| 32 | 2.25 | 82 | 5.77 | 260 | 18.28 | 720 | 50.62 | 1340 | 94.21 |
| 33 | 2.32 | 83 | 5.84 | 265 | 18.63 | 730 | 51.32 | 1360 | 95.62 |
| 34 | 2.39 | 84 | 5.91 | 270 | 18.98 | 740 | 52.03 | 1380 | 97.02 |
| 35 | 2.46 | 85 | 5.98 | 275 | 19.33 | 750 | 52.73 | 1400 | 98.43 |
| 36 | 2.53 | 86 | 6.05 | 280 | 19.69 | 760 | 53.43 | 1420 | 99.84 |
| 37 | 2.60 | 87 | 6.12 | 285 | 20.04 | 770 | 54.14 | 1440 | 101.24 |
| 38 | 2.67 | 88 | 6.19 | 290 | 20.39 | 780 | 54.84 | 1460 | 102.65 |
| 39 | 2.74 | 89 | 6.26 | 295 | 20.74 | 790 | 55.54 | 1480 | 104.05 |
| 40 | 2.81 | 90 | 6.33 | 300 | 21.09 | 800 | 56.25 | 1500 | 105.46 |
| 41 | 2.88 | 91 | 6.40 | 310 | 21.80 | 810 | 56.95 | 1520 | 106.87 |
| 42 | 2.95 | 92 | 6.47 | 320 | 22.50 | 820 | 57.65 | 1540 | 108.27 |
| 43 | 3.02 | 93 | 6.54 | 330 | 23.20 | 830 | 58.35 | 1560 | 109.68 |
| 44 | 3.09 | 94 | 6.61 | 340 | 23.90 | 840 | 59.06 | 1580 | 111.09 |
| 45 | 3.16 | 95 | 6.68 | 350 | 24.61 | 850 | 59.76 | 1600 | 112.49 |
| 46 | 3.23 | 96 | 6.75 | 360 | 25.31 | 860 | 60.46 | 1620 | 113.90 |
| 47 | 3.30 | 97 | 6.82 | 370 | 26.01 | 870 | 61.17 | 1640 | 115.30 |
| 48 | 3.37 | 98 | 6.89 | 380 | 26.72 | 880 | 61.87 | 1660 | 116.71 |
| 49 | 3.45 | 99 | 6.96 | 390 | 27.42 | 890 | 62.57 | 1680 | 118.12 |
| 50 | 3.52 | 100 | 7.03 | 400 | 28.12 | 900 | 63.28 | 1700 | 119.52 |

Pressure Conversion Table

Bar → kgf/cm²
(1Bar=1.019716kgf/cm²)

| 1~50 | | 51~100 | | 105~350 | | 355~600 | | 605~850 | |
|------|---------------------|--------|---------------------|---------|---------------------|---------|---------------------|---------|---------------------|
| Bar | kgf/cm ² | Bar | kgf/cm ² | Bar | kgf/cm ² | Bar | kgf/cm ² | Bar | kgf/cm ² |
| 1 | 1.0197 | 51 | 52.006 | 105 | 107.07 | 355 | 362.00 | 605 | 616.93 |
| 2 | 2.0394 | 52 | 53.025 | 110 | 112.17 | 360 | 367.10 | 610 | 622.03 |
| 3 | 3.0591 | 53 | 54.045 | 115 | 117.27 | 365 | 372.20 | 615 | 627.13 |
| 4 | 4.0789 | 54 | 55.065 | 120 | 122.37 | 370 | 377.29 | 620 | 632.22 |
| 5 | 5.0986 | 55 | 56.084 | 125 | 127.46 | 375 | 382.39 | 625 | 637.32 |
| 6 | 6.1183 | 56 | 57.104 | 130 | 132.56 | 380 | 387.49 | 630 | 642.42 |
| 7 | 7.1380 | 57 | 58.124 | 135 | 137.66 | 385 | 392.59 | 635 | 647.52 |
| 8 | 8.1557 | 58 | 59.144 | 140 | 142.76 | 390 | 397.69 | 640 | 652.62 |
| 9 | 9.1774 | 59 | 60.163 | 145 | 147.86 | 395 | 402.79 | 645 | 657.72 |
| 10 | 10.197 | 60 | 61.183 | 150 | 152.96 | 400 | 407.89 | 650 | 662.82 |
| 11 | 11.217 | 61 | 62.203 | 155 | 158.06 | 405 | 412.98 | 655 | 667.91 |
| 12 | 12.237 | 62 | 63.222 | 160 | 163.15 | 410 | 418.08 | 660 | 673.01 |
| 13 | 13.256 | 63 | 64.242 | 165 | 168.25 | 415 | 423.18 | 665 | 678.11 |
| 14 | 14.276 | 64 | 65.262 | 170 | 173.35 | 420 | 428.28 | 670 | 683.21 |
| 15 | 15.296 | 65 | 66.282 | 175 | 178.45 | 425 | 433.38 | 675 | 688.31 |
| 16 | 16.315 | 66 | 67.301 | 180 | 183.55 | 430 | 438.48 | 680 | 693.41 |
| 17 | 17.335 | 67 | 68.321 | 185 | 188.65 | 435 | 443.58 | 685 | 698.51 |
| 18 | 18.355 | 68 | 69.341 | 190 | 193.75 | 440 | 448.68 | 690 | 703.60 |
| 19 | 19.375 | 69 | 70.360 | 195 | 198.84 | 445 | 453.77 | 695 | 708.70 |
| 20 | 20.394 | 70 | 71.380 | 200 | 203.94 | 450 | 458.87 | 700 | 713.80 |
| 21 | 21.414 | 71 | 72.400 | 205 | 209.04 | 455 | 463.97 | 705 | 718.90 |
| 22 | 22.434 | 72 | 73.420 | 210 | 214.14 | 460 | 469.07 | 710 | 724.00 |
| 23 | 23.453 | 73 | 74.439 | 215 | 219.24 | 465 | 474.17 | 715 | 729.10 |
| 24 | 24.473 | 74 | 75.459 | 220 | 224.34 | 470 | 479.27 | 720 | 734.20 |
| 25 | 25.493 | 75 | 76.479 | 225 | 229.44 | 475 | 484.37 | 725 | 739.29 |
| 26 | 26.513 | 76 | 77.498 | 230 | 234.53 | 480 | 489.46 | 730 | 744.39 |
| 27 | 27.532 | 77 | 78.518 | 235 | 239.63 | 485 | 494.56 | 735 | 749.49 |
| 28 | 28.552 | 78 | 79.538 | 240 | 244.73 | 490 | 499.66 | 740 | 754.59 |
| 29 | 29.572 | 79 | 80.558 | 245 | 249.83 | 495 | 504.75 | 745 | 759.69 |
| 30 | 30.591 | 80 | 81.577 | 250 | 254.93 | 500 | 509.85 | 750 | 764.79 |
| 31 | 31.611 | 81 | 82.597 | 255 | 260.03 | 505 | 514.95 | 755 | 769.89 |
| 32 | 32.631 | 82 | 83.617 | 260 | 265.13 | 510 | 520.05 | 760 | 774.98 |
| 33 | 33.651 | 83 | 84.636 | 265 | 270.22 | 515 | 525.15 | 765 | 780.08 |
| 34 | 34.670 | 84 | 85.656 | 270 | 275.32 | 520 | 530.25 | 770 | 785.18 |
| 35 | 35.690 | 85 | 86.676 | 275 | 280.42 | 525 | 535.35 | 775 | 790.28 |
| 36 | 36.710 | 86 | 87.696 | 280 | 285.52 | 530 | 540.45 | 780 | 795.38 |
| 37 | 37.729 | 87 | 88.715 | 285 | 290.62 | 535 | 545.55 | 785 | 800.48 |
| 38 | 38.749 | 88 | 89.735 | 290 | 295.72 | 540 | 550.65 | 790 | 805.58 |
| 39 | 39.769 | 89 | 90.755 | 295 | 300.82 | 545 | 555.75 | 795 | 810.67 |
| 40 | 40.789 | 90 | 91.774 | 300 | 305.91 | 550 | 560.85 | 800 | 815.77 |
| 41 | 41.808 | 91 | 92.794 | 305 | 311.01 | 555 | 565.94 | 805 | 820.87 |
| 42 | 42.828 | 92 | 93.814 | 310 | 316.11 | 560 | 571.04 | 810 | 825.97 |
| 43 | 43.848 | 93 | 94.834 | 315 | 321.21 | 565 | 576.14 | 815 | 831.07 |
| 44 | 44.868 | 94 | 95.853 | 320 | 326.31 | 570 | 581.24 | 820 | 836.17 |
| 45 | 45.887 | 95 | 96.873 | 325 | 331.41 | 575 | 586.34 | 825 | 841.27 |
| 46 | 46.907 | 96 | 97.892 | 330 | 336.51 | 580 | 591.44 | 830 | 846.36 |
| 47 | 47.927 | 97 | 98.912 | 335 | 341.60 | 585 | 596.53 | 835 | 851.46 |
| 48 | 48.946 | 98 | 99.932 | 340 | 346.70 | 590 | 601.63 | 840 | 856.56 |
| 49 | 49.966 | 99 | 100.95 | 345 | 351.80 | 595 | 606.73 | 845 | 861.66 |
| 50 | 50.986 | 100 | 101.97 | 350 | 356.90 | 600 | 611.83 | 850 | 866.76 |

Temperature Conversion Table

| -459° ~ 0° | | | -1° ~ 60° | | | 61° ~ 290° | | | 300° ~ 890° | | | 900° ~ 3000° | | |
|------------|---------|--------|-----------|---------|-------|------------|---------|-------|-------------|---------|------|--------------|---------|------|
| °C | °C / °F | °F | °C | °C / °F | °F | °C | °C / °F | °F | °C | °C / °F | °F | °C | °C / °F | °F |
| -273 | -459 | | -17.2 | 1 | 33.8 | 16.1 | 61 | 141.8 | 149 | 300 | 572 | 482 | 900 | 1652 |
| -268 | -450 | | -16.7 | 2 | 35.6 | 16.7 | 62 | 143.6 | 154 | 310 | 590 | 488 | 910 | 1670 |
| -262 | -440 | | -16.1 | 3 | 37.4 | 17.2 | 63 | 145.4 | 160 | 320 | 608 | 493 | 920 | 1688 |
| -257 | -430 | | -15.6 | 4 | 39.2 | 17.8 | 64 | 147.2 | 166 | 330 | 626 | 499 | 930 | 1706 |
| -251 | -420 | | -15.0 | 5 | 41.0 | 18.3 | 65 | 149.0 | 171 | 340 | 644 | 504 | 940 | 1724 |
| -246 | -410 | | -14.4 | 6 | 42.8 | 18.9 | 66 | 150.8 | 177 | 350 | 662 | 510 | 950 | 1742 |
| -240 | -400 | | -13.9 | 7 | 44.6 | 19.4 | 67 | 152.6 | 182 | 360 | 680 | 516 | 960 | 1760 |
| -234 | -390 | | -13.3 | 8 | 46.4 | 20.0 | 68 | 154.4 | 188 | 370 | 698 | 521 | 970 | 1778 |
| -229 | -380 | | -12.8 | 9 | 48.2 | 20.6 | 69 | 156.2 | 193 | 380 | 716 | 527 | 980 | 1796 |
| -223 | -370 | | -12.2 | 10 | 50.0 | 21.1 | 70 | 158.0 | 196 | 390 | 734 | 532 | 990 | 1814 |
| -218 | -360 | | -11.7 | 11 | 51.8 | 21.7 | 71 | 159.8 | 204 | 400 | 752 | 538 | 1000 | 1832 |
| -212 | -350 | | -11.1 | 12 | 53.6 | 22.2 | 72 | 161.6 | 210 | 410 | 770 | 549 | 1020 | 1868 |
| -207 | -340 | | -10.6 | 13 | 55.4 | 22.8 | 73 | 163.4 | 216 | 420 | 788 | 560 | 1040 | 1904 |
| -201 | -330 | | -10.0 | 14 | 57.2 | 23.3 | 74 | 165.2 | 221 | 430 | 806 | 571 | 1060 | 1940 |
| -196 | -320 | | -9.4 | 15 | 59.0 | 23.9 | 75 | 167.0 | 227 | 440 | 824 | 582 | 1080 | 1976 |
| -190 | -310 | | -8.9 | 16 | 60.8 | 24.4 | 76 | 168.8 | 232 | 450 | 842 | 593 | 1100 | 2012 |
| -184 | -300 | | -8.3 | 17 | 62.6 | 25.0 | 77 | 170.6 | 238 | 460 | 860 | 604 | 1120 | 2048 |
| -179 | -290 | | -7.8 | 18 | 64.4 | 25.6 | 78 | 172.4 | 243 | 470 | 878 | 616 | 1140 | 2084 |
| -173 | -280 | | -7.2 | 19 | 66.2 | 26.1 | 79 | 174.2 | 249 | 480 | 896 | 627 | 1160 | 2120 |
| -169 | -273 | -459.4 | -6.7 | 20 | 68.0 | 26.7 | 80 | 176.0 | 254 | 490 | 914 | 638 | 1180 | 2156 |
| -168 | -270 | -454 | -6.1 | 21 | 69.8 | 27.2 | 81 | 177.8 | 260 | 500 | 932 | 649 | 1200 | 2192 |
| -162 | -260 | -436 | -5.6 | 22 | 71.6 | 27.8 | 82 | 179.6 | 266 | 510 | 950 | 660 | 1220 | 2228 |
| -157 | -250 | -418 | -5.0 | 23 | 73.4 | 28.3 | 83 | 181.4 | 271 | 520 | 968 | 671 | 1240 | 2264 |
| -151 | -240 | -400 | -4.4 | 24 | 75.2 | 28.9 | 84 | 183.2 | 277 | 530 | 986 | 682 | 1260 | 2300 |
| -146 | -230 | -382 | -3.9 | 25 | 77.0 | 29.4 | 85 | 185.0 | 282 | 540 | 1004 | 693 | 1280 | 2336 |
| -140 | -220 | -364 | -3.3 | 26 | 78.8 | 30.0 | 86 | 186.8 | 288 | 550 | 1022 | 704 | 1300 | 2372 |
| -134 | -210 | -346 | -2.8 | 27 | 80.6 | 30.6 | 87 | 188.6 | 293 | 560 | 1040 | 732 | 1350 | 2462 |
| -129 | -200 | -328 | -2.2 | 28 | 82.4 | 31.1 | 88 | 190.4 | 299 | 570 | 1058 | 760 | 1400 | 2552 |
| -123 | -190 | -310 | -1.7 | 29 | 84.2 | 31.7 | 89 | 192.2 | 304 | 580 | 1076 | 788 | 1450 | 2642 |
| -118 | -180 | -292 | -1.1 | 30 | 86.0 | 32.2 | 90 | 194.0 | 310 | 590 | 1094 | 816 | 1500 | 2732 |
| -112 | -170 | -274 | -0.6 | 31 | 87.8 | 32.8 | 91 | 195.8 | 316 | 600 | 1112 | 843 | 1550 | 2822 |
| -107 | -160 | -256 | -0.6 | 32 | 89.6 | 33.3 | 92 | 197.6 | 321 | 610 | 1130 | 871 | 1600 | 2912 |
| -101 | -150 | -238 | 0.0 | 33 | 91.4 | 33.9 | 93 | 199.4 | 327 | 620 | 1148 | 899 | 1650 | 3002 |
| -96 | -140 | -220 | 1.1 | 34 | 93.2 | 34.4 | 94 | 201.2 | 332 | 630 | 1166 | 927 | 1700 | 3092 |
| -90 | -130 | -202 | 1.7 | 35 | 95.0 | 35.0 | 95 | 203.0 | 338 | 640 | 1184 | 954 | 1750 | 3182 |
| -84 | -120 | -184 | 2.2 | 36 | 96.8 | 35.6 | 96 | 204.8 | 343 | 650 | 1202 | 982 | 1800 | 3272 |
| -79 | -110 | -166 | 2.8 | 37 | 98.6 | 36.1 | 97 | 206.6 | 349 | 660 | 1220 | 1010 | 1850 | 3362 |
| -73 | -100 | -148 | 3.3 | 38 | 100.4 | 36.7 | 98 | 208.4 | 354 | 670 | 1238 | 1038 | 1900 | 3452 |
| -68 | -90 | -130 | 3.9 | 39 | 102.2 | 37.2 | 99 | 210.2 | 360 | 680 | 1256 | 1066 | 1950 | 3542 |
| -62 | -80 | -112 | 4.4 | 40 | 104.0 | 37.8 | 100 | 212 | 366 | 690 | 1274 | 1093 | 2000 | 3632 |
| -57 | -70 | -94 | 5.0 | 41 | 105.8 | 43 | 110 | 230 | 371 | 700 | 1292 | 1121 | 2050 | 3722 |
| -51 | -60 | -76 | 5.6 | 42 | 107.6 | 49 | 120 | 248 | 377 | 710 | 1310 | 1149 | 2100 | 3812 |
| -46 | -50 | -58 | 6.1 | 43 | 109.4 | 54 | 130 | 266 | 382 | 720 | 1328 | 1177 | 2150 | 3902 |
| -40 | -40 | -40 | 6.7 | 44 | 111.2 | 60 | 140 | 284 | 388 | 730 | 1346 | 1204 | 2200 | 3992 |
| -34 | -30 | -22 | 7.2 | 45 | 113.0 | 66 | 150 | 302 | 393 | 740 | 1364 | 1232 | 2250 | 4082 |
| -29 | -20 | -4 | 7.8 | 46 | 114.8 | 71 | 160 | 320 | 399 | 750 | 1382 | 1260 | 2300 | 4172 |
| -23 | -10 | 14 | 8.3 | 47 | 116.6 | 77 | 170 | 338 | 404 | 760 | 1400 | 1288 | 2350 | 4262 |
| -17.8 | 0 | 32 | 8.9 | 48 | 118.4 | 82 | 180 | 356 | 410 | 770 | 1418 | 1316 | 2400 | 4352 |
| | | | 9.4 | 49 | 120.2 | 88 | 190 | 374 | 416 | 780 | 1436 | 1343 | 2450 | 4442 |
| | | | 10.0 | 50 | 122.0 | 93 | 200 | 392 | 421 | 790 | 1454 | 1371 | 2500 | 4532 |
| | | | 10.6 | 51 | 123.8 | 99 | 210 | 410 | 427 | 800 | 1472 | 1399 | 2550 | 4622 |
| | | | 11.1 | 52 | 125.6 | 100 | 212 | 413.6 | 432 | 810 | 1490 | 1427 | 2600 | 4712 |
| | | | 11.7 | 53 | 127.4 | 104 | 220 | 428 | 438 | 820 | 1508 | 1454 | 2650 | 4802 |
| | | | 12.2 | 54 | 129.2 | 110 | 230 | 446 | 443 | 830 | 1526 | 1482 | 2700 | 4892 |
| | | | 12.8 | 55 | 131.0 | 116 | 240 | 464 | 449 | 840 | 1544 | 1510 | 2750 | 4982 |
| | | | 13.3 | 56 | 132.8 | 121 | 250 | 482 | 454 | 850 | 1562 | 1538 | 2800 | 5072 |
| | | | 13.9 | 57 | 134.6 | 127 | 260 | 500 | 460 | 860 | 1580 | 1566 | 2850 | 5162 |
| | | | 14.4 | 58 | 136.4 | 132 | 270 | 518 | 466 | 870 | 1598 | 1593 | 2900 | 5252 |
| | | | 15.0 | 59 | 138.2 | 138 | 280 | 536 | 471 | 880 | 1616 | 1621 | 2950 | 5342 |
| | | | 15.6 | 60 | 140.0 | 143 | 290 | 554 | 477 | 890 | 1634 | 1649 | 3000 | 5432 |

TECH
Technical Information

Temperature Pressure Table for Saturated Vapor

| Temperature | | | Pressure (abs.) | | | Pressure (G) | | |
|----------------|---------------------|------------------|---------------------|------------------|---------------------------|------------------|---------------------|---------------------------|
| Temperature °C | Pressure (abs.) MPa | Pressure (G) MPa | Pressure (abs.) MPa | Pressure (G) MPa | Saturation Temperature °C | Pressure (G) MPa | Pressure (abs.) MPa | Saturation Temperature °C |
| 70 | 0.03 | -0.07 | 0.09 | -0.01 | 99.1 | 0 | 0.10 | 100.0 |
| 80 | 0.05 | -0.05 | 0.19 | 0.09 | 119.6 | 0.09 | 0.19 | 120.1 |
| 90 | 0.07 | -0.03 | 0.29 | 0.19 | 132.9 | 0.19 | 0.29 | 133.2 |
| 100 | 0.10 | 0 | 0.39 | 0.29 | 142.9 | 0.29 | 0.39 | 143.2 |
| 110 | 0.14 | 0.04 | 0.49 | 0.39 | 151.1 | 0.39 | 0.49 | 151.3 |
| 120 | 0.19 | 0.09 | 0.58 | 0.48 | 158.1 | 0.49 | 0.59 | 158.3 |
| 130 | 0.26 | 0.16 | 0.68 | 0.58 | 164.2 | 0.58 | 0.68 | 164.3 |
| 140 | 0.36 | 0.26 | 0.78 | 0.68 | 169.6 | 0.68 | 0.78 | 169.8 |
| 150 | 0.47 | 0.37 | 0.88 | 0.78 | 174.5 | 0.78 | 0.88 | 174.7 |
| 160 | 0.61 | 0.51 | 0.98 | 0.88 | 179.0 | 0.88 | 0.98 | 179.3 |
| 170 | 0.79 | 0.69 | 1.17 | 1.07 | 187.1 | 0.98 | 1.08 | 183.2 |
| 180 | 1.00 | 0.90 | 1.37 | 1.27 | 194.1 | 1.17 | 1.27 | 190.0 |
| 190 | 1.25 | 1.15 | 1.56 | 1.46 | 200.4 | 1.37 | 1.47 | 197.4 |
| 200 | 1.55 | 1.45 | 1.76 | 1.66 | 206.2 | 1.56 | 1.66 | 203.4 |
| 210 | 1.90 | 1.80 | 1.96 | 1.86 | 211.4 | 1.78 | 1.88 | 208.9 |
| 220 | 2.32 | 2.21 | 2.45 | 2.35 | 222.9 | 1.96 | 2.06 | 213.8 |
| 230 | 2.79 | 2.69 | 2.94 | 2.84 | 232.8 | 2.45 | 2.55 | 223.8 |
| 240 | 3.34 | 3.24 | 3.43 | 3.33 | 241.4 | 2.94 | 3.04 | 234.5 |
| 250 | 3.97 | 3.87 | 3.92 | 3.82 | 249.2 | 3.92 | 4.02 | 250.6 |
| 260 | 4.66 | 4.56 | 4.90 | 4.80 | 262.7 | 4.90 | 5.00 | 263.9 |
| 270 | 5.50 | 5.40 | 5.88 | 5.78 | 274.3 | 5.88 | 5.98 | 275.3 |
| 280 | 6.41 | 6.31 | 6.86 | 6.76 | 284.5 | 6.86 | 6.96 | 285.4 |
| 290 | 7.44 | 7.34 | 7.84 | 7.74 | 293.6 | 7.84 | 7.94 | 294.5 |
| 300 | 8.59 | 8.49 | 8.82 | 8.72 | 301.9 | 8.82 | 8.92 | 302.7 |
| 310 | 9.87 | 9.77 | 9.80 | 9.70 | 309.5 | 9.80 | 9.90 | 310.9 |
| 320 | 11.28 | 11.18 | 11.76 | 11.66 | 323.1 | 11.76 | 11.86 | 323.8 |
| 330 | 12.86 | 12.76 | 13.72 | 13.62 | 335.1 | 13.72 | 13.82 | 335.6 |
| 340 | 14.61 | 14.51 | 15.69 | 15.59 | 345.7 | 15.69 | 15.79 | 346.2 |
| 350 | 16.47 | 16.37 | 17.65 | 17.55 | 355.4 | 17.65 | 17.75 | 355.8 |
| 360 | 18.77 | 18.67 | 19.61 | 19.51 | 364.1 | 19.61 | 19.71 | 364.5 |
| 370 | 21.15 | 21.05 | 21.57 | 21.47 | 372.0 | 21.57 | 21.67 | 372.5 |

Fugitive Emission Standards

■ Federal Clean Air Act in US (EPA Method 21-1994)

Allowable Leakage \leq 500PPM

■ California State Regulation (1997)

Allowable Leakage \leq 100PPM

■ API 622 (2011) Type Testing for Process Valve Packing for Fugitive Emissions

■ API 624 (2014) Type Testing of Rising Stem Valves Equipped with Flexible Graphite Packing for Fugitive Emissions

Acceptance criteria (100ppmv) for fugitive emission type testing of rising and rising-rotating stem valves equipped with packing previously tested in accordance with API 622.

■ API 641 (2016) Type Testing for Quarter-turn Valves for Fugitive Emissions

Valves larger than 24^B and pressure class greater than 1500 are out of this scope.

Valves with pressure rating at ambient temperature lower than 100 psig are out of this scope.

Acceptance criteria : Not exceeding 100 ppmv

* Valve groups are belows for reference

• Valve Groups: Valve Temperature Rating \geq 260°C (500°F)

| Valve Pressure Rating at 260°C (500°F) is \geq 41.1 barg (600psig) | Valve Pressure Rating at 260°C (500°F) is < 41.1 barg (600psig) and \geq 6.89 barg (100 psig) | Valve with Temperature Rating \geq 260°C (500°F) and does not comply with the requirements of Group A or Group B |
|--|---|--|
| Group A | Group B | Group C |

Note: Valves with pressure rating less than 6.89 barg (100 psig) at ambient temperature are out of this standard.

• Valve Groups: Valve Temperature Rating < 260°C (500°F)

| Valve Pressure Rating at its Maximum-rated Temperature is \geq 41.1 barg (600psig) | Valve Pressure Rating at its Maximum-rated Temperature is < 41.1 barg (600psig) and \geq 6.89 barg (100 psig) | Valve with Temperature Rating < 260°C (500°F) and does not comply with the requirements of Group D or Group E |
|--|---|---|
| Group D | Group E | Group F |

Note: Valves with pressure rating less than 6.89 barg (100 psig) at ambient temperature are out of this standard.

■ ISO 15848-1 (2015) Industrial valves - Measurement, test and qualification procedures for fugitive emissions

Part 1: Classification system and qualification procedures for type testing of valves

* Tightness classes are belows for reference

• Tightness Classes for Stem (or Shaft) Seals with Helium

| Class | Measured Leak Rate (Mass Flow) | Measured Leak Rate (Mass Flow) | Measured Leak Rate (Volumic Flow) | Remarks |
|-------|---|--|--|--|
| | mg · s ⁻¹ · m ⁻¹ Stem Perimeter (for information) | mg · s ⁻¹ · mm ⁻¹ Stem Diameter Through Stem Seal System | mbar · l · s ⁻¹ · per mm Stem Diameter Through Stem Seal System | |
| Ah | $\leq 10^{-5}$ | $\leq 3.14 \cdot 10^{-8}$ | $\leq 1.78 \cdot 10^{-7}$ | Typically achieved with bellow seals or equivalent stem (shaft) sealing system for quarter turn valves |
| BH | $\leq 10^{-4}$ | $\leq 3.14 \cdot 10^{-7}$ | $\leq 1.78 \cdot 10^{-6}$ | Typically achieved with PTFE based packings or elastomeric seals |
| CH | $\leq 10^{-2}$ | $\leq 3.14 \cdot 10^{-5}$ | $\leq 1.78 \cdot 10^{-4}$ | Typically achieved with flexible graphite based packings |

■ ISO 15848-2 (2015) Industrial valves - Measurement, test and qualification procedures and fugitive emissions

Part 2: Production acceptance test of valves

■ TA Luft (2002): "Technical Instructions on Air Quality Control" (Technische Anleitung zur Reinhaltung der Luft)

TA Luft specifies sealing system of stem passage. A simple manufacturer declaration is sufficient for verification. TA Luft qualifies "high quality sealing system" only. TA Luft considers its compliance if metal bellows with safety packing or similar sealing systems are used; whereby equivalence in the verification system must be in accordance with VDI 2440.

■ End user specification from Shell Oil Company (MESC SPE 77/312).

MESC SPE 77/312 (February 2019) Fugitive Emission Production Testing
Amendments and Supplements to ISO 15848-2

Disclaimer

- KITZ does not take any responsibilities for damages arise from a result of natural disasters, accidents or fire which KITZ is not liable for, conduct of a third party, intentional act, misuse or use under abnormal conditions by the customer.
- KITZ does not take any responsibilities for damages arising from negligence of the prohibitions and cautions given in the catalogs and operation manuals, or installation and usage beyond the specification range.
- KITZ does not take any responsibilities for damages arising from product modification not entrusted to KITZ or usage under the load applied from other devices.

CAUTION

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog.

For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving the suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable.

While this catalog has been compiled with the utmost care, we assume no responsibility for errors, impropriety, or inadequacy. Any information provided in this catalog is subject to from-time-to-time change without notice for error rectification, product discontinuation, design modification, new product introduction, or any other cause that KITZ Corporation considers necessary. This edition cancels all previous issues.


Read the instruction manual carefully before use.

NOTICE

If any products designated as strategic material in the Foreign Exchange and Foreign Trade Law, Cabinet Order Concerning Control of Export Trade, Cabinet Order Concerning Control of Foreign Exchange, and other related laws and ordinances ("Foreign Exchange Laws") are exported to any foreign country or countries, an export license issued by the Japanese Government will be required under the Foreign Exchange Laws.

Further, there may be cases where an export license issued by the government of the United States or other country will be required under the applicable export-related laws and ordinances in such relevant countries.

The contract shall become effective subject to the fact that a relevant export license is obtained from the Japanese Government.



*A chrysanthemum-handle is a symbol of KITZ,
the brand of valve reliability*

ISO 9001 certified since 1989

KITZ
KITZ CORPORATION

Tokyo Shiodome Building,
1-9-1, Higashi-Shimbashi, Minato-ku, Tokyo 105-7305, Japan
International Business Development Dept.
Phone : +81-50-3649-2202
URL : <https://www.kitz.com/en/>

— Distributed by —